Figure 5A.24(1)
Sediment Basin Design Example #1

TEMPORARY SEDIMENT BASIN DESIGN DATA SHEET

Computed by DWL Date 1-04 Checked by PLS Date 1-04
Project SNOOKS POND Basin # 1
Location MANLIUS, NY Total Area draining to basin 20 Acres

BASIN SIZE DESIGN

1. Minimum sediment storage volume = 134 cu. yds. x 20 acres of drainage area = 2,680 cu.yds.
2. a. Cleanout at 50 percent of minimum required volume = 1,340 cu. yds.
   b. Elevation corresponding to scheduled time to clean out 96.5
   c. Distance below top of riser 3.5 Ft.
3. Minimum surface area is larger of 0.01 $Q_{(1)}$ 0.32 or, 0.015 DA = 0.30 use 0.32 Acres

DESIGN OF SPILLWAYS & ELEVATIONS

Runoff

4. $Q_{p(10)}$ = 88 cfs
   (EFH, Ch. 2, TR-55, or Section 4; Attach runoff computation sheet)

Pipe Spillway (Q_{ps})

5. Min. pipe spillway cap., Q_{ps} = 0.2 x 20 ac. Drainage = 4 cfs
   Note: If there is no emergency spillway, then req'd $Q_{ps} = Q_{p(10)}$ = ——— cfs.
6. H = 10 ft. Barrel length = 85 ft
7. Barrel: Diam. 12 inches; Q_{ps} = (Q) 10.2 x (cor.fac.) .945 = 9.6 cfs.
8. Riser: Diam. 21 inches; Length 9 ft.; h = 1.0 ft. Crest Elev. 100.0
9. Trash Rack: Diam. 30 inches; H = 11 inches

Emergency Spillway Design

10. Emergency Spillway Flow, $Q_{es} = Q_p - Q_{ps}$ = 88 - 10 = 78 cfs.
11. Width 20 ft.; H_p 1.4 ft Crest elevation 101.0 ; Design High Water Elev. 102.4
    Entrance channel slope 2 % ; Top of Dam Elev. 103.4
    Exit channel slope > 2.7 %

ANTI-SEEP COLLAR/
SEEPAGE DIAPHRAGM DESIGN

Collars:

12. y = 8 ft.; z = 2 :1; pipe slope = 1 %, L_s = 50 ft.
    Use 2 collars, 4' - 6" inches square; projection = 1.8 ft.

Diaphragms:

1 width 7 ft. height 10 ft.

DEWATERING ORIFICE SIZING

13. $Ao = \frac{A_s \times (2h)^{0.5}}{122{,}568}$ = 0.30 sq. ft.; h = 3.5 ft.; therefore use, 7.4" → USE 6" orifice

Figure 5A.24(2)
Sediment Basin Design Example #2

TEMPORARY SEDIMENT BASIN DESIGN DATA SHEET

Computed by DWL Date 1-04 Checked by PLS Date 1-04

Project SNOOKS POND Basin # 1

Location MANLIUS, NY Total Area draining to basin 20 Acres

BASIN SIZE DESIGN

1. Minimum sediment storage volume = 134 cu. yds. x 20 acres of drainage area = 2,680 cu.yds.
2. a. Cleanout at 50 percent of minimum required volume = 1,340 cu. yds.
   b. Elevation corresponding to scheduled time to clean out 96.5
   c. Distance below top of riser 3.5 feet
3. Minimum surface area is larger of 0.01 $Q_{(1)}$ 0.32 or, 0.015 DA = 0.30 use 0.32 acres

DESIGN OF SPILLWAYS & ELEVATIONS

Runoff

4. $Q_{p(10)}$ = 88 cfs
   (EFH, Ch. 2, TR-55, or Section 4; Attach runoff computation sheet)

Pipe Spillway (Q_{ps})

5. Min. pipe spillway cap., Q_{ps} = 0.2 x 20 ac. Drainage = 4 cfs
   Note: If there is no emergency spillway, then req'd Q_{ps} = $Q_{p(10)}$ = 88 cfs.
6. H = 10 ft. Barrel length = 85 ft
7. Barrel: Diam. 36 inches; Q_{ps} = (Q) 91.2 x (cor.fac.) .955 = 87.1 cfs.
8. Riser: Diam. 54 inches; Length 9 ft.; h = 1.7 ft. Crest Elev. 100.0
9. Trash Rack: Diam. 78 inches; H = 25 inches

Emergency Spillway Design

10. Emergency Spillway Flow, Q_{es} = Q_p - Q_{ps} = _____ - _____ = _____ cfs.
11. Width _____ ft.; H_p _____ ft Crest elevation _____; Design High Water Elev. _____
    Entrance channel slope _____ % ; Top of Dam Elev. _____
    Exit channel slope _____ %

ANTI-SEEP COLLAR/
SEEPAGE DIAPHRAGM DESIGN

Collars:

12. y = 8 ft.; z = 2 :1; pipe slope = 1 %, L_s = 50 ft.
    Use 2 collars, 4' - 6 inches square; projection = 1.8 ft.

Diaphragms:

1 width 7 ft. height 10 ft.

DEWATERING ORIFICE SIZING

13. $Ao = \frac{A_s \times (2h)^{0.5}}{122{,}568}$ = 0.30 sq. ft.; h = 3.5 ft.; therefore use, 7.4" → USE 6" orifice

Figure 5A.25
Riser Inflow Chart (USDA - NRCS)

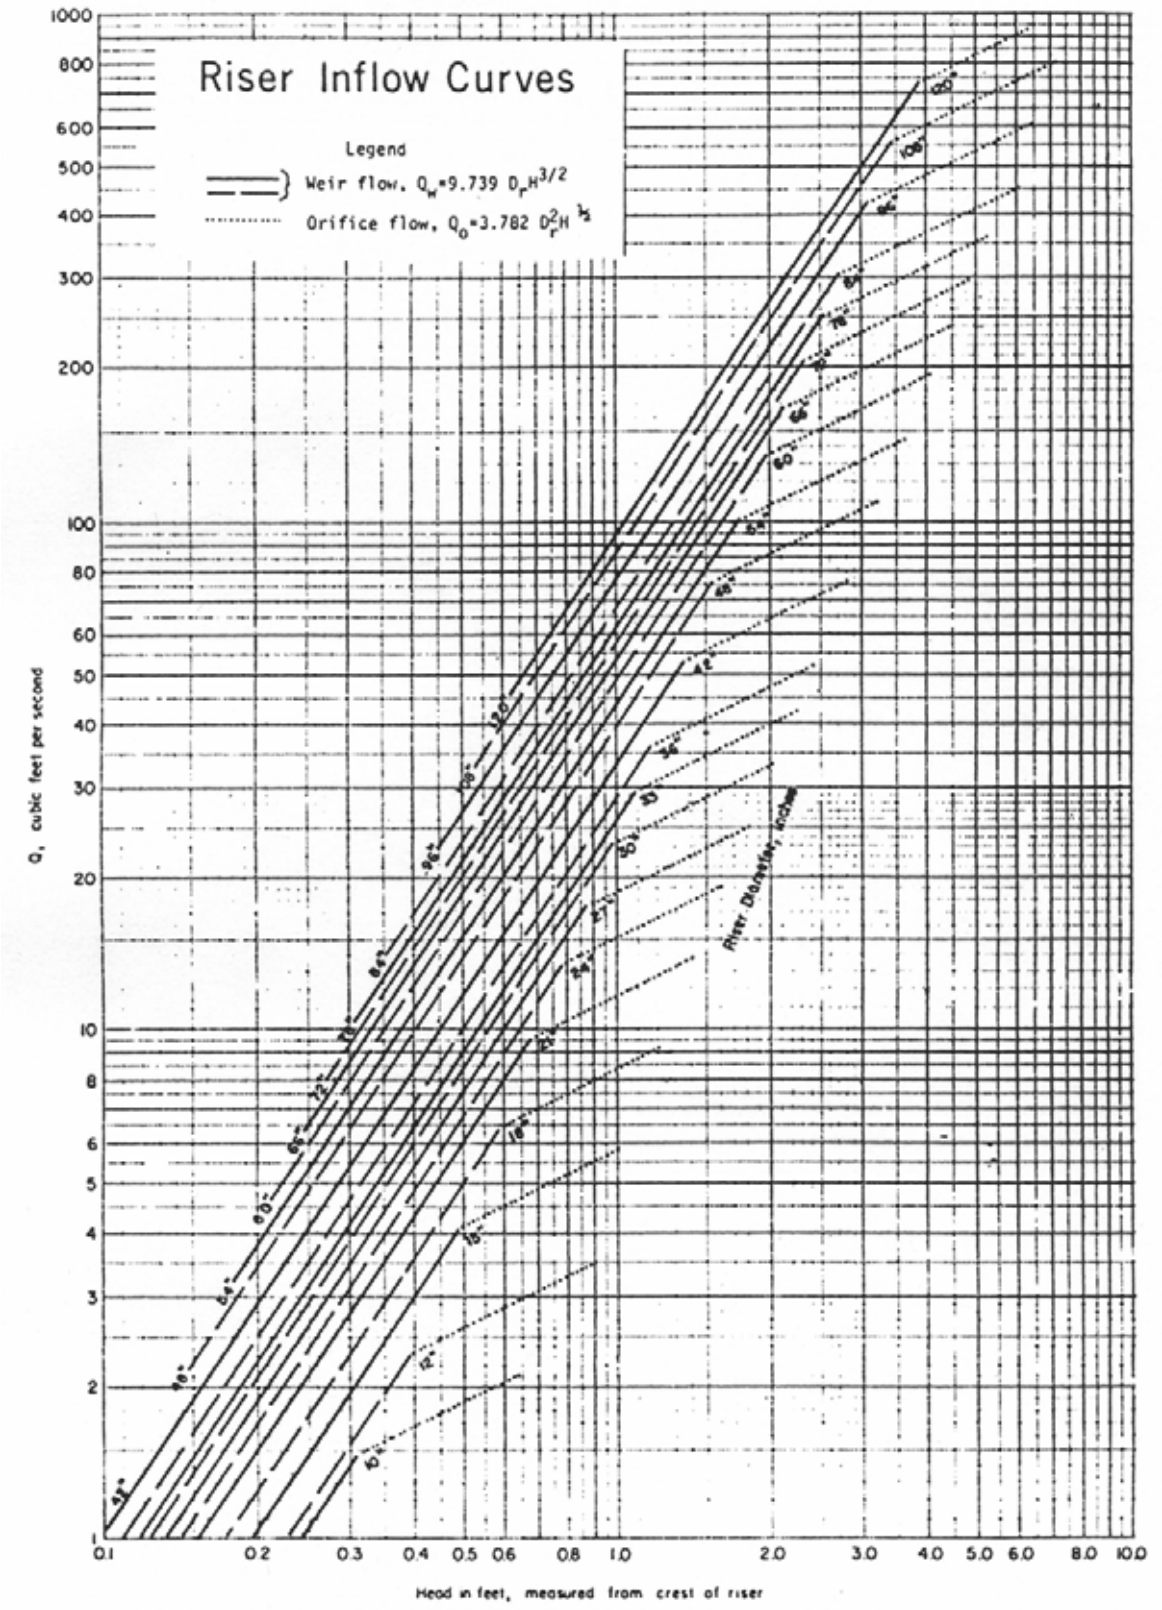

Figure 5A.26
Pipe Flow Chart; "n" = 0.025 (USDA - NRCS)

PIPE FLOW CHART n = 0.025

FOR CORRUGATED METAL PIPE INLET $K_m = K_e + K_b = 1.0$ AND 70 FEET OF CORRUGATED METAL PIPE CONDUIT (full flow assumed)

Note correction factors for pipe lengths other than 70 feet

H, in feet	Diameter of pipe in inches																							
	6"	8"	10"	12"	15"	18"	21"	24"	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"	96"	102"
1	0.33	0.70	1.25	1.98	3.48	5.47	7.99	11.0	18.8	28.8	41.1	55.7	72.6	91.8	113	137	163	191	222	255	290
2	0.47	0.99	1.76	2.80	4.92	7.74	11.3	15.6	26.6	40.8	58.2	78.8	103	130	160	194	231	271	314	360	410
3	0.58	1.22	2.16	3.43	6.02	9.48	13.8	19.1	32.6	49.9	71.2	96.5	126	159	196	237	282	331	384	441	502
4	0.67	1.40	2.49	3.97	6.96	10.9	16.0	22.1	37.6	57.7	82.3	111	145	184	226	274	326	383	444	510	580
5	0.74	1.57	2.79	4.43	7.78	12.2	17.9	24.7	42.1	64.5	92.0	125	162	205	253	306	365	428	496	570	648
6	0.82	1.72	3.05	4.86	8.52	13.4	19.6	27.0	46.1	70.6	101	136	178	225	277	336	399	469	544	624	710
7	0.88	1.86	3.30	5.25	9.20	14.5	21.1	29.2	49.8	76.3	109	147	192	243	300	362	431	506	587	674	767
8	0.94	1.99	3.53	5.61	9.84	15.5	22.6	31.2	53.2	81.5	116	158	205	260	320	388	461	541	628	721	820
9	1.00	2.11	3.74	5.95	10.4	16.4	24.0	33.1	56.4	86.5	123	167	218	275	340	411	489	574	666	764	870
10	1.05	2.22	3.94	6.27	11.0	17.3	25.3	34.9	59.5	91.2	130	176	230	290	358	433	516	605	702	806	917
11	1.10	2.33	4.13	6.58	11.5	18.2	26.5	36.6	62.4	95.6	136	185	241	304	376	454	541	635	736	845	962
12	1.15	2.43	4.32	6.87	12.1	19.0	27.7	38.2	65.2	99.9	142	193	252	318	392	475	565	663	769	883	1004
13	1.20	2.53	4.49	7.15	12.6	19.7	28.8	39.8	67.8	104	148	201	262	331	408	494	588	690	800	919	1045
14	1.25	2.63	4.66	7.42	13.0	20.5	29.9	41.3	70.4	108	154	208	272	343	424	513	610	716	830	953	1085
15	1.29	2.72	4.83	7.68	13.5	21.2	30.9	42.8	72.8	112	159	216	281	355	439	531	631	741	860	987	1123
16	1.33	2.81	4.99	7.93	13.9	21.9	32.0	44.2	75.2	115	165	223	290	367	453	548	652	765	888	1019	1160
17	1.37	2.90	5.14	8.18	14.3	22.6	32.9	45.5	77.5	119	170	230	229	378	467	565	672	789	915	1051	1195
18	1.41	2.98	5.29	8.41	14.8	23.2	33.9	46.8	79.8	120	174	236	308	389	480	581	692	812	942	1081	1230
19	1.45	3.06	5.43	8.64	15.2	23.9	34.8	48.1	82.0	126	179	243	316	400	494	597	711	834	967	1111	1264
20	1.49	3.14	5.57	8.87	15.6	24.5	35.7	49.4	84.1	129	184	249	325	410	506	613	729	856	993	1139	1297
21	1.53	3.22	5.71	9.09	15.9	25.1	36.6	50.6	86.2	132	188	255	333	421	519	628	747	877	1017	1168	1329
22	1.56	3.29	5.85	9.30	16.3	25.7	37.5	51.8	88.2	135	193	261	341	430	531	643	765	898	1041	1195	1360
23	1.60	3.37	5.98	9.51	16.7	26.2	38.3	53.0	90.2	138	197	267	348	440	543	657	782	918	1064	1222	1390
24	1.63	3.44	6.11	9.72	17.0	26.8	39.1	54.1	92.1	141	201	273	356	450	555	671	799	937	1087	1248	1420
25	1.66	3.51	6.23	9.92	17.4	27.4	39.9	55.2	94.0	144	206	279	363	459	566	685	815	957	1110	1274	1450
26	1.70	3.58	6.36	10.1	17.7	27.9	40.7	56.3	95.9	147	210	284	370	468	577	699	831	976	1132	1299	1478
27	1.73	3.65	6.48	10.3	18.1	28.4	41.5	57.4	97.7	150	214	290	377	477	588	712	847	994	1153	1324	1507
28	1.76	3.72	6.60	10.5	18.4	29.0	42.3	58.4	99.5	153	218	295	384	486	599	725	863	1013	1174	1348	1534
29	1.79	3.78	6.71	10.7	18.7	29.5	43.0	59.5	101	155	221	300	391	494	610	738	878	1030	1195	1372	1561
30	1.82	3.85	6.83	10.9	19.1	30.0	43.7	60.5	103	158	225	305	398	503	620	750	893	1048	1216	1396	1588
L, in feet	Correction Factors For Other Pipe Lengths																				
20	1.69	1.63	1.58	1.53	1.47	1.42	1.37	1.34	1.28	1.24	1.20	1.18	1.16	1.14	1.13	1.11	1.10	1.10	1.09	1.08	1.08
30	1.44	1.41	1.39	1.36	1.32	1.29	1.27	1.24	1.21	1.18	1.15	1.13	1.12	1.11	1.10	1.09	1.08	1.07	1.07	1.06	1.06
40	1.26	1.27	1.25	1.23	1.21	1.20	1.18	1.17	1.14	1.12	1.11	1.10	1.09	1.08	1.07	1.06	1.06	1.05	1.05	1.05	1.04
50	1.16	1.16	1.15	1.14	1.13	1.12	1.11	1.10	1.09	1.08	1.07	1.06	1.06	1.05	1.05	1.04	1.04	1.04	1.04	1.03	1.03
60	1.07	1.07	1.06	1.06	1.06	1.05	1.05	1.05	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.01
70	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
80	.94	.94	.95	.95	.95	.95	.96	.96	.96	.97	.97	.97	.98	.98	.98	.98	.98	.98	.99	.99	.99
90	.89	.89	.90	.90	.91	.91	.92	.92	.93	.94	.94	.95	.95	.96	.96	.96	.97	.97	.97	.97	.94
100	.85	.85	.86	.86	.87	.88	.89	.89	.90	.91	.92	.93	.93	.94	.94	.95	.95	.95	.96	.96	.94
120	.78	.79	.79	.80	.81	.82	.83	.83	.85	.86	.87	.89	.89	.90	.91	.89	.92	.93	.93	.94	.92
140	.72	.73	.74	.75	.76	.77	.78	.79	.81	.82	.84	.85	.86	.87	.88	.86	.89	.90	.91	.91	.90
160	.68	.69	.69	.70	.71	.73	.74	.75	.77	.79	.80	.82	.83	.84	.85	.92	.87	.88	.89	.89	

Figure 5A.27
Pipe Flow Chart; "n" = 0.013 (USDA - NRCS)

PIPE FLOW CHART n = 0.013

FOR REINFORCED CONCRETE PIPE INLET $K_m = K_e + K_b = (1.00$ AND 70 FEET OF REINFORCED CONCRETE PIPE CONDUIT (full flow assumed)

Note correction factors for pipe lengths other than 70 feet

H, in feet	diameter of pipe in inches																					
	12"	15"	18"	21"	24"	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"	96"	102"
1	3.22	5.44	8.29	11.8	15.9	26.0	38.6	53.8	71.4	91.5	114	139	167	197	229	264	302	342
2	4.55	7.69	11.7	16.7	22.5	36.8	54.6	76.0	101	129	161	197	236	278	324	374	427	483
3	5.57	9.42	14.4	20.4	27.5	45.0	66.9	93.1	124	159	198	241	289	341	397	458	523	592
4	6.43	10.9	16.6	23.5	31.8	52.0	77.3	108	143	183	228	278	334	394	459	529	604	683
5	7.19	12.2	18.5	26.3	35.5	58.1	86.4	120	160	205	255	311	373	440	513	591	675	764
6	7.88	13.3	20.3	28.8	38.9	63.7	94.6	132	175	224	280	341	409	482	562	647	739	837
7	8.51	14.4	21.9	31.1	42.0	68.8	102	142	189	242	302	368	441	521	607	699	798	904
8	9.10	15.4	23.5	33.3	44.9	73.5	109	152	202	259	323	394	472	557	685	748	854	966
9	9.65	16.3	24.9	35.3	47.7	78.0	116	161	214	275	342	418	500	590	688	793	905	1025
10	10.2	17.2	26.2	37.2	50.2	82.2	122	170	226	289	361	440	527	622	725	836	954	1080
11	10.7	18.0	27.5	39.0	52.7	86.2	128	178	237	304	379	462	553	653	761	877	1001	1133
12	11.1	18.9	28.7	40.8	55.0	90.1	134	186	247	317	395	482	578	682	794	916	1045	1184
13	11.6	19.6	29.9	42.4	57.3	93.7	139	194	257	330	411	502	601	710	827	953	1088	1232
14	12.0	20.4	31.0	44.1	59.4	97.3	145	201	267	342	427	521	624	736	858	989	1129	1278
15	12.5	21.1	32.1	45.6	61.5	101	150	208	277	354	442	539	646	762	888	1024	1169	1323
16	12.9	21.8	33.2	47.1	63.5	104	155	215	286	366	457	557	667	787	917	1057	1207	1367
17	13.3	22.4	34.2	48.5	65.5	107	159	222	294	377	471	574	688	812	946	1090	1244	1409
18	13.7	23.1	35.2	49.9	67.4	110	164	228	303	388	484	591	708	835	973	1121	1280	1450
19	14.0	23.7	36.1	51.3	69.2	113	168	234	311	399	497	607	727	858	1000	1152	1315	1489
20	14.4	24.3	37.1	52.6	71.0	116	173	240	319	409	510	623	746	880	1026	1182	1350	1528
21	14.7	24.9	38.0	53.9	72.8	119	177	246	327	419	523	638	764	902	1051	1211	1383	1566
22	15.1	25.5	38.9	55.2	74.5	122	181	252	335	429	535	653	782	923	1076	1240	1415	1603
23	15.4	26.1	39.8	56.5	76.2	125	186	258	342	439	547	668	800	944	1100	1268	1447	1639
24	15.8	26.7	40.6	57.7	77.8	127	189	263	350	448	559	682	817	964	1123	1295	1478	1674
25	16.1	27.2	41.5	58.9	79.4	130	193	269	357	458	571	696	834	984	1147	1322	1509	1708
26	16.4	27.7	42.3	60.0	81.0	133	197	274	364	467	582	710	850	1004	1169	1348	1539	1742
27	16.7	28.3	43.1	61.2	82.5	135	201	279	371	476	593	723	867	1023	1192	1373	1568	1775
28	17.0	28.8	43.9	62.3	84.1	138	204	285	378	484	604	737	883	1041	1214	1399	1597	1808
29	17.3	29.3	44.7	63.4	85.5	140	208	290	384	493	615	750	898	1060	1235	1423	1625	1840
30	17.6	29.8	45.4	64.5	87.0	142	212	294	391	501	625	763	913	1078	1256	1448	1653	1871
L, in feet	Correction Factors For Other Pipe Lengths																	
20	1.30	1.24	1.21	1.18	1.15	1.12	1.10	1.08	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.03	1.03
30	1.22	1.18	1.15	1.13	1.12	1.09	1.08	1.06	1.05	1.05	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.02
40	1.15	1.13	1.11	1.10	1.08	1.07	1.05	1.05	1.04	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02
50	1.09	1.08	1.07	1.06	1.05	1.04	1.04	1.03	1.03	1.02	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.01
60	1.04	1.04	1.03	1.03	1.03	1.02	1.02	1.02	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01
70	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
80	.96	.97	.97	.97	.98	.98	.98	.99	.99	.99	.99	.99	.99	.99	.99	.99	.99	.99
90	.93	.94	.94	.95	.95	.96	.97	.97	.98	.98	.98	.98	.98	.99	.99	.99	.99	.99
100	.90	.91	.92	.93	.93	.95	.95	.96	.97	.97	.97	.98	.98	.98	.98	.98	.98	.99
120	.84	.86	.87	.89	.90	.91	.93	.94	.94	.95	.96	.96	.96	.97	.97	.97	.97	.98
140	.80	.82	.83	.85	.86	.88	.90	.91	.92	.93	.94	.94	.95	.95	.96	.96	.96	.97
160	.76	.78	.80	.82	.83	.86	.88	.89	.90	.91	.92	.93	.94	.94	.95	.95	.95	.96