

APPENDIX G

IN SITU HYDRAULIC CONDUCTIVITY TEST RESULTS

APPENDIX G.1 SINGLE-WELL RESPONSE TESTS


APPENDIX G.2 SHORT-DURATION PUMPING TEST

APPENDIX G.1

SINGLE-WELL RESPONSE TESTS

Client: Nepera Inc. Company: Conestoga Rovers & Associates
 Location: Former Lagoon Site Project: 3698

MW-1U-91 FALLING HEAD TEST #1

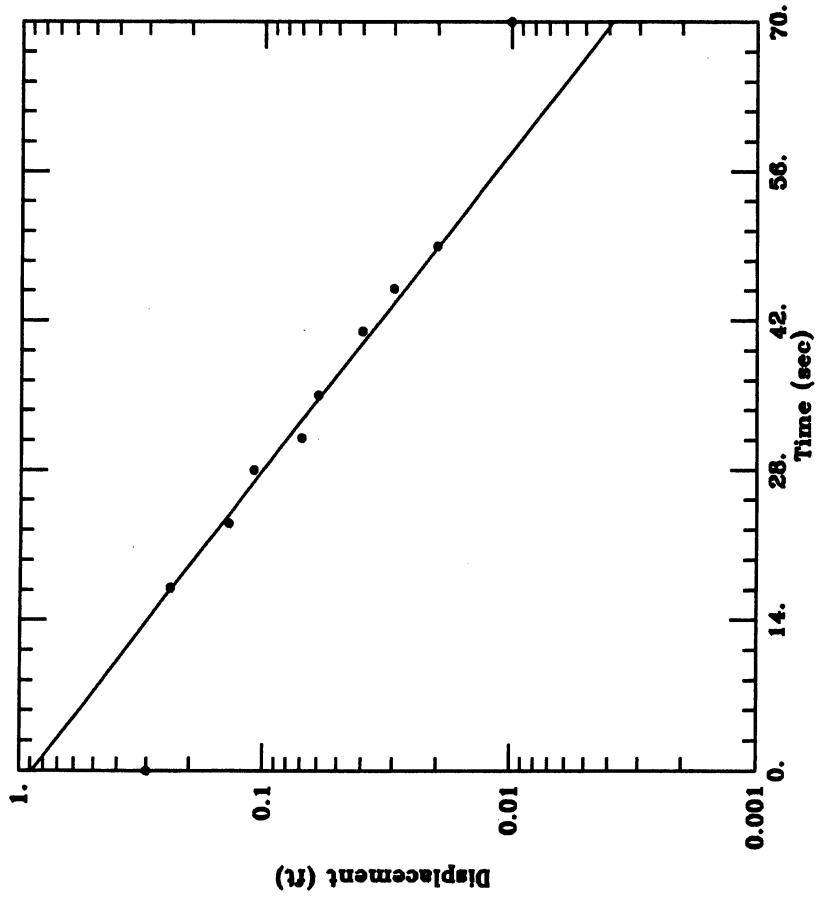

DATA SET:
 MW1U1F.DAT
 08/08/95

AQUIFER MODEL:
 Unconfined

SOLUTION METHOD:
 Boulwer-Rice

PROJECT DATA:
 test date: 05/13/95
 test well: MW-1U-91
 obs. well: MW-1U-91


TEST DATA:
 H0 = 0.3 ft
 rc = 0.083 ft
 rw = 0.333 ft
 L = 6.28 ft
 b = 7.9 ft
 H = 7.9 ft

PARAMETER ESTIMATES:
 K = 9.826E-05 ft/sec
 Y0 = 0.8863 ft

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-1U-91 RISING HEAD TEST #1	
<p>DATA SET: MW1U1R.DAT 08/08/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 05/13/95 test well: MW-1U-91 obs. well: MW-1U-91</p> <p>TEST DATA: H0 = 0.67 ft rc = 0.083 ft rw = 0.333 ft L = 6.28 ft b = 7.9 ft H = 7.9 ft</p> <p>PARAMETER ESTIMATES: K = 0.0001343 ft/sec Y0 = 1.643 ft</p>	
<p style="text-align: right;">AQTESOLV</p>	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																												
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																												
<p align="center">MW-1U-91 FALLING HEAD TEST #2</p>																																													
<p>DATA SET: MW1U2F.DAT 08/08/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>																																												
<p>PROJECT DATA: test date: 05/12/93 test well: MW-1U-91 obs. well: MW-1U-91</p>	<p>TEST DATA: H0 = 0.88 ft rC = 0.083 ft rW = 0.333 ft L = 6.28 ft b = 7.9 ft H = 7.9 ft</p>																																												
<p>PARAMETER ESTIMATES: K = 0.0001263 ft/sec Y0 = 1.448 ft</p>																																													
<table border="1"> <caption>Approximate Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>1.0</td></tr> <tr><td>4</td><td>0.4</td></tr> <tr><td>8</td><td>0.25</td></tr> <tr><td>12</td><td>0.18</td></tr> <tr><td>16</td><td>0.14</td></tr> <tr><td>20</td><td>0.11</td></tr> <tr><td>24</td><td>0.09</td></tr> <tr><td>28</td><td>0.08</td></tr> <tr><td>32</td><td>0.07</td></tr> <tr><td>36</td><td>0.06</td></tr> <tr><td>40</td><td>0.05</td></tr> <tr><td>44</td><td>0.04</td></tr> <tr><td>48</td><td>0.035</td></tr> <tr><td>52</td><td>0.03</td></tr> <tr><td>56</td><td>0.025</td></tr> <tr><td>60</td><td>0.02</td></tr> <tr><td>64</td><td>0.018</td></tr> <tr><td>68</td><td>0.016</td></tr> <tr><td>72</td><td>0.014</td></tr> <tr><td>76</td><td>0.012</td></tr> <tr><td>80</td><td>0.01</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	1.0	4	0.4	8	0.25	12	0.18	16	0.14	20	0.11	24	0.09	28	0.08	32	0.07	36	0.06	40	0.05	44	0.04	48	0.035	52	0.03	56	0.025	60	0.02	64	0.018	68	0.016	72	0.014	76	0.012	80	0.01
Time (sec)	Displacement (ft)																																												
0	1.0																																												
4	0.4																																												
8	0.25																																												
12	0.18																																												
16	0.14																																												
20	0.11																																												
24	0.09																																												
28	0.08																																												
32	0.07																																												
36	0.06																																												
40	0.05																																												
44	0.04																																												
48	0.035																																												
52	0.03																																												
56	0.025																																												
60	0.02																																												
64	0.018																																												
68	0.016																																												
72	0.014																																												
76	0.012																																												
80	0.01																																												
<p align="right">AQTESOLV</p>																																													

Client: Nepera Inc.	Company: Conestoga Rovers & Associates																																				
Location: Former Lagoon Site	Project: 3698																																				
MW-1U-91 RISING HEAD TEST #2																																					
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW1U2R.DAT 08/08/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 05/13/93 test well: MW-1U-91 obs. well: MW-1U-91</p> <p>TEST DATA: H0 = 0.74 ft rc = 0.083 ft rw = 0.333 ft L = 6.28 ft b = 7.9 ft H = 7.9 ft</p> <p>PARAMETER ESTIMATES: K = 0.0001276 ft/sec y0 = 1.322 ft</p> </div> <div style="width: 50%; text-align: center;"> <table border="1" style="margin: 10px auto;"> <caption>Approximate Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.001</td></tr> <tr><td>2</td><td>0.002</td></tr> <tr><td>4</td><td>0.004</td></tr> <tr><td>6</td><td>0.008</td></tr> <tr><td>8</td><td>0.015</td></tr> <tr><td>10</td><td>0.025</td></tr> <tr><td>12</td><td>0.04</td></tr> <tr><td>15</td><td>0.06</td></tr> <tr><td>20</td><td>0.1</td></tr> <tr><td>25</td><td>0.15</td></tr> <tr><td>30</td><td>0.25</td></tr> <tr><td>35</td><td>0.4</td></tr> <tr><td>40</td><td>0.6</td></tr> <tr><td>45</td><td>1.0</td></tr> <tr><td>50</td><td>1.5</td></tr> <tr><td>55</td><td>2.0</td></tr> <tr><td>60</td><td>2.5</td></tr> </tbody> </table> </div> </div>		Time (sec)	Displacement (ft)	0	0.001	2	0.002	4	0.004	6	0.008	8	0.015	10	0.025	12	0.04	15	0.06	20	0.1	25	0.15	30	0.25	35	0.4	40	0.6	45	1.0	50	1.5	55	2.0	60	2.5
Time (sec)	Displacement (ft)																																				
0	0.001																																				
2	0.002																																				
4	0.004																																				
6	0.008																																				
8	0.015																																				
10	0.025																																				
12	0.04																																				
15	0.06																																				
20	0.1																																				
25	0.15																																				
30	0.25																																				
35	0.4																																				
40	0.6																																				
45	1.0																																				
50	1.5																																				
55	2.0																																				
60	2.5																																				
AGTESOLV																																					

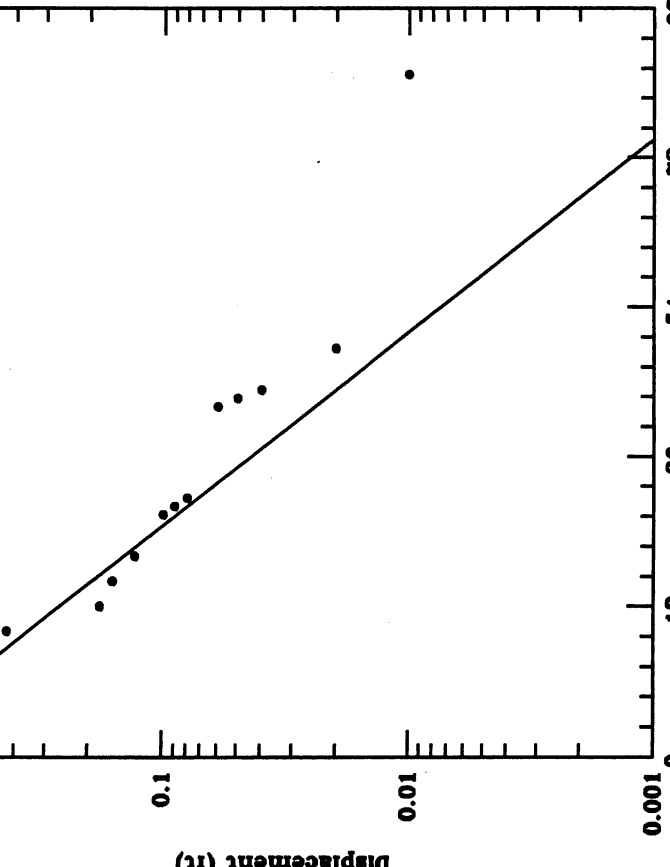Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-1U-91 FALLING HEAD TEST #3	
<div style="display: flex; justify-content: space-between;"> <div data-bbox="422 231 527 651"> <p>DATA SET: MW1U3F.DAT 08/08/95</p> </div> <div data-bbox="422 651 527 1039"> <p>AQUIFER MODEL: Unconfined</p> </div> <div data-bbox="422 1039 527 1858"> <p>SOLUTION METHOD: Bouwer-Rice</p> </div> </div> <div style="display: flex; justify-content: space-between;"> <div data-bbox="527 231 665 651"> <p>PROJECT DATA: test date: 05/12/93 test well: MW-1U-91 obs. well: MW-1U-91</p> </div> <div data-bbox="527 651 665 1039"> <p>TEST DATA: H0 = 0.85 ft rc = 0.083 ft rw = 0.333 ft L = 6.28 ft b = 7.9 ft H = 7.9 ft</p> </div> <div data-bbox="527 1039 665 1858"> <p>PARAMETER ESTIMATES: K = 0.0001252 ft/sec Y0 = 1.545 ft</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  </div>	
AGTESOLV	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																		
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																		
<p align="center">MW-1U-91 RISING HEAD TEST #3</p>																																			
<p>DATA SET: MW1U91.DAT 08/08/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 05/12/93 test well: MW-1U-91 obs. well: MW-1U-91</p> <p>TEST DATA: H0 = 0.75 ft rc = 0.083 ft rw = 0.333 ft L = 6.28 ft b = 7.9 ft H = 7.9 ft</p> <p>PARAMETER ESTIMATES: K = 0.000112 ft/sec Y0 = 1.154 ft</p>																																			
<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.001</td></tr> <tr><td>2</td><td>0.002</td></tr> <tr><td>4</td><td>0.004</td></tr> <tr><td>6</td><td>0.008</td></tr> <tr><td>8</td><td>0.015</td></tr> <tr><td>10</td><td>0.025</td></tr> <tr><td>12</td><td>0.04</td></tr> <tr><td>15</td><td>0.06</td></tr> <tr><td>20</td><td>0.1</td></tr> <tr><td>25</td><td>0.15</td></tr> <tr><td>30</td><td>0.25</td></tr> <tr><td>35</td><td>0.4</td></tr> <tr><td>40</td><td>0.6</td></tr> <tr><td>45</td><td>0.9</td></tr> <tr><td>50</td><td>1.2</td></tr> <tr><td>60</td><td>1.5</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.001	2	0.002	4	0.004	6	0.008	8	0.015	10	0.025	12	0.04	15	0.06	20	0.1	25	0.15	30	0.25	35	0.4	40	0.6	45	0.9	50	1.2	60	1.5
Time (sec)	Displacement (ft)																																		
0	0.001																																		
2	0.002																																		
4	0.004																																		
6	0.008																																		
8	0.015																																		
10	0.025																																		
12	0.04																																		
15	0.06																																		
20	0.1																																		
25	0.15																																		
30	0.25																																		
35	0.4																																		
40	0.6																																		
45	0.9																																		
50	1.2																																		
60	1.5																																		
<p align="right">AQTESOLV</p>																																			

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-2 FALLING HEAD TEST


DATA SET:
MW2FALL.DAT
08/04/95

AQUIFER MODEL:
Unconfined
SOLUTION METHOD:
Bouwer-Rice

PROJECT DATA:
test date: 06/15/95
test well: MW2
obs. well: MW2

TEST DATA:
H0 = 0.43 ft
rc = 0.083 ft
rw = 0.333 ft
L = 6. ft
b = 9.55 ft
H = 6.55 ft

PARAMETER ESTIMATES:
K = 0.0002892 ft/sec
Y0 = 0.4209 ft

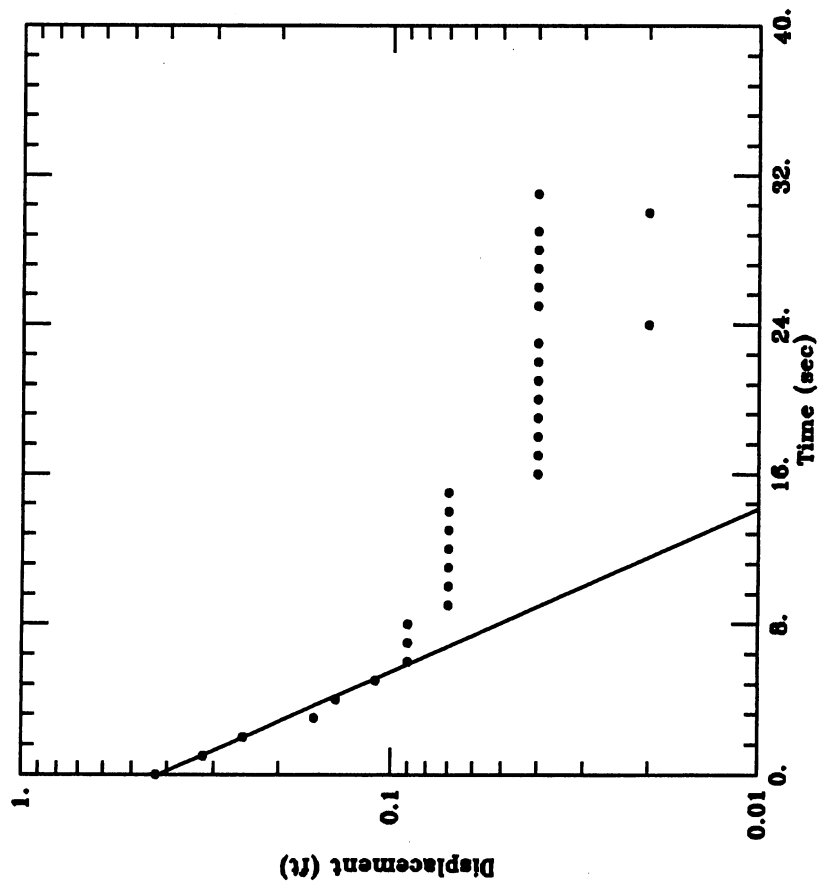


<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-2 RISING HEAD TEST</p>	
<p>DATA SET: MW2RISE.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/15/95 test well: MW2 obs. well: MW2</p> <p>TEST DATA: H0 = 0.78 ft rc = 0.083 ft rw = 0.333 ft L = 6. ft b = 9.55 ft H = 6.55 ft</p> <p>PARAMETER ESTIMATES: K = 0.0002575 ft/sec Y0 = 0.4108 ft</p>	
<p>The graph shows a semi-logarithmic plot of Displacement (ft) versus Time (sec). The y-axis (Displacement) is logarithmic, ranging from 0.01 to 1. The x-axis (Time) is linear, ranging from 0 to 30 seconds. The data points, represented by dots, show a linear relationship on this scale, indicating a Bouwer-Rice solution. A solid line represents the theoretical fit to the data.</p>	
<p>AGTESOLV</p>	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																		
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																		
<p>MW-2 FALLING HEAD TEST "A"</p>																																			
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2FALLA.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/23/95 test well: MW2 obs. well: MW2</p> <p>TEST DATA: H0 = 0.5 ft rc = 0.083 ft rw = 0.33 ft L = 6. ft b = 9.33 ft H = 6.33 ft</p> <p>PARAMETER ESTIMATES: K = 0.000109 ft/sec Y0 = 0.2224 ft</p> </div> <div style="width: 50%; text-align: center;"> <table border="1" style="margin: 10px auto;"> <caption>Approximate Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>1.0</td></tr> <tr><td>2</td><td>0.5</td></tr> <tr><td>4</td><td>0.3</td></tr> <tr><td>6</td><td>0.2</td></tr> <tr><td>8</td><td>0.15</td></tr> <tr><td>10</td><td>0.12</td></tr> <tr><td>12</td><td>0.1</td></tr> <tr><td>14</td><td>0.08</td></tr> <tr><td>16</td><td>0.07</td></tr> <tr><td>18</td><td>0.06</td></tr> <tr><td>20</td><td>0.05</td></tr> <tr><td>22</td><td>0.045</td></tr> <tr><td>24</td><td>0.04</td></tr> <tr><td>26</td><td>0.035</td></tr> <tr><td>28</td><td>0.03</td></tr> <tr><td>30</td><td>0.025</td></tr> </tbody> </table> </div> </div>		Time (sec)	Displacement (ft)	0	1.0	2	0.5	4	0.3	6	0.2	8	0.15	10	0.12	12	0.1	14	0.08	16	0.07	18	0.06	20	0.05	22	0.045	24	0.04	26	0.035	28	0.03	30	0.025
Time (sec)	Displacement (ft)																																		
0	1.0																																		
2	0.5																																		
4	0.3																																		
6	0.2																																		
8	0.15																																		
10	0.12																																		
12	0.1																																		
14	0.08																																		
16	0.07																																		
18	0.06																																		
20	0.05																																		
22	0.045																																		
24	0.04																																		
26	0.035																																		
28	0.03																																		
30	0.025																																		
<p>AGTESOLV</p>																																			

Client: Nepera Inc.	Company: Conestoga Rovers & Associates																		
Location: Former Lagoon Site	Project: 3698																		
MW-2 RISING HEAD TEST "A"																			
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2RISEA.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/23/95 test well: MW-2 obs. well: MW-2</p> <p>TEST DATA: H0 = 0.35 ft rc = 0.083 ft rw = 0.333 ft L = 6. ft b = 9.33 ft H = 6.33 ft</p> <p>PARAMETER ESTIMATES: K = 0.0001517 ft/sec y0 = 0.2165 ft</p> </div> <div style="width: 50%; text-align: center;"> <table border="1" style="margin: 10px auto;"> <caption>Approximate Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>0.25</td></tr> <tr><td>1.0</td><td>0.35</td></tr> <tr><td>2.0</td><td>0.50</td></tr> <tr><td>4.0</td><td>0.70</td></tr> <tr><td>8.0</td><td>1.00</td></tr> <tr><td>12.0</td><td>1.30</td></tr> <tr><td>16.0</td><td>1.60</td></tr> <tr><td>20.0</td><td>1.80</td></tr> </tbody> </table> </div> </div>		Time (sec)	Displacement (ft)	0.5	0.25	1.0	0.35	2.0	0.50	4.0	0.70	8.0	1.00	12.0	1.30	16.0	1.60	20.0	1.80
Time (sec)	Displacement (ft)																		
0.5	0.25																		
1.0	0.35																		
2.0	0.50																		
4.0	0.70																		
8.0	1.00																		
12.0	1.30																		
16.0	1.60																		
20.0	1.80																		
AGTESOLV																			

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																		
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																		
<p>MW2 FALLING HEAD TEST "B"</p>																																			
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2FALLB.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/15/95 test well: MW2 obs. well: MW2</p> <p>TEST DATA: H0 = 0.46 ft rc = 0.083 ft rw = 0.333 ft L = 6. ft b = 6.55 ft H = 6.55 ft</p> <p>PARAMETER ESTIMATES: K = 0.0003235 ft/sec Y0 = 0.317 ft</p> </div> <div style="width: 50%; text-align: center;"> <table border="1" style="margin: 10px auto;"> <caption>Approximate data points from the plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.46</td></tr> <tr><td>2</td><td>0.35</td></tr> <tr><td>4</td><td>0.28</td></tr> <tr><td>6</td><td>0.22</td></tr> <tr><td>8</td><td>0.18</td></tr> <tr><td>10</td><td>0.15</td></tr> <tr><td>12</td><td>0.13</td></tr> <tr><td>14</td><td>0.11</td></tr> <tr><td>16</td><td>0.10</td></tr> <tr><td>18</td><td>0.09</td></tr> <tr><td>20</td><td>0.08</td></tr> <tr><td>22</td><td>0.075</td></tr> <tr><td>24</td><td>0.07</td></tr> <tr><td>26</td><td>0.065</td></tr> <tr><td>28</td><td>0.06</td></tr> <tr><td>30</td><td>0.055</td></tr> </tbody> </table> </div> </div>		Time (sec)	Displacement (ft)	0	0.46	2	0.35	4	0.28	6	0.22	8	0.18	10	0.15	12	0.13	14	0.11	16	0.10	18	0.09	20	0.08	22	0.075	24	0.07	26	0.065	28	0.06	30	0.055
Time (sec)	Displacement (ft)																																		
0	0.46																																		
2	0.35																																		
4	0.28																																		
6	0.22																																		
8	0.18																																		
10	0.15																																		
12	0.13																																		
14	0.11																																		
16	0.10																																		
18	0.09																																		
20	0.08																																		
22	0.075																																		
24	0.07																																		
26	0.065																																		
28	0.06																																		
30	0.055																																		
<p>AGTESDLY</p>																																			

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																												
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																												
<p align="center">MW-2 RISING HEAD TEST "B"</p>																																													
<p>DATA SET: MW2RISEB.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>																																												
<p>PROJECT DATA: test date: 06/15/95 test well: MW-2 obs. well: MW-2</p>	<p>TEST DATA: H0 = 0.51 ft rc = 0.083 ft rw = 0.33 ft L = 6. ft b = 9.55 ft H = 6.55 ft</p>																																												
<p>PARAMETER ESTIMATES: K = 0.0002738 ft/sec Y0 = 0.4219 ft</p>																																													
<table border="1"> <caption>Estimated Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>0.25</td></tr> <tr><td>1.0</td><td>0.35</td></tr> <tr><td>2.0</td><td>0.50</td></tr> <tr><td>3.0</td><td>0.65</td></tr> <tr><td>4.0</td><td>0.80</td></tr> <tr><td>5.0</td><td>0.95</td></tr> <tr><td>6.0</td><td>1.10</td></tr> <tr><td>7.0</td><td>1.25</td></tr> <tr><td>8.0</td><td>1.40</td></tr> <tr><td>9.0</td><td>1.55</td></tr> <tr><td>10.0</td><td>1.70</td></tr> <tr><td>11.0</td><td>1.85</td></tr> <tr><td>12.0</td><td>2.00</td></tr> <tr><td>13.0</td><td>2.15</td></tr> <tr><td>14.0</td><td>2.30</td></tr> <tr><td>15.0</td><td>2.45</td></tr> <tr><td>16.0</td><td>2.60</td></tr> <tr><td>17.0</td><td>2.75</td></tr> <tr><td>18.0</td><td>2.90</td></tr> <tr><td>19.0</td><td>3.05</td></tr> <tr><td>20.0</td><td>3.20</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0.5	0.25	1.0	0.35	2.0	0.50	3.0	0.65	4.0	0.80	5.0	0.95	6.0	1.10	7.0	1.25	8.0	1.40	9.0	1.55	10.0	1.70	11.0	1.85	12.0	2.00	13.0	2.15	14.0	2.30	15.0	2.45	16.0	2.60	17.0	2.75	18.0	2.90	19.0	3.05	20.0	3.20
Time (sec)	Displacement (ft)																																												
0.5	0.25																																												
1.0	0.35																																												
2.0	0.50																																												
3.0	0.65																																												
4.0	0.80																																												
5.0	0.95																																												
6.0	1.10																																												
7.0	1.25																																												
8.0	1.40																																												
9.0	1.55																																												
10.0	1.70																																												
11.0	1.85																																												
12.0	2.00																																												
13.0	2.15																																												
14.0	2.30																																												
15.0	2.45																																												
16.0	2.60																																												
17.0	2.75																																												
18.0	2.90																																												
19.0	3.05																																												
20.0	3.20																																												
<p align="right">AQTESOLV</p>																																													

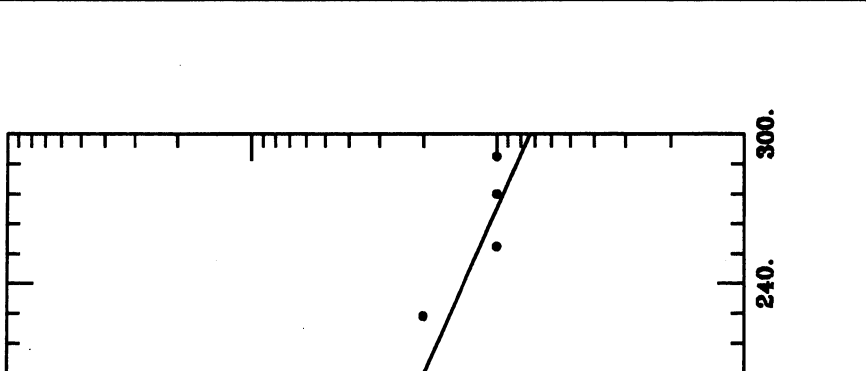Client: Nepera Inc.	Company: Conestoga Rovers & Associates																																																																
Location: Former Lagoon Site	Project: 3698																																																																
SW-2 FALLING HEAD TEST																																																																	
DATA SET: SW2FALL.DAT 08/04/95	AGUIFER MODEL: Unconfined SOLUTION METHOD: Bouwer-Rice																																																																
PROJECT DATA: test date: 06/14/95 test well: SW-2 obs. well: SW-2	TEST DATA: H0 = 0.14 ft rc = 0.166 ft rw = 0.287 ft L = 11. ft b = 11.26 ft H = 11.26 ft																																																																
PARAMETER ESTIMATES: K = 3.622E-05 ft/sec Y0 = 0.164 ft																																																																	
 <table border="1" data-bbox="511 661 1372 1029"> <caption>Approximate data points from the Displacement vs Time plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.2</td></tr> <tr><td>10</td><td>0.15</td></tr> <tr><td>20</td><td>0.12</td></tr> <tr><td>30</td><td>0.1</td></tr> <tr><td>40</td><td>0.08</td></tr> <tr><td>50</td><td>0.07</td></tr> <tr><td>60</td><td>0.06</td></tr> <tr><td>70</td><td>0.05</td></tr> <tr><td>80</td><td>0.045</td></tr> <tr><td>90</td><td>0.04</td></tr> <tr><td>100</td><td>0.035</td></tr> <tr><td>110</td><td>0.03</td></tr> <tr><td>120</td><td>0.025</td></tr> <tr><td>130</td><td>0.02</td></tr> <tr><td>140</td><td>0.018</td></tr> <tr><td>150</td><td>0.016</td></tr> <tr><td>160</td><td>0.014</td></tr> <tr><td>170</td><td>0.012</td></tr> <tr><td>180</td><td>0.01</td></tr> <tr><td>190</td><td>0.009</td></tr> <tr><td>200</td><td>0.008</td></tr> <tr><td>210</td><td>0.007</td></tr> <tr><td>220</td><td>0.006</td></tr> <tr><td>230</td><td>0.005</td></tr> <tr><td>240</td><td>0.0045</td></tr> <tr><td>250</td><td>0.004</td></tr> <tr><td>260</td><td>0.0035</td></tr> <tr><td>270</td><td>0.003</td></tr> <tr><td>280</td><td>0.0025</td></tr> <tr><td>290</td><td>0.002</td></tr> <tr><td>300</td><td>0.0015</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.2	10	0.15	20	0.12	30	0.1	40	0.08	50	0.07	60	0.06	70	0.05	80	0.045	90	0.04	100	0.035	110	0.03	120	0.025	130	0.02	140	0.018	150	0.016	160	0.014	170	0.012	180	0.01	190	0.009	200	0.008	210	0.007	220	0.006	230	0.005	240	0.0045	250	0.004	260	0.0035	270	0.003	280	0.0025	290	0.002	300	0.0015
Time (sec)	Displacement (ft)																																																																
0	0.2																																																																
10	0.15																																																																
20	0.12																																																																
30	0.1																																																																
40	0.08																																																																
50	0.07																																																																
60	0.06																																																																
70	0.05																																																																
80	0.045																																																																
90	0.04																																																																
100	0.035																																																																
110	0.03																																																																
120	0.025																																																																
130	0.02																																																																
140	0.018																																																																
150	0.016																																																																
160	0.014																																																																
170	0.012																																																																
180	0.01																																																																
190	0.009																																																																
200	0.008																																																																
210	0.007																																																																
220	0.006																																																																
230	0.005																																																																
240	0.0045																																																																
250	0.004																																																																
260	0.0035																																																																
270	0.003																																																																
280	0.0025																																																																
290	0.002																																																																
300	0.0015																																																																
AGTESOLV																																																																	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																												
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																												
<p>SW-2 RISING HEAD TEST</p>																																													
<div style="display: flex; justify-content: space-between;"> <div data-bbox="503 241 665 651"> <p>DATA SET: SW2RISE.DAT 08/04/95</p> </div> <div data-bbox="665 241 795 651"> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> </div> <div data-bbox="795 241 925 651"> <p>PROJECT DATA: test date: 06/14/95 test well: SW-2 obs. well: SW-2</p> </div> <div data-bbox="925 241 1055 651"> <p>TEST DATA: H0 = 0.26 ft rc = 0.166 ft rw = 0.287 ft L = 11. ft b = 11.26 ft H = 11.26 ft</p> </div> <div data-bbox="1055 241 1380 651"> <p>PARAMETER ESTIMATES: K = 2.854E-05 ft/sec y0 = 0.2762 ft</p> </div> </div>																																													
<table border="1" style="margin-top: 10px;"> <caption>Approximate data points from the plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.05</td></tr> <tr><td>10</td><td>0.06</td></tr> <tr><td>20</td><td>0.07</td></tr> <tr><td>30</td><td>0.08</td></tr> <tr><td>40</td><td>0.09</td></tr> <tr><td>50</td><td>0.10</td></tr> <tr><td>60</td><td>0.11</td></tr> <tr><td>70</td><td>0.12</td></tr> <tr><td>80</td><td>0.13</td></tr> <tr><td>90</td><td>0.14</td></tr> <tr><td>100</td><td>0.15</td></tr> <tr><td>120</td><td>0.17</td></tr> <tr><td>140</td><td>0.19</td></tr> <tr><td>160</td><td>0.21</td></tr> <tr><td>180</td><td>0.23</td></tr> <tr><td>200</td><td>0.25</td></tr> <tr><td>220</td><td>0.27</td></tr> <tr><td>240</td><td>0.29</td></tr> <tr><td>260</td><td>0.31</td></tr> <tr><td>280</td><td>0.33</td></tr> <tr><td>300</td><td>0.35</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.05	10	0.06	20	0.07	30	0.08	40	0.09	50	0.10	60	0.11	70	0.12	80	0.13	90	0.14	100	0.15	120	0.17	140	0.19	160	0.21	180	0.23	200	0.25	220	0.27	240	0.29	260	0.31	280	0.33	300	0.35
Time (sec)	Displacement (ft)																																												
0	0.05																																												
10	0.06																																												
20	0.07																																												
30	0.08																																												
40	0.09																																												
50	0.10																																												
60	0.11																																												
70	0.12																																												
80	0.13																																												
90	0.14																																												
100	0.15																																												
120	0.17																																												
140	0.19																																												
160	0.21																																												
180	0.23																																												
200	0.25																																												
220	0.27																																												
240	0.29																																												
260	0.31																																												
280	0.33																																												
300	0.35																																												
<p>AGTESOLV</p>																																													

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																												
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																												
<p align="center">SW-2 RISING HEAD TEST "A"</p>																																													
<p>DATA SET: SW2RISE1.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/26/95 test well: SW-2 obs. well: SW-2</p> <p>TEST DATA: H0 = 0.74 ft rc = 0.166 ft rw = 0.287 ft L = 9.76 ft b = 9.76 ft H = 9.76 ft</p> <p>PARAMETER ESTIMATES: K = 0.001245 ft/min Y0 = 0.6038 ft</p>																																													
<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (min)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0.5</td><td>0.15</td></tr> <tr><td>1.0</td><td>0.20</td></tr> <tr><td>2.0</td><td>0.30</td></tr> <tr><td>3.0</td><td>0.40</td></tr> <tr><td>4.0</td><td>0.50</td></tr> <tr><td>5.0</td><td>0.60</td></tr> <tr><td>6.0</td><td>0.70</td></tr> <tr><td>7.0</td><td>0.80</td></tr> <tr><td>8.0</td><td>0.90</td></tr> <tr><td>9.0</td><td>1.00</td></tr> <tr><td>10.0</td><td>1.10</td></tr> <tr><td>11.0</td><td>1.20</td></tr> <tr><td>12.0</td><td>1.30</td></tr> <tr><td>13.0</td><td>1.40</td></tr> <tr><td>14.0</td><td>1.50</td></tr> <tr><td>15.0</td><td>1.60</td></tr> <tr><td>16.0</td><td>1.70</td></tr> <tr><td>17.0</td><td>1.80</td></tr> <tr><td>18.0</td><td>1.90</td></tr> <tr><td>19.0</td><td>2.00</td></tr> <tr><td>20.0</td><td>2.10</td></tr> </tbody> </table>		Time (min)	Displacement (ft)	0.5	0.15	1.0	0.20	2.0	0.30	3.0	0.40	4.0	0.50	5.0	0.60	6.0	0.70	7.0	0.80	8.0	0.90	9.0	1.00	10.0	1.10	11.0	1.20	12.0	1.30	13.0	1.40	14.0	1.50	15.0	1.60	16.0	1.70	17.0	1.80	18.0	1.90	19.0	2.00	20.0	2.10
Time (min)	Displacement (ft)																																												
0.5	0.15																																												
1.0	0.20																																												
2.0	0.30																																												
3.0	0.40																																												
4.0	0.50																																												
5.0	0.60																																												
6.0	0.70																																												
7.0	0.80																																												
8.0	0.90																																												
9.0	1.00																																												
10.0	1.10																																												
11.0	1.20																																												
12.0	1.30																																												
13.0	1.40																																												
14.0	1.50																																												
15.0	1.60																																												
16.0	1.70																																												
17.0	1.80																																												
18.0	1.90																																												
19.0	2.00																																												
20.0	2.10																																												
<p align="right">AGTESOLV</p>																																													


Client: Nepera Inc.	Company: Conestoga Rovers & Associates								
Location: Former Lagoon Site	Project: 3698								
MW-3 FALLING HEAD TEST									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;"> DATA SET: MW3FALL.DAT 08/04/95 </td> <td style="width: 25%;"> AQUIFER MODEL: Unconfined </td> </tr> <tr> <td> SOLUTION METHOD: Bouwer-Rice </td> <td> PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3 </td> </tr> <tr> <td colspan="2"> TEST DATA: H0 = 0.82 ft rc = 0.083 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft </td> </tr> <tr> <td colspan="2"> PARAMETER ESTIMATES: K = 1.617E-05 ft/sec Y0 = 0.5598 ft </td> </tr> </table>		DATA SET: MW3FALL.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3	TEST DATA: H0 = 0.82 ft rc = 0.083 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft		PARAMETER ESTIMATES: K = 1.617E-05 ft/sec Y0 = 0.5598 ft	
DATA SET: MW3FALL.DAT 08/04/95	AQUIFER MODEL: Unconfined								
SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3								
TEST DATA: H0 = 0.82 ft rc = 0.083 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft									
PARAMETER ESTIMATES: K = 1.617E-05 ft/sec Y0 = 0.5598 ft									
<div style="text-align: center;"> </div>									
AGTESOLV									

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>														
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>														
<p align="center">MW-3 RISING HEAD TEST</p>															
<table border="1"> <tr> <td data-bbox="430 243 527 661"> <p>DATA SET: MWRISE.DAT 08/04/95</p> </td> <td data-bbox="527 243 673 661"> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> </td> </tr> <tr> <td colspan="2" data-bbox="673 243 803 661"> <p>PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3</p> </td> </tr> <tr> <td colspan="2" data-bbox="803 243 1015 661"> <p>TEST DATA: H0 = 0.71 ft rc = 0.089 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft</p> </td> </tr> <tr> <td colspan="2" data-bbox="1015 243 1380 661"> <p>PARAMETER ESTIMATES: K = 2.338E-05 ft/sec y0 = 0.7004 ft</p> </td> </tr> </table>		<p>DATA SET: MWRISE.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>	<p>PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3</p>		<p>TEST DATA: H0 = 0.71 ft rc = 0.089 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft</p>		<p>PARAMETER ESTIMATES: K = 2.338E-05 ft/sec y0 = 0.7004 ft</p>							
<p>DATA SET: MWRISE.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>														
<p>PROJECT DATA: test date: 06/23/95 test well: MW-3 obs. well: MW-3</p>															
<p>TEST DATA: H0 = 0.71 ft rc = 0.089 ft rw = 0.33 ft L = 4.68 ft b = 6.45 ft H = 6.45 ft</p>															
<p>PARAMETER ESTIMATES: K = 2.338E-05 ft/sec y0 = 0.7004 ft</p>															
<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.15</td></tr> <tr><td>18</td><td>0.25</td></tr> <tr><td>36</td><td>0.40</td></tr> <tr><td>54</td><td>0.60</td></tr> <tr><td>72</td><td>0.75</td></tr> <tr><td>90</td><td>0.85</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.15	18	0.25	36	0.40	54	0.60	72	0.75	90	0.85
Time (sec)	Displacement (ft)														
0	0.15														
18	0.25														
36	0.40														
54	0.60														
72	0.75														
90	0.85														
<p align="right">AGTESOLV</p>															

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																																																
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																																																
<p align="center">SW-3 RISING HEAD TEST</p>																																																																	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: SWRISE.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/23/95 test well: SW3 obs. well: SW3</p> <p>TEST DATA: H0 = 0.23 ft rc = 0.166 ft rw = 0.287 ft L = 2.62 ft b = 2.62 ft H = 2.62 ft</p> <p>PARAMETER ESTIMATES: K = 0.0001106 ft/sec Y0 = 0.2112 ft</p> </div> <div style="width: 45%; text-align: right;"> <p>AGTESOLV</p> </div> </div>																																																																	
<table border="1"> <caption>Approximate data points from the plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.01</td></tr> <tr><td>10</td><td>0.02</td></tr> <tr><td>20</td><td>0.03</td></tr> <tr><td>30</td><td>0.04</td></tr> <tr><td>40</td><td>0.05</td></tr> <tr><td>50</td><td>0.06</td></tr> <tr><td>60</td><td>0.07</td></tr> <tr><td>70</td><td>0.08</td></tr> <tr><td>80</td><td>0.09</td></tr> <tr><td>90</td><td>0.10</td></tr> <tr><td>100</td><td>0.11</td></tr> <tr><td>110</td><td>0.12</td></tr> <tr><td>120</td><td>0.13</td></tr> <tr><td>130</td><td>0.14</td></tr> <tr><td>140</td><td>0.15</td></tr> <tr><td>150</td><td>0.16</td></tr> <tr><td>160</td><td>0.17</td></tr> <tr><td>170</td><td>0.18</td></tr> <tr><td>180</td><td>0.19</td></tr> <tr><td>190</td><td>0.20</td></tr> <tr><td>200</td><td>0.21</td></tr> <tr><td>210</td><td>0.22</td></tr> <tr><td>220</td><td>0.23</td></tr> <tr><td>230</td><td>0.24</td></tr> <tr><td>240</td><td>0.25</td></tr> <tr><td>250</td><td>0.26</td></tr> <tr><td>260</td><td>0.27</td></tr> <tr><td>270</td><td>0.28</td></tr> <tr><td>280</td><td>0.29</td></tr> <tr><td>290</td><td>0.30</td></tr> <tr><td>300</td><td>0.31</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.01	10	0.02	20	0.03	30	0.04	40	0.05	50	0.06	60	0.07	70	0.08	80	0.09	90	0.10	100	0.11	110	0.12	120	0.13	130	0.14	140	0.15	150	0.16	160	0.17	170	0.18	180	0.19	190	0.20	200	0.21	210	0.22	220	0.23	230	0.24	240	0.25	250	0.26	260	0.27	270	0.28	280	0.29	290	0.30	300	0.31
Time (sec)	Displacement (ft)																																																																
0	0.01																																																																
10	0.02																																																																
20	0.03																																																																
30	0.04																																																																
40	0.05																																																																
50	0.06																																																																
60	0.07																																																																
70	0.08																																																																
80	0.09																																																																
90	0.10																																																																
100	0.11																																																																
110	0.12																																																																
120	0.13																																																																
130	0.14																																																																
140	0.15																																																																
150	0.16																																																																
160	0.17																																																																
170	0.18																																																																
180	0.19																																																																
190	0.20																																																																
200	0.21																																																																
210	0.22																																																																
220	0.23																																																																
230	0.24																																																																
240	0.25																																																																
250	0.26																																																																
260	0.27																																																																
270	0.28																																																																
280	0.29																																																																
290	0.30																																																																
300	0.31																																																																

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																												
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																												
<p align="center">SW-4 RISING HEAD TEST</p>																																													
<table border="1"> <tr> <td data-bbox="422 241 527 661"> <p>DATA SET: SW4RISE.DAT 08/04/95</p> </td> <td data-bbox="527 241 665 661"> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> </td> </tr> <tr> <td colspan="2" data-bbox="665 241 795 661"> <p>PROJECT DATA: test date: 07/27/95 test well: SW-4 obs. well: SW-4</p> </td> </tr> <tr> <td colspan="2" data-bbox="795 241 998 661"> <p>TEST DATA: H0 = 1.05 ft rc = 0.166 ft rW = 0.287 ft L = 7.06 ft b = 7.06 ft H = 7.06 ft</p> </td> </tr> <tr> <td colspan="2" data-bbox="998 241 1380 661"> <p>PARAMETER ESTIMATES: K = 0.0002103 ft/min Y0 = 0.9955 ft</p> </td> </tr> </table>		<p>DATA SET: SW4RISE.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>	<p>PROJECT DATA: test date: 07/27/95 test well: SW-4 obs. well: SW-4</p>		<p>TEST DATA: H0 = 1.05 ft rc = 0.166 ft rW = 0.287 ft L = 7.06 ft b = 7.06 ft H = 7.06 ft</p>		<p>PARAMETER ESTIMATES: K = 0.0002103 ft/min Y0 = 0.9955 ft</p>																																					
<p>DATA SET: SW4RISE.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>																																												
<p>PROJECT DATA: test date: 07/27/95 test well: SW-4 obs. well: SW-4</p>																																													
<p>TEST DATA: H0 = 1.05 ft rc = 0.166 ft rW = 0.287 ft L = 7.06 ft b = 7.06 ft H = 7.06 ft</p>																																													
<p>PARAMETER ESTIMATES: K = 0.0002103 ft/min Y0 = 0.9955 ft</p>																																													
<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (min)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.01</td></tr> <tr><td>10</td><td>0.02</td></tr> <tr><td>20</td><td>0.03</td></tr> <tr><td>30</td><td>0.04</td></tr> <tr><td>40</td><td>0.05</td></tr> <tr><td>50</td><td>0.06</td></tr> <tr><td>60</td><td>0.07</td></tr> <tr><td>70</td><td>0.08</td></tr> <tr><td>80</td><td>0.09</td></tr> <tr><td>90</td><td>0.10</td></tr> <tr><td>100</td><td>0.11</td></tr> <tr><td>110</td><td>0.12</td></tr> <tr><td>120</td><td>0.13</td></tr> <tr><td>130</td><td>0.14</td></tr> <tr><td>140</td><td>0.15</td></tr> <tr><td>150</td><td>0.16</td></tr> <tr><td>160</td><td>0.17</td></tr> <tr><td>170</td><td>0.18</td></tr> <tr><td>180</td><td>0.19</td></tr> <tr><td>190</td><td>0.20</td></tr> <tr><td>200</td><td>0.21</td></tr> </tbody> </table>		Time (min)	Displacement (ft)	0	0.01	10	0.02	20	0.03	30	0.04	40	0.05	50	0.06	60	0.07	70	0.08	80	0.09	90	0.10	100	0.11	110	0.12	120	0.13	130	0.14	140	0.15	150	0.16	160	0.17	170	0.18	180	0.19	190	0.20	200	0.21
Time (min)	Displacement (ft)																																												
0	0.01																																												
10	0.02																																												
20	0.03																																												
30	0.04																																												
40	0.05																																												
50	0.06																																												
60	0.07																																												
70	0.08																																												
80	0.09																																												
90	0.10																																												
100	0.11																																												
110	0.12																																												
120	0.13																																												
130	0.14																																												
140	0.15																																												
150	0.16																																												
160	0.17																																												
170	0.18																																												
180	0.19																																												
190	0.20																																												
200	0.21																																												
<p align="right">AGTESOLV</p>																																													


<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																										
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																										
<p>MW-5U FALLING HEAD TEST</p>																											
<div style="display: flex; justify-content: space-between;"> <div data-bbox="446 241 527 661" style="width: 20%;"> <p>DATA SET: MM5UFALL.DAT 08/04/95</p> </div> <div data-bbox="544 241 673 661" style="width: 20%;"> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> </div> <div data-bbox="690 241 803 661" style="width: 20%;"> <p>PROJECT DATA: test date: 06/28/95 test well: MW-5U obs. well: MW-5U</p> </div> <div data-bbox="820 241 1015 661" style="width: 20%;"> <p>TEST DATA: H0 = 1.09 ft rc = 0.083 ft rw = 0.333 ft L = 13.41 ft b = 15.51 ft H = 13.41 ft</p> </div> <div data-bbox="1031 241 1372 661" style="width: 20%;"> <p>PARAMETER ESTIMATES: K = 1.338E-05 ft/sec y0 = 0.769 ft</p> </div> </div> <div data-bbox="446 682 1372 1879" style="text-align: center; margin-top: 20px;"> <table border="1" style="margin-top: 10px; width: 100%; border-collapse: collapse;"> <caption>Estimated Data Points from Plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>1.0</td></tr> <tr><td>5</td><td>0.8</td></tr> <tr><td>10</td><td>0.65</td></tr> <tr><td>20</td><td>0.45</td></tr> <tr><td>30</td><td>0.35</td></tr> <tr><td>40</td><td>0.28</td></tr> <tr><td>50</td><td>0.23</td></tr> <tr><td>60</td><td>0.19</td></tr> <tr><td>70</td><td>0.16</td></tr> <tr><td>80</td><td>0.14</td></tr> <tr><td>90</td><td>0.12</td></tr> <tr><td>100</td><td>0.11</td></tr> </tbody> </table> </div>		Time (sec)	Displacement (ft)	0	1.0	5	0.8	10	0.65	20	0.45	30	0.35	40	0.28	50	0.23	60	0.19	70	0.16	80	0.14	90	0.12	100	0.11
Time (sec)	Displacement (ft)																										
0	1.0																										
5	0.8																										
10	0.65																										
20	0.45																										
30	0.35																										
40	0.28																										
50	0.23																										
60	0.19																										
70	0.16																										
80	0.14																										
90	0.12																										
100	0.11																										
<p>AGTESOLV</p>																											

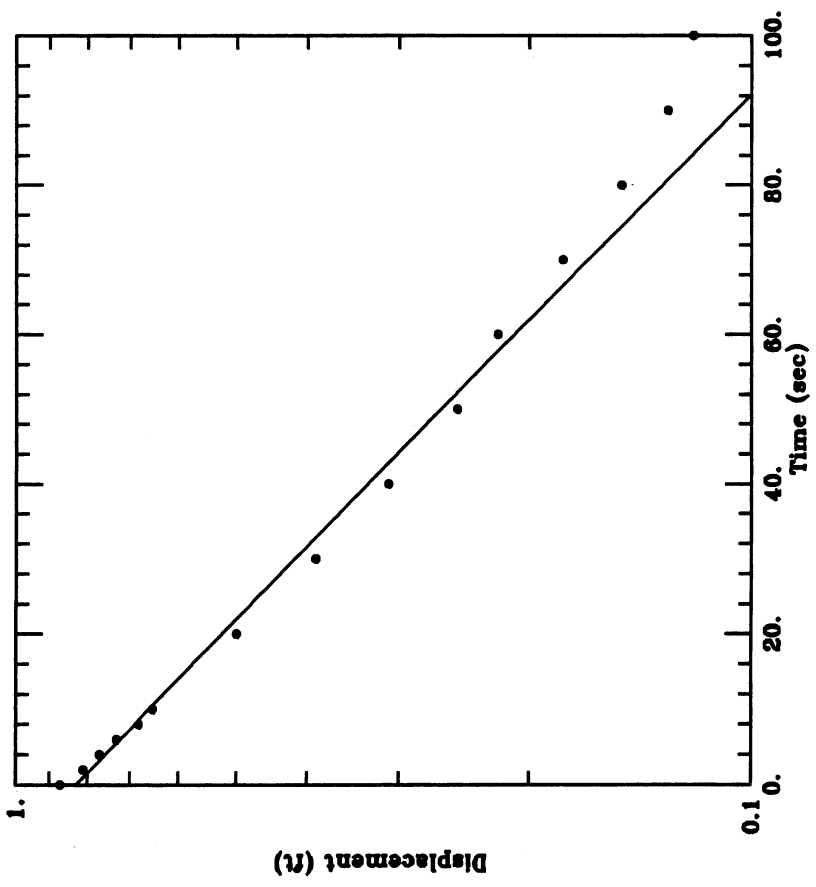Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-5U RISING HEAD TEST	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW5U1RIS.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/28/95 test well: MW-5U obs. well: MW-5U</p> <p>TEST DATA: H0 = 0.87 ft rc = 0.083 ft rw = 0.333 ft L = 13.41 ft b = 15.51 ft H = 13.41 ft</p> <p>PARAMETER ESTIMATES: K = 1.521E-05 ft./sec y0 = 0.8276 ft</p> </div> <div style="width: 50%; text-align: center;">  </div> </div>	
AGTESOLV	

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-7 FALLING HEAD TEST

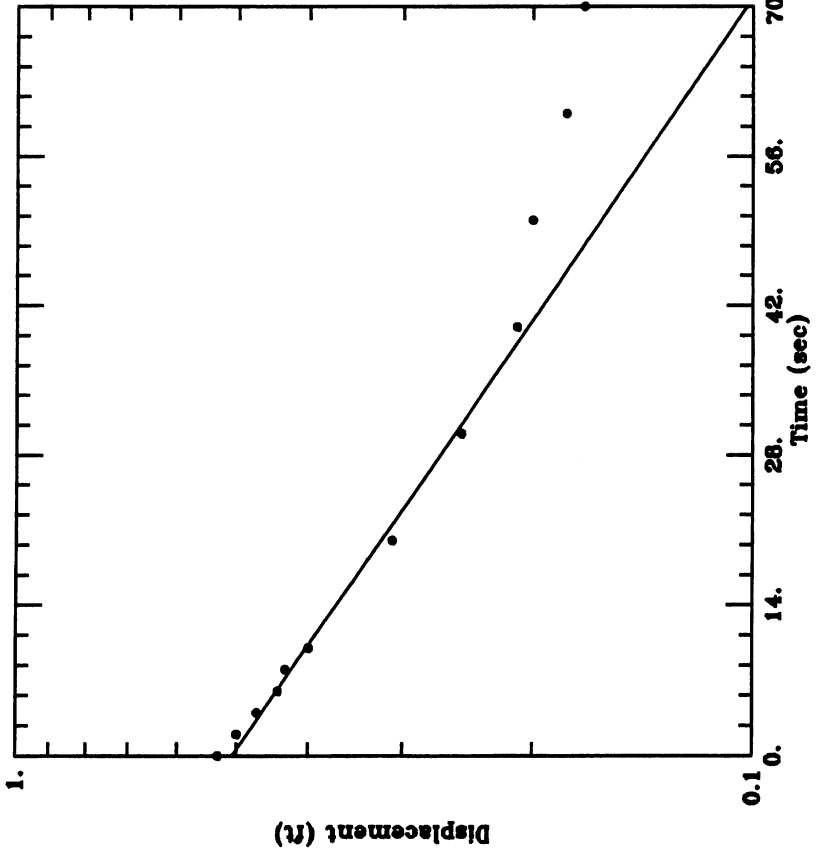

DATA SET:
MW7FALL.DAT
08/04/95

AQUIFER MODEL:
Unconfined

SOLUTION METHOD:
Bouwer-Rice

PROJECT DATA:
test date: 06/27/95
test well: MW7
obs. well: MW7

TEST DATA:
H0 = 0.53 ft
rc = 0.083 ft
rw = 0.333 ft
L = 4.46 ft
b = 4.46 ft
H = 4.46 ft

PARAMETER ESTIMATES:
K = 3.323E-05 ft/sec
y0 = 0.5058 ft

Client: Nepera Inc.	Company: Conestoga Rovers & Associates																																												
Location: Former Lagoon Site	Project: 3698																																												
MW-7 RISING HEAD TEST																																													
<p>DATA SET: MW7RISE.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/27/95 test well: MW7 obs. well: MW7</p> <p>TEST DATA: H0 = 0.64 ft rC = 0.083 ft rW = 0.333 ft L = 4.46 ft b = 4.46 ft H = 4.46 ft</p> <p>PARAMETER ESTIMATES: K = 6.264E-05 ft/sec Y0 = 0.4919 ft</p>	<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.05</td></tr> <tr><td>4</td><td>0.06</td></tr> <tr><td>8</td><td>0.07</td></tr> <tr><td>12</td><td>0.08</td></tr> <tr><td>16</td><td>0.09</td></tr> <tr><td>20</td><td>0.10</td></tr> <tr><td>24</td><td>0.11</td></tr> <tr><td>28</td><td>0.12</td></tr> <tr><td>32</td><td>0.13</td></tr> <tr><td>36</td><td>0.14</td></tr> <tr><td>40</td><td>0.15</td></tr> <tr><td>44</td><td>0.16</td></tr> <tr><td>48</td><td>0.17</td></tr> <tr><td>52</td><td>0.18</td></tr> <tr><td>56</td><td>0.19</td></tr> <tr><td>60</td><td>0.20</td></tr> <tr><td>64</td><td>0.21</td></tr> <tr><td>68</td><td>0.22</td></tr> <tr><td>72</td><td>0.23</td></tr> <tr><td>76</td><td>0.24</td></tr> <tr><td>80</td><td>0.25</td></tr> </tbody> </table>	Time (sec)	Displacement (ft)	0	0.05	4	0.06	8	0.07	12	0.08	16	0.09	20	0.10	24	0.11	28	0.12	32	0.13	36	0.14	40	0.15	44	0.16	48	0.17	52	0.18	56	0.19	60	0.20	64	0.21	68	0.22	72	0.23	76	0.24	80	0.25
Time (sec)	Displacement (ft)																																												
0	0.05																																												
4	0.06																																												
8	0.07																																												
12	0.08																																												
16	0.09																																												
20	0.10																																												
24	0.11																																												
28	0.12																																												
32	0.13																																												
36	0.14																																												
40	0.15																																												
44	0.16																																												
48	0.17																																												
52	0.18																																												
56	0.19																																												
60	0.20																																												
64	0.21																																												
68	0.22																																												
72	0.23																																												
76	0.24																																												
80	0.25																																												
AQTESOLV																																													

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

SW-8 RISING HEAD TEST

DATA SET:
SWRISE.DAT
08/04/95


AQUIFER MODEL:
Unconfined

SOLUTION METHOD:
Bouwer-Rice

PROJECT DATA:
test date: 07/27/95
test well: SW-8
obs. well: SW-8

TEST DATA:
H0 = 0.85 ft
rc = 0.166 ft
rw = 0.287 ft
L = 2.42 ft
b = 2.42 ft
H = 2.42 ft

PARAMETER ESTIMATES:
K = 0.00103 ft/min
y0 = 0.8268 ft

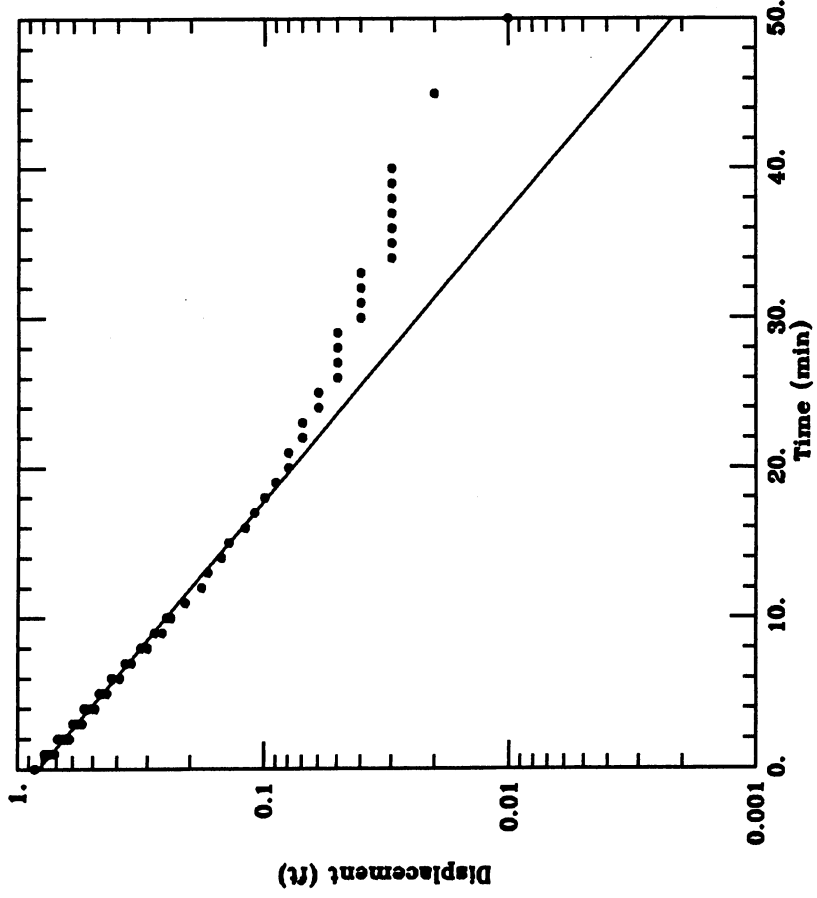

AGTESOLV

Client: Nepera Inc.	Company: Conestoga Rovers & Associates								
Location: Former Lagoon Site	Project: 3698								
MW-8U FALLING HEAD TEST									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;"> DATA SET: MWBUFALL.DAT 08/04/95 </td> <td style="width: 25%;"> AQUIFER MODEL: Unconfined </td> </tr> <tr> <td> SOLUTION METHOD: Bouwer-Rice </td> <td> PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U </td> </tr> <tr> <td colspan="2"> TEST DATA: H0 = 1.13 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft </td> </tr> <tr> <td colspan="2"> PARAMETER ESTIMATES: K = 6.807E-06 ft/sec y0 = 0.8933 ft </td> </tr> </table>		DATA SET: MWBUFALL.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U	TEST DATA: H0 = 1.13 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft		PARAMETER ESTIMATES: K = 6.807E-06 ft/sec y0 = 0.8933 ft	
DATA SET: MWBUFALL.DAT 08/04/95	AQUIFER MODEL: Unconfined								
SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U								
TEST DATA: H0 = 1.13 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft									
PARAMETER ESTIMATES: K = 6.807E-06 ft/sec y0 = 0.8933 ft									
<div style="text-align: center;"> <p>The figure is a semi-logarithmic plot showing the relationship between Displacement (ft) on the y-axis and Time (sec) on the x-axis. The y-axis ranges from 0.1 to 1.0 on a logarithmic scale. The x-axis ranges from 0 to 200 on a linear scale. The data points, represented by solid circles, show a linear trend on this semi-log plot, which is characteristic of a falling head test. A straight line is drawn through the data points, starting from approximately (0, 1.0) and extending to (200, 0.1).</p> </div>									
AGTESOLV									

Client: Nepera Inc.	Company: Conestoga Rovers & Associates																																		
Location: Former Lagoon Site	Project: 3698																																		
MW-8U RISING HEAD TEST																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;"> DATA SET: MMBURISE.DAT 08/04/95 </td> <td style="width: 25%;"> AQUIFER MODEL: Unconfined </td> <td style="width: 25%;"> SOLUTION METHOD: Bouwer-Rice </td> <td style="width: 25%;"> PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U </td> </tr> <tr> <td colspan="4"> TEST DATA: H0 = 0.92 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft </td> </tr> <tr> <td colspan="4"> PARAMETER ESTIMATES: K = 7.94E-06 ft/sec y0 = 0.8798 ft </td> </tr> </table>		DATA SET: MMBURISE.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U	TEST DATA: H0 = 0.92 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft				PARAMETER ESTIMATES: K = 7.94E-06 ft/sec y0 = 0.8798 ft																									
DATA SET: MMBURISE.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/29/95 test well: MW-8U obs. well: MW-8U																																
TEST DATA: H0 = 0.92 ft rc = 0.083 ft rw = 0.333 ft L = 6.2 ft b = 7.98 ft H = 7.98 ft																																			
PARAMETER ESTIMATES: K = 7.94E-06 ft/sec y0 = 0.8798 ft																																			
<table border="1" style="margin: 10px auto; border-collapse: collapse;"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.15</td></tr> <tr><td>10</td><td>0.18</td></tr> <tr><td>20</td><td>0.22</td></tr> <tr><td>30</td><td>0.28</td></tr> <tr><td>40</td><td>0.35</td></tr> <tr><td>50</td><td>0.42</td></tr> <tr><td>60</td><td>0.50</td></tr> <tr><td>70</td><td>0.58</td></tr> <tr><td>80</td><td>0.68</td></tr> <tr><td>90</td><td>0.78</td></tr> <tr><td>100</td><td>0.85</td></tr> <tr><td>120</td><td>0.95</td></tr> <tr><td>140</td><td>1.05</td></tr> <tr><td>160</td><td>1.15</td></tr> <tr><td>180</td><td>1.25</td></tr> <tr><td>200</td><td>1.35</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.15	10	0.18	20	0.22	30	0.28	40	0.35	50	0.42	60	0.50	70	0.58	80	0.68	90	0.78	100	0.85	120	0.95	140	1.05	160	1.15	180	1.25	200	1.35
Time (sec)	Displacement (ft)																																		
0	0.15																																		
10	0.18																																		
20	0.22																																		
30	0.28																																		
40	0.35																																		
50	0.42																																		
60	0.50																																		
70	0.58																																		
80	0.68																																		
90	0.78																																		
100	0.85																																		
120	0.95																																		
140	1.05																																		
160	1.15																																		
180	1.25																																		
200	1.35																																		
AGTESOLV																																			

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p align="center">SW-9 RISING HEAD TEST</p>	
<p>DATA SET: SW9RISE.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/27/95 test well: SW-9 obs. well: SW-9</p> <p>TEST DATA: H0 = 0.16 ft rc = 0.166 ft rw = 0.287 ft L = 6.12 ft b = 6.12 ft H = 6.12 ft</p> <p>PARAMETER ESTIMATES: K = 0.0004357 ft/min y0 = 0.08998 ft</p>	
<p align="right">AGTESOLV</p>	


<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																																																																								
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																																																																								
<p align="center">SW-10 RISING HEAD TEST</p>																																																																									
<p>DATA SET: SM10RISE.DAT 08/04/95</p>	<p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p>																																																																								
<p>PROJECT DATA: test date: 06/14/95 test well: SW-10 obs. well: SW-10</p>	<p>TEST DATA: H0 = 0.14 ft rc = 0.166 ft rW = 0.287 ft L = 7.5 ft b = 7.5 ft H = 7.5 ft</p>																																																																								
<p>PARAMETER ESTIMATES: K = 5.178E-06 ft/sec Y0 = 0.1437 ft</p>																																																																									
<table border="1"> <caption>Approximate data points from the rising head test plot</caption> <thead> <tr> <th>Time (sec)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.05</td></tr> <tr><td>10</td><td>0.055</td></tr> <tr><td>20</td><td>0.06</td></tr> <tr><td>30</td><td>0.065</td></tr> <tr><td>40</td><td>0.07</td></tr> <tr><td>50</td><td>0.075</td></tr> <tr><td>60</td><td>0.08</td></tr> <tr><td>70</td><td>0.085</td></tr> <tr><td>80</td><td>0.09</td></tr> <tr><td>100</td><td>0.10</td></tr> <tr><td>120</td><td>0.11</td></tr> <tr><td>140</td><td>0.12</td></tr> <tr><td>160</td><td>0.13</td></tr> <tr><td>180</td><td>0.14</td></tr> <tr><td>200</td><td>0.15</td></tr> <tr><td>220</td><td>0.16</td></tr> <tr><td>240</td><td>0.17</td></tr> <tr><td>260</td><td>0.18</td></tr> <tr><td>280</td><td>0.19</td></tr> <tr><td>300</td><td>0.20</td></tr> <tr><td>320</td><td>0.21</td></tr> <tr><td>340</td><td>0.22</td></tr> <tr><td>360</td><td>0.23</td></tr> <tr><td>380</td><td>0.24</td></tr> <tr><td>400</td><td>0.25</td></tr> <tr><td>420</td><td>0.26</td></tr> <tr><td>440</td><td>0.27</td></tr> <tr><td>460</td><td>0.28</td></tr> <tr><td>480</td><td>0.29</td></tr> <tr><td>500</td><td>0.30</td></tr> <tr><td>520</td><td>0.31</td></tr> <tr><td>540</td><td>0.32</td></tr> <tr><td>560</td><td>0.33</td></tr> <tr><td>580</td><td>0.34</td></tr> <tr><td>600</td><td>0.35</td></tr> </tbody> </table>		Time (sec)	Displacement (ft)	0	0.05	10	0.055	20	0.06	30	0.065	40	0.07	50	0.075	60	0.08	70	0.085	80	0.09	100	0.10	120	0.11	140	0.12	160	0.13	180	0.14	200	0.15	220	0.16	240	0.17	260	0.18	280	0.19	300	0.20	320	0.21	340	0.22	360	0.23	380	0.24	400	0.25	420	0.26	440	0.27	460	0.28	480	0.29	500	0.30	520	0.31	540	0.32	560	0.33	580	0.34	600	0.35
Time (sec)	Displacement (ft)																																																																								
0	0.05																																																																								
10	0.055																																																																								
20	0.06																																																																								
30	0.065																																																																								
40	0.07																																																																								
50	0.075																																																																								
60	0.08																																																																								
70	0.085																																																																								
80	0.09																																																																								
100	0.10																																																																								
120	0.11																																																																								
140	0.12																																																																								
160	0.13																																																																								
180	0.14																																																																								
200	0.15																																																																								
220	0.16																																																																								
240	0.17																																																																								
260	0.18																																																																								
280	0.19																																																																								
300	0.20																																																																								
320	0.21																																																																								
340	0.22																																																																								
360	0.23																																																																								
380	0.24																																																																								
400	0.25																																																																								
420	0.26																																																																								
440	0.27																																																																								
460	0.28																																																																								
480	0.29																																																																								
500	0.30																																																																								
520	0.31																																																																								
540	0.32																																																																								
560	0.33																																																																								
580	0.34																																																																								
600	0.35																																																																								
<p align="right">AGTESOLV</p>																																																																									

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p align="center">SW-10 RISING HEAD TEST "A"</p>	
<p>DATA SET: SW10RIS1.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/26/95 test well: SW-10 obs. well: SW-10</p> <p>TEST DATA: H0 = 0.61 ft rc = 0.166 ft rw = 0.287 ft L = 6.36 ft b = 6.36 ft H = 6.36 ft</p> <p>PARAMETER ESTIMATES: K = 0.0001394 ft/min y0 = 0.5079 ft</p>	
<p align="right">AGTESOLV</p>	

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-1D FALLING HEAD TEST

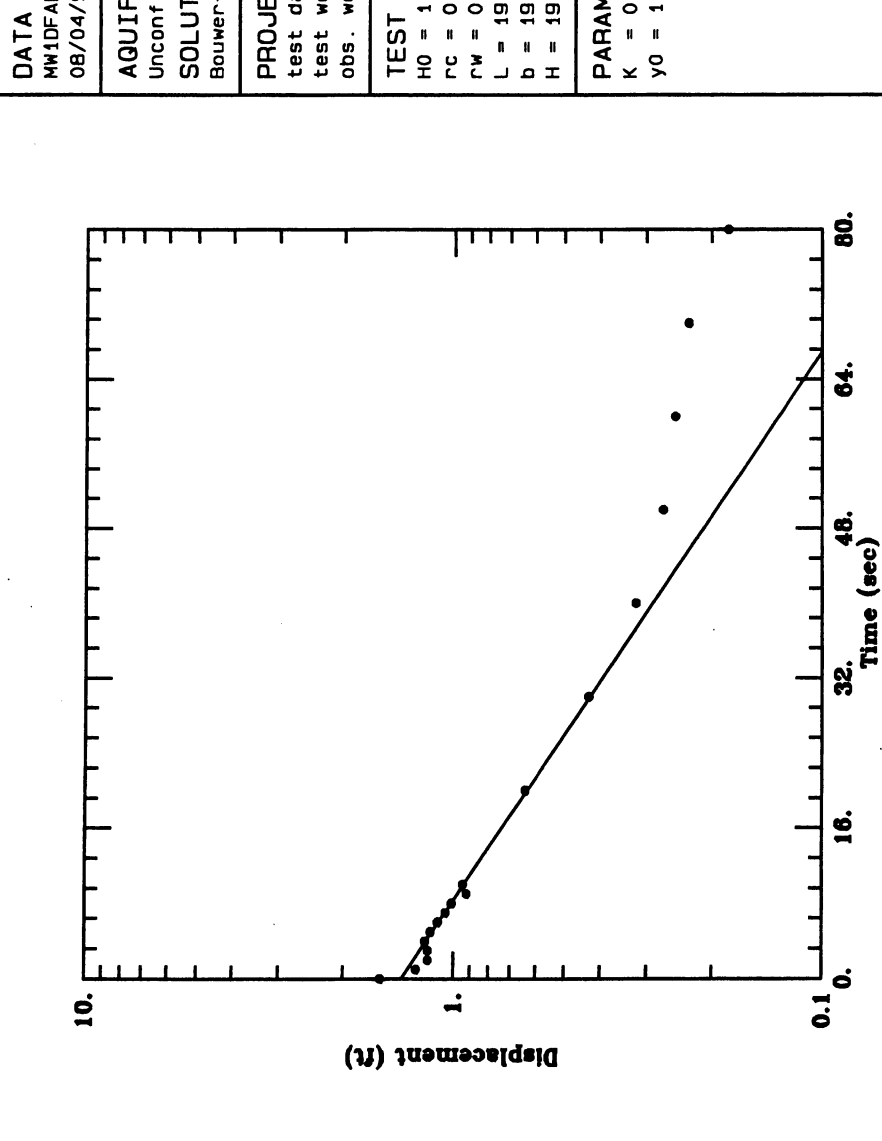

DATA SET:
MW1DFALL.DAT
08/04/95

AQUIFER MODEL:
Unconfined
SOLUTION METHOD:
Bouwer-Rice

PROJECT DATA:
test date: 06/16/95
test well: MW-1D
obs. well: MW-1D

TEST DATA:
H0 = 1.58 ft
rc = 0.166 ft
rw = 0.166 ft
L = 19.54 ft
b = 19.98 ft
H = 19.98 ft

PARAMETER ESTIMATES:
K = 0.0001021 ft/sec
Y0 = 1.384 ft

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-1D RISING HEAD TEST</p>	
<p>DATA SET:</p>	<p>MW1DRISE.DAT 08/04/95</p>
<p>AQUIFER MODEL:</p>	<p>Unconfined</p>
<p>SOLUTION METHOD:</p>	<p>Bouwer-Rice</p>
<p>PROJECT DATA:</p>	<p>test date: 06/16/95 test well: MW-1D obs. well: MW-1D</p>
<p>TEST DATA:</p>	<p>H0 = 1.63 ft rc = 0.166 ft rw = 0.166 ft L = 19.54 ft b = 19.98 ft H = 19.98 ft</p>
<p>PARAMETER ESTIMATES:</p>	<p>K = 0.0001542 ft/sec Y0 = 1.755 ft</p>
<p>AGTESOLV</p>	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-2D FALLING HEAD TEST	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2DFALL.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/20/95 test well: MW-2D obs. well: MW-2D</p> <p>TEST DATA: H0 = 1.37 ft rc = 0.166 ft rw = 0.166 ft L = 27.28 ft b = 34.61 ft H = 34.61 ft</p> <p>PARAMETER ESTIMATES: K = 1.621E-06 ft/sec y0 = 1.326 ft</p> </div> <div style="width: 50%; text-align: center;"> <p>The graph plots Displacement (ft) on a logarithmic y-axis (ranging from 1 to 10) against Time (sec) on a linear x-axis (ranging from 0 to 100). The data points, represented by small circles, show a very rapid initial decrease in displacement, reaching a value of approximately 1.3 ft within the first few seconds. Following this initial drop, the displacement remains nearly constant at approximately 1.3 ft for the remainder of the 100-second test duration, indicating a very low permeability aquifer.</p> </div> </div>	
AGTESOLV	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-2D RISING HEAD TEST</p>	
<p>DATA SET: MW2DRISE.DAT 08/04/95</p>	
<p>AQUIFER MODEL: Unconfined SOLUTION METHOD: Bouwer-Rice</p>	
<p>PROJECT DATA: test date: 06/20/95 test well: MW-2D obs. well: MW-2D</p>	
<p>TEST DATA: H0 = 1.46 ft rc = 0.166 ft rw = 0.166 ft L = 27.28 ft b = 34.61 ft H = 34.61 ft</p>	
<p>PARAMETER ESTIMATES: K = 2.814E-06 ft/sec y0 = 1.417 ft</p>	
<p>AGTESOLV</p>	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-2D FALLING HEAD TEST "A"	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2DFALA.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/15/95 test well: MW-2D obs. well: MW-2D</p> <p>TEST DATA: H0 = 0.32 ft rc = 0.166 ft rw = 0.166 ft L = 27.28 ft b = 34.61 ft H = 34.61 ft</p> <p>PARAMETER ESTIMATES: K = 1.332E-06 ft/sec y0 = 0.3279 ft</p> </div> <div style="width: 50%; text-align: center;"> <p>The graph shows a plot of Displacement (ft) on the y-axis (logarithmic scale from 0.1 to 1.0) versus Time (sec) on the x-axis (linear scale from 0 to 900). The data points form a curve that is approximately linear on this semi-log plot, indicating a falling head test. The displacement starts at approximately 0.32 ft at time 0 and decreases as time increases, reaching about 0.1 ft at 900 seconds.</p> </div> </div>	
AGTESOLV	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-2D RISING HEAD TEST "A"	
<p>DATA SET: MM2DRISA.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/15/95 test well: MW-2D obs. well: MW-2D</p> <p>TEST DATA: H0 = 0.38 ft rc = 0.166 ft rw = 0.166 ft L = 27.28 ft b = 34.61 ft H = 34.61 ft</p> <p>PARAMETER ESTIMATES: K = 1.02E-06 ft/sec y0 = 0.3839 ft</p>	
<p style="text-align: right;">AGTESOLV</p>	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates												
Location: Former Lagoon Site	Project: 3698												
MW-3D FALLING HEAD TEST													
<table border="0" style="width: 100%;"> <tr> <td style="width: 25%;"> DATA SET: MM3DFALL.DAT 08/04/95 </td> <td style="width: 25%;"> AQUIFER MODEL: Unconfined </td> <td style="width: 25%;"> SOLUTION METHOD: Bouwer-Rice </td> <td style="width: 25%;"> PROJECT DATA: test date: 06/19/95 test well: MW-3D obs. well: MW-3D </td> </tr> <tr> <td colspan="4"> TEST DATA: H0 = 1.49 ft rc = 0.166 ft rw = 0.166 ft L = 24.65 ft b = 29.48 ft H = 29.48 ft </td> </tr> <tr> <td colspan="4"> PARAMETER ESTIMATES: K = 5.405E-06 ft/sec y0 = 1.444 ft </td> </tr> </table>		DATA SET: MM3DFALL.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/19/95 test well: MW-3D obs. well: MW-3D	TEST DATA: H0 = 1.49 ft rc = 0.166 ft rw = 0.166 ft L = 24.65 ft b = 29.48 ft H = 29.48 ft				PARAMETER ESTIMATES: K = 5.405E-06 ft/sec y0 = 1.444 ft			
DATA SET: MM3DFALL.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 06/19/95 test well: MW-3D obs. well: MW-3D										
TEST DATA: H0 = 1.49 ft rc = 0.166 ft rw = 0.166 ft L = 24.65 ft b = 29.48 ft H = 29.48 ft													
PARAMETER ESTIMATES: K = 5.405E-06 ft/sec y0 = 1.444 ft													
<div style="text-align: center;"> <p style="text-align: center;">Displacement (ft)</p> <p style="text-align: center;">Time (sec)</p> </div>													
AQTESOLV													

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-3D RISING HEAD TEST


DATA SET:
MW3DRISE.DAT
08/04/95

AQUIFER MODEL:
Unconfined
SOLUTION METHOD:
Bouwer-Rice

PROJECT DATA:
test date: 06/19/95
test well: MW-3D
obs. well: MW-3D

TEST DATA:
H0 = 1.5 ft
rc = 0.166 ft
rw = 0.166 ft
L = 29. ft
b = 29.48 ft
H = 29.48 ft

PARAMETER ESTIMATES:
K = 6.987E-06 ft/sec
Y0 = 1.46 ft

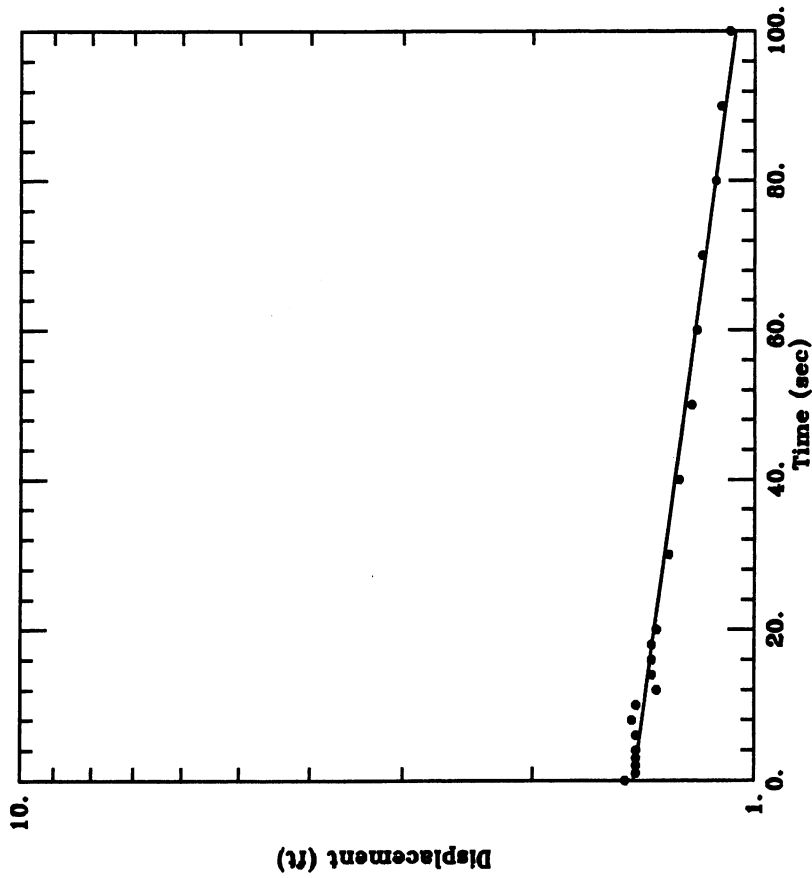

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW-4D FALLING HEAD TEST	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW4DFALL.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 06/21/95 test well: MW-4D obs. well: MW-4D</p> <p>TEST DATA: H0 = 1.4 ft rc = 0.166 ft rw = 0.166 ft L = 3.02 ft b = 9.99 ft H = 9.99 ft</p> <p>PARAMETER ESTIMATES: K = 0.000254 ft/sec y0 = 1.268 ft</p> </div> <div style="width: 50%; text-align: center;"> </div> </div>	
AGTESOLV	


<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-4D RISING HEAD TEST</p>	
<p>DATA SET: MW4DRISE.DAT 08/04/95</p>	
<p>AQUIFER MODEL: Unconfined</p>	<p>SOLUTION METHOD: Bouwer-Rice</p>
<p>PROJECT DATA: test date: 06/21/95 test well: MW-4D obs. well: MW-4D</p>	<p>TEST DATA: H0 = 1.51 ft rc = 0.166 ft rw = 0.166 ft L = 3.02 ft b = 9.99 ft H = 9.99 ft</p>
<p>PARAMETER ESTIMATES: K = 0.0002597 ft/sec Y0 = 1.364 ft</p>	
<p>AGTESOLV</p>	

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																										
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																										
<p>MW-5D FALLING HEAD TEST</p>																											
<p>DATA SET: MMSDFALL.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/27/95 test well: MW-5D obs. well: MW-5D</p> <p>TEST DATA: H0 = 1.58 ft rc = 0.166 ft rw = 0.166 ft L = 61. ft b = 81.76 ft H = 81.76 ft</p> <p>PARAMETER ESTIMATES: K = 3.892E-05 ft/min Y0 = 1.468 ft</p>																											
<table border="1"> <caption>Estimated Data Points from Plot</caption> <thead> <tr> <th>Time (min)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>1.58</td></tr> <tr><td>5</td><td>1.2</td></tr> <tr><td>10</td><td>0.9</td></tr> <tr><td>20</td><td>0.5</td></tr> <tr><td>30</td><td>0.3</td></tr> <tr><td>40</td><td>0.2</td></tr> <tr><td>50</td><td>0.15</td></tr> <tr><td>60</td><td>0.12</td></tr> <tr><td>70</td><td>0.1</td></tr> <tr><td>80</td><td>0.08</td></tr> <tr><td>90</td><td>0.07</td></tr> <tr><td>100</td><td>0.06</td></tr> </tbody> </table>		Time (min)	Displacement (ft)	0	1.58	5	1.2	10	0.9	20	0.5	30	0.3	40	0.2	50	0.15	60	0.12	70	0.1	80	0.08	90	0.07	100	0.06
Time (min)	Displacement (ft)																										
0	1.58																										
5	1.2																										
10	0.9																										
20	0.5																										
30	0.3																										
40	0.2																										
50	0.15																										
60	0.12																										
70	0.1																										
80	0.08																										
90	0.07																										
100	0.06																										
<p>AGTESOLV</p>																											

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-5D RISING HEAD TEST</p>	
<p>DATA SET: MW5DRISE.DAT 08/04/95</p>	
<p>AQUIFER MODEL: Unconfined</p>	<p>TEST DATA: $H_0 = 1.61$ ft $rc = 0.166$ ft $rw = 0.166$ ft $L = 61.$ ft $b = 81.76$ ft $H = 81.76$ ft</p>
<p>SOLUTION METHOD: Bouwer-Rice</p>	<p>PARAMETER ESTIMATES: $K = 3.771E-05$ ft/min $Y_0 = 1.482$ ft</p>
<p>PROJECT DATA: test date: 07/27/95 test well: MW-5D obs. well: MW-5D</p>	<p>AGTESOLV</p>

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>																										
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>																										
<p>MW-6D FALLING HEAD TEST</p>																											
<p>DATA SET: MW6DFALL.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/27/95 test well: MW-6D obs. well: MW-6D</p> <p>TEST DATA: H0 = 1.54 ft rc = 0.166 ft rw = 0.166 ft L = 9. ft b = 66.01 ft H = 66.01 ft</p> <p>PARAMETER ESTIMATES: K = 7.041E-05 ft/min y0 = 1.454 ft</p>																											
<table border="1"> <caption>Estimated Data Points from Plot</caption> <thead> <tr> <th>Time (min)</th> <th>Displacement (ft)</th> </tr> </thead> <tbody> <tr><td>0</td><td>10.0</td></tr> <tr><td>10</td><td>2.0</td></tr> <tr><td>20</td><td>1.0</td></tr> <tr><td>30</td><td>0.6</td></tr> <tr><td>40</td><td>0.4</td></tr> <tr><td>50</td><td>0.3</td></tr> <tr><td>60</td><td>0.25</td></tr> <tr><td>80</td><td>0.2</td></tr> <tr><td>100</td><td>0.18</td></tr> <tr><td>120</td><td>0.16</td></tr> <tr><td>150</td><td>0.15</td></tr> <tr><td>200</td><td>0.14</td></tr> </tbody> </table>		Time (min)	Displacement (ft)	0	10.0	10	2.0	20	1.0	30	0.6	40	0.4	50	0.3	60	0.25	80	0.2	100	0.18	120	0.16	150	0.15	200	0.14
Time (min)	Displacement (ft)																										
0	10.0																										
10	2.0																										
20	1.0																										
30	0.6																										
40	0.4																										
50	0.3																										
60	0.25																										
80	0.2																										
100	0.18																										
120	0.16																										
150	0.15																										
200	0.14																										
<p>AGTESOLV</p>																											

Client: Nepera Inc.	Company: Conestoga Rovers & Associates									
Location: Former Lagoon Site	Project: 3698									
MW-6D RISING HEAD TEST										
<table border="0" style="width: 100%;"> <tr> <td style="width: 33%;"> DATA SET: MW6DRISE.DAT 08/04/95 </td> <td style="width: 33%;"> AQUIFER MODEL: Unconfined </td> <td style="width: 33%;"> SOLUTION METHOD: Bouwer-Rice </td> </tr> <tr> <td> PROJECT DATA: test date: 07/28/95 test well: MW-6D obs. well: MW-6D </td> <td colspan="2"> TEST DATA: H0 = 1.08 ft rc = 0.166 ft rw = 0.166 ft L = 9. ft b = 66.01 ft H = 66.01 ft </td> </tr> <tr> <td colspan="3"> PARAMETER ESTIMATES: K = 0.0001186 ft/min Y0 = 1.073 ft </td> </tr> </table>		DATA SET: MW6DRISE.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice	PROJECT DATA: test date: 07/28/95 test well: MW-6D obs. well: MW-6D	TEST DATA: H0 = 1.08 ft rc = 0.166 ft rw = 0.166 ft L = 9. ft b = 66.01 ft H = 66.01 ft		PARAMETER ESTIMATES: K = 0.0001186 ft/min Y0 = 1.073 ft		
DATA SET: MW6DRISE.DAT 08/04/95	AQUIFER MODEL: Unconfined	SOLUTION METHOD: Bouwer-Rice								
PROJECT DATA: test date: 07/28/95 test well: MW-6D obs. well: MW-6D	TEST DATA: H0 = 1.08 ft rc = 0.166 ft rw = 0.166 ft L = 9. ft b = 66.01 ft H = 66.01 ft									
PARAMETER ESTIMATES: K = 0.0001186 ft/min Y0 = 1.073 ft										
<div style="text-align: center;"> </div>										
AGTESDLV										
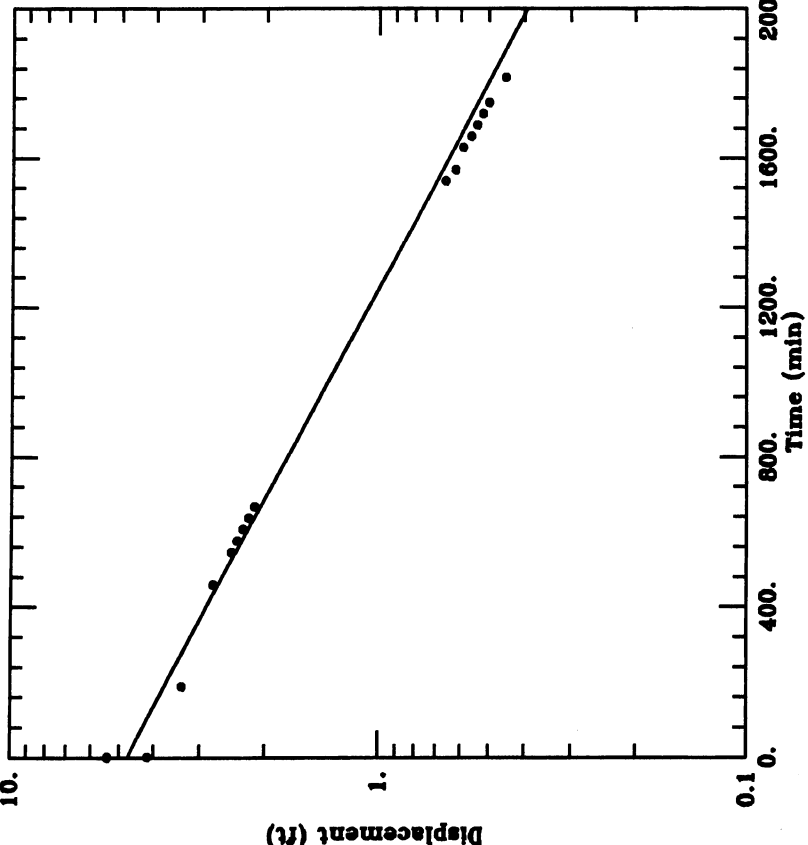
<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>DW-1 RISING HEAD TEST</p>	
<div style="display: flex; justify-content: space-between;"> <div data-bbox="446 231 527 651"> <p>DATA SET: DW1RISE.DAT 08/04/95</p> </div> <div data-bbox="544 231 673 651"> <p>AQUIFER MODEL: Unconfined SOLUTION METHOD: Bouwer-Rice</p> </div> <div data-bbox="690 231 803 651"> <p>PROJECT DATA: test date: 07/27/95 test well: DW-1 obs. well: DW-1</p> </div> <div data-bbox="820 231 1006 651"> <p>TEST DATA: H0 = 5.4 ft rc = 0.166 ft rw = 0.25 ft L = 11. ft b = 101.5 ft H = 98.5 ft</p> </div> <div data-bbox="1023 231 1364 651"> <p>PARAMETER ESTIMATES: K = 5.642E-06 ft/min y0 = 4.73 ft</p> </div> </div> <div style="text-align: center; margin-top: 20px;">  </div>	
<p>AGTESOLV</p>	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
DW-2 RISING HEAD TEST	
<p>DATA SET: DWRISE1.DAT 08/08/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Bouwer-Rice</p> <p>PROJECT DATA: test date: 07/26/95 test well: DW-2 obs. well: DW-2</p> <p>TEST DATA: H0 = 6.35 ft rc = 0.166 ft rw = 0.25 ft L = 10. ft b = 94.8 ft H = 93.8 ft</p> <p>PARAMETER ESTIMATES: K = 1.027E-06 ft/min Y0 = 6.305 ft</p>	
AQTESOLV	

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : FALLING HEAD TEST
Test Well : MW-1U-91
Start Date/Time : 05/13/95 | 00:00:00
Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
05/13/95	00:00:17	0.28	7.240	368.660	0.240
05/13/95	00:00:23	0.38	7.340	368.560	0.140
05/13/95	00:00:28	0.47	7.370	368.530	0.110
05/13/95	00:00:31	0.52	7.410	368.490	0.070
05/13/95	00:00:35	0.58	7.420	368.480	0.060
05/13/95	00:00:41	0.68	7.440	368.460	0.040
05/13/95	00:00:45	0.75	7.450	368.450	0.030
05/13/95	00:00:49	0.82	7.460	368.440	0.020
05/13/95	00:01:10	1.17	7.470	368.430	0.010

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : RISING HEAD TEST
Test Well : MW-1U-91
Start Date/Time : 05/13/95 | 00:00:00
Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
05/13/95	00:00:10	0.17	8.150	367.750	0.670
05/13/95	00:00:12	0.20	7.930	367.970	0.450
05/13/95	00:00:14	0.23	7.800	368.100	0.320
05/13/95	00:00:17	0.28	7.740	368.160	0.260
05/13/95	00:00:22	0.37	7.650	368.250	0.170
05/13/95	00:00:26	0.43	7.600	368.300	0.120
05/13/95	00:00:28	0.47	7.550	368.350	0.070
05/13/95	00:00:31	0.52	7.540	368.360	0.060
05/13/95	00:00:35	0.58	7.520	368.380	0.040
05/13/95	00:00:46	0.77	7.510	368.390	0.030
05/13/95	00:00:51	0.85	7.500	368.400	0.020
05/13/95	00:01:00	1.00	7.490	368.410	0.010

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : FALLING HEAD TEST
Test Well : MW-1U-91
Start Date/Time : 05/12/93 | 00:00:00
Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
05/12/93	00:00:14	0.23	7.060	368.840	0.420
05/12/93	00:00:17	0.28	7.280	368.620	0.200
05/12/93	00:00:20	0.33	7.340	368.560	0.140
05/12/93	00:00:24	0.40	7.350	368.550	0.130
05/12/93	00:00:28	0.47	7.380	368.520	0.100
05/12/93	00:00:29	0.48	7.370	368.530	0.110
05/12/93	00:00:31	0.52	7.390	368.510	0.090
05/12/93	00:00:43	0.72	7.420	368.480	0.060
05/12/93	00:00:44	0.73	7.430	368.470	0.050
05/12/93	00:00:48	0.80	7.460	368.440	0.020
05/12/93	00:01:20	1.33	7.470	368.430	0.010
05/13/93	00:00:05	1440.08	6.600	369.300	0.880

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : RISING HEAD TEST
Test Well : MW-1U-91
Start Date/Time : 05/13/93 | 00:00:00
Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
05/13/93	00:00:06	0.10	8.220	367.680	0.740
05/13/93	00:00:11	0.18	7.900	368.000	0.420
05/13/93	00:00:13	0.22	7.810	368.090	0.330
05/13/93	00:00:16	0.27	7.730	368.170	0.250
05/13/93	00:00:23	0.38	7.640	368.260	0.160
05/13/93	00:00:26	0.43	7.600	368.300	0.120
05/13/93	00:00:28	0.47	7.560	368.340	0.080
05/13/93	00:00:31	0.52	7.540	368.360	0.060
05/13/93	00:00:36	0.60	7.520	368.380	0.040
05/13/93	00:00:47	0.78	7.510	368.390	0.030
05/13/93	00:00:52	0.87	7.500	368.400	0.020
05/13/93	00:01:00	1.00	7.490	368.410	0.010

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : FALLING HEAD TEST
Test Well : MW-1U-91
Start Date/Time : 05/12/93 | 00:00:00
Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
05/12/93	00:00:06	0.10	6.630	369.270	0.850
05/12/93	00:00:15	0.25	7.050	368.850	0.430
05/12/93	00:00:18	0.30	7.300	368.600	0.180
05/12/93	00:00:21	0.35	7.320	368.580	0.160
05/12/93	00:00:24	0.40	7.350	368.550	0.130
05/12/93	00:00:29	0.48	7.380	368.520	0.100
05/12/93	00:00:30	0.50	7.390	368.510	0.090
05/12/93	00:00:31	0.52	7.400	368.500	0.080
05/12/93	00:00:42	0.70	7.420	368.480	0.060
05/12/93	00:00:43	0.72	7.430	368.470	0.050
05/12/93	00:00:44	0.73	7.440	368.460	0.040
05/12/93	00:00:49	0.82	7.460	368.440	0.020
05/12/93	00:01:22	1.37	7.470	368.430	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-1U-91
 Start Date/Time : 05/12/93 | 00:00:00
 Reference Elevation : 375.900 ft AMSL

Static Water Level : 7.480 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
05/12/93	00:00:05	0.08	8.240	367.660	0.760
05/12/93	00:00:10	0.17	7.930	367.970	0.450
05/12/93	00:00:12	0.20	7.830	368.070	0.350
05/12/93	00:00:17	0.28	7.810	368.090	0.330
05/12/93	00:00:22	0.37	7.650	368.250	0.170
05/12/93	00:00:26	0.43	7.600	368.300	0.120
05/12/93	00:00:29	0.48	7.550	368.350	0.070
05/12/93	00:00:31	0.52	7.540	368.360	0.060
05/12/93	00:00:35	0.58	7.530	368.370	0.050
05/12/93	00:00:46	0.77	7.510	368.390	0.030
05/12/93	00:00:52	0.87	7.500	368.400	0.020
05/12/93	00:01:00	1.00	7.490	368.410	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW2
 Start Date/Time : 06/15/95 | 15:42:32
 Reference Elevation : 372.350 ft AMSL

Static Water Level : 2.000 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	15:42:33	0.02	2.320	374.670	0.320
06/15/95	15:42:34	0.03	2.250	374.600	0.250
06/15/95	15:42:35	0.05	2.160	374.510	0.160
06/15/95	15:42:36	0.07	2.140	374.490	0.140
06/15/95	15:42:37	0.08	2.110	374.460	0.110
06/15/95	15:42:38	0.10	2.090	374.440	0.090
06/15/95	15:42:39	0.12	2.090	374.440	0.090
06/15/95	15:42:40	0.13	2.090	374.440	0.090
06/15/95	15:42:41	0.15	2.070	374.420	0.070
06/15/95	15:42:42	0.17	2.070	374.420	0.070
06/15/95	15:42:43	0.18	2.070	374.420	0.070
06/15/95	15:42:44	0.20	2.070	374.420	0.070
06/15/95	15:42:45	0.22	2.070	374.420	0.070
06/15/95	15:42:46	0.23	2.070	374.420	0.070
06/15/95	15:42:47	0.25	2.070	374.420	0.070
06/15/95	15:42:48	0.27	2.040	374.390	0.040
06/15/95	15:42:49	0.28	2.040	374.390	0.040
06/15/95	15:42:50	0.30	2.040	374.390	0.040
06/15/95	15:42:51	0.32	2.040	374.390	0.040
06/15/95	15:42:52	0.33	2.040	374.390	0.040
06/15/95	15:42:53	0.35	2.040	374.390	0.040
06/15/95	15:42:54	0.37	2.040	374.390	0.040
06/15/95	15:42:55	0.38	2.040	374.390	0.040
06/15/95	15:42:56	0.40	2.020	374.370	0.020
06/15/95	15:42:57	0.42	2.040	374.390	0.040
06/15/95	15:42:58	0.43	2.040	374.390	0.040
06/15/95	15:42:59	0.45	2.040	374.390	0.040
06/15/95	15:43:00	0.47	2.040	374.390	0.040
06/15/95	15:43:01	0.48	2.040	374.390	0.040
06/15/95	15:43:02	0.50	2.020	374.370	0.020
06/15/95	15:43:03	0.52	2.040	374.390	0.040
06/15/95	15:43:04	0.53	2.020	374.370	0.020
06/15/95	15:43:05	0.55	2.020	374.370	0.020
06/15/95	15:43:06	0.57	2.020	374.370	0.020
06/15/95	15:43:07	0.58	2.020	374.370	0.020

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	15:43:08	0.60	2.020	374.370	0.020
06/15/95	15:43:09	0.62	2.020	374.370	0.020
06/15/95	15:43:10	0.63	2.020	374.370	0.020
06/15/95	15:43:11	0.65	2.020	374.370	0.020
06/15/95	15:43:12	0.67	2.020	374.370	0.020
06/15/95	15:43:13	0.68	2.020	374.370	0.020
06/15/95	15:43:14	0.70	2.020	374.370	0.020
06/15/95	15:43:15	0.72	2.020	374.370	0.020
06/15/95	15:43:16	0.73	2.020	374.370	0.020
06/15/95	15:43:17	0.75	2.020	374.370	0.020
06/15/95	15:43:18	0.77	2.020	374.370	0.020
06/15/95	15:43:19	0.78	2.020	374.370	0.020
06/15/95	15:43:20	0.80	2.020	374.370	0.020
06/15/95	15:43:21	0.82	2.020	374.370	0.020
06/15/95	15:43:22	0.83	2.020	374.370	0.020
06/15/95	15:43:23	0.85	2.020	374.370	0.020
06/15/95	15:43:24	0.87	2.020	374.370	0.020
06/15/95	15:43:25	0.88	2.020	374.370	0.020
06/15/95	15:43:26	0.90	2.020	374.370	0.020
06/15/95	15:43:27	0.92	2.020	374.370	0.020
06/15/95	15:43:28	0.93	2.020	374.370	0.020
06/15/95	15:43:29	0.95	2.020	374.370	0.020
06/15/95	15:43:30	0.97	2.020	374.370	0.020
06/15/95	15:43:31	0.98	2.020	374.370	0.020
06/15/95	15:43:32	1.00	2.020	374.370	0.020
06/15/95	15:43:33	1.02	2.020	374.370	0.020
06/15/95	15:43:34	1.03	2.020	374.370	0.020
06/15/95	15:43:35	1.05	2.020	374.370	0.020
06/15/95	15:43:36	1.07	2.020	374.370	0.020
06/15/95	15:43:37	1.08	2.020	374.370	0.020
06/15/95	15:43:38	1.10	2.020	374.370	0.020
06/15/95	15:43:39	1.12	2.020	374.370	0.020
06/15/95	15:43:40	1.13	2.020	374.370	0.020
06/15/95	15:43:41	1.15	2.020	374.370	0.020
06/15/95	15:43:42	1.17	2.020	374.370	0.020
06/15/95	15:43:43	1.18	2.020	374.370	0.020
06/15/95	15:43:44	1.20	2.020	374.370	0.020
06/15/95	15:43:45	1.22	2.020	374.370	0.020
06/15/95	15:43:46	1.23	2.020	374.370	0.020
06/15/95	15:43:47	1.25	2.020	374.370	0.020
06/15/95	15:43:48	1.27	2.020	374.370	0.020
06/15/95	15:43:49	1.28	2.020	374.370	0.020
06/15/95	15:43:50	1.30	2.020	374.370	0.020
06/15/95	15:43:51	1.32	2.020	374.370	0.020
06/15/95	15:43:52	1.33	2.020	374.370	0.020
06/15/95	15:43:53	1.35	2.020	374.370	0.020
06/15/95	15:43:54	1.37	2.020	374.370	0.020
06/15/95	15:43:55	1.38	2.020	374.370	0.020
06/15/95	15:43:56	1.40	2.020	374.370	0.020

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
------	------	--------------------------	------------------------	-----------------------------	------------------

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW2
 Start Date/Time : 06/15/95 | 16:07:17
 Reference Elevation : 372.350 ft AMSL

Static Water Level : 2.010 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	16:07:18	0.02	1.650	374.000	0.360
06/15/95	16:07:19	0.03	1.770	374.120	0.240
06/15/95	16:07:20	0.05	1.810	374.160	0.200
06/15/95	16:07:21	0.07	1.860	374.210	0.150
06/15/95	16:07:22	0.08	1.880	374.230	0.130
06/15/95	16:07:23	0.10	1.880	374.230	0.130
06/15/95	16:07:24	0.12	1.910	374.260	0.100
06/15/95	16:07:25	0.13	1.910	374.260	0.100
06/15/95	16:07:26	0.15	1.930	374.280	0.080
06/15/95	16:07:27	0.17	1.930	374.280	0.080
06/15/95	16:07:28	0.18	1.930	374.280	0.080
06/15/95	16:07:29	0.20	1.930	374.280	0.080
06/15/95	16:07:30	0.22	1.950	374.300	0.060
06/15/95	16:07:31	0.23	1.950	374.300	0.060
06/15/95	16:07:32	0.25	1.950	374.300	0.060
06/15/95	16:07:33	0.27	1.950	374.300	0.060
06/15/95	16:07:34	0.28	1.950	374.300	0.060
06/15/95	16:07:35	0.30	1.950	374.300	0.060
06/15/95	16:07:36	0.32	1.950	374.300	0.060
06/15/95	16:07:37	0.33	1.950	374.300	0.060
06/15/95	16:07:38	0.35	1.950	374.300	0.060
06/15/95	16:07:39	0.37	1.980	374.330	0.030
06/15/95	16:07:40	0.38	1.980	374.330	0.030
06/15/95	16:07:41	0.40	1.980	374.330	0.030
06/15/95	16:07:42	0.42	1.980	374.330	0.030
06/15/95	16:07:43	0.43	1.980	374.330	0.030
06/15/95	16:07:44	0.45	1.980	374.330	0.030
06/15/95	16:07:45	0.47	1.980	374.330	0.030
06/15/95	16:07:46	0.48	1.980	374.330	0.030
06/15/95	16:07:47	0.50	1.980	374.330	0.030
06/15/95	16:07:48	0.52	1.980	374.330	0.030
06/15/95	16:07:49	0.53	1.980	374.330	0.030
06/15/95	16:07:50	0.55	1.980	374.330	0.030
06/15/95	16:07:51	0.57	1.980	374.330	0.030
06/15/95	16:07:52	0.58	1.980	374.330	0.030

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	16:07:53	0.60	1.980	374.330	0.030
06/15/95	16:07:54	0.62	2.000	374.350	0.010
06/15/95	16:07:55	0.63	1.980	374.330	0.030
06/15/95	16:07:56	0.65	1.980	374.330	0.030
06/15/95	16:07:57	0.67	2.000	374.350	0.010
06/15/95	16:07:58	0.68	1.980	374.330	0.030
06/15/95	16:07:59	0.70	1.980	374.330	0.030
06/15/95	16:08:00	0.72	2.000	374.350	0.010
06/15/95	16:08:01	0.73	1.980	374.330	0.030
06/15/95	16:08:02	0.75	1.980	374.330	0.030
06/15/95	16:08:03	0.77	2.000	374.350	0.010
06/15/95	16:08:04	0.78	2.000	374.350	0.010
06/15/95	16:08:05	0.80	2.000	374.350	0.010
06/15/95	16:08:06	0.82	2.000	374.350	0.010
06/15/95	16:08:07	0.83	2.000	374.350	0.010
06/15/95	16:08:08	0.85	2.000	374.350	0.010
06/15/95	16:08:09	0.87	2.000	374.350	0.010
06/15/95	16:08:10	0.88	2.000	374.350	0.010
06/15/95	16:08:11	0.90	2.000	374.350	0.010
06/15/95	16:08:12	0.92	2.000	374.350	0.010
06/15/95	16:08:13	0.93	2.000	374.350	0.010
06/15/95	16:08:14	0.95	2.000	374.350	0.010
06/15/95	16:08:15	0.97	2.000	374.350	0.010
06/15/95	16:08:16	0.98	2.000	374.350	0.010
06/15/95	16:08:17	1.00	2.000	374.350	0.010
06/15/95	16:08:18	1.02	2.000	374.350	0.010
06/15/95	16:08:19	1.03	2.000	374.350	0.010
06/15/95	16:08:20	1.05	2.000	374.350	0.010
06/15/95	16:08:21	1.07	2.000	374.350	0.010
06/15/95	16:08:22	1.08	2.000	374.350	0.010
06/15/95	16:08:23	1.10	2.000	374.350	0.010
06/15/95	16:08:24	1.12	2.000	374.350	0.010
06/15/95	16:08:25	1.13	2.000	374.350	0.010
06/15/95	16:08:26	1.15	2.000	374.350	0.010
06/15/95	16:08:27	1.17	2.000	374.350	0.010
06/15/95	16:08:28	1.18	2.000	374.350	0.010
06/15/95	16:08:29	1.20	2.000	374.350	0.010
06/15/95	16:08:30	1.22	2.000	374.350	0.010
06/15/95	16:08:31	1.23	2.000	374.350	0.010
06/15/95	16:08:32	1.25	2.000	374.350	0.010
06/15/95	16:08:33	1.27	2.000	374.350	0.010
06/15/95	16:08:34	1.28	2.000	374.350	0.010
06/15/95	16:08:35	1.30	2.000	374.350	0.010
06/15/95	16:08:36	1.32	2.000	374.350	0.010
06/15/95	16:08:37	1.33	2.000	374.350	0.010
06/15/95	16:08:38	1.35	2.000	374.350	0.010
06/15/95	16:08:39	1.37	2.000	374.350	0.010
06/15/95	16:08:40	1.38	2.000	374.350	0.010
06/15/95	16:08:41	1.40	2.000	374.350	0.010

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	16:08:42	1.42	2.000	374.350	0.010
06/15/95	16:08:43	1.43	2.000	374.350	0.010
06/15/95	16:08:44	1.45	2.000	374.350	0.010
06/15/95	16:08:45	1.47	2.000	374.350	0.010
06/15/95	16:08:46	1.48	2.000	374.350	0.010
06/15/95	16:08:47	1.50	2.000	374.350	0.010
06/15/95	16:08:48	1.52	2.000	374.350	0.010
06/15/95	16:08:49	1.53	2.000	374.350	0.010
06/15/95	16:08:50	1.55	2.000	374.350	0.010
06/15/95	16:08:51	1.57	2.000	374.350	0.010
06/15/95	16:08:52	1.58	2.000	374.350	0.010
06/15/95	16:08:53	1.60	2.000	374.350	0.010
06/15/95	16:08:54	1.62	2.000	374.350	0.010
06/15/95	16:08:55	1.63	2.000	374.350	0.010
06/15/95	16:08:56	1.65	2.000	374.350	0.010
06/15/95	16:08:57	1.67	2.000	374.350	0.010
06/15/95	16:08:58	1.68	2.000	374.350	0.010
06/15/95	16:08:59	1.70	2.000	374.350	0.010
06/15/95	16:09:00	1.72	2.000	374.350	0.010
06/15/95	16:09:01	1.73	2.000	374.350	0.010
06/15/95	16:09:02	1.75	2.000	374.350	0.010
06/15/95	16:09:03	1.77	2.000	374.350	0.010
06/15/95	16:09:04	1.78	2.000	374.350	0.010
06/15/95	16:09:05	1.80	2.000	374.350	0.010
06/15/95	16:09:06	1.82	2.000	374.350	0.010
06/15/95	16:09:07	1.83	1.980	374.330	0.030
06/15/95	16:09:08	1.85	2.000	374.350	0.010
06/15/95	16:09:09	1.87	2.000	374.350	0.010
06/15/95	16:09:10	1.88	2.000	374.350	0.010
06/15/95	16:09:11	1.90	2.000	374.350	0.010
06/15/95	16:09:12	1.92	2.000	374.350	0.010
06/15/95	16:09:13	1.93	2.000	374.350	0.010
06/15/95	16:09:14	1.95	2.000	374.350	0.010
06/15/95	16:09:15	1.97	2.000	374.350	0.010
06/15/95	16:09:16	1.98	2.000	374.350	0.010
06/15/95	16:09:17	2.00	2.000	374.350	0.010
06/15/95	16:09:18	2.02	2.000	374.350	0.010
06/15/95	16:09:19	2.03	2.000	374.350	0.010
06/15/95	16:09:20	2.05	2.000	374.350	0.010
06/15/95	16:09:21	2.07	2.000	374.350	0.010
06/15/95	16:09:22	2.08	2.000	374.350	0.010
06/15/95	16:09:23	2.10	2.000	374.350	0.010
06/15/95	16:09:24	2.12	2.000	374.350	0.010
06/15/95	16:09:25	2.13	2.000	374.350	0.010
06/15/95	16:09:26	2.15	2.000	374.350	0.010
06/15/95	16:09:27	2.17	2.000	374.350	0.010
06/15/95	16:09:28	2.18	2.000	374.350	0.010
06/15/95	16:09:29	2.20	2.000	374.350	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW2
 Start Date/Time : 06/23/95 | 00:16:53
 Reference Elevation : 372.350 ft AMSL

Static Water Level : 3.120 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/23/95	00:16:55	0.03	3.350	375.700	0.230
06/23/95	00:16:57	0.07	3.260	375.610	0.140
06/23/95	00:16:59	0.10	3.230	375.580	0.110
06/23/95	00:17:01	0.13	3.210	375.560	0.090
06/23/95	00:17:03	0.17	3.210	375.560	0.090
06/23/95	00:17:05	0.20	3.190	375.540	0.070
06/23/95	00:17:07	0.23	3.190	375.540	0.070
06/23/95	00:17:09	0.27	3.190	375.540	0.070
06/23/95	00:17:11	0.30	3.180	375.530	0.060
06/23/95	00:17:13	0.33	3.180	375.530	0.060
06/23/95	00:17:15	0.37	3.180	375.530	0.060
06/23/95	00:17:17	0.40	3.160	375.510	0.040
06/23/95	00:17:19	0.43	3.160	375.510	0.040
06/23/95	00:17:21	0.47	3.160	375.510	0.040
06/23/95	00:17:23	0.50	3.160	375.510	0.040
06/23/95	00:17:25	0.53	3.160	375.510	0.040
06/23/95	00:17:27	0.57	3.160	375.510	0.040
06/23/95	00:17:29	0.60	3.150	375.500	0.030
06/23/95	00:17:31	0.63	3.150	375.500	0.030
06/23/95	00:17:33	0.67	3.150	375.500	0.030
06/23/95	00:17:35	0.70	3.150	375.500	0.030
06/23/95	00:17:37	0.73	3.150	375.500	0.030
06/23/95	00:17:39	0.77	3.150	375.500	0.030
06/23/95	00:17:41	0.80	3.150	375.500	0.030
06/23/95	00:17:43	0.83	3.150	375.500	0.030
06/23/95	00:17:45	0.87	3.150	375.500	0.030
06/23/95	00:17:47	0.90	3.150	375.500	0.030
06/23/95	00:17:49	0.93	3.150	375.500	0.030
06/23/95	00:17:51	0.97	3.150	375.500	0.030
06/23/95	00:17:53	1.00	3.150	375.500	0.030
06/23/95	00:17:55	1.03	3.150	375.500	0.030
06/23/95	00:17:57	1.07	3.150	375.500	0.030
06/23/95	00:17:59	1.10	3.150	375.500	0.030
06/23/95	00:18:01	1.13	3.150	375.500	0.030
06/23/95	00:18:03	1.17	3.150	375.500	0.030

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/23/95	00:18:05	1.20	3.150	375.500	0.030
06/23/95	00:18:07	1.23	3.150	375.500	0.030
06/23/95	00:18:09	1.27	3.150	375.500	0.030
06/23/95	00:18:11	1.30	3.150	375.500	0.030
06/23/95	00:18:13	1.33	3.150	375.500	0.030
06/23/95	00:18:15	1.37	3.150	375.500	0.030
06/23/95	00:18:17	1.40	3.150	375.500	0.030
06/23/95	00:18:19	1.43	3.130	375.480	0.010
06/23/95	00:18:21	1.47	3.150	375.500	0.030
06/23/95	00:18:23	1.50	3.150	375.500	0.030
06/23/95	00:18:25	1.53	3.150	375.500	0.030
06/23/95	00:18:27	1.57	3.130	375.480	0.010
06/23/95	00:18:29	1.60	3.150	375.500	0.030
06/23/95	00:18:31	1.63	3.150	375.500	0.030
06/23/95	00:18:33	1.67	3.130	375.480	0.010
06/23/95	00:18:35	1.70	3.150	375.500	0.030
06/23/95	00:18:37	1.73	3.130	375.480	0.010
06/23/95	00:18:39	1.77	3.150	375.500	0.030
06/23/95	00:18:41	1.80	3.150	375.500	0.030
06/23/95	00:18:43	1.83	3.130	375.480	0.010
06/23/95	00:18:45	1.87	3.130	375.480	0.010
06/23/95	00:18:47	1.90	3.130	375.480	0.010
06/23/95	00:18:49	1.93	3.130	375.480	0.010
06/23/95	00:18:51	1.97	3.130	375.480	0.010
06/23/95	00:18:53	2.00	3.130	375.480	0.010
06/23/95	00:18:55	2.03	3.150	375.500	0.030
06/23/95	00:18:57	2.07	3.130	375.480	0.010
06/23/95	00:18:59	2.10	3.130	375.480	0.010
06/23/95	00:19:01	2.13	3.130	375.480	0.010
06/23/95	00:19:03	2.17	3.130	375.480	0.010
06/23/95	00:19:05	2.20	3.130	375.480	0.010
06/23/95	00:19:07	2.23	3.130	375.480	0.010
06/23/95	00:19:09	2.27	3.130	375.480	0.010
06/23/95	00:19:11	2.30	3.130	375.480	0.010
06/23/95	00:19:13	2.33	3.130	375.480	0.010
06/23/95	00:19:15	2.37	3.130	375.480	0.010
06/23/95	00:19:17	2.40	3.130	375.480	0.010
06/23/95	00:19:19	2.43	3.130	375.480	0.010
06/23/95	00:19:21	2.47	3.150	375.500	0.030
06/23/95	00:19:23	2.50	3.130	375.480	0.010
06/23/95	00:19:25	2.53	3.130	375.480	0.010
06/23/95	00:19:27	2.57	3.130	375.480	0.010
06/23/95	00:19:29	2.60	3.130	375.480	0.010
06/23/95	00:19:31	2.63	3.130	375.480	0.010
06/23/95	00:19:33	2.67	3.130	375.480	0.010
06/23/95	00:19:35	2.70	3.130	375.480	0.010
06/23/95	00:19:37	2.73	3.130	375.480	0.010
06/23/95	00:19:39	2.77	3.130	375.480	0.010
06/23/95	00:19:41	2.80	3.130	375.480	0.010

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/23/95	00:19:43	2.83	3.130	375.480	0.010
06/23/95	00:19:45	2.87	3.130	375.480	0.010
06/23/95	00:19:47	2.90	3.130	375.480	0.010
06/23/95	00:19:49	2.93	3.130	375.480	0.010
06/23/95	00:19:51	2.97	3.130	375.480	0.010
06/23/95	00:19:53	3.00	3.130	375.480	0.010
06/23/95	00:19:55	3.03	3.130	375.480	0.010
06/23/95	00:19:57	3.07	3.130	375.480	0.010
06/23/95	00:19:59	3.10	3.130	375.480	0.010
06/23/95	00:20:01	3.13	3.130	375.480	0.010
06/23/95	00:20:03	3.17	3.130	375.480	0.010
06/23/95	00:20:05	3.20	3.130	375.480	0.010
06/23/95	00:20:07	3.23	3.130	375.480	0.010
06/23/95	00:20:09	3.27	3.130	375.480	0.010
06/23/95	00:20:11	3.30	3.130	375.480	0.010
06/23/95	00:20:13	3.33	3.130	375.480	0.010
06/23/95	00:20:15	3.37	3.130	375.480	0.010
06/23/95	00:20:17	3.40	3.130	375.480	0.010
06/23/95	00:20:19	3.43	3.130	375.480	0.010
06/23/95	00:20:21	3.47	3.130	375.480	0.010
06/23/95	00:20:23	3.50	3.130	375.480	0.010
06/23/95	00:20:25	3.53	3.130	375.480	0.010
06/23/95	00:20:27	3.57	3.130	375.480	0.010
06/23/95	00:20:29	3.60	3.130	375.480	0.010
06/23/95	00:20:31	3.63	3.130	375.480	0.010
06/23/95	00:20:33	3.67	3.130	375.480	0.010
06/23/95	00:20:35	3.70	3.130	375.480	0.010
06/23/95	00:20:37	3.73	3.130	375.480	0.010
06/23/95	00:20:39	3.77	3.130	375.480	0.010
06/23/95	00:20:41	3.80	3.130	375.480	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-2
 Start Date/Time : 06/23/95 | 00:32:01
 Reference Elevation : 372.350 ft AMSL

Static Water Level : 3.120 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	00:32:03	0.03	2.960	375.310	0.160
06/23/95	00:32:05	0.07	3.020	375.370	0.100
06/23/95	00:32:07	0.10	3.030	375.380	0.090
06/23/95	00:32:09	0.13	3.050	375.400	0.070
06/23/95	00:32:11	0.17	3.050	375.400	0.070
06/23/95	00:32:13	0.20	3.080	375.430	0.040
06/23/95	00:32:15	0.23	3.080	375.430	0.040
06/23/95	00:32:17	0.27	3.080	375.430	0.040
06/23/95	00:32:19	0.30	3.080	375.430	0.040
06/23/95	00:32:21	0.33	3.080	375.430	0.040
06/23/95	00:32:23	0.37	3.080	375.430	0.040
06/23/95	00:32:25	0.40	3.080	375.430	0.040
06/23/95	00:32:27	0.43	3.090	375.440	0.030
06/23/95	00:32:29	0.47	3.090	375.440	0.030
06/23/95	00:32:31	0.50	3.090	375.440	0.030
06/23/95	00:32:33	0.53	3.090	375.440	0.030
06/23/95	00:32:35	0.57	3.090	375.440	0.030
06/23/95	00:32:37	0.60	3.090	375.440	0.030
06/23/95	00:32:39	0.63	3.100	375.450	0.020
06/23/95	00:32:41	0.67	3.100	375.450	0.020
06/23/95	00:32:43	0.70	3.100	375.450	0.020
06/23/95	00:32:45	0.73	3.100	375.450	0.020
06/23/95	00:32:47	0.77	3.100	375.450	0.020
06/23/95	00:32:49	0.80	3.090	375.440	0.030
06/23/95	00:32:51	0.83	3.100	375.450	0.020
06/23/95	00:32:53	0.87	3.100	375.450	0.020
06/23/95	00:32:55	0.90	3.100	375.450	0.020
06/23/95	00:32:57	0.93	3.100	375.450	0.020
06/23/95	00:32:59	0.97	3.100	375.450	0.020
06/23/95	00:33:01	1.00	3.100	375.450	0.020
06/23/95	00:33:03	1.03	3.100	375.450	0.020
06/23/95	00:33:05	1.07	3.100	375.450	0.020
06/23/95	00:33:07	1.10	3.100	375.450	0.020
06/23/95	00:33:09	1.13	3.100	375.450	0.020
06/23/95	00:33:11	1.17	3.100	375.450	0.020

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	00:33:13	1.20	3.100	375.450	0.020
06/23/95	00:33:15	1.23	3.100	375.450	0.020
06/23/95	00:33:17	1.27	3.100	375.450	0.020
06/23/95	00:33:19	1.30	3.100	375.450	0.020
06/23/95	00:33:21	1.33	3.100	375.450	0.020
06/23/95	00:33:23	1.37	3.100	375.450	0.020
06/23/95	00:33:25	1.40	3.100	375.450	0.020
06/23/95	00:33:27	1.43	3.120	375.470	0.000

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : FALLING HEAD TEST
Test Well : MW2
Start Date/Time : 06/15/95 | 15:04:56
Reference Elevation : 372.350 ft AMSL

Static Water Level : 2.000 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	15:04:57	0.02	2.270	374.620	0.270
06/15/95	15:04:58	0.03	2.180	374.530	0.180
06/15/95	15:04:59	0.05	2.140	374.490	0.140
06/15/95	15:05:00	0.07	2.110	374.460	0.110
06/15/95	15:05:01	0.08	2.090	374.440	0.090
06/15/95	15:05:02	0.10	2.090	374.440	0.090
06/15/95	15:05:03	0.12	2.070	374.420	0.070
06/15/95	15:05:04	0.13	2.070	374.420	0.070
06/15/95	15:05:05	0.15	2.070	374.420	0.070
06/15/95	15:05:06	0.17	2.070	374.420	0.070
06/15/95	15:05:07	0.18	2.070	374.420	0.070
06/15/95	15:05:08	0.20	2.040	374.390	0.040
06/15/95	15:05:09	0.22	2.040	374.390	0.040
06/15/95	15:05:10	0.23	2.040	374.390	0.040
06/15/95	15:05:11	0.25	2.040	374.390	0.040
06/15/95	15:05:12	0.27	2.040	374.390	0.040
06/15/95	15:05:13	0.28	2.040	374.390	0.040
06/15/95	15:05:14	0.30	2.040	374.390	0.040
06/15/95	15:05:15	0.32	2.020	374.370	0.020
06/15/95	15:05:16	0.33	2.020	374.370	0.020
06/15/95	15:05:17	0.35	2.020	374.370	0.020
06/15/95	15:05:18	0.37	2.020	374.370	0.020
06/15/95	15:05:19	0.38	2.020	374.370	0.020

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-2
 Start Date/Time : 06/15/95 | 15:23:13
 Reference Elevation : 372.350 ft AMSL

Static Water Level : 2.000 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	15:23:14	0.02	1.720	374.070	0.280
06/15/95	15:23:15	0.03	1.770	374.120	0.230
06/15/95	15:23:16	0.05	1.810	374.160	0.190
06/15/95	15:23:17	0.07	1.860	374.210	0.140
06/15/95	15:23:18	0.08	1.880	374.230	0.120
06/15/95	15:23:19	0.10	1.910	374.260	0.090
06/15/95	15:23:20	0.12	1.910	374.260	0.090
06/15/95	15:23:21	0.13	1.910	374.260	0.090
06/15/95	15:23:22	0.15	1.930	374.280	0.070
06/15/95	15:23:23	0.17	1.930	374.280	0.070
06/15/95	15:23:24	0.18	1.930	374.280	0.070
06/15/95	15:23:25	0.20	1.930	374.280	0.070
06/15/95	15:23:26	0.22	1.930	374.280	0.070
06/15/95	15:23:27	0.23	1.950	374.300	0.050
06/15/95	15:23:28	0.25	1.950	374.300	0.050
06/15/95	15:23:29	0.27	1.950	374.300	0.050
06/15/95	15:23:30	0.28	1.950	374.300	0.050
06/15/95	15:23:31	0.30	1.950	374.300	0.050
06/15/95	15:23:32	0.32	1.950	374.300	0.050
06/15/95	15:23:33	0.33	1.950	374.300	0.050
06/15/95	15:23:34	0.35	1.950	374.300	0.050
06/15/95	15:23:35	0.37	1.950	374.300	0.050
06/15/95	15:23:36	0.38	1.950	374.300	0.050
06/15/95	15:23:37	0.40	1.950	374.300	0.050
06/15/95	15:23:38	0.42	1.950	374.300	0.050
06/15/95	15:23:39	0.43	1.950	374.300	0.050
06/15/95	15:23:40	0.45	1.950	374.300	0.050
06/15/95	15:23:41	0.47	1.980	374.330	0.020
06/15/95	15:23:42	0.48	1.980	374.330	0.020
06/15/95	15:23:43	0.50	1.980	374.330	0.020
06/15/95	15:23:44	0.52	1.980	374.330	0.020
06/15/95	15:23:45	0.53	1.950	374.300	0.050
06/15/95	15:23:46	0.55	1.980	374.330	0.020
06/15/95	15:23:47	0.57	1.980	374.330	0.020
06/15/95	15:23:48	0.58	1.980	374.330	0.020

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	15:23:49	0.60	1.980	374.330	0.020
06/15/95	15:23:50	0.62	1.980	374.330	0.020
06/15/95	15:23:51	0.63	1.980	374.330	0.020
06/15/95	15:23:52	0.65	1.950	374.300	0.050
06/15/95	15:23:53	0.67	1.950	374.300	0.050
06/15/95	15:23:54	0.68	1.950	374.300	0.050
06/15/95	15:23:55	0.70	1.980	374.330	0.020
06/15/95	15:23:56	0.72	1.950	374.300	0.050
06/15/95	15:23:57	0.73	1.950	374.300	0.050
06/15/95	15:23:58	0.75	1.950	374.300	0.050
06/15/95	15:23:59	0.77	1.950	374.300	0.050
06/15/95	15:24:00	0.78	1.950	374.300	0.050
06/15/95	15:24:01	0.80	1.980	374.330	0.020
06/15/95	15:24:02	0.82	1.950	374.300	0.050
06/15/95	15:24:03	0.83	1.950	374.300	0.050
06/15/95	15:24:04	0.85	1.950	374.300	0.050
06/15/95	15:24:05	0.87	1.980	374.330	0.020
06/15/95	15:24:06	0.88	1.980	374.330	0.020
06/15/95	15:24:07	0.90	1.980	374.330	0.020
06/15/95	15:24:08	0.92	1.980	374.330	0.020
06/15/95	15:24:09	0.93	1.980	374.330	0.020
06/15/95	15:24:10	0.95	1.950	374.300	0.050
06/15/95	15:24:11	0.97	1.980	374.330	0.020
06/15/95	15:24:12	0.98	1.980	374.330	0.020
06/15/95	15:24:13	1.00	1.980	374.330	0.020
06/15/95	15:24:14	1.02	1.980	374.330	0.020
06/15/95	15:24:15	1.03	1.980	374.330	0.020
06/15/95	15:24:16	1.05	1.980	374.330	0.020
06/15/95	15:24:17	1.07	1.980	374.330	0.020
06/15/95	15:24:18	1.08	1.950	374.300	0.050
06/15/95	15:24:19	1.10	1.950	374.300	0.050
06/15/95	15:24:20	1.12	1.980	374.330	0.020
06/15/95	15:24:21	1.13	1.980	374.330	0.020
06/15/95	15:24:22	1.15	1.980	374.330	0.020
06/15/95	15:24:23	1.17	1.980	374.330	0.020
06/15/95	15:24:24	1.18	1.980	374.330	0.020
06/15/95	15:24:25	1.20	1.980	374.330	0.020
06/15/95	15:24:26	1.22	1.980	374.330	0.020
06/15/95	15:24:27	1.23	1.980	374.330	0.020
06/15/95	15:24:28	1.25	1.980	374.330	0.020
06/15/95	15:24:29	1.27	1.980	374.330	0.020

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : FALLING HEAD TEST
Test Well : SW-2
Start Date/Time : 06/14/95 | 00:00:00
Reference Elevation : 368.230 ft AMSL

Static Water Level : 8.240 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/14/95	00:00:15	0.25	8.100	360.130	0.140
06/14/95	00:01:13	1.22	8.160	360.070	0.080
06/14/95	00:01:37	1.62	8.180	360.050	0.060
06/14/95	00:02:02	2.03	8.200	360.030	0.040
06/14/95	00:02:35	2.58	8.200	360.030	0.040
06/14/95	00:02:56	2.93	8.220	360.010	0.020
06/14/95	00:03:20	3.33	8.220	360.010	0.020
06/14/95	00:03:47	3.78	8.220	360.010	0.020
06/14/95	00:04:15	4.25	8.230	360.000	0.010
06/14/95	00:04:36	4.60	8.230	360.000	0.010
06/14/95	00:04:51	4.85	8.230	360.000	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-2
 Start Date/Time : 06/14/95 | 00:00:00
 Reference Elevation : 368.230 ft AMSL

Static Water Level : 8.240 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/14/95	00:00:24	0.40	8.500	359.730	0.260
06/14/95	00:00:45	0.75	8.420	359.810	0.180
06/14/95	00:00:59	0.98	8.400	359.830	0.160
06/14/95	00:01:15	1.25	8.370	359.860	0.130
06/14/95	00:01:31	1.52	8.360	359.870	0.120
06/14/95	00:01:48	1.80	8.340	359.890	0.100
06/14/95	00:02:05	2.08	8.340	359.890	0.100
06/14/95	00:02:42	2.70	8.320	359.910	0.080
06/14/95	00:03:07	3.12	8.310	359.920	0.070
06/14/95	00:03:25	3.42	8.300	359.930	0.060
06/14/95	00:04:01	4.02	8.290	359.940	0.050
06/14/95	00:04:29	4.48	8.280	359.950	0.040
06/14/95	00:04:44	4.73	8.280	359.950	0.040
06/14/95	00:05:26	5.43	8.280	359.950	0.040
06/14/95	00:05:46	5.77	8.280	359.950	0.040
06/14/95	00:06:19	6.32	8.270	359.960	0.030
06/14/95	00:06:40	6.67	8.270	359.960	0.030
06/14/95	00:07:03	7.05	8.270	359.960	0.030
06/14/95	00:07:23	7.38	8.270	359.960	0.030
06/14/95	00:08:05	8.08	8.270	359.960	0.030
06/14/95	00:09:01	9.02	8.260	359.970	0.020
06/14/95	00:09:39	9.65	8.260	359.970	0.020
06/14/95	00:11:53	11.88	8.260	359.970	0.020
06/14/95	00:12:37	12.62	8.260	359.970	0.020
06/14/95	00:13:38	13.63	8.260	359.970	0.020
06/14/95	00:14:21	14.35	8.260	359.970	0.020
06/14/95	00:15:24	15.40	8.260	359.970	0.020
06/14/95	00:16:28	16.47	8.260	359.970	0.020
06/14/95	00:18:38	18.63	8.260	359.970	0.020
06/14/95	00:20:07	20.12	8.260	359.970	0.020
06/14/95	00:27:05	27.08	8.250	359.980	0.010
06/14/95	00:35:58	35.97	8.250	359.980	0.010
06/14/95	00:45:30	45.50	8.250	359.980	0.010
06/14/95	01:03:10	63.17	8.250	359.980	0.010
06/14/95	01:45:23	105.38	8.250	359.980	0.010

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
------	------	--------------------------	------------------------	-----------------------------	------------------

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-2
 Start Date/Time : 07/26/95 | 10:34:00
 Reference Elevation : 368.230 ft AMSL

Static Water Level : 9.740 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	10:34:01	0.02	10.480	357.750	0.740
07/26/95	10:34:15	0.25	10.300	357.930	0.560
07/26/95	10:34:30	0.50	10.260	357.970	0.520
07/26/95	10:34:45	0.75	10.200	358.030	0.460
07/26/95	10:35:00	1.00	10.160	358.070	0.420
07/26/95	10:35:15	1.25	10.120	358.110	0.380
07/26/95	10:35:30	1.50	10.080	358.150	0.340
07/26/95	10:35:45	1.75	10.060	358.170	0.320
07/26/95	10:36:00	2.00	10.030	358.200	0.290
07/26/95	10:36:15	2.25	10.020	358.210	0.280
07/26/95	10:36:30	2.50	9.990	358.240	0.250
07/26/95	10:36:45	2.75	9.960	358.270	0.220
07/26/95	10:37:00	3.00	9.940	358.290	0.200
07/26/95	10:37:15	3.25	9.920	358.310	0.180
07/26/95	10:37:30	3.50	9.910	358.320	0.170
07/26/95	10:37:45	3.75	9.900	358.330	0.160
07/26/95	10:38:00	4.00	9.890	358.340	0.150
07/26/95	10:38:15	4.25	9.870	358.360	0.130
07/26/95	10:38:30	4.50	9.860	358.370	0.120
07/26/95	10:38:45	4.75	9.850	358.380	0.110
07/26/95	10:39:00	5.00	9.840	358.390	0.100
07/26/95	10:39:30	5.50	9.830	358.400	0.090
07/26/95	10:40:00	6.00	9.820	358.410	0.080
07/26/95	10:40:30	6.50	9.810	358.420	0.070
07/26/95	10:41:00	7.00	9.810	358.420	0.070
07/26/95	10:41:30	7.50	9.800	358.430	0.060
07/26/95	10:42:00	8.00	9.800	358.430	0.060
07/26/95	10:42:30	8.50	9.800	358.430	0.060
07/26/95	10:43:00	9.00	9.790	358.440	0.050
07/26/95	10:43:30	9.50	9.790	358.440	0.050
07/26/95	10:44:00	10.00	9.780	358.450	0.040
07/26/95	10:45:00	11.00	9.780	358.450	0.040
07/26/95	10:46:00	12.00	9.780	358.450	0.040
07/26/95	10:47:00	13.00	9.770	358.460	0.030
07/26/95	10:48:00	14.00	9.770	358.460	0.030

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	10:49:00	15.00	9.770	358.460	0.030
07/26/95	10:50:00	16.00	9.770	358.460	0.030
07/26/95	10:51:00	17.00	9.770	358.460	0.030

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-3
 Start Date/Time : 06/23/95 | 02:43:25
 Reference Elevation : 378.770 ft AMSL

Static Water Level : 4.000 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/23/95	02:43:27	0.03	4.550	383.320	0.550
06/23/95	02:43:29	0.07	4.530	383.300	0.530
06/23/95	02:43:31	0.10	4.530	383.300	0.530
06/23/95	02:43:37	0.20	4.490	383.260	0.490
06/23/95	02:43:43	0.30	4.460	383.230	0.460
06/23/95	02:43:49	0.40	4.430	383.200	0.430
06/23/95	02:43:55	0.50	4.420	383.190	0.420
06/23/95	02:44:01	0.60	4.390	383.160	0.390
06/23/95	02:44:07	0.70	4.360	383.130	0.360
06/23/95	02:44:13	0.80	4.350	383.120	0.350
06/23/95	02:44:19	0.90	4.320	383.090	0.320
06/23/95	02:44:25	1.00	4.300	383.070	0.300
06/23/95	02:45:25	2.00	4.170	382.940	0.170
06/23/95	02:46:25	3.00	4.100	382.870	0.100
06/23/95	02:47:25	4.00	4.070	382.840	0.070
06/23/95	02:48:25	5.00	4.060	382.830	0.060
06/23/95	02:49:25	6.00	4.060	382.830	0.060
06/23/95	02:50:25	7.00	4.040	382.810	0.040
06/23/95	02:51:25	8.00	4.040	382.810	0.040
06/23/95	02:52:25	9.00	4.040	382.810	0.040
06/23/95	02:53:25	10.00	4.040	382.810	0.040
06/23/95	02:57:19	13.90	4.040	382.810	0.040

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-3
 Start Date/Time : 06/23/95 | 02:57:25
 Reference Elevation : 378.770 ft AMSL

Static Water Level : 4.000 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	02:57:27	0.03	3.310	382.080	0.690
06/23/95	02:57:29	0.07	3.340	382.110	0.660
06/23/95	02:57:31	0.10	3.360	382.130	0.640
06/23/95	02:57:33	0.13	3.390	382.160	0.610
06/23/95	02:57:35	0.17	3.390	382.160	0.610
06/23/95	02:57:37	0.20	3.420	382.190	0.580
06/23/95	02:57:39	0.23	3.440	382.210	0.560
06/23/95	02:57:41	0.27	3.450	382.220	0.550
06/23/95	02:57:43	0.30	3.480	382.250	0.520
06/23/95	02:57:45	0.33	3.480	382.250	0.520
06/23/95	02:57:47	0.37	3.490	382.260	0.510
06/23/95	02:57:49	0.40	3.510	382.280	0.490
06/23/95	02:57:51	0.43	3.520	382.290	0.480
06/23/95	02:57:53	0.47	3.540	382.310	0.460
06/23/95	02:57:55	0.50	3.550	382.320	0.450
06/23/95	02:57:57	0.53	3.570	382.340	0.430
06/23/95	02:57:59	0.57	3.580	382.350	0.420
06/23/95	02:58:01	0.60	3.590	382.360	0.410
06/23/95	02:58:03	0.63	3.610	382.380	0.390
06/23/95	02:58:05	0.67	3.610	382.380	0.390
06/23/95	02:58:07	0.70	3.620	382.390	0.380
06/23/95	02:58:09	0.73	3.640	382.410	0.360
06/23/95	02:58:11	0.77	3.650	382.420	0.350
06/23/95	02:58:13	0.80	3.670	382.440	0.330
06/23/95	02:58:15	0.83	3.670	382.440	0.330
06/23/95	02:58:17	0.87	3.680	382.450	0.320
06/23/95	02:58:19	0.90	3.680	382.450	0.320
06/23/95	02:58:21	0.93	3.710	382.480	0.290
06/23/95	02:58:23	0.97	3.710	382.480	0.290
06/23/95	02:58:25	1.00	3.710	382.480	0.290
06/23/95	02:58:27	1.03	3.720	382.490	0.280
06/23/95	02:58:29	1.07	3.740	382.510	0.260
06/23/95	02:58:31	1.10	3.740	382.510	0.260
06/23/95	02:58:33	1.13	3.750	382.520	0.250
06/23/95	02:58:35	1.17	3.750	382.520	0.250

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	02:58:37	1.20	3.770	382.540	0.230
06/23/95	02:58:39	1.23	3.770	382.540	0.230
06/23/95	02:58:41	1.27	3.780	382.550	0.220
06/23/95	02:58:43	1.30	3.780	382.550	0.220
06/23/95	02:58:45	1.33	3.780	382.550	0.220
06/23/95	02:58:47	1.37	3.800	382.570	0.200
06/23/95	02:58:49	1.40	3.800	382.570	0.200
06/23/95	02:58:51	1.43	3.800	382.570	0.200
06/23/95	02:58:53	1.47	3.810	382.580	0.190
06/23/95	02:58:55	1.50	3.830	382.600	0.170
06/23/95	02:58:57	1.53	3.840	382.610	0.160
06/23/95	02:58:59	1.57	3.840	382.610	0.160
06/23/95	02:59:01	1.60	3.840	382.610	0.160
06/23/95	02:59:03	1.63	3.850	382.620	0.150
06/23/95	02:59:05	1.67	3.850	382.620	0.150
06/23/95	02:59:07	1.70	3.840	382.610	0.160
06/23/95	02:59:09	1.73	3.870	382.640	0.130
06/23/95	02:59:11	1.77	3.870	382.640	0.130
06/23/95	02:59:13	1.80	3.870	382.640	0.130
06/23/95	02:59:15	1.83	3.870	382.640	0.130
06/23/95	02:59:17	1.87	3.880	382.650	0.120
06/23/95	02:59:19	1.90	3.880	382.650	0.120
06/23/95	02:59:21	1.93	3.880	382.650	0.120
06/23/95	02:59:23	1.97	3.900	382.670	0.100
06/23/95	02:59:25	2.00	3.900	382.670	0.100
06/23/95	02:59:27	2.03	3.900	382.670	0.100
06/23/95	02:59:29	2.07	3.900	382.670	0.100
06/23/95	02:59:31	2.10	3.900	382.670	0.100
06/23/95	02:59:33	2.13	3.900	382.670	0.100
06/23/95	02:59:35	2.17	3.910	382.680	0.090
06/23/95	02:59:37	2.20	3.910	382.680	0.090
06/23/95	02:59:39	2.23	3.910	382.680	0.090
06/23/95	02:59:41	2.27	3.930	382.700	0.070
06/23/95	02:59:43	2.30	3.930	382.700	0.070
06/23/95	02:59:45	2.33	3.930	382.700	0.070
06/23/95	02:59:47	2.37	3.930	382.700	0.070
06/23/95	02:59:49	2.40	3.940	382.710	0.060
06/23/95	02:59:51	2.43	3.930	382.700	0.070
06/23/95	02:59:53	2.47	3.940	382.710	0.060
06/23/95	02:59:55	2.50	3.940	382.710	0.060
06/23/95	02:59:57	2.53	3.940	382.710	0.060
06/23/95	02:59:59	2.57	3.940	382.710	0.060
06/23/95	03:00:01	2.60	3.960	382.730	0.040
06/23/95	03:00:03	2.63	3.940	382.710	0.060
06/23/95	03:00:05	2.67	3.940	382.710	0.060
06/23/95	03:00:07	2.70	3.960	382.730	0.040
06/23/95	03:00:09	2.73	3.960	382.730	0.040
06/23/95	03:00:11	2.77	3.960	382.730	0.040
06/23/95	03:00:13	2.80	3.960	382.730	0.040

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	03:00:15	2.83	3.960	382.730	0.040
06/23/95	03:00:17	2.87	3.960	382.730	0.040
06/23/95	03:00:19	2.90	3.960	382.730	0.040
06/23/95	03:00:21	2.93	3.970	382.740	0.030
06/23/95	03:00:23	2.97	3.970	382.740	0.030
06/23/95	03:00:25	3.00	3.970	382.740	0.030
06/23/95	03:00:27	3.03	3.970	382.740	0.030
06/23/95	03:00:29	3.07	3.970	382.740	0.030
06/23/95	03:00:31	3.10	3.970	382.740	0.030
06/23/95	03:00:33	3.13	3.970	382.740	0.030
06/23/95	03:00:35	3.17	3.970	382.740	0.030
06/23/95	03:00:37	3.20	3.970	382.740	0.030
06/23/95	03:00:39	3.23	3.970	382.740	0.030
06/23/95	03:00:41	3.27	3.970	382.740	0.030
06/23/95	03:00:43	3.30	3.980	382.750	0.020
06/23/95	03:00:45	3.33	3.970	382.740	0.030
06/23/95	03:00:47	3.37	3.980	382.750	0.020
06/23/95	03:00:49	3.40	3.980	382.750	0.020
06/23/95	03:00:51	3.43	3.970	382.740	0.030
06/23/95	03:00:53	3.47	3.980	382.750	0.020
06/23/95	03:00:55	3.50	3.980	382.750	0.020
06/23/95	03:00:57	3.53	3.980	382.750	0.020
06/23/95	03:00:59	3.57	3.980	382.750	0.020
06/23/95	03:01:01	3.60	3.980	382.750	0.020
06/23/95	03:01:03	3.63	3.980	382.750	0.020
06/23/95	03:01:05	3.67	3.980	382.750	0.020
06/23/95	03:01:07	3.70	3.980	382.750	0.020
06/23/95	03:01:09	3.73	3.980	382.750	0.020
06/23/95	03:01:11	3.77	3.980	382.750	0.020
06/23/95	03:01:13	3.80	3.980	382.750	0.020

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW3
 Start Date/Time : 06/23/95 | 04:05:04
 Reference Elevation : 380.300 ft AMSL

Static Water Level : 1.280 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/23/95	04:05:06	0.03	1.050	381.350	0.230
06/23/95	04:05:08	0.07	1.080	381.380	0.200
06/23/95	04:05:10	0.10	1.080	381.380	0.200
06/23/95	04:05:16	0.20	1.130	381.430	0.150
06/23/95	04:05:22	0.30	1.140	381.440	0.140
06/23/95	04:05:28	0.40	1.140	381.440	0.140
06/23/95	04:05:34	0.50	1.160	381.460	0.120
06/23/95	04:05:40	0.60	1.170	381.470	0.110
06/23/95	04:05:46	0.70	1.170	381.470	0.110
06/23/95	04:05:52	0.80	1.180	381.480	0.100
06/23/95	04:05:58	0.90	1.180	381.480	0.100
06/23/95	04:06:04	1.00	1.180	381.480	0.100
06/23/95	04:07:04	2.00	1.230	381.530	0.050
06/23/95	04:08:04	3.00	1.240	381.540	0.040
06/23/95	04:09:04	4.00	1.240	381.540	0.040
06/23/95	04:10:04	5.00	1.260	381.560	0.020
06/23/95	04:11:04	6.00	1.240	381.540	0.040
06/23/95	04:12:04	7.00	1.260	381.560	0.020
06/23/95	04:13:04	8.00	1.270	381.570	0.010
06/23/95	04:14:04	9.00	1.270	381.570	0.010
06/23/95	04:15:04	10.00	1.270	381.570	0.010
06/23/95	04:20:00	14.93	1.270	381.570	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-4
 Start Date/Time : 07/27/95 | 11:41:00
 Reference Elevation : 379.580 ft AMSL

Static Water Level : 12.400 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	11:41:01	0.02	13.450	366.130	1.050
07/27/95	11:41:15	0.25	13.410	366.170	1.010
07/27/95	11:41:30	0.50	13.390	366.190	0.990
07/27/95	11:41:45	0.75	13.360	366.220	0.960
07/27/95	11:42:00	1.00	13.340	366.240	0.940
07/27/95	11:42:15	1.25	13.330	366.250	0.930
07/27/95	11:42:30	1.50	13.330	366.250	0.930
07/27/95	11:42:45	1.75	13.320	366.260	0.920
07/27/95	11:43:00	2.00	13.320	366.260	0.920
07/27/95	11:43:15	2.25	13.310	366.270	0.910
07/27/95	11:43:30	2.50	13.300	366.280	0.900
07/27/95	11:43:45	2.75	13.290	366.290	0.890
07/27/95	11:44:00	3.00	13.280	366.300	0.880
07/27/95	11:44:15	3.25	13.270	366.310	0.870
07/27/95	11:44:30	3.50	13.260	366.320	0.860
07/27/95	11:44:45	3.75	13.250	366.330	0.850
07/27/95	11:45:00	4.00	13.240	366.340	0.840
07/27/95	11:45:15	4.25	13.230	366.350	0.830
07/27/95	11:45:30	4.50	13.210	366.370	0.810
07/27/95	11:45:45	4.75	13.200	366.380	0.800
07/27/95	11:46:00	5.00	13.190	366.390	0.790
07/27/95	11:46:30	5.50	13.160	366.420	0.760
07/27/95	11:47:00	6.00	13.150	366.430	0.750
07/27/95	11:47:30	6.50	13.130	366.450	0.730
07/27/95	11:48:00	7.00	13.110	366.470	0.710
07/27/95	11:48:30	7.50	13.090	366.490	0.690
07/27/95	11:49:00	8.00	13.070	366.510	0.670
07/27/95	11:49:30	8.50	13.050	366.530	0.650
07/27/95	11:50:00	9.00	13.030	366.550	0.630
07/27/95	11:50:30	9.50	13.020	366.560	0.620
07/27/95	11:51:00	10.00	13.010	366.570	0.610
07/27/95	11:52:00	11.00	12.980	366.600	0.580
07/27/95	11:53:00	12.00	12.950	366.630	0.550
07/27/95	11:54:00	13.00	12.930	366.650	0.530
07/27/95	11:55:00	14.00	12.910	366.670	0.510

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	11:56:00	15.00	12.890	366.690	0.490
07/27/95	11:57:00	16.00	12.870	366.710	0.470
07/27/95	11:58:00	17.00	12.850	366.730	0.450
07/27/95	11:59:00	18.00	12.830	366.750	0.430
07/27/95	12:00:00	19.00	12.810	366.770	0.410
07/27/95	12:01:00	20.00	12.800	366.780	0.400
07/27/95	12:03:00	22.00	12.770	366.810	0.370
07/27/95	12:05:00	24.00	12.740	366.840	0.340
07/27/95	12:07:00	26.00	12.710	366.870	0.310
07/27/95	12:09:00	28.00	12.690	366.890	0.290
07/27/95	12:11:00	30.00	12.690	366.890	0.290
07/27/95	12:16:00	35.00	12.630	366.950	0.230
07/27/95	12:21:00	40.00	12.590	366.990	0.190
07/27/95	12:26:00	45.00	12.570	367.010	0.170
07/27/95	12:31:00	50.00	12.530	367.050	0.130
07/27/95	12:36:00	55.00	12.530	367.050	0.130
07/27/95	12:41:00	60.00	12.510	367.070	0.110
07/27/95	12:51:00	70.00	12.490	367.090	0.090
07/27/95	13:01:00	80.00	12.470	367.110	0.070
07/27/95	13:11:00	90.00	12.450	367.130	0.050
07/27/95	13:21:00	100.00	12.440	367.140	0.040
07/27/95	13:31:00	110.00	12.440	367.140	0.040
07/27/95	13:41:00	120.00	12.430	367.150	0.030

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-5U
 Start Date/Time : 06/28/95 | 15:07:29
 Reference Elevation : 363.310 ft AMSL

Static Water Level : 6.920 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/28/95	15:07:31	0.03	7.810	371.120	0.890
06/28/95	15:07:33	0.07	7.670	370.980	0.750
06/28/95	15:07:35	0.10	7.650	370.960	0.730
06/28/95	15:07:41	0.20	7.540	370.850	0.620
06/28/95	15:07:47	0.30	7.460	370.770	0.540
06/28/95	15:07:53	0.40	7.390	370.700	0.470
06/28/95	15:07:59	0.50	7.330	370.640	0.410
06/28/95	15:08:05	0.60	7.290	370.600	0.370
06/28/95	15:08:11	0.70	7.250	370.560	0.330
06/28/95	15:08:17	0.80	7.200	370.510	0.280
06/28/95	15:08:23	0.90	7.190	370.500	0.270
06/28/95	15:08:29	1.00	7.160	370.470	0.240
06/28/95	15:09:29	2.00	7.030	370.340	0.110
06/28/95	15:10:29	3.00	6.990	370.300	0.070
06/28/95	15:11:29	4.00	6.960	370.270	0.040
06/28/95	15:12:29	5.00	6.960	370.270	0.040
06/28/95	15:13:29	6.00	6.960	370.270	0.040
06/28/95	15:14:29	7.00	6.960	370.270	0.040
06/28/95	15:15:29	8.00	6.960	370.270	0.040
06/28/95	15:16:29	9.00	6.970	370.280	0.050
06/28/95	15:17:29	10.00	6.970	370.280	0.050
06/28/95	15:23:41	16.20	6.960	370.270	0.040

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-5U
 Start Date/Time : 06/28/95 | 15:29:45
 Reference Elevation : 363.310 ft AMSL

Static Water Level : 6.920 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/28/95	15:29:47	0.03	6.110	369.420	0.810
06/28/95	15:29:49	0.07	6.150	369.460	0.770
06/28/95	15:29:51	0.10	6.190	369.500	0.730
06/28/95	15:29:57	0.20	6.310	369.620	0.610
06/28/95	15:30:03	0.30	6.400	369.710	0.520
06/28/95	15:30:09	0.40	6.470	369.780	0.450
06/28/95	15:30:15	0.50	6.530	369.840	0.390
06/28/95	15:30:21	0.60	6.570	369.880	0.350
06/28/95	15:30:27	0.70	6.610	369.920	0.310
06/28/95	15:30:33	0.80	6.660	369.970	0.260
06/28/95	15:30:39	0.90	6.670	369.980	0.250
06/28/95	15:30:45	1.00	6.700	370.010	0.220
06/28/95	15:31:45	2.00	6.840	370.150	0.080
06/28/95	15:32:45	3.00	6.870	370.180	0.050
06/28/95	15:33:45	4.00	6.900	370.210	0.020
06/28/95	15:34:45	5.00	6.900	370.210	0.020
06/28/95	15:35:45	6.00	6.900	370.210	0.020
06/28/95	15:36:45	7.00	6.900	370.210	0.020
06/28/95	15:37:45	8.00	6.890	370.200	0.030
06/28/95	15:38:45	9.00	6.870	370.180	0.050
06/28/95	15:39:45	10.00	6.860	370.170	0.060
06/28/95	15:49:45	20.00	6.770	370.080	0.150
06/28/95	15:50:31	20.77	6.760	370.070	0.160

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW7
 Start Date/Time : 06/27/95 | 15:40:57
 Reference Elevation : 372.410 ft AMSL

Static Water Level : 1.810 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/27/95	15:40:59	0.03	2.310	374.720	0.500
06/27/95	15:41:01	0.07	2.280	374.690	0.470
06/27/95	15:41:03	0.10	2.250	374.660	0.440
06/27/95	15:41:09	0.20	2.190	374.600	0.380
06/27/95	15:41:15	0.30	2.140	374.550	0.330
06/27/95	15:41:21	0.40	2.090	374.500	0.280
06/27/95	15:41:27	0.50	2.060	374.470	0.250
06/27/95	15:41:33	0.60	2.040	374.450	0.230
06/27/95	15:41:39	0.70	2.020	374.430	0.210
06/27/95	15:41:45	0.80	2.010	374.420	0.200
06/27/95	15:41:51	0.90	1.990	374.400	0.180
06/27/95	15:41:57	1.00	1.990	374.400	0.180
06/27/95	15:42:57	2.00	1.960	374.370	0.150
06/27/95	15:43:57	3.00	1.930	374.340	0.120
06/27/95	15:44:57	4.00	1.920	374.330	0.110
06/27/95	15:45:57	5.00	1.880	374.290	0.070
06/27/95	15:46:57	6.00	1.830	374.240	0.020
06/27/95	15:47:57	7.00	1.850	374.260	0.040
06/27/95	15:48:57	8.00	1.860	374.270	0.050
06/27/95	15:49:57	9.00	1.860	374.270	0.050
06/27/95	15:50:57	10.00	1.880	374.290	0.070
06/27/95	15:59:55	18.97	1.820	374.230	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW7
 Start Date/Time : 06/27/95 | 16:06:43
 Reference Elevation : 372.410 ft AMSL

Static Water Level : 1.810 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/27/95	16:06:45	0.03	1.340	373.750	0.470
06/27/95	16:06:47	0.07	1.400	373.810	0.410
06/27/95	16:06:49	0.10	1.440	373.850	0.370
06/27/95	16:06:51	0.13	1.470	373.880	0.340
06/27/95	16:06:53	0.17	1.500	373.910	0.310
06/27/95	16:06:55	0.20	1.530	373.940	0.280
06/27/95	16:06:57	0.23	1.540	373.950	0.270
06/27/95	16:06:59	0.27	1.570	373.980	0.240
06/27/95	16:07:01	0.30	1.590	374.000	0.220
06/27/95	16:07:03	0.33	1.620	374.030	0.190
06/27/95	16:07:05	0.37	1.630	374.040	0.180
06/27/95	16:07:07	0.40	1.630	374.040	0.180
06/27/95	16:07:09	0.43	1.650	374.060	0.160
06/27/95	16:07:11	0.47	1.660	374.070	0.150
06/27/95	16:07:13	0.50	1.670	374.080	0.140
06/27/95	16:07:15	0.53	1.670	374.080	0.140
06/27/95	16:07:17	0.57	1.690	374.100	0.120
06/27/95	16:07:19	0.60	1.690	374.100	0.120
06/27/95	16:07:21	0.63	1.700	374.110	0.110
06/27/95	16:07:23	0.67	1.700	374.110	0.110
06/27/95	16:07:25	0.70	1.700	374.110	0.110
06/27/95	16:07:27	0.73	1.720	374.130	0.090
06/27/95	16:07:29	0.77	1.720	374.130	0.090
06/27/95	16:07:31	0.80	1.720	374.130	0.090
06/27/95	16:07:33	0.83	1.730	374.140	0.080
06/27/95	16:07:35	0.87	1.730	374.140	0.080
06/27/95	16:07:37	0.90	1.730	374.140	0.080
06/27/95	16:07:39	0.93	1.730	374.140	0.080
06/27/95	16:07:41	0.97	1.750	374.160	0.060
06/27/95	16:07:43	1.00	1.750	374.160	0.060
06/27/95	16:07:45	1.03	1.750	374.160	0.060
06/27/95	16:07:47	1.07	1.750	374.160	0.060
06/27/95	16:07:49	1.10	1.750	374.160	0.060
06/27/95	16:07:51	1.13	1.760	374.170	0.050
06/27/95	16:07:53	1.17	1.760	374.170	0.050

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/27/95	16:07:55	1.20	1.760	374.170	0.050
06/27/95	16:07:57	1.23	1.760	374.170	0.050
06/27/95	16:07:59	1.27	1.760	374.170	0.050
06/27/95	16:08:01	1.30	1.760	374.170	0.050
06/27/95	16:08:03	1.33	1.760	374.170	0.050
06/27/95	16:08:05	1.37	1.760	374.170	0.050
06/27/95	16:08:07	1.40	1.760	374.170	0.050
06/27/95	16:08:09	1.43	1.760	374.170	0.050
06/27/95	16:08:11	1.47	1.760	374.170	0.050
06/27/95	16:08:13	1.50	1.780	374.190	0.030
06/27/95	16:08:15	1.53	1.760	374.170	0.050
06/27/95	16:08:17	1.57	1.780	374.190	0.030
06/27/95	16:08:19	1.60	1.780	374.190	0.030
06/27/95	16:08:21	1.63	1.780	374.190	0.030
06/27/95	16:08:23	1.67	1.780	374.190	0.030
06/27/95	16:08:25	1.70	1.780	374.190	0.030
06/27/95	16:08:27	1.73	1.780	374.190	0.030
06/27/95	16:08:29	1.77	1.780	374.190	0.030
06/27/95	16:08:31	1.80	1.780	374.190	0.030
06/27/95	16:08:33	1.83	1.780	374.190	0.030
06/27/95	16:08:35	1.87	1.780	374.190	0.030
06/27/95	16:08:37	1.90	1.780	374.190	0.030
06/27/95	16:08:39	1.93	1.780	374.190	0.030
06/27/95	16:08:41	1.97	1.790	374.200	0.020
06/27/95	16:08:43	2.00	1.780	374.190	0.030
06/27/95	16:08:45	2.03	1.790	374.200	0.020
06/27/95	16:08:47	2.07	1.790	374.200	0.020
06/27/95	16:08:49	2.10	1.780	374.190	0.030
06/27/95	16:08:51	2.13	1.790	374.200	0.020
06/27/95	16:08:53	2.17	1.790	374.200	0.020
06/27/95	16:08:55	2.20	1.790	374.200	0.020
06/27/95	16:08:57	2.23	1.790	374.200	0.020
06/27/95	16:08:59	2.27	1.790	374.200	0.020
06/27/95	16:09:01	2.30	1.790	374.200	0.020
06/27/95	16:09:03	2.33	1.790	374.200	0.020
06/27/95	16:09:05	2.37	1.790	374.200	0.020
06/27/95	16:09:07	2.40	1.790	374.200	0.020
06/27/95	16:09:09	2.43	1.790	374.200	0.020
06/27/95	16:09:11	2.47	1.790	374.200	0.020
06/27/95	16:09:13	2.50	1.790	374.200	0.020
06/27/95	16:09:15	2.53	1.790	374.200	0.020
06/27/95	16:09:17	2.57	1.790	374.200	0.020
06/27/95	16:09:19	2.60	1.800	374.210	0.010
06/27/95	16:09:21	2.63	1.800	374.210	0.010
06/27/95	16:09:23	2.67	1.800	374.210	0.010
06/27/95	16:09:25	2.70	1.800	374.210	0.010
06/27/95	16:09:27	2.73	1.800	374.210	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-8
 Start Date/Time : 07/27/95 | 10:00:00
 Reference Elevation : 374.640 ft AMSL

Static Water Level : 15.580 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	10:00:01	0.02	16.430	358.210	0.850
07/27/95	10:00:15	0.25	16.400	358.240	0.820
07/27/95	10:00:30	0.50	16.360	358.280	0.780
07/27/95	10:00:45	0.75	16.330	358.310	0.750
07/27/95	10:01:00	1.00	16.310	358.330	0.730
07/27/95	10:01:15	1.25	16.290	358.350	0.710
07/27/95	10:01:30	1.50	16.270	358.370	0.690
07/27/95	10:01:45	1.75	16.240	358.400	0.660
07/27/95	10:02:00	2.00	16.220	358.420	0.640
07/27/95	10:02:15	2.25	16.200	358.440	0.620
07/27/95	10:02:30	2.50	16.180	358.460	0.600
07/27/95	10:02:45	2.75	16.160	358.480	0.580
07/27/95	10:03:00	3.00	16.140	358.500	0.560
07/27/95	10:03:15	3.25	16.130	358.510	0.550
07/27/95	10:03:30	3.50	16.120	358.520	0.540
07/27/95	10:03:45	3.75	16.110	358.530	0.530
07/27/95	10:04:00	4.00	16.090	358.550	0.510
07/27/95	10:04:15	4.25	16.070	358.570	0.490
07/27/95	10:04:30	4.50	16.050	358.590	0.470
07/27/95	10:04:45	4.75	16.040	358.600	0.460
07/27/95	10:05:00	5.00	16.020	358.620	0.440
07/27/95	10:05:30	5.50	16.000	358.640	0.420
07/27/95	10:06:00	6.00	15.970	358.670	0.390
07/27/95	10:06:30	6.50	15.950	358.690	0.370
07/27/95	10:07:00	7.00	15.930	358.710	0.350
07/27/95	10:07:30	7.50	15.900	358.740	0.320
07/27/95	10:08:00	8.00	15.880	358.760	0.300
07/27/95	10:08:30	8.50	15.860	358.780	0.280
07/27/95	10:09:00	9.00	15.840	358.800	0.260
07/27/95	10:09:30	9.50	15.830	358.810	0.250
07/27/95	10:10:00	10.00	15.820	358.820	0.240
07/27/95	10:11:00	11.00	15.790	358.850	0.210
07/27/95	10:12:00	12.00	15.760	358.880	0.180
07/27/95	10:13:00	13.00	15.750	358.890	0.170
07/27/95	10:14:00	14.00	15.730	358.910	0.150

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	10:15:00	15.00	15.720	358.920	0.140
07/27/95	10:16:00	16.00	15.700	358.940	0.120
07/27/95	10:17:00	17.00	15.690	358.950	0.110
07/27/95	10:18:00	18.00	15.680	358.960	0.100
07/27/95	10:19:00	19.00	15.670	358.970	0.090
07/27/95	10:20:00	20.00	15.660	358.980	0.080
07/27/95	10:21:00	21.00	15.660	358.980	0.080
07/27/95	10:22:00	22.00	15.650	358.990	0.070
07/27/95	10:23:00	23.00	15.650	358.990	0.070
07/27/95	10:24:00	24.00	15.640	359.000	0.060
07/27/95	10:25:00	25.00	15.640	359.000	0.060
07/27/95	10:26:00	26.00	15.630	359.010	0.050
07/27/95	10:27:00	27.00	15.630	359.010	0.050
07/27/95	10:28:00	28.00	15.630	359.010	0.050
07/27/95	10:29:00	29.00	15.630	359.010	0.050
07/27/95	10:30:00	30.00	15.620	359.020	0.040
07/27/95	10:31:00	31.00	15.620	359.020	0.040
07/27/95	10:32:00	32.00	15.620	359.020	0.040
07/27/95	10:33:00	33.00	15.620	359.020	0.040
07/27/95	10:34:00	34.00	15.610	359.030	0.030
07/27/95	10:35:00	35.00	15.610	359.030	0.030
07/27/95	10:36:00	36.00	15.610	359.030	0.030
07/27/95	10:37:00	37.00	15.610	359.030	0.030
07/27/95	10:38:00	38.00	15.610	359.030	0.030
07/27/95	10:39:00	39.00	15.610	359.030	0.030
07/27/95	10:40:00	40.00	15.610	359.030	0.030
07/27/95	10:45:00	45.00	15.600	359.040	0.020
07/27/95	10:50:00	50.00	15.590	359.050	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-8U
 Start Date/Time : 06/29/95 | 09:01:55
 Reference Elevation : 361.040 ft AMSL

Static Water Level : 4.470 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/29/95	09:01:57	0.03	5.260	366.300	0.790
06/29/95	09:01:59	0.07	5.400	366.440	0.930
06/29/95	09:02:01	0.10	5.360	366.400	0.890
06/29/95	09:02:07	0.20	5.310	366.350	0.840
06/29/95	09:02:13	0.30	5.280	366.320	0.810
06/29/95	09:02:19	0.40	5.260	366.300	0.790
06/29/95	09:02:25	0.50	5.240	366.280	0.770
06/29/95	09:02:31	0.60	5.200	366.240	0.730
06/29/95	09:02:37	0.70	5.170	366.210	0.700
06/29/95	09:02:43	0.80	5.150	366.190	0.680
06/29/95	09:02:49	0.90	5.140	366.180	0.670
06/29/95	09:02:55	1.00	5.110	366.150	0.640
06/29/95	09:03:55	2.00	4.950	365.990	0.480
06/29/95	09:04:55	3.00	4.820	365.860	0.350
06/29/95	09:05:55	4.00	4.740	365.780	0.270
06/29/95	09:06:55	5.00	4.680	365.720	0.210
06/29/95	09:07:55	6.00	4.630	365.670	0.160
06/29/95	09:08:55	7.00	4.610	365.650	0.140
06/29/95	09:09:55	8.00	4.560	365.600	0.090
06/29/95	09:10:55	9.00	4.530	365.570	0.060
06/29/95	09:11:55	10.00	4.530	365.570	0.060
06/29/95	09:21:55	20.00	4.520	365.560	0.050
06/29/95	09:27:35	25.67	4.530	365.570	0.060

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-8U
 Observation Well : MW-8U
 Start Date/Time : 06/29/95 | 09:27:57
 Reference Elevation : 361.040 ft AMSL

Static Water Level : 4.470 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/29/95	09:27:59	0.03	3.580	364.620	0.890
06/29/95	09:28:01	0.07	3.610	364.650	0.860
06/29/95	09:28:03	0.10	3.610	364.650	0.860
06/29/95	09:28:09	0.20	3.670	364.710	0.800
06/29/95	09:28:15	0.30	3.700	364.740	0.770
06/29/95	09:28:21	0.40	3.720	364.760	0.750
06/29/95	09:28:27	0.50	3.750	364.790	0.720
06/29/95	09:28:33	0.60	3.780	364.820	0.690
06/29/95	09:28:39	0.70	3.800	364.840	0.670
06/29/95	09:28:45	0.80	3.830	364.870	0.640
06/29/95	09:28:51	0.90	3.840	364.880	0.630
06/29/95	09:28:57	1.00	3.870	364.910	0.600
06/29/95	09:29:57	2.00	4.040	365.080	0.430
06/29/95	09:30:57	3.00	4.160	365.200	0.310
06/29/95	09:31:57	4.00	4.240	365.280	0.230
06/29/95	09:32:57	5.00	4.320	365.360	0.150
06/29/95	09:33:57	6.00	4.360	365.400	0.110
06/29/95	09:34:57	7.00	4.390	365.430	0.080
06/29/95	09:35:57	8.00	4.420	365.460	0.050
06/29/95	09:36:57	9.00	4.430	365.470	0.040
06/29/95	09:37:57	10.00	4.450	365.490	0.020
06/29/95	09:47:57	20.00	4.450	365.490	0.020
06/29/95	09:52:17	24.33	4.460	365.500	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-9
 Start Date/Time : 07/27/95 | 08:45:00
 Reference Elevation : 369.200 ft AMSL

Static Water Level : 11.300 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	08:45:01	0.02	11.460	357.740	0.160
07/27/95	08:45:15	0.25	11.420	357.780	0.120
07/27/95	08:45:30	0.50	11.400	357.800	0.100
07/27/95	08:45:45	0.75	11.400	357.800	0.100
07/27/95	08:46:00	1.00	11.390	357.810	0.090
07/27/95	08:46:15	1.25	11.380	357.820	0.080
07/27/95	08:46:30	1.50	11.380	357.820	0.080
07/27/95	08:46:45	1.75	11.380	357.820	0.080
07/27/95	08:47:00	2.00	11.370	357.830	0.070
07/27/95	08:47:15	2.25	11.370	357.830	0.070
07/27/95	08:47:30	2.50	11.370	357.830	0.070
07/27/95	08:47:45	2.75	11.370	357.830	0.070
07/27/95	08:48:00	3.00	11.370	357.830	0.070
07/27/95	08:48:15	3.25	11.360	357.840	0.060
07/27/95	08:48:30	3.50	11.360	357.840	0.060
07/27/95	08:48:45	3.75	11.360	357.840	0.060
07/27/95	08:49:00	4.00	11.360	357.840	0.060
07/27/95	08:49:15	4.25	11.360	357.840	0.060
07/27/95	08:49:30	4.50	11.360	357.840	0.060
07/27/95	08:49:45	4.75	11.360	357.840	0.060
07/27/95	08:50:00	5.00	11.350	357.850	0.050
07/27/95	08:50:30	5.50	11.350	357.850	0.050
07/27/95	08:51:00	6.00	11.350	357.850	0.050
07/27/95	08:51:30	6.50	11.350	357.850	0.050
07/27/95	08:52:00	7.00	11.350	357.850	0.050
07/27/95	08:52:30	7.50	11.340	357.860	0.040
07/27/95	08:53:00	8.00	11.340	357.860	0.040
07/27/95	08:53:30	8.50	11.340	357.860	0.040
07/27/95	08:54:00	9.00	11.340	357.860	0.040
07/27/95	08:54:30	9.50	11.330	357.870	0.030
07/27/95	08:55:00	10.00	11.330	357.870	0.030
07/27/95	08:56:00	11.00	11.330	357.870	0.030
07/27/95	08:57:00	12.00	11.330	357.870	0.030
07/27/95	08:58:00	13.00	11.330	357.870	0.030
07/27/95	08:59:00	14.00	11.330	357.870	0.030

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	09:00:00	15.00	11.330	357.870	0.030
07/27/95	09:01:00	16.00	11.330	357.870	0.030
07/27/95	09:02:00	17.00	11.320	357.880	0.020
07/27/95	09:03:00	18.00	11.320	357.880	0.020
07/27/95	09:04:00	19.00	11.320	357.880	0.020
07/27/95	09:05:00	20.00	11.320	357.880	0.020
07/27/95	09:06:00	21.00	11.320	357.880	0.020
07/27/95	09:07:00	22.00	11.320	357.880	0.020
07/27/95	09:08:00	23.00	11.320	357.880	0.020
07/27/95	09:09:00	24.00	11.320	357.880	0.020
07/27/95	09:10:00	25.00	11.320	357.880	0.020
07/27/95	09:15:00	30.00	11.320	357.880	0.020
07/27/95	09:20:00	35.00	11.310	357.890	0.010
07/27/95	09:25:00	40.00	11.310	357.890	0.010
07/27/95	09:30:00	45.00	11.310	357.890	0.010

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-10
 Start Date/Time : 06/14/95 | 00:00:00
 Reference Elevation : 375.460 ft AMSL

Static Water Level : 11.960 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/14/95	00:00:13	0.22	12.100	363.360	0.140
06/14/95	00:00:35	0.58	12.100	363.360	0.140
06/14/95	00:01:06	1.10	12.100	363.360	0.140
06/14/95	00:01:29	1.48	12.100	363.360	0.140
06/14/95	00:02:09	2.15	12.090	363.370	0.130
06/14/95	00:02:27	2.45	12.080	363.380	0.120
06/14/95	00:02:46	2.77	12.080	363.380	0.120
06/14/95	00:03:29	3.48	12.060	363.400	0.100
06/14/95	00:03:49	3.82	12.060	363.400	0.100
06/14/95	00:04:05	4.08	12.060	363.400	0.100
06/14/95	00:04:19	4.32	12.060	363.400	0.100
06/14/95	00:04:44	4.73	12.060	363.400	0.100
06/14/95	00:04:58	4.97	12.060	363.400	0.100
06/14/95	00:05:16	5.27	12.060	363.400	0.100
06/14/95	00:05:34	5.57	12.060	363.400	0.100
06/14/95	00:06:12	6.20	12.060	363.400	0.100
06/14/95	00:06:57	6.95	12.050	363.410	0.090
06/14/95	00:08:56	8.93	12.040	363.420	0.080
06/14/95	00:09:22	9.37	12.040	363.420	0.080
06/14/95	00:09:37	9.62	12.040	363.420	0.080
06/14/95	00:10:09	10.15	12.040	363.420	0.080
06/14/95	00:10:31	10.52	12.040	363.420	0.080
06/14/95	00:11:11	11.18	12.030	363.430	0.070
06/14/95	00:11:39	11.65	12.030	363.430	0.070
06/14/95	00:12:42	12.70	12.030	363.430	0.070
06/14/95	00:13:55	13.92	12.030	363.430	0.070
06/14/95	00:15:00	15.00	12.020	363.440	0.060
06/14/95	00:15:36	15.60	12.020	363.440	0.060
06/14/95	00:15:49	15.82	12.020	363.440	0.060
06/14/95	00:16:06	16.10	12.020	363.440	0.060
06/14/95	00:16:15	16.25	12.020	363.440	0.060
06/14/95	00:16:24	16.40	12.020	363.440	0.060
06/14/95	00:16:44	16.73	12.020	363.440	0.060
06/14/95	00:17:00	17.00	12.020	363.440	0.060
06/14/95	00:17:22	17.37	12.020	363.440	0.060

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/14/95	00:17:41	17.68	12.020	363.440	0.060
06/14/95	00:18:12	18.20	12.020	363.440	0.060
06/14/95	00:18:50	18.83	12.020	363.440	0.060
06/14/95	00:19:15	19.25	12.020	363.440	0.060
06/14/95	00:19:36	19.60	12.020	363.440	0.060
06/14/95	00:20:20	20.33	12.020	363.440	0.060
06/14/95	00:22:07	22.12	12.010	363.450	0.050
06/14/95	00:22:37	22.62	12.010	363.450	0.050
06/14/95	00:22:53	22.88	12.010	363.450	0.050
06/14/95	00:23:15	23.25	12.010	363.450	0.050
06/14/95	00:24:03	24.05	12.010	363.450	0.050
06/14/95	00:24:44	24.73	12.000	363.460	0.040
06/14/95	00:27:50	27.83	12.000	363.460	0.040
06/14/95	00:28:20	28.33	12.000	363.460	0.040
06/14/95	00:28:41	28.68	12.000	363.460	0.040
06/14/95	00:29:16	29.27	12.000	363.460	0.040
06/14/95	00:29:36	29.60	12.000	363.460	0.040
06/14/95	00:29:50	29.83	12.000	363.460	0.040
06/14/95	00:30:46	30.77	12.000	363.460	0.040
06/14/95	00:32:10	32.17	12.000	363.460	0.040
06/14/95	00:33:29	33.48	12.000	363.460	0.040
06/14/95	00:34:40	34.67	12.000	363.460	0.040
06/14/95	00:35:21	35.35	11.990	363.470	0.030
06/14/95	00:36:40	36.67	11.990	363.470	0.030
06/14/95	00:41:13	41.22	11.980	363.480	0.020
06/14/95	00:44:20	44.33	11.980	363.480	0.020
06/14/95	00:50:37	50.62	11.980	363.480	0.020
06/14/95	00:54:27	54.45	11.970	363.490	0.010
06/14/95	00:57:10	57.17	11.970	363.490	0.010
06/14/95	01:02:19	62.32	11.970	363.490	0.010
06/14/95	01:07:57	67.95	11.960	363.500	0.000
06/14/95	01:13:27	73.45	11.960	363.500	0.000

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : SW-10
 Start Date/Time : 07/26/95 | 15:07:00
 Reference Elevation : 375.460 ft AMSL

Static Water Level : 13.100 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	15:07:01	0.02	13.710	361.750	0.610
07/26/95	15:07:15	0.25	13.680	361.780	0.580
07/26/95	15:07:30	0.50	13.680	361.780	0.580
07/26/95	15:07:45	0.75	13.670	361.790	0.570
07/26/95	15:08:00	1.00	13.660	361.800	0.560
07/26/95	15:08:15	1.25	13.650	361.810	0.550
07/26/95	15:08:30	1.50	13.650	361.810	0.550
07/26/95	15:08:45	1.75	13.640	361.820	0.540
07/26/95	15:09:00	2.00	13.630	361.830	0.530
07/26/95	15:09:15	2.25	13.630	361.830	0.530
07/26/95	15:09:30	2.50	13.630	361.830	0.530
07/26/95	15:09:45	2.75	13.620	361.840	0.520
07/26/95	15:10:00	3.00	13.620	361.840	0.520
07/26/95	15:10:30	3.50	13.600	361.860	0.500
07/26/95	15:11:00	4.00	13.590	361.870	0.490
07/26/95	15:11:30	4.50	13.580	361.880	0.480
07/26/95	15:12:00	5.00	13.570	361.890	0.470
07/26/95	15:13:00	6.00	13.560	361.900	0.460
07/26/95	15:14:00	7.00	13.540	361.920	0.440
07/26/95	15:15:00	8.00	13.520	361.940	0.420
07/26/95	15:16:00	9.00	13.510	361.950	0.410
07/26/95	15:17:00	10.00	13.500	361.960	0.400
07/26/95	15:19:00	12.00	13.470	361.990	0.370
07/26/95	15:21:00	14.00	13.450	362.010	0.350
07/26/95	15:23:00	16.00	13.430	362.030	0.330
07/26/95	15:25:00	18.00	13.410	362.050	0.310
07/26/95	15:27:00	20.00	13.390	362.070	0.290
07/26/95	15:32:00	25.00	13.350	362.110	0.250
07/26/95	15:37:00	30.00	13.320	362.140	0.220
07/26/95	15:42:00	35.00	13.290	362.170	0.190
07/26/95	15:47:00	40.00	13.270	362.190	0.170
07/26/95	15:57:00	50.00	13.220	362.240	0.120
07/26/95	16:07:00	60.00	13.200	362.260	0.100
07/26/95	16:17:00	70.00	13.180	362.280	0.080
07/26/95	16:27:00	80.00	13.160	362.300	0.060

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	16:37:00	90.00	13.150	362.310	0.050
07/26/95	16:47:00	100.00	13.140	362.320	0.040

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-1D
 Start Date/Time : 06/16/95 | 14:17:35
 Reference Elevation : 380.540 ft AMSL

Static Water Level : 10.500 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/16/95	14:17:36	0.02	11.760	392.300	1.260
06/16/95	14:17:37	0.03	11.670	392.210	1.170
06/16/95	14:17:38	0.05	11.670	392.210	1.170
06/16/95	14:17:39	0.07	11.690	392.230	1.190
06/16/95	14:17:40	0.08	11.650	392.190	1.150
06/16/95	14:17:41	0.10	11.600	392.140	1.100
06/16/95	14:17:47	0.20	11.280	391.820	0.780
06/16/95	14:17:53	0.30	11.090	391.630	0.590
06/16/95	14:17:59	0.40	11.050	391.590	0.550
06/16/95	14:18:05	0.50	10.930	391.470	0.430
06/16/95	14:18:11	0.60	10.860	391.400	0.360
06/16/95	14:18:17	0.70	10.800	391.340	0.300
06/16/95	14:18:23	0.80	10.800	391.340	0.300
06/16/95	14:18:29	0.90	10.770	391.310	0.270
06/16/95	14:18:35	1.00	10.750	391.290	0.250
06/16/95	14:19:35	2.00	10.660	391.200	0.160
06/16/95	14:20:35	3.00	10.640	391.180	0.140
06/16/95	14:21:35	4.00	10.640	391.180	0.140
06/16/95	14:22:35	5.00	10.590	391.130	0.090
06/16/95	14:23:35	6.00	10.590	391.130	0.090
06/16/95	14:24:35	7.00	10.590	391.130	0.090
06/16/95	14:25:35	8.00	10.540	391.080	0.040
06/16/95	14:26:35	9.00	10.540	391.080	0.040
06/16/95	14:27:35	10.00	10.540	391.080	0.040
06/16/95	14:33:28	15.88	10.540	391.080	0.040

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-1D
 Start Date/Time : 06/16/95 | 14:35:48
 Reference Elevation : 380.540 ft AMSL

Static Water Level : 10.500 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/16/95	14:35:49	0.02	8.940	389.480	1.560
06/16/95	14:35:50	0.03	9.000	389.540	1.500
06/16/95	14:35:51	0.05	9.100	389.640	1.400
06/16/95	14:35:52	0.07	9.170	389.710	1.330
06/16/95	14:35:53	0.08	9.230	389.770	1.270
06/16/95	14:35:54	0.10	9.300	389.840	1.200
06/16/95	14:36:00	0.20	9.620	390.160	0.880
06/16/95	14:36:06	0.30	9.880	390.420	0.620
06/16/95	14:36:12	0.40	10.010	390.550	0.490
06/16/95	14:36:18	0.50	10.130	390.670	0.370
06/16/95	14:36:24	0.60	10.200	390.740	0.300
06/16/95	14:36:30	0.70	10.240	390.780	0.260
06/16/95	14:36:36	0.80	10.270	390.810	0.230
06/16/95	14:36:42	0.90	10.290	390.830	0.210
06/16/95	14:36:48	1.00	10.310	390.850	0.190
06/16/95	14:37:48	2.00	10.360	390.900	0.140
06/16/95	14:38:48	3.00	10.360	390.900	0.140
06/16/95	14:39:48	4.00	10.410	390.950	0.090
06/16/95	14:40:48	5.00	10.410	390.950	0.090
06/16/95	14:41:48	6.00	10.410	390.950	0.090
06/16/95	14:42:48	7.00	10.410	390.950	0.090
06/16/95	14:43:48	8.00	10.430	390.970	0.070
06/16/95	14:44:48	9.00	10.450	390.990	0.050
06/16/95	14:45:48	10.00	10.450	390.990	0.050
06/16/95	14:55:48	20.00	10.450	390.990	0.050
06/16/95	15:04:42	28.90	10.470	391.010	0.030

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-2D
 Observation Well : MW-2D
 Start Date/Time : 06/20/95 | 14:05:33
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 10.850 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/20/95	14:05:33	0.00	12.170	391.700	1.320
06/20/95	14:05:34	0.02	12.150	391.680	1.300
06/20/95	14:05:35	0.03	12.150	391.680	1.300
06/20/95	14:05:36	0.05	12.150	391.680	1.300
06/20/95	14:05:37	0.07	12.170	391.700	1.320
06/20/95	14:05:38	0.08	12.170	391.700	1.320
06/20/95	14:05:39	0.10	12.170	391.700	1.320
06/20/95	14:05:45	0.20	12.170	391.700	1.320
06/20/95	14:05:51	0.30	12.150	391.680	1.300
06/20/95	14:05:57	0.40	12.150	391.680	1.300
06/20/95	14:06:03	0.50	12.150	391.680	1.300
06/20/95	14:06:09	0.60	12.130	391.660	1.280
06/20/95	14:06:15	0.70	12.130	391.660	1.280
06/20/95	14:06:21	0.80	12.130	391.660	1.280
06/20/95	14:06:27	0.90	12.130	391.660	1.280
06/20/95	14:06:33	1.00	12.110	391.640	1.260
06/20/95	14:07:33	2.00	12.060	391.590	1.210
06/20/95	14:08:33	3.00	11.970	391.500	1.120
06/20/95	14:09:33	4.00	11.920	391.450	1.070
06/20/95	14:10:33	5.00	11.830	391.360	0.980
06/20/95	14:11:33	6.00	11.780	391.310	0.930
06/20/95	14:12:33	7.00	11.740	391.270	0.890
06/20/95	14:13:33	8.00	11.690	391.220	0.840
06/20/95	14:14:33	9.00	11.650	391.180	0.800
06/20/95	14:15:33	10.00	11.620	391.150	0.770
06/20/95	14:25:33	20.00	11.320	390.850	0.470
06/20/95	14:35:33	30.00	11.190	390.720	0.340
06/20/95	14:45:33	40.00	11.030	390.560	0.180
06/20/95	14:55:33	50.00	10.910	390.440	0.060
06/20/95	15:03:25	57.87	10.890	390.420	0.040

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-2D
 Start Date/Time : 06/20/95 | 15:07:47
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 10.850 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:07:48	0.02	9.420	388.950	1.430
06/20/95	15:07:49	0.03	9.440	388.970	1.410
06/20/95	15:07:50	0.05	9.440	388.970	1.410
06/20/95	15:07:51	0.07	9.440	388.970	1.410
06/20/95	15:07:52	0.08	9.440	388.970	1.410
06/20/95	15:07:53	0.10	9.440	388.970	1.410
06/20/95	15:07:54	0.12	9.440	388.970	1.410
06/20/95	15:07:55	0.13	9.440	388.970	1.410
06/20/95	15:07:56	0.15	9.460	388.990	1.390
06/20/95	15:07:57	0.17	9.460	388.990	1.390
06/20/95	15:07:58	0.18	9.460	388.990	1.390
06/20/95	15:07:59	0.20	9.460	388.990	1.390
06/20/95	15:08:00	0.22	9.460	388.990	1.390
06/20/95	15:08:01	0.23	9.460	388.990	1.390
06/20/95	15:08:02	0.25	9.460	388.990	1.390
06/20/95	15:08:03	0.27	9.460	388.990	1.390
06/20/95	15:08:04	0.28	9.460	388.990	1.390
06/20/95	15:08:05	0.30	9.490	389.020	1.360
06/20/95	15:08:06	0.32	9.490	389.020	1.360
06/20/95	15:08:07	0.33	9.490	389.020	1.360
06/20/95	15:08:08	0.35	9.490	389.020	1.360
06/20/95	15:08:09	0.37	9.490	389.020	1.360
06/20/95	15:08:10	0.38	9.490	389.020	1.360
06/20/95	15:08:11	0.40	9.490	389.020	1.360
06/20/95	15:08:12	0.42	9.490	389.020	1.360
06/20/95	15:08:13	0.43	9.490	389.020	1.360
06/20/95	15:08:14	0.45	9.490	389.020	1.360
06/20/95	15:08:15	0.47	9.510	389.040	1.340
06/20/95	15:08:16	0.48	9.510	389.040	1.340
06/20/95	15:08:17	0.50	9.490	389.020	1.360
06/20/95	15:08:18	0.52	9.510	389.040	1.340
06/20/95	15:08:19	0.53	9.510	389.040	1.340
06/20/95	15:08:20	0.55	9.510	389.040	1.340
06/20/95	15:08:21	0.57	9.510	389.040	1.340
06/20/95	15:08:22	0.58	9.510	389.040	1.340

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:08:23	0.60	9.510	389.040	1.340
06/20/95	15:08:24	0.62	9.510	389.040	1.340
06/20/95	15:08:25	0.63	9.530	389.060	1.320
06/20/95	15:08:26	0.65	9.530	389.060	1.320
06/20/95	15:08:27	0.67	9.510	389.040	1.340
06/20/95	15:08:28	0.68	9.510	389.040	1.340
06/20/95	15:08:29	0.70	9.510	389.040	1.340
06/20/95	15:08:30	0.72	9.530	389.060	1.320
06/20/95	15:08:31	0.73	9.530	389.060	1.320
06/20/95	15:08:32	0.75	9.530	389.060	1.320
06/20/95	15:08:33	0.77	9.510	389.040	1.340
06/20/95	15:08:34	0.78	9.530	389.060	1.320
06/20/95	15:08:35	0.80	9.530	389.060	1.320
06/20/95	15:08:36	0.82	9.530	389.060	1.320
06/20/95	15:08:37	0.83	9.530	389.060	1.320
06/20/95	15:08:38	0.85	9.530	389.060	1.320
06/20/95	15:08:39	0.87	9.530	389.060	1.320
06/20/95	15:08:40	0.88	9.530	389.060	1.320
06/20/95	15:08:41	0.90	9.530	389.060	1.320
06/20/95	15:08:42	0.92	9.530	389.060	1.320
06/20/95	15:08:43	0.93	9.530	389.060	1.320
06/20/95	15:08:44	0.95	9.530	389.060	1.320
06/20/95	15:08:45	0.97	9.530	389.060	1.320
06/20/95	15:08:46	0.98	9.530	389.060	1.320
06/20/95	15:08:47	1.00	9.530	389.060	1.320
06/20/95	15:08:48	1.02	9.530	389.060	1.320
06/20/95	15:08:49	1.03	9.560	389.090	1.290
06/20/95	15:08:50	1.05	9.530	389.060	1.320
06/20/95	15:08:51	1.07	9.530	389.060	1.320
06/20/95	15:08:52	1.08	9.530	389.060	1.320
06/20/95	15:08:53	1.10	9.560	389.090	1.290
06/20/95	15:08:54	1.12	9.560	389.090	1.290
06/20/95	15:08:55	1.13	9.560	389.090	1.290
06/20/95	15:08:56	1.15	9.560	389.090	1.290
06/20/95	15:08:57	1.17	9.560	389.090	1.290
06/20/95	15:08:58	1.18	9.560	389.090	1.290
06/20/95	15:08:59	1.20	9.560	389.090	1.290
06/20/95	15:09:00	1.22	9.560	389.090	1.290
06/20/95	15:09:01	1.23	9.560	389.090	1.290
06/20/95	15:09:02	1.25	9.560	389.090	1.290
06/20/95	15:09:03	1.27	9.560	389.090	1.290
06/20/95	15:09:04	1.28	9.560	389.090	1.290
06/20/95	15:09:05	1.30	9.560	389.090	1.290
06/20/95	15:09:06	1.32	9.560	389.090	1.290
06/20/95	15:09:07	1.33	9.580	389.110	1.270
06/20/95	15:09:08	1.35	9.560	389.090	1.290
06/20/95	15:09:09	1.37	9.560	389.090	1.290
06/20/95	15:09:10	1.38	9.560	389.090	1.290
06/20/95	15:09:11	1.40	9.560	389.090	1.290

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:09:12	1.42	9.560	389.090	1.290
06/20/95	15:09:13	1.43	9.560	389.090	1.290
06/20/95	15:09:14	1.45	9.580	389.110	1.270
06/20/95	15:09:15	1.47	9.580	389.110	1.270
06/20/95	15:09:16	1.48	9.560	389.090	1.290
06/20/95	15:09:17	1.50	9.580	389.110	1.270
06/20/95	15:09:18	1.52	9.580	389.110	1.270
06/20/95	15:09:19	1.53	9.580	389.110	1.270
06/20/95	15:09:20	1.55	9.580	389.110	1.270
06/20/95	15:09:21	1.57	9.580	389.110	1.270
06/20/95	15:09:22	1.58	9.560	389.090	1.290
06/20/95	15:09:23	1.60	9.580	389.110	1.270
06/20/95	15:09:24	1.62	9.580	389.110	1.270
06/20/95	15:09:25	1.63	9.580	389.110	1.270
06/20/95	15:09:26	1.65	9.580	389.110	1.270
06/20/95	15:09:27	1.67	9.580	389.110	1.270
06/20/95	15:09:28	1.68	9.580	389.110	1.270
06/20/95	15:09:29	1.70	9.580	389.110	1.270
06/20/95	15:09:30	1.72	9.580	389.110	1.270
06/20/95	15:09:31	1.73	9.580	389.110	1.270
06/20/95	15:09:32	1.75	9.580	389.110	1.270
06/20/95	15:09:33	1.77	9.600	389.130	1.250
06/20/95	15:09:34	1.78	9.600	389.130	1.250
06/20/95	15:09:35	1.80	9.600	389.130	1.250
06/20/95	15:09:36	1.82	9.580	389.110	1.270
06/20/95	15:09:37	1.83	9.580	389.110	1.270
06/20/95	15:09:38	1.85	9.580	389.110	1.270
06/20/95	15:09:39	1.87	9.580	389.110	1.270
06/20/95	15:09:40	1.88	9.600	389.130	1.250
06/20/95	15:09:41	1.90	9.580	389.110	1.270
06/20/95	15:09:42	1.92	9.580	389.110	1.270
06/20/95	15:09:43	1.93	9.600	389.130	1.250
06/20/95	15:09:44	1.95	9.600	389.130	1.250
06/20/95	15:09:45	1.97	9.600	389.130	1.250
06/20/95	15:09:46	1.98	9.580	389.110	1.270
06/20/95	15:09:47	2.00	9.600	389.130	1.250
06/20/95	15:09:48	2.02	9.600	389.130	1.250
06/20/95	15:09:49	2.03	9.600	389.130	1.250
06/20/95	15:09:50	2.05	9.600	389.130	1.250
06/20/95	15:09:51	2.07	9.600	389.130	1.250
06/20/95	15:09:52	2.08	9.600	389.130	1.250
06/20/95	15:09:53	2.10	9.600	389.130	1.250
06/20/95	15:09:54	2.12	9.600	389.130	1.250
06/20/95	15:09:55	2.13	9.600	389.130	1.250
06/20/95	15:09:56	2.15	9.600	389.130	1.250
06/20/95	15:09:57	2.17	9.600	389.130	1.250
06/20/95	15:09:58	2.18	9.600	389.130	1.250
06/20/95	15:09:59	2.20	9.600	389.130	1.250
06/20/95	15:10:00	2.22	9.600	389.130	1.250

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:10:01	2.23	9.600	389.130	1.250
06/20/95	15:10:02	2.25	9.620	389.150	1.230
06/20/95	15:10:03	2.27	9.620	389.150	1.230
06/20/95	15:10:04	2.28	9.620	389.150	1.230
06/20/95	15:10:05	2.30	9.620	389.150	1.230
06/20/95	15:10:06	2.32	9.600	389.130	1.250
06/20/95	15:10:07	2.33	9.620	389.150	1.230
06/20/95	15:10:08	2.35	9.620	389.150	1.230
06/20/95	15:10:09	2.37	9.600	389.130	1.250
06/20/95	15:10:10	2.38	9.600	389.130	1.250
06/20/95	15:10:11	2.40	9.620	389.150	1.230
06/20/95	15:10:12	2.42	9.620	389.150	1.230
06/20/95	15:10:13	2.43	9.620	389.150	1.230
06/20/95	15:10:14	2.45	9.620	389.150	1.230
06/20/95	15:10:15	2.47	9.620	389.150	1.230
06/20/95	15:10:16	2.48	9.620	389.150	1.230
06/20/95	15:10:17	2.50	9.620	389.150	1.230
06/20/95	15:10:18	2.52	9.620	389.150	1.230
06/20/95	15:10:19	2.53	9.620	389.150	1.230
06/20/95	15:10:20	2.55	9.620	389.150	1.230
06/20/95	15:10:21	2.57	9.620	389.150	1.230
06/20/95	15:10:22	2.58	9.650	389.180	1.200
06/20/95	15:10:23	2.60	9.650	389.180	1.200
06/20/95	15:10:24	2.62	9.620	389.150	1.230
06/20/95	15:10:25	2.63	9.620	389.150	1.230
06/20/95	15:10:26	2.65	9.620	389.150	1.230
06/20/95	15:10:27	2.67	9.620	389.150	1.230
06/20/95	15:10:28	2.68	9.620	389.150	1.230
06/20/95	15:10:29	2.70	9.620	389.150	1.230
06/20/95	15:10:30	2.72	9.650	389.180	1.200
06/20/95	15:10:31	2.73	9.650	389.180	1.200
06/20/95	15:10:32	2.75	9.650	389.180	1.200
06/20/95	15:10:33	2.77	9.620	389.150	1.230
06/20/95	15:10:34	2.78	9.650	389.180	1.200
06/20/95	15:10:35	2.80	9.650	389.180	1.200
06/20/95	15:10:36	2.82	9.650	389.180	1.200
06/20/95	15:10:37	2.83	9.650	389.180	1.200
06/20/95	15:10:38	2.85	9.650	389.180	1.200
06/20/95	15:10:39	2.87	9.650	389.180	1.200
06/20/95	15:10:40	2.88	9.650	389.180	1.200
06/20/95	15:10:41	2.90	9.670	389.200	1.180
06/20/95	15:10:42	2.92	9.650	389.180	1.200
06/20/95	15:10:43	2.93	9.650	389.180	1.200
06/20/95	15:10:44	2.95	9.650	389.180	1.200
06/20/95	15:10:45	2.97	9.650	389.180	1.200
06/20/95	15:10:46	2.98	9.690	389.220	1.160
06/20/95	15:10:47	3.00	9.650	389.180	1.200
06/20/95	15:10:48	3.02	9.650	389.180	1.200
06/20/95	15:10:49	3.03	9.650	389.180	1.200

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:10:50	3.05	9.670	389.200	1.180
06/20/95	15:10:51	3.07	9.670	389.200	1.180
06/20/95	15:10:52	3.08	9.670	389.200	1.180
06/20/95	15:10:53	3.10	9.650	389.180	1.200
06/20/95	15:10:54	3.12	9.650	389.180	1.200
06/20/95	15:10:55	3.13	9.650	389.180	1.200
06/20/95	15:10:56	3.15	9.650	389.180	1.200
06/20/95	15:10:57	3.17	9.650	389.180	1.200
06/20/95	15:10:58	3.18	9.670	389.200	1.180
06/20/95	15:10:59	3.20	9.670	389.200	1.180
06/20/95	15:11:00	3.22	9.670	389.200	1.180
06/20/95	15:11:01	3.23	9.650	389.180	1.200
06/20/95	15:11:02	3.25	9.670	389.200	1.180
06/20/95	15:11:03	3.27	9.670	389.200	1.180
06/20/95	15:11:04	3.28	9.670	389.200	1.180
06/20/95	15:11:05	3.30	9.670	389.200	1.180
06/20/95	15:11:06	3.32	9.650	389.180	1.200
06/20/95	15:11:07	3.33	9.670	389.200	1.180
06/20/95	15:11:08	3.35	9.690	389.220	1.160
06/20/95	15:11:09	3.37	9.670	389.200	1.180
06/20/95	15:11:10	3.38	9.670	389.200	1.180
06/20/95	15:11:11	3.40	9.670	389.200	1.180
06/20/95	15:11:12	3.42	9.670	389.200	1.180
06/20/95	15:11:13	3.43	9.670	389.200	1.180
06/20/95	15:11:14	3.45	9.650	389.180	1.200
06/20/95	15:11:15	3.47	9.670	389.200	1.180
06/20/95	15:11:16	3.48	9.670	389.200	1.180
06/20/95	15:11:17	3.50	9.670	389.200	1.180
06/20/95	15:11:18	3.52	9.690	389.220	1.160
06/20/95	15:11:19	3.53	9.670	389.200	1.180
06/20/95	15:11:20	3.55	9.670	389.200	1.180
06/20/95	15:11:21	3.57	9.690	389.220	1.160
06/20/95	15:11:22	3.58	9.670	389.200	1.180
06/20/95	15:11:23	3.60	9.670	389.200	1.180
06/20/95	15:11:24	3.62	9.670	389.200	1.180
06/20/95	15:11:25	3.63	9.690	389.220	1.160
06/20/95	15:11:26	3.65	9.690	389.220	1.160
06/20/95	15:11:27	3.67	9.690	389.220	1.160
06/20/95	15:11:28	3.68	9.690	389.220	1.160
06/20/95	15:11:29	3.70	9.690	389.220	1.160
06/20/95	15:11:30	3.72	9.690	389.220	1.160
06/20/95	15:11:31	3.73	9.690	389.220	1.160
06/20/95	15:11:32	3.75	9.690	389.220	1.160
06/20/95	15:11:33	3.77	9.690	389.220	1.160
06/20/95	15:11:34	3.78	9.690	389.220	1.160
06/20/95	15:11:35	3.80	9.690	389.220	1.160
06/20/95	15:11:36	3.82	9.720	389.250	1.130
06/20/95	15:11:37	3.83	9.720	389.250	1.130
06/20/95	15:11:38	3.85	9.690	389.220	1.160

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:11:39	3.87	9.690	389.220	1.160
06/20/95	15:11:40	3.88	9.690	389.220	1.160
06/20/95	15:11:41	3.90	9.720	389.250	1.130
06/20/95	15:11:42	3.92	9.720	389.250	1.130
06/20/95	15:11:43	3.93	9.720	389.250	1.130
06/20/95	15:11:44	3.95	9.690	389.220	1.160
06/20/95	15:11:45	3.97	9.720	389.250	1.130
06/20/95	15:11:46	3.98	9.720	389.250	1.130
06/20/95	15:11:47	4.00	9.720	389.250	1.130
06/20/95	15:11:48	4.02	9.720	389.250	1.130
06/20/95	15:11:49	4.03	9.720	389.250	1.130
06/20/95	15:11:50	4.05	9.720	389.250	1.130
06/20/95	15:11:51	4.07	9.720	389.250	1.130
06/20/95	15:11:52	4.08	9.720	389.250	1.130
06/20/95	15:11:53	4.10	9.720	389.250	1.130
06/20/95	15:11:54	4.12	9.740	389.270	1.110
06/20/95	15:11:55	4.13	9.740	389.270	1.110
06/20/95	15:11:56	4.15	9.740	389.270	1.110
06/20/95	15:11:57	4.17	9.720	389.250	1.130
06/20/95	15:11:58	4.18	9.720	389.250	1.130
06/20/95	15:11:59	4.20	9.720	389.250	1.130
06/20/95	15:12:00	4.22	9.720	389.250	1.130
06/20/95	15:12:01	4.23	9.740	389.270	1.110
06/20/95	15:12:02	4.25	9.720	389.250	1.130
06/20/95	15:12:03	4.27	9.720	389.250	1.130
06/20/95	15:12:04	4.28	9.740	389.270	1.110
06/20/95	15:12:05	4.30	9.740	389.270	1.110
06/20/95	15:12:06	4.32	9.740	389.270	1.110
06/20/95	15:12:07	4.33	9.720	389.250	1.130
06/20/95	15:12:08	4.35	9.740	389.270	1.110
06/20/95	15:12:09	4.37	9.740	389.270	1.110
06/20/95	15:12:10	4.38	9.740	389.270	1.110
06/20/95	15:12:11	4.40	9.740	389.270	1.110
06/20/95	15:12:12	4.42	9.720	389.250	1.130
06/20/95	15:12:13	4.43	9.740	389.270	1.110
06/20/95	15:12:14	4.45	9.740	389.270	1.110
06/20/95	15:12:15	4.47	9.760	389.290	1.090
06/20/95	15:12:16	4.48	9.740	389.270	1.110
06/20/95	15:12:17	4.50	9.740	389.270	1.110
06/20/95	15:12:18	4.52	9.740	389.270	1.110
06/20/95	15:12:19	4.53	9.740	389.270	1.110
06/20/95	15:12:20	4.55	9.740	389.270	1.110
06/20/95	15:12:21	4.57	9.740	389.270	1.110
06/20/95	15:12:22	4.58	9.740	389.270	1.110
06/20/95	15:12:23	4.60	9.740	389.270	1.110
06/20/95	15:12:24	4.62	9.760	389.290	1.090
06/20/95	15:12:25	4.63	9.760	389.290	1.090
06/20/95	15:12:26	4.65	9.740	389.270	1.110
06/20/95	15:12:27	4.67	9.740	389.270	1.110

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:12:28	4.68	9.760	389.290	1.090
06/20/95	15:12:29	4.70	9.740	389.270	1.110
06/20/95	15:12:30	4.72	9.740	389.270	1.110
06/20/95	15:12:31	4.73	9.740	389.270	1.110
06/20/95	15:12:32	4.75	9.740	389.270	1.110
06/20/95	15:12:33	4.77	9.760	389.290	1.090
06/20/95	15:12:34	4.78	9.760	389.290	1.090
06/20/95	15:12:35	4.80	9.740	389.270	1.110
06/20/95	15:12:36	4.82	9.760	389.290	1.090
06/20/95	15:12:37	4.83	9.760	389.290	1.090
06/20/95	15:12:38	4.85	9.740	389.270	1.110
06/20/95	15:12:39	4.87	9.760	389.290	1.090
06/20/95	15:12:40	4.88	9.760	389.290	1.090
06/20/95	15:12:41	4.90	9.740	389.270	1.110
06/20/95	15:12:42	4.92	9.760	389.290	1.090
06/20/95	15:12:43	4.93	9.760	389.290	1.090
06/20/95	15:12:44	4.95	9.760	389.290	1.090
06/20/95	15:12:45	4.97	9.760	389.290	1.090
06/20/95	15:12:46	4.98	9.760	389.290	1.090
06/20/95	15:12:47	5.00	9.760	389.290	1.090
06/20/95	15:12:48	5.02	9.760	389.290	1.090
06/20/95	15:12:49	5.03	9.760	389.290	1.090
06/20/95	15:12:50	5.05	9.760	389.290	1.090
06/20/95	15:12:51	5.07	9.760	389.290	1.090
06/20/95	15:12:52	5.08	9.790	389.320	1.060
06/20/95	15:12:53	5.10	9.790	389.320	1.060
06/20/95	15:12:54	5.12	9.760	389.290	1.090
06/20/95	15:12:55	5.13	9.760	389.290	1.090
06/20/95	15:12:56	5.15	9.760	389.290	1.090
06/20/95	15:12:57	5.17	9.760	389.290	1.090
06/20/95	15:12:58	5.18	9.760	389.290	1.090
06/20/95	15:12:59	5.20	9.760	389.290	1.090
06/20/95	15:13:00	5.22	9.760	389.290	1.090
06/20/95	15:13:01	5.23	9.790	389.320	1.060
06/20/95	15:13:02	5.25	9.790	389.320	1.060
06/20/95	15:13:03	5.27	9.810	389.340	1.040
06/20/95	15:13:04	5.28	9.760	389.290	1.090
06/20/95	15:13:05	5.30	9.760	389.290	1.090
06/20/95	15:13:06	5.32	9.760	389.290	1.090
06/20/95	15:13:07	5.33	9.790	389.320	1.060
06/20/95	15:13:08	5.35	9.760	389.290	1.090
06/20/95	15:13:09	5.37	9.760	389.290	1.090
06/20/95	15:13:10	5.38	9.760	389.290	1.090
06/20/95	15:13:11	5.40	9.790	389.320	1.060
06/20/95	15:13:12	5.42	9.760	389.290	1.090
06/20/95	15:13:13	5.43	9.790	389.320	1.060
06/20/95	15:13:14	5.45	9.790	389.320	1.060
06/20/95	15:13:15	5.47	9.790	389.320	1.060
06/20/95	15:13:16	5.48	9.790	389.320	1.060

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:13:17	5.50	9.790	389.320	1.060
06/20/95	15:13:18	5.52	9.790	389.320	1.060
06/20/95	15:13:19	5.53	9.790	389.320	1.060
06/20/95	15:13:20	5.55	9.790	389.320	1.060
06/20/95	15:13:21	5.57	9.790	389.320	1.060
06/20/95	15:13:22	5.58	9.790	389.320	1.060
06/20/95	15:13:23	5.60	9.790	389.320	1.060
06/20/95	15:13:24	5.62	9.790	389.320	1.060
06/20/95	15:13:25	5.63	9.790	389.320	1.060
06/20/95	15:13:26	5.65	9.790	389.320	1.060
06/20/95	15:13:27	5.67	9.790	389.320	1.060
06/20/95	15:13:28	5.68	9.790	389.320	1.060
06/20/95	15:13:29	5.70	9.790	389.320	1.060
06/20/95	15:13:30	5.72	9.790	389.320	1.060
06/20/95	15:13:31	5.73	9.790	389.320	1.060
06/20/95	15:13:32	5.75	9.790	389.320	1.060
06/20/95	15:13:33	5.77	9.790	389.320	1.060
06/20/95	15:13:34	5.78	9.810	389.340	1.040
06/20/95	15:13:35	5.80	9.790	389.320	1.060
06/20/95	15:13:36	5.82	9.790	389.320	1.060
06/20/95	15:13:37	5.83	9.790	389.320	1.060
06/20/95	15:13:38	5.85	9.790	389.320	1.060
06/20/95	15:13:39	5.87	9.810	389.340	1.040
06/20/95	15:13:40	5.88	9.790	389.320	1.060
06/20/95	15:13:41	5.90	9.790	389.320	1.060
06/20/95	15:13:42	5.92	9.790	389.320	1.060
06/20/95	15:13:43	5.93	9.790	389.320	1.060
06/20/95	15:13:44	5.95	9.790	389.320	1.060
06/20/95	15:13:45	5.97	9.810	389.340	1.040
06/20/95	15:13:46	5.98	9.810	389.340	1.040
06/20/95	15:13:47	6.00	9.810	389.340	1.040
06/20/95	15:13:48	6.02	9.810	389.340	1.040
06/20/95	15:13:49	6.03	9.810	389.340	1.040
06/20/95	15:13:50	6.05	9.810	389.340	1.040
06/20/95	15:13:51	6.07	9.810	389.340	1.040
06/20/95	15:13:52	6.08	9.810	389.340	1.040
06/20/95	15:13:53	6.10	9.810	389.340	1.040
06/20/95	15:13:54	6.12	9.810	389.340	1.040
06/20/95	15:13:55	6.13	9.810	389.340	1.040
06/20/95	15:13:56	6.15	9.810	389.340	1.040
06/20/95	15:13:57	6.17	9.810	389.340	1.040
06/20/95	15:13:58	6.18	9.810	389.340	1.040
06/20/95	15:13:59	6.20	9.810	389.340	1.040
06/20/95	15:14:00	6.22	9.810	389.340	1.040
06/20/95	15:14:01	6.23	9.810	389.340	1.040
06/20/95	15:14:02	6.25	9.810	389.340	1.040
06/20/95	15:14:03	6.27	9.810	389.340	1.040
06/20/95	15:14:04	6.28	9.810	389.340	1.040
06/20/95	15:14:05	6.30	9.810	389.340	1.040

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:14:06	6.32	9.810	389.340	1.040
06/20/95	15:14:07	6.33	9.810	389.340	1.040
06/20/95	15:14:08	6.35	9.810	389.340	1.040
06/20/95	15:14:09	6.37	9.810	389.340	1.040
06/20/95	15:14:10	6.38	9.810	389.340	1.040
06/20/95	15:14:11	6.40	9.810	389.340	1.040
06/20/95	15:14:12	6.42	9.810	389.340	1.040
06/20/95	15:14:13	6.43	9.830	389.360	1.020
06/20/95	15:14:14	6.45	9.830	389.360	1.020
06/20/95	15:14:15	6.47	9.830	389.360	1.020
06/20/95	15:14:16	6.48	9.810	389.340	1.040
06/20/95	15:14:17	6.50	9.830	389.360	1.020
06/20/95	15:14:18	6.52	9.830	389.360	1.020
06/20/95	15:14:19	6.53	9.810	389.340	1.040
06/20/95	15:14:20	6.55	9.830	389.360	1.020
06/20/95	15:14:21	6.57	9.830	389.360	1.020
06/20/95	15:14:22	6.58	9.830	389.360	1.020
06/20/95	15:14:23	6.60	9.830	389.360	1.020
06/20/95	15:14:24	6.62	9.830	389.360	1.020
06/20/95	15:14:25	6.63	9.830	389.360	1.020
06/20/95	15:14:26	6.65	9.830	389.360	1.020
06/20/95	15:14:27	6.67	9.830	389.360	1.020
06/20/95	15:14:28	6.68	9.830	389.360	1.020
06/20/95	15:14:29	6.70	9.830	389.360	1.020
06/20/95	15:14:30	6.72	9.830	389.360	1.020
06/20/95	15:14:31	6.73	9.830	389.360	1.020
06/20/95	15:14:32	6.75	9.830	389.360	1.020
06/20/95	15:14:33	6.77	9.830	389.360	1.020
06/20/95	15:14:34	6.78	9.830	389.360	1.020
06/20/95	15:14:35	6.80	9.830	389.360	1.020
06/20/95	15:14:36	6.82	9.830	389.360	1.020
06/20/95	15:14:37	6.83	9.830	389.360	1.020
06/20/95	15:14:38	6.85	9.830	389.360	1.020
06/20/95	15:14:39	6.87	9.830	389.360	1.020
06/20/95	15:14:40	6.88	9.830	389.360	1.020
06/20/95	15:14:41	6.90	9.830	389.360	1.020
06/20/95	15:14:42	6.92	9.830	389.360	1.020
06/20/95	15:14:43	6.93	9.830	389.360	1.020
06/20/95	15:14:44	6.95	9.830	389.360	1.020
06/20/95	15:14:45	6.97	9.830	389.360	1.020
06/20/95	15:14:46	6.98	9.830	389.360	1.020
06/20/95	15:14:47	7.00	9.830	389.360	1.020
06/20/95	15:14:48	7.02	9.850	389.380	1.000
06/20/95	15:14:49	7.03	9.850	389.380	1.000
06/20/95	15:14:50	7.05	9.830	389.360	1.020
06/20/95	15:14:51	7.07	9.830	389.360	1.020
06/20/95	15:14:52	7.08	9.830	389.360	1.020
06/20/95	15:14:53	7.10	9.830	389.360	1.020
06/20/95	15:14:54	7.12	9.830	389.360	1.020

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/20/95	15:14:55	7.13	9.830	389.360	1.020
06/20/95	15:14:56	7.15	9.850	389.380	1.000
06/20/95	15:14:57	7.17	9.850	389.380	1.000
06/20/95	15:14:58	7.18	9.850	389.380	1.000
06/20/95	15:14:59	7.20	9.850	389.380	1.000
06/20/95	15:15:00	7.22	9.850	389.380	1.000
06/20/95	15:15:01	7.23	9.830	389.360	1.020
06/20/95	15:15:02	7.25	9.850	389.380	1.000
06/20/95	15:15:03	7.27	9.850	389.380	1.000
06/20/95	15:15:04	7.28	9.850	389.380	1.000
06/20/95	15:15:05	7.30	9.830	389.360	1.020
06/20/95	15:15:06	7.32	9.850	389.380	1.000
06/20/95	15:15:07	7.33	9.850	389.380	1.000
06/20/95	15:15:08	7.35	9.850	389.380	1.000
06/20/95	15:15:09	7.37	9.850	389.380	1.000
06/20/95	15:15:10	7.38	9.850	389.380	1.000
06/20/95	15:15:11	7.40	9.850	389.380	1.000
06/20/95	15:15:12	7.42	9.850	389.380	1.000
06/20/95	15:15:13	7.43	9.850	389.380	1.000
06/20/95	15:15:14	7.45	9.850	389.380	1.000
06/20/95	15:15:15	7.47	9.850	389.380	1.000
06/20/95	15:15:16	7.48	9.850	389.380	1.000
06/20/95	15:15:17	7.50	9.850	389.380	1.000
06/20/95	15:15:18	7.52	9.850	389.380	1.000
06/20/95	15:15:19	7.53	9.850	389.380	1.000
06/20/95	15:15:20	7.55	9.850	389.380	1.000
06/20/95	15:15:21	7.57	9.850	389.380	1.000
06/20/95	15:15:22	7.58	9.850	389.380	1.000
06/20/95	15:15:23	7.60	9.850	389.380	1.000
06/20/95	15:15:24	7.62	9.850	389.380	1.000
06/20/95	15:15:25	7.63	9.850	389.380	1.000
06/20/95	15:15:26	7.65	9.850	389.380	1.000
06/20/95	15:15:27	7.67	9.850	389.380	1.000
06/20/95	15:15:28	7.68	9.850	389.380	1.000
06/20/95	15:15:29	7.70	9.850	389.380	1.000
06/20/95	15:15:30	7.72	9.850	389.380	1.000
06/20/95	15:15:31	7.73	9.850	389.380	1.000
06/20/95	15:15:32	7.75	9.850	389.380	1.000
06/20/95	15:15:33	7.77	9.850	389.380	1.000
06/20/95	15:15:34	7.78	9.850	389.380	1.000
06/20/95	15:15:35	7.80	9.850	389.380	1.000
06/20/95	15:15:36	7.82	9.850	389.380	1.000
06/20/95	15:15:37	7.83	9.850	389.380	1.000
06/20/95	15:15:38	7.85	9.850	389.380	1.000
06/20/95	15:15:39	7.87	9.850	389.380	1.000
06/20/95	15:15:40	7.88	9.850	389.380	1.000
06/20/95	15:15:41	7.90	9.850	389.380	1.000
06/20/95	15:15:42	7.92	9.850	389.380	1.000
06/20/95	15:15:43	7.93	9.880	389.410	0.970

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-2D
 Start Date/Time : 06/15/95 | 00:00:00
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 12.700 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	00:01:28	1.47	12.380	367.150	0.320
06/15/95	00:02:00	2.00	12.390	367.140	0.310
06/15/95	00:02:35	2.58	12.400	367.130	0.300
06/15/95	00:02:44	2.73	12.400	367.130	0.300
06/15/95	00:03:08	3.13	12.410	367.120	0.290
06/15/95	00:03:22	3.37	12.420	367.110	0.280
06/15/95	00:03:34	3.57	12.420	367.110	0.280
06/15/95	00:03:45	3.75	12.420	367.110	0.280
06/15/95	00:03:58	3.97	12.420	367.110	0.280
06/15/95	00:04:16	4.27	12.430	367.100	0.270
06/15/95	00:04:30	4.50	12.430	367.100	0.270
06/15/95	00:04:41	4.68	12.430	367.100	0.270
06/15/95	00:05:13	5.22	12.430	367.100	0.270
06/15/95	00:05:23	5.38	12.430	367.100	0.270
06/15/95	00:05:43	5.72	12.440	367.090	0.260
06/15/95	00:05:54	5.90	12.440	367.090	0.260
06/15/95	00:06:18	6.30	12.440	367.090	0.260
06/15/95	00:06:29	6.48	12.440	367.090	0.260
06/15/95	00:06:41	6.68	12.450	367.080	0.250
06/15/95	00:06:53	6.88	12.450	367.080	0.250
06/15/95	00:07:05	7.08	12.450	367.080	0.250
06/15/95	00:07:15	7.25	12.450	367.080	0.250
06/15/95	00:07:40	7.67	12.460	367.070	0.240
06/15/95	00:07:57	7.95	12.460	367.070	0.240
06/15/95	00:08:11	8.18	12.460	367.070	0.240
06/15/95	00:08:20	8.33	12.460	367.070	0.240
06/15/95	00:08:32	8.53	12.460	367.070	0.240
06/15/95	00:08:44	8.73	12.460	367.070	0.240
06/15/95	00:09:01	9.02	12.470	367.060	0.230
06/15/95	00:09:17	9.28	12.470	367.060	0.230
06/15/95	00:09:34	9.57	12.470	367.060	0.230
06/15/95	00:09:50	9.83	12.480	367.050	0.220
06/15/95	00:10:07	10.12	12.480	367.050	0.220
06/15/95	00:10:24	10.40	12.480	367.050	0.220
06/15/95	00:10:41	10.68	12.480	367.050	0.220

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	00:10:54	10.90	12.480	367.050	0.220
06/15/95	00:11:05	11.08	12.490	367.040	0.210
06/15/95	00:11:34	11.57	12.490	367.040	0.210
06/15/95	00:11:58	11.97	12.490	367.040	0.210
06/15/95	00:12:04	12.07	12.490	367.040	0.210
06/15/95	00:12:18	12.30	12.500	367.030	0.200
06/15/95	00:12:57	12.95	12.500	367.030	0.200
06/15/95	00:13:11	13.18	12.500	367.030	0.200
06/15/95	00:13:20	13.33	12.500	367.030	0.200
06/15/95	00:13:43	13.72	12.510	367.020	0.190
06/15/95	00:13:56	13.93	12.510	367.020	0.190
06/15/95	00:14:06	14.10	12.510	367.020	0.190
06/15/95	00:14:16	14.27	12.510	367.020	0.190
06/15/95	00:14:28	14.47	12.510	367.020	0.190
06/15/95	00:14:49	14.82	12.510	367.020	0.190
06/15/95	00:15:04	15.07	12.510	367.020	0.190
06/15/95	00:15:18	15.30	12.510	367.020	0.190
06/15/95	00:15:30	15.50	12.520	367.010	0.180
06/15/95	00:15:42	15.70	12.520	367.010	0.180
06/15/95	00:16:00	16.00	12.520	367.010	0.180
06/15/95	00:16:18	16.30	12.520	367.010	0.180
06/15/95	00:16:40	16.67	12.530	367.000	0.170
06/15/95	00:16:51	16.85	12.530	367.000	0.170
06/15/95	00:17:00	17.00	12.530	367.000	0.170
06/15/95	00:17:11	17.18	12.530	367.000	0.170
06/15/95	00:17:23	17.38	12.530	367.000	0.170
06/15/95	00:17:42	17.70	12.530	367.000	0.170
06/15/95	00:18:04	18.07	12.530	367.000	0.170
06/15/95	00:18:17	18.28	12.530	367.000	0.170
06/15/95	00:18:42	18.70	12.530	367.000	0.170
06/15/95	00:19:04	19.07	12.540	366.990	0.160
06/15/95	00:19:29	19.48	12.540	366.990	0.160
06/15/95	00:19:46	19.77	12.540	366.990	0.160
06/15/95	00:20:07	20.12	12.540	366.990	0.160
06/15/95	00:21:38	21.63	12.550	366.980	0.150
06/15/95	00:21:52	21.87	12.550	366.980	0.150
06/15/95	00:22:09	22.15	12.550	366.980	0.150
06/15/95	00:22:28	22.47	12.560	366.970	0.140
06/15/95	00:23:18	23.30	12.560	366.970	0.140
06/15/95	00:23:33	23.55	12.560	366.970	0.140
06/15/95	00:23:48	23.80	12.560	366.970	0.140
06/15/95	00:24:02	24.03	12.560	366.970	0.140
06/15/95	00:24:14	24.23	12.560	366.970	0.140
06/15/95	00:24:31	24.52	12.570	366.960	0.130
06/15/95	00:26:30	26.50	12.570	366.960	0.130
06/15/95	00:27:07	27.12	12.570	366.960	0.130
06/15/95	00:28:09	28.15	12.580	366.950	0.120
06/15/95	00:29:15	29.25	12.580	366.950	0.120
06/15/95	00:31:29	31.48	12.590	366.940	0.110

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/15/95	00:33:50	33.83	12.600	366.930	0.100
06/15/95	00:34:32	34.53	12.600	366.930	0.100
06/15/95	00:35:38	35.63	12.610	366.920	0.090
06/15/95	00:37:20	37.33	12.610	366.920	0.090
06/15/95	00:39:09	39.15	12.620	366.910	0.080
06/15/95	00:40:25	40.42	12.620	366.910	0.080
06/15/95	00:40:55	40.92	12.630	366.900	0.070
06/15/95	00:42:31	42.52	12.630	366.900	0.070
06/15/95	00:43:34	43.57	12.630	366.900	0.070
06/15/95	00:45:36	45.60	12.640	366.890	0.060
06/15/95	00:46:40	46.67	12.640	366.890	0.060
06/15/95	00:48:37	48.62	12.640	366.890	0.060
06/15/95	00:50:58	50.97	12.650	366.880	0.050
06/15/95	00:53:09	53.15	12.650	366.880	0.050
06/15/95	00:55:20	55.33	12.660	366.870	0.040
06/15/95	00:56:40	56.67	12.660	366.870	0.040
06/15/95	00:59:10	59.17	12.660	366.870	0.040
06/15/95	01:01:46	61.77	12.670	366.860	0.030
06/15/95	01:03:36	63.60	12.670	366.860	0.030
06/15/95	01:07:04	67.07	12.670	366.860	0.030
06/15/95	01:10:40	70.67	12.680	366.850	0.020
06/15/95	01:12:13	72.22	12.680	366.850	0.020
06/15/95	01:14:28	74.47	12.680	366.850	0.020
06/15/95	01:17:05	77.08	12.690	366.840	0.010
06/15/95	01:22:08	82.13	12.700	366.830	0.000
06/15/95	01:23:20	83.33	12.700	366.830	0.000
06/15/95	01:25:30	85.50	12.700	366.830	0.000

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-2D
 Start Date/Time : 06/15/95 | 00:00:00
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 12.700 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	00:00:40	0.67	13.080	366.450	0.380
06/15/95	00:01:09	1.15	13.060	366.470	0.360
06/15/95	00:01:27	1.45	13.060	366.470	0.360
06/15/95	00:02:20	2.33	13.050	366.480	0.350
06/15/95	00:02:40	2.67	13.040	366.490	0.340
06/15/95	00:03:04	3.07	13.040	366.490	0.340
06/15/95	00:03:20	3.33	13.040	366.490	0.340
06/15/95	00:03:53	3.88	13.040	366.490	0.340
06/15/95	00:04:28	4.47	13.040	366.490	0.340
06/15/95	00:06:12	6.20	13.020	366.510	0.320
06/15/95	00:06:46	6.77	13.010	366.520	0.310
06/15/95	00:07:36	7.60	13.000	366.530	0.300
06/15/95	00:08:17	8.28	12.990	366.540	0.290
06/15/95	00:08:41	8.68	12.990	366.540	0.290
06/15/95	00:09:38	9.63	12.990	366.540	0.290
06/15/95	00:10:10	10.17	12.990	366.540	0.290
06/15/95	00:10:53	10.88	12.980	366.550	0.280
06/15/95	00:13:08	13.13	12.960	366.570	0.260
06/15/95	00:14:30	14.50	12.950	366.580	0.250
06/15/95	00:15:23	15.38	12.950	366.580	0.250
06/15/95	00:20:25	20.42	12.930	366.600	0.230
06/15/95	00:23:31	23.52	12.920	366.610	0.220
06/15/95	00:28:33	28.55	12.890	366.640	0.190
06/15/95	00:32:50	32.83	12.880	366.650	0.180
06/15/95	00:42:02	42.03	12.850	366.680	0.150
06/15/95	00:46:08	46.13	12.840	366.690	0.140
06/15/95	00:51:27	51.45	12.820	366.710	0.120
06/15/95	00:56:11	56.18	12.820	366.710	0.120
06/15/95	01:03:59	63.98	12.800	366.730	0.100
06/15/95	01:09:05	69.08	12.800	366.730	0.100
06/15/95	01:12:20	72.33	12.800	366.730	0.100
06/15/95	01:16:45	76.75	12.790	366.740	0.090
06/15/95	01:20:36	80.60	12.790	366.740	0.090
06/15/95	01:27:35	87.58	12.790	366.740	0.090
06/15/95	01:33:08	93.13	12.780	366.750	0.080

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/15/95	01:38:32	98.53	12.780	366.750	0.080
06/15/95	01:46:49	106.82	12.780	366.750	0.080
06/15/95	01:55:28	115.47	12.780	366.750	0.080
06/15/95	02:04:23	124.38	12.770	366.760	0.070
06/15/95	02:12:31	132.52	12.780	366.750	0.080
06/15/95	02:19:08	139.13	12.770	366.760	0.070
06/15/95	02:31:22	151.37	12.770	366.760	0.070
06/15/95	02:54:13	174.22	12.770	366.760	0.070
06/15/95	03:08:24	188.40	12.760	366.770	0.060
06/15/95	03:21:53	201.88	12.760	366.770	0.060
06/15/95	03:43:39	223.65	12.760	366.770	0.060
06/15/95	04:05:42	245.70	12.760	366.770	0.060
06/15/95	04:20:44	260.73	12.760	366.770	0.060
06/15/95	05:06:49	306.82	12.760	366.770	0.060
06/15/95	06:03:09	363.15	12.760	366.770	0.060

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-3D
 Start Date/Time : 06/19/95 | 16:35:09
 Reference Elevation : 375.310 ft AMSL

Static Water Level : 12.270 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/19/95	16:35:10	0.02	13.710	389.020	1.440
06/19/95	16:35:11	0.03	13.710	389.020	1.440
06/19/95	16:35:12	0.05	13.710	389.020	1.440
06/19/95	16:35:13	0.07	13.710	389.020	1.440
06/19/95	16:35:14	0.08	13.710	389.020	1.440
06/19/95	16:35:15	0.10	13.690	389.000	1.420
06/19/95	16:35:21	0.20	13.670	388.980	1.400
06/19/95	16:35:27	0.30	13.670	388.980	1.400
06/19/95	16:35:33	0.40	13.620	388.930	1.350
06/19/95	16:35:39	0.50	13.600	388.910	1.330
06/19/95	16:35:45	0.60	13.580	388.890	1.310
06/19/95	16:35:51	0.70	13.550	388.860	1.280
06/19/95	16:35:57	0.80	13.550	388.860	1.280
06/19/95	16:36:03	0.90	13.510	388.820	1.240
06/19/95	16:36:09	1.00	13.510	388.820	1.240
06/19/95	16:37:09	2.00	13.370	388.680	1.100
06/19/95	16:38:09	3.00	13.280	388.590	1.010
06/19/95	16:39:09	4.00	13.180	388.490	0.910
06/19/95	16:40:09	5.00	13.120	388.430	0.850
06/19/95	16:41:09	6.00	13.050	388.360	0.780
06/19/95	16:42:09	7.00	13.000	388.310	0.730
06/19/95	16:43:09	8.00	12.960	388.270	0.690
06/19/95	16:44:09	9.00	12.890	388.200	0.620
06/19/95	16:45:09	10.00	12.860	388.170	0.590
06/19/95	16:55:09	20.00	12.590	387.900	0.320
06/19/95	17:05:09	30.00	12.450	387.760	0.180
06/19/95	17:15:09	40.00	12.380	387.690	0.110
06/19/95	17:25:09	50.00	12.360	387.670	0.090
06/19/95	17:25:27	50.30	12.330	387.640	0.060

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-3D
 Observation Well : MW-3D
 Start Date/Time : 06/19/95 | 17:26:58
 Reference Elevation : 375.310 ft AMSL

Static Water Level : 12.270 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/19/95	17:26:58	0.00	10.770	386.080	1.500
06/19/95	17:26:59	0.02	10.820	386.130	1.450
06/19/95	17:27:00	0.03	10.820	386.130	1.450
06/19/95	17:27:01	0.05	10.820	386.130	1.450
06/19/95	17:27:02	0.07	10.820	386.130	1.450
06/19/95	17:27:03	0.08	10.840	386.150	1.430
06/19/95	17:27:04	0.10	10.820	386.130	1.450
06/19/95	17:27:10	0.20	10.910	386.220	1.360
06/19/95	17:27:16	0.30	10.890	386.200	1.380
06/19/95	17:27:22	0.40	10.930	386.240	1.340
06/19/95	17:27:28	0.50	10.960	386.270	1.310
06/19/95	17:27:34	0.60	10.980	386.290	1.290
06/19/95	17:27:40	0.70	11.030	386.340	1.240
06/19/95	17:27:46	0.80	11.030	386.340	1.240
06/19/95	17:27:52	0.90	11.050	386.360	1.220
06/19/95	17:27:58	1.00	11.070	386.380	1.200
06/19/95	17:28:58	2.00	11.210	386.520	1.060
06/19/95	17:29:58	3.00	11.320	386.630	0.950
06/19/95	17:30:58	4.00	11.420	386.730	0.850
06/19/95	17:31:58	5.00	11.480	386.790	0.790
06/19/95	17:32:58	6.00	11.550	386.860	0.720
06/19/95	17:33:58	7.00	11.600	386.910	0.670
06/19/95	17:34:58	8.00	11.670	386.980	0.600
06/19/95	17:35:58	9.00	11.690	387.000	0.580
06/19/95	17:36:58	10.00	11.760	387.070	0.510
06/19/95	17:46:58	20.00	11.990	387.300	0.280
06/19/95	17:56:58	30.00	12.110	387.420	0.160
06/19/95	18:01:13	34.25	12.170	387.480	0.100

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-4D
 Start Date/Time : 06/21/95 | 13:50:36
 Reference Elevation : 375.210 ft AMSL

Static Water Level : 5.580 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/21/95	13:50:37	0.02	6.820	382.030	1.240
06/21/95	13:50:38	0.03	6.640	381.850	1.060
06/21/95	13:50:39	0.05	6.850	382.060	1.270
06/21/95	13:50:40	0.07	6.800	382.010	1.220
06/21/95	13:50:41	0.08	6.850	382.060	1.270
06/21/95	13:50:42	0.10	6.710	381.920	1.130
06/21/95	13:50:48	0.20	6.550	381.760	0.970
06/21/95	13:50:54	0.30	6.430	381.640	0.850
06/21/95	13:51:00	0.40	6.290	381.500	0.710
06/21/95	13:51:06	0.50	6.290	381.500	0.710
06/21/95	13:51:12	0.60	6.180	381.390	0.600
06/21/95	13:51:18	0.70	6.090	381.300	0.510
06/21/95	13:51:24	0.80	6.040	381.250	0.460
06/21/95	13:51:30	0.90	6.020	381.230	0.440
06/21/95	13:51:36	1.00	5.970	381.180	0.390
06/21/95	13:52:36	2.00	5.790	381.000	0.210
06/21/95	13:53:36	3.00	5.720	380.930	0.140
06/21/95	13:54:36	4.00	5.700	380.910	0.120
06/21/95	13:55:36	5.00	5.670	380.880	0.090
06/21/95	13:56:36	6.00	5.670	380.880	0.090
06/21/95	13:57:36	7.00	5.650	380.860	0.070
06/21/95	13:57:40	7.07	5.650	380.860	0.070

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-4D
 Start Date/Time : 06/21/95 | 16:05:00
 Reference Elevation : 375.210 ft AMSL

Static Water Level : 5.580 ft

Water level measured from : TOP OF RISER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/21/95	16:05:01	0.02	4.160	379.370	1.420
06/21/95	16:05:02	0.03	4.230	379.440	1.350
06/21/95	16:05:03	0.05	4.270	379.480	1.310
06/21/95	16:05:04	0.07	4.300	379.510	1.280
06/21/95	16:05:05	0.08	4.340	379.550	1.240
06/21/95	16:05:06	0.10	4.390	379.600	1.190
06/21/95	16:05:12	0.20	4.550	379.760	1.030
06/21/95	16:05:18	0.30	4.710	379.920	0.870
06/21/95	16:05:24	0.40	4.800	380.010	0.780
06/21/95	16:05:30	0.50	4.870	380.080	0.710
06/21/95	16:05:36	0.60	4.960	380.170	0.620
06/21/95	16:05:42	0.70	5.010	380.220	0.570
06/21/95	16:05:48	0.80	5.080	380.290	0.500
06/21/95	16:05:54	0.90	5.100	380.310	0.480
06/21/95	16:06:00	1.00	5.150	380.360	0.430
06/21/95	16:07:00	2.00	5.350	380.560	0.230
06/21/95	16:08:00	3.00	5.420	380.630	0.160
06/21/95	16:09:00	4.00	5.440	380.650	0.140
06/21/95	16:10:00	5.00	5.470	380.680	0.110
06/21/95	16:11:00	6.00	5.490	380.700	0.090
06/21/95	16:12:00	7.00	5.510	380.720	0.070
06/21/95	16:13:00	8.00	5.510	380.720	0.070
06/21/95	16:14:00	9.00	5.510	380.720	0.070
06/21/95	16:15:00	10.00	5.540	380.750	0.040
06/21/95	16:25:00	20.00	5.560	380.770	0.020
06/21/95	16:25:02	20.03	5.560	380.770	0.020

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-5D
 Start Date/Time : 07/27/95 | 06:52:39
 Reference Elevation : 0.000 ft AMSL

Static Water Level : 9.810 ft

Water level measured from : TRANSDUCER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/27/95	06:52:42	0.05	11.300	11.300	1.490
07/27/95	06:52:45	0.10	11.300	11.300	1.490
07/27/95	06:52:51	0.20	11.300	11.300	1.490
07/27/95	06:52:57	0.30	11.280	11.280	1.470
07/27/95	06:53:03	0.40	11.280	11.280	1.470
07/27/95	06:53:09	0.50	11.280	11.280	1.470
07/27/95	06:53:15	0.60	11.260	11.260	1.450
07/27/95	06:53:21	0.70	11.260	11.260	1.450
07/27/95	06:53:27	0.80	11.260	11.260	1.450
07/27/95	06:53:33	0.90	11.230	11.230	1.420
07/27/95	06:53:39	1.00	11.230	11.230	1.420
07/27/95	06:54:39	2.00	11.160	11.160	1.350
07/27/95	06:55:39	3.00	11.120	11.120	1.310
07/27/95	06:56:39	4.00	11.070	11.070	1.260
07/27/95	06:57:39	5.00	11.000	11.000	1.190
07/27/95	06:58:39	6.00	10.960	10.960	1.150
07/27/95	06:59:39	7.00	10.910	10.910	1.100
07/27/95	07:00:39	8.00	10.890	10.890	1.080
07/27/95	07:01:39	9.00	10.840	10.840	1.030
07/27/95	07:02:39	10.00	10.820	10.820	1.010
07/27/95	07:12:39	20.00	10.520	10.520	0.710
07/27/95	07:22:39	30.00	10.340	10.340	0.530
07/27/95	07:32:39	40.00	10.180	10.180	0.370
07/27/95	07:42:39	50.00	10.080	10.080	0.270
07/27/95	07:52:39	60.00	10.010	10.010	0.200
07/27/95	08:02:39	70.00	9.970	9.970	0.160
07/27/95	08:12:39	80.00	9.920	9.920	0.110
07/27/95	08:22:39	90.00	9.900	9.900	0.090
07/27/95	08:30:54	98.25	9.880	9.880	0.070

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-5D
 Start Date/Time : 07/27/95 | 09:15:04
 Reference Elevation : 0.000 ft AMSL

Static Water Level : 9.810 ft

Water level measured from : TRANSDUCER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	09:15:07	0.05	8.220	8.220	1.590
07/27/95	09:15:10	0.10	8.250	8.250	1.560
07/27/95	09:15:16	0.20	8.270	8.270	1.540
07/27/95	09:15:22	0.30	8.290	8.290	1.520
07/27/95	09:15:28	0.40	8.290	8.290	1.520
07/27/95	09:15:34	0.50	8.290	8.290	1.520
07/27/95	09:15:40	0.60	8.320	8.320	1.490
07/27/95	09:15:46	0.70	8.320	8.320	1.490
07/27/95	09:15:52	0.80	8.320	8.320	1.490
07/27/95	09:15:58	0.90	8.340	8.340	1.470
07/27/95	09:16:04	1.00	8.340	8.340	1.470
07/27/95	09:17:04	2.00	8.410	8.410	1.400
07/27/95	09:18:04	3.00	8.500	8.500	1.310
07/27/95	09:19:04	4.00	8.570	8.570	1.240
07/27/95	09:20:04	5.00	8.610	8.610	1.200
07/27/95	09:21:04	6.00	8.660	8.660	1.150
07/27/95	09:22:04	7.00	8.710	8.710	1.100
07/27/95	09:23:04	8.00	8.730	8.730	1.080
07/27/95	09:24:04	9.00	8.770	8.770	1.040
07/27/95	09:25:04	10.00	8.820	8.820	0.990
07/27/95	09:35:04	20.00	9.120	9.120	0.690
07/27/95	09:45:04	30.00	9.300	9.300	0.510
07/27/95	09:55:04	40.00	9.420	9.420	0.390
07/27/95	10:05:04	50.00	9.490	9.490	0.320
07/27/95	10:15:04	60.00	9.560	9.560	0.250
07/27/95	10:25:04	70.00	9.600	9.600	0.210
07/27/95	10:35:04	80.00	9.650	9.650	0.160
07/27/95	10:45:04	90.00	9.650	9.650	0.160
07/27/95	10:55:04	100.00	9.650	9.650	0.160
07/27/95	10:57:34	102.50	9.670	9.670	0.140

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : FALLING HEAD TEST
 Test Well : MW-6D
 Start Date/Time : 07/27/95 | 14:09:43
 Reference Elevation : 0.000 ft AMSL

Static Water Level : 9.880 ft

Water level measured from : TRANSDUCER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/27/95	14:09:47	0.07	11.350	11.350	1.470
07/27/95	14:09:51	0.13	11.320	11.320	1.440
07/27/95	14:09:55	0.20	11.350	11.350	1.470
07/27/95	14:09:59	0.27	11.350	11.350	1.470
07/27/95	14:10:07	0.40	11.350	11.350	1.470
07/27/95	14:10:11	0.47	11.350	11.350	1.470
07/27/95	14:10:19	0.60	11.350	11.350	1.470
07/27/95	14:10:23	0.67	11.350	11.350	1.470
07/27/95	14:10:31	0.80	11.320	11.320	1.440
07/27/95	14:10:35	0.87	11.350	11.350	1.470
07/27/95	14:10:43	1.00	11.320	11.320	1.440
07/27/95	14:11:43	2.00	11.300	11.300	1.420
07/27/95	14:12:43	3.00	11.280	11.280	1.400
07/27/95	14:13:43	4.00	11.260	11.260	1.380
07/27/95	14:14:43	5.00	11.230	11.230	1.350
07/27/95	14:15:43	6.00	11.230	11.230	1.350
07/27/95	14:16:43	7.00	11.230	11.230	1.350
07/27/95	14:17:43	8.00	11.210	11.210	1.330
07/27/95	14:18:43	9.00	11.210	11.210	1.330
07/27/95	14:19:43	10.00	11.160	11.160	1.280
07/27/95	14:29:43	20.00	11.030	11.030	1.150
07/27/95	14:39:43	30.00	10.910	10.910	1.030
07/27/95	14:49:43	40.00	10.800	10.800	0.920
07/27/95	14:59:43	50.00	10.700	10.700	0.820
07/27/95	15:09:43	60.00	10.640	10.640	0.760
07/27/95	15:19:43	70.00	10.520	10.520	0.640
07/27/95	15:29:43	80.00	10.500	10.500	0.620
07/27/95	15:39:43	90.00	10.450	10.450	0.570
07/27/95	15:49:43	100.00	10.410	10.410	0.530
07/27/95	16:26:07	136.40	10.240	10.240	0.360

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : MW-6D
 Start Date/Time : 07/28/95 | 10:07:01
 Reference Elevation : 0.000 ft AMSL

Static Water Level : 9.880 ft

Water level measured from : TRANSDUCER ELEVATION

** TABLE OF LOG TIME DATA **

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/28/95	10:07:05	0.07	8.820	8.820	1.060
07/28/95	10:07:09	0.13	8.820	8.820	1.060
07/28/95	10:07:13	0.20	8.800	8.800	1.080
07/28/95	10:07:17	0.27	8.800	8.800	1.080
07/28/95	10:07:25	0.40	8.800	8.800	1.080
07/28/95	10:07:29	0.47	8.820	8.820	1.060
07/28/95	10:07:37	0.60	8.820	8.820	1.060
07/28/95	10:07:41	0.67	8.820	8.820	1.060
07/28/95	10:07:49	0.80	8.820	8.820	1.060
07/28/95	10:07:53	0.87	8.820	8.820	1.060
07/28/95	10:08:01	1.00	8.820	8.820	1.060
07/28/95	10:09:01	2.00	8.840	8.840	1.040
07/28/95	10:10:01	3.00	8.840	8.840	1.040
07/28/95	10:11:01	4.00	8.890	8.890	0.990
07/28/95	10:12:01	5.00	8.910	8.910	0.970
07/28/95	10:13:01	6.00	8.940	8.940	0.940
07/28/95	10:14:01	7.00	8.960	8.960	0.920
07/28/95	10:15:01	8.00	8.980	8.980	0.900
07/28/95	10:16:01	9.00	8.980	8.980	0.900
07/28/95	10:17:01	10.00	9.000	9.000	0.880
07/28/95	10:27:01	20.00	9.120	9.120	0.760
07/28/95	10:37:01	30.00	9.230	9.230	0.650
07/28/95	10:47:01	40.00	9.330	9.330	0.550
07/28/95	10:57:01	50.00	9.420	9.420	0.460
07/28/95	11:07:01	60.00	9.510	9.510	0.370
07/28/95	11:17:01	70.00	9.580	9.580	0.300
07/28/95	11:27:01	80.00	9.620	9.620	0.260
07/28/95	11:37:01	90.00	9.720	9.720	0.160
07/28/95	11:47:01	100.00	9.760	9.760	0.120
07/28/95	12:23:13	136.20	9.920	9.920	-0.040

Client : Nepera Inc.
Site Location : Former Lagoon Site
Project No : 3698
Test Type : RISING HEAD TEST
Test Well : DW-1
Start Date/Time : 07/27/95 | 07:51:00
Reference Elevation : 367.790 ft AMSL

Static Water Level : 24.140 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	07:52:30	1.50	29.540	338.250	5.400
07/27/95	07:53:00	2.00	28.300	339.490	4.160
07/27/95	11:00:00	189.00	27.500	340.290	3.360
07/27/95	15:30:00	459.00	26.900	340.890	2.760
07/27/95	16:56:00	545.00	26.600	341.190	2.460
07/27/95	17:27:00	576.00	26.520	341.270	2.380
07/27/95	17:58:00	607.00	26.440	341.350	2.300
07/27/95	18:28:00	637.00	26.360	341.430	2.220
07/27/95	18:58:00	667.00	26.280	341.510	2.140
07/28/95	09:30:00	1539.00	24.800	342.990	0.660
07/28/95	10:00:00	1569.00	24.760	343.030	0.620
07/28/95	11:00:00	1629.00	24.730	343.060	0.590
07/28/95	11:30:00	1659.00	24.700	343.090	0.560
07/28/95	12:00:00	1689.00	24.680	343.110	0.540
07/28/95	12:30:00	1719.00	24.660	343.130	0.520
07/28/95	13:00:00	1749.00	24.640	343.150	0.500
07/28/95	14:07:00	1816.00	24.590	343.200	0.450

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : RISING HEAD TEST
 Test Well : DW-2
 Start Date/Time : 07/26/95 | 13:37:00
 Reference Elevation : 367.060 ft AMSL

Static Water Level : 13.750 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	13:37:01	0.02	20.100	346.960	6.350
07/26/95	13:37:15	0.25	20.090	346.970	6.340
07/26/95	13:37:30	0.50	20.090	346.970	6.340
07/26/95	13:37:45	0.75	20.090	346.970	6.340
07/26/95	13:38:00	1.00	20.080	346.980	6.330
07/26/95	13:38:15	1.25	20.080	346.980	6.330
07/26/95	13:38:30	1.50	20.080	346.980	6.330
07/26/95	13:38:45	1.75	20.080	346.980	6.330
07/26/95	13:39:00	2.00	20.080	346.980	6.330
07/26/95	13:39:15	2.25	20.070	346.990	6.320
07/26/95	13:39:30	2.50	20.070	346.990	6.320
07/26/95	13:39:45	2.75	20.070	346.990	6.320
07/26/95	13:40:00	3.00	20.070	346.990	6.320
07/26/95	13:40:15	3.25	20.060	347.000	6.310
07/26/95	13:40:30	3.50	20.060	347.000	6.310
07/26/95	13:40:45	3.75	20.060	347.000	6.310
07/26/95	13:41:00	4.00	20.060	347.000	6.310
07/26/95	13:41:15	4.25	20.060	347.000	6.310
07/26/95	13:41:30	4.50	20.060	347.000	6.310
07/26/95	13:41:45	4.75	20.060	347.000	6.310
07/26/95	13:42:00	5.00	20.060	347.000	6.310
07/26/95	13:43:00	6.00	20.060	347.000	6.310
07/26/95	13:44:00	7.00	20.060	347.000	6.310
07/26/95	13:45:00	8.00	20.050	347.010	6.300
07/26/95	13:46:00	9.00	20.050	347.010	6.300
07/26/95	13:47:00	10.00	20.050	347.010	6.300
07/26/95	13:48:00	11.00	20.050	347.010	6.300
07/26/95	13:49:00	12.00	20.040	347.020	6.290
07/26/95	13:50:00	13.00	20.040	347.020	6.290
07/26/95	13:51:00	14.00	20.040	347.020	6.290
07/26/95	13:52:00	15.00	20.040	347.020	6.290
07/26/95	13:57:00	20.00	20.030	347.030	6.280
07/26/95	14:02:00	25.00	20.020	347.040	6.270
07/26/95	14:07:00	30.00	20.010	347.050	6.260
07/26/95	14:12:00	35.00	20.010	347.050	6.260

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/26/95	14:17:00	40.00	20.000	347.060	6.250
07/26/95	14:22:00	45.00	19.990	347.070	6.240
07/26/95	14:27:00	50.00	19.980	347.080	6.230
07/26/95	14:37:00	60.00	19.970	347.090	6.220
07/26/95	14:47:00	70.00	19.960	347.100	6.210
07/26/95	14:57:00	80.00	19.940	347.120	6.190
07/26/95	15:07:00	90.00	19.930	347.130	6.180
07/26/95	15:17:00	100.00	19.910	347.150	6.160
07/26/95	15:27:00	110.00	19.900	347.160	6.150
07/26/95	15:37:00	120.00	19.890	347.170	6.140
07/26/95	16:07:00	150.00	19.850	347.210	6.100
07/26/95	16:37:00	180.00	19.810	347.250	6.060
07/26/95	17:07:00	210.00	19.770	347.290	6.020
07/26/95	17:37:00	240.00	19.740	347.320	5.990
07/26/95	18:07:00	270.00	19.700	347.360	5.950
07/26/95	18:37:00	300.00	19.660	347.400	5.910
07/26/95	19:07:00	330.00	19.620	347.440	5.870
07/26/95	19:37:00	360.00	19.590	347.470	5.840
07/26/95	20:07:00	390.00	19.550	347.510	5.800
07/26/95	20:37:00	420.00	19.510	347.550	5.760
07/27/95	05:37:00	960.00	18.940	348.120	5.190
07/27/95	06:07:00	990.00	18.890	348.170	5.140
07/27/95	06:37:00	1020.00	18.850	348.210	5.100
07/27/95	07:07:00	1050.00	18.820	348.240	5.070
07/27/95	07:37:00	1080.00	18.800	348.260	5.050
07/27/95	08:07:00	1110.00	18.780	348.280	5.030
07/27/95	08:37:00	1140.00	18.740	348.320	4.990
07/27/95	09:07:00	1170.00	18.710	348.350	4.960
07/27/95	10:07:00	1230.00	18.660	348.400	4.910
07/27/95	10:37:00	1260.00	18.630	348.430	4.880
07/27/95	11:07:00	1290.00	18.600	348.460	4.850
07/27/95	12:07:00	1350.00	18.560	348.500	4.810
07/27/95	13:07:00	1410.00	18.480	348.580	4.730
07/27/95	13:37:00	1440.00	18.460	348.600	4.710
07/27/95	14:37:00	1500.00	18.410	348.650	4.660
07/27/95	15:37:00	1560.00	18.360	348.700	4.610
07/27/95	16:37:00	1620.00	18.310	348.750	4.560
07/27/95	17:37:00	1680.00	18.260	348.800	4.510
07/27/95	18:37:00	1740.00	18.210	348.850	4.460
07/27/95	19:37:00	1800.00	18.160	348.900	4.410
07/28/95	09:07:00	2610.00	17.520	349.540	3.770
07/28/95	09:37:00	2640.00	17.460	349.600	3.710
07/28/95	10:37:00	2700.00	17.440	349.620	3.690
07/28/95	11:37:00	2760.00	17.380	349.680	3.630
07/28/95	12:37:00	2820.00	17.340	349.720	3.590
07/28/95	13:37:00	2880.00	17.300	349.760	3.550

APPENDIX G.2


SHORT-DURATION PUMPING TEST

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW1D DRAWDOWN</p>	
<p>DATA SET: MW1D-PD.DAT 08/04/95</p>	
<p>AQUIFER MODEL: Unconfined</p>	
<p>SOLUTION METHOD: Theis</p>	
<p>PROJECT DATA: test date: 07/13/95 test well: MW1D obs. well: MW1D</p>	
<p>TEST DATA: Q = 0.144 ft³/min r = 0.166 ft b = 17. ft</p>	
<p>PARAMETER ESTIMATES: T = 0.01946 ft²/min S = 0.1574</p>	<p>AGTESOLV</p>

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-1D RECOVERY

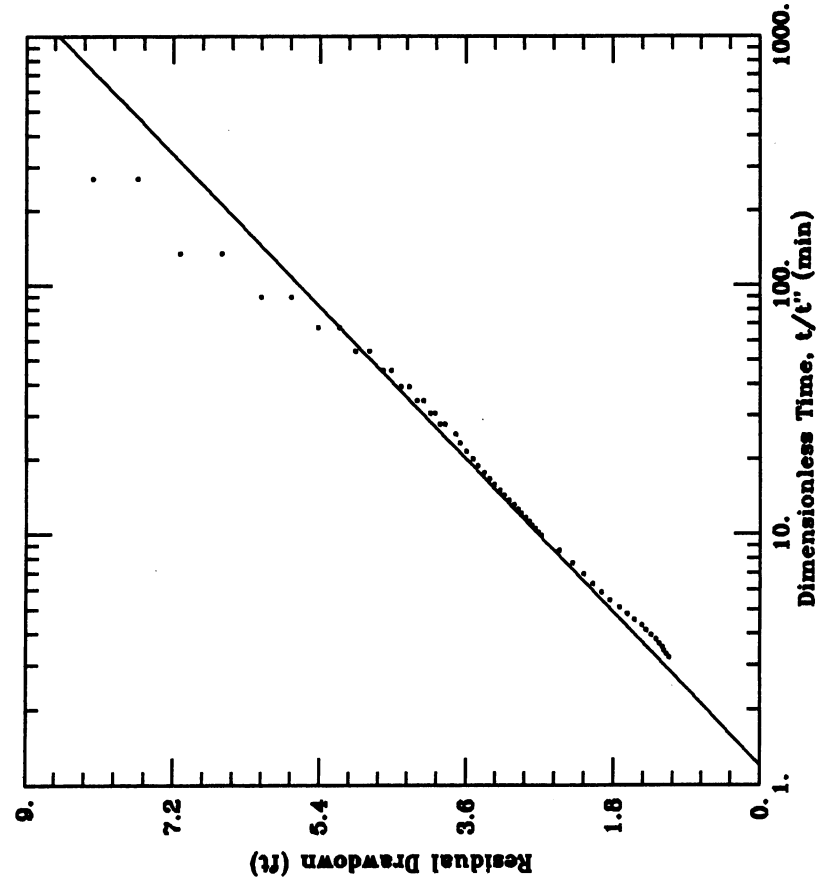

DATA SET:
MW1D-PR.DAT
08/14/95

AQUIFER MODEL:
Confined

SOLUTION METHOD:
Theis Recovery

PROJECT DATA:
test date: 07/13/95
test well: MW1D
obs. well: MW1D

TEST DATA:
g = 0.134 ft³/min
r = 0.166 ft
b = 17. ft

PARAMETER ESTIMATES:
T = 0.008353 ft²/min
S' = 1.198

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW2D DRAWDOWN</p>	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW2D-PD.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Theis</p> <p>PROJECT DATA: test date: 07/14/95 test well: MW2D obs. well: MW2D</p> <p>TEST DATA: g = 0.113 ft³/min r = 0.166 ft b = 34.61 ft</p> <p>PARAMETER ESTIMATES: T = 0.003702 ft²/min S = 0.1604</p> </div> <div style="width: 50%; text-align: center;"> </div> </div>	
<p>AGTESOLV</p>	

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-2D RECOVERY

DATA SET:
MW2D-PR.DAT
08/14/95


AQUIFER MODEL:
Confined

SOLUTION METHOD:
Theis Recovery

PROJECT DATA:
test date: 07/14/95
test well: MW2D
obs. well: MW2D

TEST DATA:
g = 0.134 ft³/min
r = 0.166 ft
b = 34.61 ft

PARAMETER ESTIMATES:
T = 0.001024 ft²/min
S' = 1.58

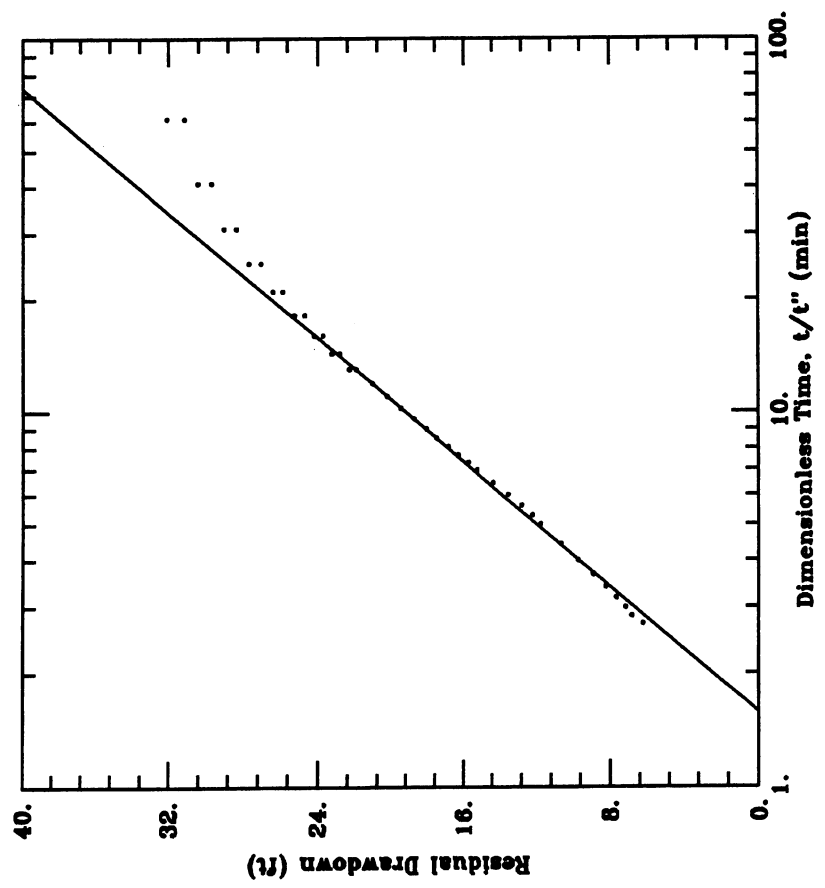


AGTESOLV

Client: Nepera Inc. Company: Conestoga Rovers & Associates

Location: Former Lagoon Site Project: 3698

MW-3D DRAWDOWN

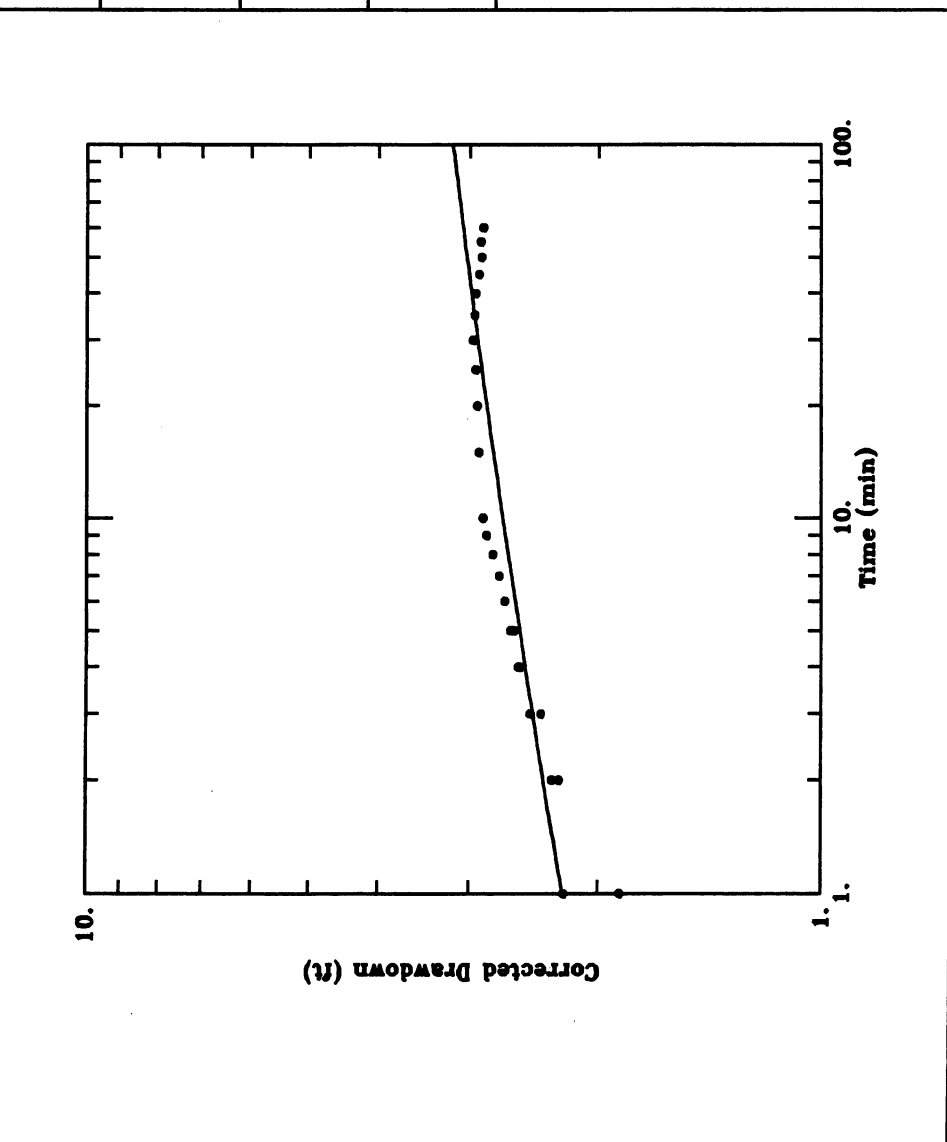

DATA SET:
MW3D-PD1.DAT
08/08/95

AQUIFER MODEL:
Unconfined
SOLUTION METHOD:
Theis

PROJECT DATA:
test date: 07/27/95
test well: MW-3D
obs. well: MW-3D

TEST DATA:
q = 0.134 ft³/min
r = 0.166 ft
b = 27.47 ft

PARAMETER ESTIMATES:
T = 0.0523 ft²/min
S = 7.548E-05

<p>Client: Nepera Inc.</p>	<p>Company: Conestoga Rovers & Associates</p>
<p>Location: Former Lagoon Site</p>	<p>Project: 3698</p>
<p>MW-3D RECOVERY</p>	
<p>DATA SET: MW3D-PR1.DAT 08/14/95</p>	
<p>AQUIFER MODEL: Confined</p>	<p>SOLUTION METHOD: Theis Recovery</p>
<p>PROJECT DATA: test date: 07/27/95 test well: MW-3D obs. well: MW-3D</p>	<p>TEST DATA: g = 0.134 ft³/min r = 0.166 ft b = 27.47 ft</p>
<p>PARAMETER ESTIMATES: T = 0.009328 ft²/min S' = 1.355</p>	
<p>AGTESOLV</p>	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW4D DRAWDOWN	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW4D-PD.DAT 08/04/95</p> <p>AQUIFER MODEL: Unconfined</p> <p>SOLUTION METHOD: Theis</p> <p>PROJECT DATA: test date: 06/29/95 test well: MW4D obs. well: MW4D</p> <p>TEST DATA: g = 0.195 ft³/min r = 0.166 ft b = 9.43 ft</p> <p>PARAMETER ESTIMATES: T = 0.04875 ft²/min S = 0.234</p> </div> <div style="width: 50%; text-align: center;"> </div> </div>	
AGTESOL.VM0 = 0.7004 ft	

Client: Nepera Inc.	Company: Conestoga Rovers & Associates
Location: Former Lagoon Site	Project: 3698
MW4D RECOVERY	
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>DATA SET: MW4D-PR.DAT 08/14/95</p> <p>AQUIFER MODEL: Confined</p> <p>SOLUTION METHOD: Theis Recovery</p> <p>PROJECT DATA: test date: 06/30/95 test well: MW4D obs. well: MW4D</p> <p>TEST DATA: g = 0.195 ft³/min r = 0.166 ft b = 9.43 ft</p> <p>PARAMETER ESTIMATES: T = 0.01827 ft²/min S' = 3.089</p> </div> <div style="width: 50%; text-align: center;"> <p>Residual Drawdown (ft)</p> <p>Dimensionless Time, t/t'' (min)</p> </div> </div>	
AGTESOLV	

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - DRAWDOWN
 Test Well : MW1D
 Start Date/Time : 07/13/95 | 10:48:00
 Reference Elevation : 380.540 ft AMSL

Static Water Level : 18.080 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/13/95	10:48:30	0.50	18.780	361.760	0.700
07/13/95	10:49:00	1.00	19.760	360.780	1.680
07/13/95	10:49:30	1.50	20.440	360.100	2.360
07/13/95	10:50:00	2.00	20.540	360.000	2.460
07/13/95	10:50:30	2.50	20.600	359.940	2.520
07/13/95	10:51:00	3.00	20.680	359.860	2.600
07/13/95	10:51:30	3.50	20.740	359.800	2.660
07/13/95	10:52:00	4.00	20.820	359.720	2.740
07/13/95	10:52:30	4.50	20.870	359.670	2.790
07/13/95	10:53:00	5.00	20.910	359.630	2.830
07/13/95	10:53:30	5.50	20.960	359.580	2.880
07/13/95	10:54:00	6.00	21.000	359.540	2.920
07/13/95	10:54:30	6.50	21.040	359.500	2.960
07/13/95	10:55:00	7.00	21.070	359.470	2.990
07/13/95	10:55:30	7.50	21.100	359.440	3.020
07/13/95	10:56:00	8.00	21.130	359.410	3.050
07/13/95	10:56:30	8.50	21.160	359.380	3.080
07/13/95	10:57:00	9.00	21.190	359.350	3.110
07/13/95	10:57:30	9.50	21.210	359.330	3.130
07/13/95	10:58:00	10.00	21.240	359.300	3.160
07/13/95	10:59:00	11.00	21.290	359.250	3.210
07/13/95	11:00:00	12.00	21.300	359.240	3.220
07/13/95	11:01:00	13.00	21.310	359.230	3.230
07/13/95	11:02:00	14.00	21.370	359.170	3.290
07/13/95	11:03:00	15.00	21.430	359.110	3.350
07/13/95	11:04:00	16.00	21.500	359.040	3.420
07/13/95	11:05:00	17.00	21.540	359.000	3.460
07/13/95	11:06:00	18.00	21.780	358.760	3.700
07/13/95	11:07:00	19.00	21.900	358.640	3.820
07/13/95	11:08:00	20.00	21.940	358.600	3.860
07/13/95	11:09:00	21.00	21.990	358.550	3.910
07/13/95	11:10:00	22.00	22.020	358.520	3.940
07/13/95	11:11:00	23.00	22.050	358.490	3.970
07/13/95	11:12:00	24.00	22.100	358.440	4.020
07/13/95	11:13:00	25.00	22.150	358.390	4.070

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/13/95	11:14:00	26.00	22.200	358.340	4.120
07/13/95	11:15:00	27.00	22.230	358.310	4.150
07/13/95	11:16:00	28.00	22.250	358.290	4.170
07/13/95	11:17:00	29.00	22.280	358.260	4.200
07/13/95	11:18:00	30.00	22.310	358.230	4.230
07/13/95	11:19:00	31.00	22.340	358.200	4.260
07/13/95	11:20:00	32.00	22.360	358.180	4.280
07/13/95	11:21:00	33.00	22.400	358.140	4.320
07/13/95	11:22:00	34.00	22.430	358.110	4.350
07/13/95	11:23:00	35.00	22.460	358.080	4.380
07/13/95	11:24:00	36.00	22.510	358.030	4.430
07/13/95	11:25:00	37.00	22.560	357.980	4.480
07/13/95	11:26:00	38.00	22.620	357.920	4.540
07/13/95	11:27:00	39.00	22.690	357.850	4.610
07/13/95	11:28:00	40.00	22.740	357.800	4.660
07/13/95	11:29:00	41.00	22.780	357.760	4.700
07/13/95	11:30:00	42.00	22.830	357.710	4.750
07/13/95	11:31:00	43.00	22.870	357.670	4.790
07/13/95	11:32:00	44.00	22.910	357.630	4.830
07/13/95	11:33:00	45.00	22.950	357.590	4.870
07/13/95	11:34:00	46.00	22.980	357.560	4.900
07/13/95	11:35:00	47.00	23.010	357.530	4.930
07/13/95	11:36:00	48.00	23.040	357.500	4.960
07/13/95	11:37:00	49.00	23.070	357.470	4.990
07/13/95	11:38:00	50.00	23.100	357.440	5.020
07/13/95	11:39:00	51.00	23.130	357.410	5.050
07/13/95	11:40:00	52.00	23.170	357.370	5.090
07/13/95	11:41:00	53.00	23.210	357.330	5.130
07/13/95	11:42:00	54.00	23.230	357.310	5.150
07/13/95	11:43:00	55.00	23.260	357.280	5.180
07/13/95	11:48:00	60.00	23.370	357.170	5.290
07/13/95	11:53:00	65.00	23.490	357.050	5.410
07/13/95	11:58:00	70.00	23.600	356.940	5.520
07/13/95	12:03:00	75.00	23.700	356.840	5.620
07/13/95	12:08:00	80.00	23.820	356.720	5.740
07/13/95	12:13:00	85.00	23.940	356.600	5.860
07/13/95	12:18:00	90.00	24.050	356.490	5.970
07/13/95	12:23:00	95.00	24.150	356.390	6.070
07/13/95	12:28:00	100.00	24.260	356.280	6.180
07/13/95	12:33:00	105.00	24.390	356.150	6.310
07/13/95	12:38:00	110.00	24.500	356.040	6.420
07/13/95	12:43:00	115.00	24.630	355.910	6.550
07/13/95	12:48:00	120.00	24.770	355.770	6.690
07/13/95	12:53:00	125.00	24.930	355.610	6.850
07/13/95	12:58:00	130.00	25.070	355.470	6.990
07/13/95	13:03:00	135.00	25.200	355.340	7.120
07/13/95	13:08:00	140.00	25.340	355.200	7.260
07/13/95	13:13:00	145.00	25.460	355.080	7.380
07/13/95	13:23:00	155.00	25.660	354.880	7.580

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/13/95	13:33:00	165.00	25.840	354.700	7.760
07/13/95	13:43:00	175.00	26.040	354.500	7.960
07/13/95	13:53:00	185.00	26.220	354.320	8.140
07/13/95	14:03:00	195.00	26.350	354.190	8.270
07/13/95	14:13:00	205.00	26.450	354.090	8.370
07/13/95	14:23:00	215.00	26.520	354.020	8.440
07/13/95	14:33:00	225.00	26.580	353.960	8.500
07/13/95	14:43:00	235.00	26.600	353.940	8.520
07/13/95	14:53:00	245.00	26.640	353.900	8.560
07/13/95	15:03:00	255.00	26.640	353.900	8.560
07/13/95	15:13:00	265.00	26.640	353.900	8.560
07/13/95	15:15:00	267.00	26.640	353.900	8.560

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - RECOVERY
 Test Well : MW1D
 Start Date/Time : 07/13/95 | 15:15:00
 Reference Elevation : 380.540 ft AMSL

Static Water Level : 18.080 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/13/95	15:15:30	0.50	26.260	354.280	8.180
07/13/95	15:16:00	1.00	25.720	354.820	7.640
07/13/95	15:16:30	1.50	25.200	355.340	7.120
07/13/95	15:17:00	2.00	24.690	355.850	6.610
07/13/95	15:17:30	2.50	24.200	356.340	6.120
07/13/95	15:18:00	3.00	23.830	356.710	5.750
07/13/95	15:18:30	3.50	23.500	357.040	5.420
07/13/95	15:19:00	4.00	23.240	357.300	5.160
07/13/95	15:19:30	4.50	23.040	357.500	4.960
07/13/95	15:20:00	5.00	22.870	357.670	4.790
07/13/95	15:20:30	5.50	22.700	357.840	4.620
07/13/95	15:21:00	6.00	22.600	357.940	4.520
07/13/95	15:21:30	6.50	22.480	358.060	4.400
07/13/95	15:22:00	7.00	22.380	358.160	4.300
07/13/95	15:22:30	7.50	22.280	358.260	4.200
07/13/95	15:23:00	8.00	22.200	358.340	4.120
07/13/95	15:23:30	8.50	22.120	358.420	4.040
07/13/95	15:24:00	9.00	22.060	358.480	3.980
07/13/95	15:24:30	9.50	22.000	358.540	3.920
07/13/95	15:25:00	10.00	21.940	358.600	3.860
07/13/95	15:26:00	11.00	21.810	358.730	3.730
07/13/95	15:27:00	12.00	21.760	358.780	3.680
07/13/95	15:28:00	13.00	21.680	358.860	3.600
07/13/95	15:29:00	14.00	21.600	358.940	3.520
07/13/95	15:30:00	15.00	21.540	359.000	3.460
07/13/95	15:31:00	16.00	21.460	359.080	3.380
07/13/95	15:32:00	17.00	21.390	359.150	3.310
07/13/95	15:33:00	18.00	21.330	359.210	3.250
07/13/95	15:34:00	19.00	21.260	359.280	3.180
07/13/95	15:35:00	20.00	21.210	359.330	3.130
07/13/95	15:36:00	21.00	21.150	359.390	3.070
07/13/95	15:37:00	22.00	21.090	359.450	3.010
07/13/95	15:38:00	23.00	21.040	359.500	2.960
07/13/95	15:39:00	24.00	21.000	359.540	2.920
07/13/95	15:40:00	25.00	20.950	359.590	2.870

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/13/95	15:41:00	26.00	20.900	359.640	2.820
07/13/95	15:42:00	27.00	20.870	359.670	2.790
07/13/95	15:43:00	28.00	20.830	359.710	2.750
07/13/95	15:44:00	29.00	20.790	359.750	2.710
07/13/95	15:45:00	30.00	20.750	359.790	2.670
07/13/95	15:50:00	35.00	20.540	360.000	2.460
07/13/95	15:55:00	40.00	20.380	360.160	2.300
07/13/95	16:00:00	45.00	20.240	360.300	2.160
07/13/95	16:05:00	50.00	20.130	360.410	2.050
07/13/95	16:10:00	55.00	20.020	360.520	1.940
07/13/95	16:15:00	60.00	19.920	360.620	1.840
07/13/95	16:20:00	65.00	19.800	360.740	1.720
07/13/95	16:25:00	70.00	19.710	360.830	1.630
07/13/95	16:30:00	75.00	19.620	360.920	1.540
07/13/95	16:35:00	80.00	19.530	361.010	1.450
07/13/95	16:40:00	85.00	19.480	361.060	1.400
07/13/95	16:45:00	90.00	19.420	361.120	1.340
07/13/95	16:50:00	95.00	19.360	361.180	1.280
07/13/95	16:55:00	100.00	19.320	361.220	1.240
07/13/95	17:00:00	105.00	19.280	361.260	1.200
07/13/95	17:05:00	110.00	19.260	361.280	1.180
07/13/95	17:10:00	115.00	19.230	361.310	1.150
07/13/95	17:15:00	120.00	19.200	361.340	1.120

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - DRAWDOWN
 Test Well : MW2D
 Start Date/Time : 07/14/95 | 08:30:00
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 14.370 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/14/95	08:30:30	0.50	14.940	364.590	0.570
07/14/95	08:31:00	1.00	15.700	363.830	1.330
07/14/95	08:31:30	1.50	16.520	363.010	2.150
07/14/95	08:32:00	2.00	17.190	362.340	2.820
07/14/95	08:32:30	2.50	17.820	361.710	3.450
07/14/95	08:33:00	3.00	18.380	361.150	4.010
07/14/95	08:33:30	3.50	19.000	360.530	4.630
07/14/95	08:34:00	4.00	19.510	360.020	5.140
07/14/95	08:34:30	4.50	20.020	359.510	5.650
07/14/95	08:35:00	5.00	20.480	359.050	6.110
07/14/95	08:35:30	5.50	20.990	358.540	6.620
07/14/95	08:36:00	6.00	21.450	358.080	7.080
07/14/95	08:36:30	6.50	21.930	357.600	7.560
07/14/95	08:37:00	7.00	22.360	357.170	7.990
07/14/95	08:37:30	7.50	22.810	356.720	8.440
07/14/95	08:38:00	8.00	23.240	356.290	8.870
07/14/95	08:38:30	8.50	23.630	355.900	9.260
07/14/95	08:39:00	9.00	24.030	355.500	9.660
07/14/95	08:39:30	9.50	24.430	355.100	10.060
07/14/95	08:40:00	10.00	24.830	354.700	10.460
07/14/95	08:41:00	11.00	25.570	353.960	11.200
07/14/95	08:42:00	12.00	26.300	353.230	11.930
07/14/95	08:43:00	13.00	26.980	352.550	12.610
07/14/95	08:44:00	14.00	27.680	351.850	13.310
07/14/95	08:45:00	15.00	28.500	351.030	14.130
07/14/95	08:46:00	16.00	29.290	350.240	14.920
07/14/95	08:47:00	17.00	29.980	349.550	15.610
07/14/95	08:48:00	18.00	30.600	348.930	16.230
07/14/95	08:49:00	19.00	31.120	348.410	16.750
07/14/95	08:50:00	20.00	31.660	347.870	17.290
07/14/95	08:51:00	21.00	32.140	347.390	17.770
07/14/95	08:52:00	22.00	32.580	346.950	18.210
07/14/95	08:53:00	23.00	32.960	346.570	18.590
07/14/95	08:54:00	24.00	33.290	346.240	18.920
07/14/95	08:55:00	25.00	33.760	345.770	19.390

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/14/95	08:56:00	26.00	34.290	345.240	19.920
07/14/95	08:57:00	27.00	34.830	344.700	20.460
07/14/95	08:58:00	28.00	35.350	344.180	20.980
07/14/95	08:59:00	29.00	35.790	343.740	21.420
07/14/95	09:00:00	30.00	36.190	343.340	21.820
07/14/95	09:01:00	31.00	36.530	343.000	22.160
07/14/95	09:02:00	32.00	36.840	342.690	22.470
07/14/95	09:03:00	33.00	37.160	342.370	22.790
07/14/95	09:04:00	34.00	37.490	342.040	23.120
07/14/95	09:05:00	35.00	37.800	341.730	23.430
07/14/95	09:06:00	36.00	38.060	341.470	23.690
07/14/95	09:07:00	37.00	38.290	341.240	23.920
07/14/95	09:08:00	38.00	38.530	341.000	24.160
07/14/95	09:09:00	39.00	38.750	340.780	24.380
07/14/95	09:10:00	40.00	39.120	340.410	24.750
07/14/95	09:11:00	41.00	39.460	340.070	25.090
07/14/95	09:12:00	42.00	39.760	339.770	25.390
07/14/95	09:13:00	43.00	40.010	339.520	25.640
07/14/95	09:14:00	44.00	40.260	339.270	25.890
07/14/95	09:15:00	45.00	40.500	339.030	26.130
07/14/95	09:16:00	46.00	40.700	338.830	26.330
07/14/95	09:17:00	47.00	40.910	338.620	26.540
07/14/95	09:18:00	48.00	41.080	338.450	26.710
07/14/95	09:20:00	50.00	41.530	338.000	27.160
07/14/95	09:21:00	51.00	41.750	337.780	27.380
07/14/95	09:22:00	52.00	41.970	337.560	27.600
07/14/95	09:23:00	53.00	42.180	337.350	27.810
07/14/95	09:24:00	54.00	42.340	337.190	27.970
07/14/95	09:25:00	55.00	42.480	337.050	28.110
07/14/95	09:26:00	56.00	42.620	336.910	28.250
07/14/95	09:27:00	57.00	42.840	336.690	28.470
07/14/95	09:28:00	58.00	43.030	336.500	28.660
07/14/95	09:29:00	59.00	43.300	336.230	28.930
07/14/95	09:30:00	60.00	43.510	336.020	29.140
07/14/95	09:32:00	62.00	43.830	335.700	29.460
07/14/95	09:34:00	64.00	44.070	335.460	29.700
07/14/95	09:36:00	66.00	44.280	335.250	29.910
07/14/95	09:38:00	68.00	44.700	334.830	30.330
07/14/95	09:40:00	70.00	45.080	334.450	30.710
07/14/95	09:42:00	72.00	45.400	334.130	31.030
07/14/95	09:44:00	74.00	45.640	333.890	31.270
07/14/95	09:46:00	76.00	45.820	333.710	31.450
07/14/95	09:48:00	78.00	45.970	333.560	31.600
07/14/95	09:50:00	80.00	46.130	333.400	31.760
07/14/95	09:52:00	82.00	46.230	333.300	31.860
07/14/95	09:54:00	84.00	46.640	332.890	32.270
07/14/95	09:56:00	86.00	47.000	332.530	32.630
07/14/95	09:58:00	88.00	47.300	332.230	32.930
07/14/95	10:00:00	90.00	47.540	331.990	33.170

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/14/95	10:05:00	95.00	47.920	331.610	33.550
07/14/95	10:10:00	100.00	48.200	331.330	33.830
07/14/95	10:15:00	105.00	48.380	331.150	34.010
07/14/95	10:20:00	110.00	48.520	331.010	34.150
07/14/95	10:25:00	115.00	48.600	330.930	34.230
07/14/95	10:30:00	120.00	48.700	330.830	34.330

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - RECOVERY
 Test Well : MW2D
 Start Date/Time : 07/14/95 | 10:30:00
 Reference Elevation : 379.530 ft AMSL

Static Water Level : 14.370 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/14/95	10:31:30	1.50	46.460	333.070	32.090
07/14/95	10:32:00	2.00	45.500	334.030	31.130
07/14/95	10:32:30	2.50	44.800	334.730	30.430
07/14/95	10:33:00	3.00	44.040	335.490	29.670
07/14/95	10:33:30	3.50	43.380	336.150	29.010
07/14/95	10:34:00	4.00	42.710	336.820	28.340
07/14/95	10:34:30	4.50	42.040	337.490	27.670
07/14/95	10:35:00	5.00	41.390	338.140	27.020
07/14/95	10:35:30	5.50	40.750	338.780	26.380
07/14/95	10:36:00	6.00	40.210	339.320	25.840
07/14/95	10:36:30	6.50	39.600	339.930	25.230
07/14/95	10:37:00	7.00	39.050	340.480	24.680
07/14/95	10:37:30	7.50	38.550	340.980	24.180
07/14/95	10:38:00	8.00	38.080	341.450	23.710
07/14/95	10:38:30	8.50	37.600	341.930	23.230
07/14/95	10:39:00	9.00	37.180	342.350	22.810
07/14/95	10:39:30	9.50	36.670	342.860	22.300
07/14/95	10:40:00	10.00	36.290	343.240	21.920
07/14/95	10:41:00	11.00	35.420	344.110	21.050
07/14/95	10:42:00	12.00	34.600	344.930	20.230
07/14/95	10:43:00	13.00	33.850	345.680	19.480
07/14/95	10:44:00	14.00	33.110	346.420	18.740
07/14/95	10:45:00	15.00	32.440	347.090	18.070
07/14/95	10:46:00	16.00	31.880	347.650	17.510
07/14/95	10:47:00	17.00	31.220	348.310	16.850
07/14/95	10:48:00	18.00	30.660	348.870	16.290
07/14/95	10:49:00	19.00	30.120	349.410	15.750
07/14/95	10:50:00	20.00	29.620	349.910	15.250
07/14/95	10:52:00	22.00	28.720	350.810	14.350
07/14/95	10:54:00	24.00	27.890	351.640	13.520
07/14/95	10:56:00	26.00	27.160	352.370	12.790
07/14/95	10:58:00	28.00	26.580	352.950	12.210
07/14/95	11:00:00	30.00	26.140	353.390	11.770
07/14/95	11:05:00	35.00	25.030	354.500	10.660
07/14/95	11:10:00	40.00	24.080	355.450	9.710

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/14/95	11:15:00	45.00	23.290	356.240	8.920
07/14/95	11:20:00	50.00	22.600	356.930	8.230
07/14/95	11:25:00	55.00	22.020	357.510	7.650
07/14/95	11:30:00	60.00	21.510	358.020	7.140
07/14/95	11:35:00	65.00	21.180	358.350	6.810
07/14/95	11:40:00	70.00	20.580	358.950	6.210

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - DRAWDOWN
 Test Well : MW-3D
 Start Date/Time : 07/27/95 | 10:00:00
 Reference Elevation : 375.310 ft AMSL

Static Water Level : 27.690 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
07/27/95	10:00:01	0.02	29.560	345.750	1.870
07/27/95	10:00:30	0.50	29.700	345.610	2.010
07/27/95	10:01:00	1.00	30.120	345.190	2.430
07/27/95	10:01:30	1.50	30.160	345.150	2.470
07/27/95	10:02:00	2.00	30.220	345.090	2.530
07/27/95	10:02:30	2.50	30.320	344.990	2.630
07/27/95	10:03:00	3.00	30.420	344.890	2.730
07/27/95	10:03:30	3.50	30.520	344.790	2.830
07/27/95	10:04:00	4.00	30.540	344.770	2.850
07/27/95	10:04:30	4.50	30.580	344.730	2.890
07/27/95	10:05:00	5.00	30.620	344.690	2.930
07/27/95	10:06:00	6.00	30.680	344.630	2.990
07/27/95	10:07:00	7.00	30.740	344.570	3.050
07/27/95	10:08:00	8.00	30.810	344.500	3.120
07/27/95	10:09:00	9.00	30.880	344.430	3.190
07/27/95	10:10:00	10.00	30.920	344.390	3.230
07/27/95	10:15:00	15.00	30.970	344.340	3.280
07/27/95	10:20:00	20.00	30.990	344.320	3.300
07/27/95	10:25:00	25.00	31.010	344.300	3.320
07/27/95	10:30:00	30.00	31.040	344.270	3.350
07/27/95	10:35:00	35.00	31.020	344.290	3.330
07/27/95	10:40:00	40.00	31.010	344.300	3.320
07/27/95	10:45:00	45.00	30.970	344.340	3.280
07/27/95	10:50:00	50.00	30.940	344.370	3.250
07/27/95	10:55:00	55.00	30.950	344.360	3.260
07/27/95	11:00:00	60.00	30.920	344.390	3.230

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - RECOVERY
 Test Well : MW-3D
 Start Date/Time : 07/27/95 | 11:00:00
 Reference Elevation : 375.310 ft AMSL

Static Water Level : 27.690 ft

Water level measured from : TOP OF RISER

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
07/27/95	11:00:01	0.02	30.920	344.390	3.230
07/27/95	11:00:30	0.50	30.780	344.530	3.090
07/27/95	11:01:00	1.00	30.710	344.600	3.020
07/27/95	11:01:30	1.50	30.670	344.640	2.980
07/27/95	11:02:00	2.00	30.600	344.710	2.910
07/27/95	11:02:30	2.50	30.560	344.750	2.870
07/27/95	11:03:00	3.00	30.500	344.810	2.810
07/27/95	11:03:30	3.50	30.400	344.910	2.710
07/27/95	11:04:00	4.00	30.310	345.000	2.620
07/27/95	11:04:30	4.50	30.230	345.080	2.540
07/27/95	11:05:00	5.00	30.140	345.170	2.450
07/27/95	11:06:00	6.00	30.010	345.300	2.320
07/27/95	11:07:00	7.00	29.880	345.430	2.190
07/27/95	11:08:00	8.00	29.770	345.540	2.080
07/27/95	11:09:00	9.00	29.670	345.640	1.980
07/27/95	11:10:00	10.00	29.570	345.740	1.880
07/27/95	11:15:00	15.00	29.200	346.110	1.510
07/27/95	11:20:00	20.00	28.920	346.390	1.230
07/27/95	11:25:00	25.00	28.720	346.590	1.030
07/27/95	11:30:00	30.00	28.550	346.760	0.860
07/27/95	11:35:00	35.00	28.440	346.870	0.750
07/27/95	11:40:00	40.00	28.340	346.970	0.650
07/27/95	11:45:00	45.00	28.270	347.040	0.580
07/27/95	11:50:00	50.00	28.200	347.110	0.510
07/27/95	11:55:00	55.00	28.150	347.160	0.460
07/27/95	12:00:00	60.00	28.100	347.210	0.410
07/27/95	12:05:00	65.00	28.060	347.250	0.370
07/27/95	12:10:00	70.00	28.030	347.280	0.340
07/27/95	12:20:00	80.00	27.980	347.330	0.290

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - DRAWDOWN
 Test Well : MW4D
 Start Date/Time : 06/29/95 | 23:46:00
 Reference Elevation : 375.210 ft AMSL

Static Water Level : 16.900 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/29/95	23:46:30	0.50	16.840	358.370	-0.060
06/29/95	23:47:00	1.00	16.840	358.370	-0.060
06/29/95	23:47:30	1.50	16.840	358.370	-0.060
06/29/95	23:48:00	2.00	16.880	358.330	-0.020
06/29/95	23:48:30	2.50	16.890	358.320	-0.010
06/29/95	23:49:00	3.00	16.870	358.340	-0.030
06/29/95	23:49:30	3.50	16.900	358.310	0.000
06/29/95	23:50:00	4.00	16.880	358.330	-0.020
06/29/95	23:50:30	4.50	16.900	358.310	0.000
06/29/95	23:51:00	5.00	16.920	358.290	0.020
06/29/95	23:51:30	5.50	17.160	358.050	0.260
06/29/95	23:52:00	6.00	17.440	357.770	0.540
06/29/95	23:52:30	6.50	17.710	357.500	0.810
06/29/95	23:53:00	7.00	17.900	357.310	1.000
06/29/95	23:53:30	7.50	18.040	357.170	1.140
06/29/95	23:54:00	8.00	18.140	357.070	1.240
06/29/95	23:54:30	8.50	18.240	356.970	1.340
06/29/95	23:55:00	9.00	18.300	356.910	1.400
06/29/95	23:55:30	9.50	18.370	356.840	1.470
06/29/95	23:56:00	10.00	18.430	356.780	1.530
06/29/95	23:57:00	11.00	18.520	356.690	1.620
06/29/95	23:58:00	12.00	18.630	356.580	1.730
06/29/95	23:59:00	13.00	18.710	356.500	1.810
06/30/95	00:00:00	14.00	18.770	356.440	1.870
06/30/95	00:01:00	15.00	18.840	356.370	1.940
06/30/95	00:02:00	16.00	18.910	356.300	2.010
06/30/95	00:03:00	17.00	18.960	356.250	2.060
06/30/95	00:04:00	18.00	19.040	356.170	2.140
06/30/95	00:05:00	19.00	19.070	356.140	2.170
06/30/95	00:06:00	20.00	19.100	356.110	2.200
06/30/95	00:11:00	25.00	19.310	355.900	2.410
06/30/95	00:16:00	30.00	19.500	355.710	2.600
06/30/95	00:21:00	35.00	19.610	355.600	2.710
06/30/95	00:26:00	40.00	19.710	355.500	2.810
06/30/95	00:31:00	45.00	19.790	355.420	2.890

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	DRAWDOWN (ft)
06/30/95	00:36:00	50.00	19.850	355.360	2.950
06/30/95	00:41:00	55.00	19.900	355.310	3.000
06/30/95	00:51:00	65.00	19.990	355.220	3.090
06/30/95	01:01:00	75.00	20.070	355.140	3.170
06/30/95	01:11:00	85.00	20.120	355.090	3.220
06/30/95	01:21:00	95.00	20.170	355.040	3.270
06/30/95	01:31:00	105.00	20.200	355.010	3.300
06/30/95	01:41:00	115.00	20.230	354.980	3.330
06/30/95	01:51:00	125.00	20.250	354.960	3.350

Client : Nepera Inc.
 Site Location : Former Lagoon Site
 Project No : 3698
 Test Type : PUMPING TEST - RECOVERY
 Test Well : MW4D
 Start Date/Time : 06/30/95 | 01:51:00
 Reference Elevation : 375.210 ft AMSL

Static Water Level : 16.900 ft

Water level measured from : TOP OF RISER ELEVATION

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/30/95	01:51:30	0.50	19.880	355.330	2.980
06/30/95	01:52:00	1.00	19.630	355.580	2.730
06/30/95	01:52:30	1.50	19.500	355.710	2.600
06/30/95	01:53:00	2.00	19.380	355.830	2.480
06/30/95	01:53:30	2.50	19.240	355.970	2.340
06/30/95	01:54:00	3.00	19.150	356.060	2.250
06/30/95	01:54:30	3.50	19.070	356.140	2.170
06/30/95	01:55:00	4.00	18.990	356.220	2.090
06/30/95	01:55:30	4.50	18.890	356.320	1.990
06/30/95	01:56:00	5.00	18.800	356.410	1.900
06/30/95	01:56:30	5.50	18.720	356.490	1.820
06/30/95	01:57:00	6.00	18.650	356.560	1.750
06/30/95	01:57:30	6.50	18.580	356.630	1.680
06/30/95	01:58:00	7.00	18.530	356.680	1.630
06/30/95	01:58:30	7.50	18.470	356.740	1.570
06/30/95	01:59:00	8.00	18.400	356.810	1.500
06/30/95	01:59:30	8.50	18.370	356.840	1.470
06/30/95	02:00:00	9.00	18.330	356.880	1.430
06/30/95	02:00:30	9.50	18.280	356.930	1.380
06/30/95	02:01:00	10.00	18.240	356.970	1.340
06/30/95	02:01:30	10.50	18.210	357.000	1.310
06/30/95	02:02:00	11.00	18.170	357.040	1.270
06/30/95	02:02:30	11.50	18.140	357.070	1.240
06/30/95	02:03:00	12.00	18.110	357.100	1.210
06/30/95	02:03:30	12.50	18.090	357.120	1.190
06/30/95	02:04:00	13.00	18.060	357.150	1.160
06/30/95	02:04:30	13.50	18.030	357.180	1.130
06/30/95	02:05:00	14.00	18.010	357.200	1.110
06/30/95	02:05:30	14.50	17.980	357.230	1.080
06/30/95	02:06:00	15.00	17.950	357.260	1.050
06/30/95	02:06:30	15.50	17.920	357.290	1.020
06/30/95	02:07:00	16.00	17.890	357.320	0.990
06/30/95	02:07:30	16.50	17.870	357.340	0.970
06/30/95	02:08:00	17.00	17.850	357.360	0.950
06/30/95	02:08:30	17.50	17.830	357.380	0.930

DATE	TIME	ELAPSED TIME (min)	WATER LEVEL (ft)	WATER ELEV. (ft AMSL)	RECOVERY (ft)
06/30/95	02:09:00	18.00	17.820	357.390	0.920
06/30/95	02:09:30	18.50	17.800	357.410	0.900
06/30/95	02:10:00	19.00	17.790	357.420	0.890
06/30/95	02:10:30	19.50	17.770	357.440	0.870
06/30/95	02:11:00	20.00	17.750	357.460	0.850
06/30/95	02:12:00	21.00	17.720	357.490	0.820
06/30/95	02:13:00	22.00	17.690	357.520	0.790
06/30/95	02:14:00	23.00	17.660	357.550	0.760
06/30/95	02:15:00	24.00	17.630	357.580	0.730
06/30/95	02:16:00	25.00	17.600	357.610	0.700
06/30/95	02:17:00	26.00	17.580	357.630	0.680
06/30/95	02:18:00	27.00	17.550	357.660	0.650