

BCP Site No. C224264
FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
KINGS COUNTY
BROOKLYN, NEW YORK
Block 1884 Lots 40 and 48

SITE MANAGEMENT PLAN

NYSDEC Site Number: C224264

Prepared for:

Rose Castle Development II LLC
266 Broadway, Suite 301
Brooklyn, NY 11211

Prepared by:



AMC Engineering PLLC
18-36 42nd Street
Astoria, NY 11105
Phone: (718) 545-0474

Revisions to Final Approved Site Management Plan:

Revision No.	Date Submitted	Summary of Revision	NYSDEC Approval Date

DECEMBER 2020

CERTIFICATION STATEMENT

I, ARIEL CZEMERINSKI, certify that I am currently a NYS registered professional engineer as in defined in 6 NYCRR Part 375 and that this Site Management Plan was prepared in accordance with all applicable statutes and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

07608

12/17/2020

LICENSE #

DATE

SIGNATURE



TABLE OF CONTENTS

**FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
KINGS COUNTY
BROOKLYN, NEW YORK
Block 1884 Lots 40 and 48**

SITE MANAGEMENT PLAN

CERTIFICATIONSi
LIST OF ACRONYMS.....v
EXECUTIVE SUMMARYvi

1.0 INTRODUCTION 1
 1.1 General..... 1
 1.2 Revisions 2
 1.3 Notifications 2

2.0 SUMMARY OF PREVIOUS INVESTIGATIONS AND REMEDIAL ACTIONS
5

 2.1 Site Location and Description 5
 2.2 Physical Setting 5
 2.2.1 Land Use5
 2.2.2 Geology 6
 2.2.3 Hydrogeology6
 2.3 Investigation and Remedial History 6
 2.3.1 Past Uses and Ownership.....7
 2.3.2 Phase I Reports9
 2.3.3 Remedial Investigation Reports.....10
 2.3.4 Remedial Action13
 2.4 Remedial Action Objectives..... 13
 2.4.1 GROUND WATER13
 2.4.2 SOIL 13
 2.4.3 SOIL VAPOR14
 2.5 Remaining Contamination..... 14
 2.5.1 Groundwater14

3.0 INSTITUTIONAL AND ENGINEERING CONTROL PLAN 16
 3.1 General..... 16
 3.2 Institutional Controls 16
 3.3 Site-Wide Inspection 17

4.0 PERIODIC ASSESSMENTS/EVALUATIONS 18
 4.1 Climate Change Vulnerability Assessment 18

4.2	Soil Vapor Intrusion Evaluation	19
5.0	MONITORING AND SAMPLING PLAN	20
5.1	General.....	20
5.1.1	Monitoring Wells associated with Monitored Bulk Asymptotic Attenuation 21	
5.2	Post-Remediation Media Monitoring and Sampling	21
5.3	Groundwater Sampling.....	22
5.3.1	Monitoring and Sampling Protocol.....	23
6.0	REPORTING REQUIREMENTS	24
6.1	Site Management Reports.....	24
6.2	Periodic Review Report.....	26
6.2.1	Certification of Institutional Controls.....	27
6.3	Corrective Measures Work Plan.....	28
7.0	REFERENCES	30

TABLE OF CONTENTS
Site Management Plan
Former NY Cleaning and Dyeing Site
376-378 Flushing Avenue

TABLES

Table 1	Notifications.....	4
Table 2	Remaining Groundwater Exceedances Above TOGS-WQ/GA Standards	
Table 3	Measured Static Water Levels from MW2	
Table 4	Post Remediation Sampling Requirements and Schedule.....	21
Table 5	Monitoring Well Construction Details.....	22
Table 6	Schedule of Interim Monitoring/Inspection Reports.....	24

FIGURES

Figure 1	Site Location Map
Figure 2	Site Plan
Figure 3	Groundwater Contour Map
Figure 4	Remaining Exceedances Above TOGS/WQ Standards
Figure 5	RIR Site Sampling Map
Figure 6	RIR Soil Exceedances
Figure 7	RIR Groundwater Exceedances
Figure 8	RIR Soil Gas Detections
Figure 9	Institutional Controls Boundaries

ATTACHMENTS

Attachment A	List of Site Contacts
Attachment B	Responsibilities of Owner and Remedial Party
Attachment C	Environmental Easement
Attachment D	Monitoring Well Construction and Purge Logs
Attachment E	Field Sampling Plan
Attachment F	Quality Assurance Project Plan
Attachment G	Health and Safety Plan
Attachment H	Community Air Monitoring Plan
Attachment I	Site Management Forms
Attachment J	Permits and Permit Equivalents

LIST OF ACRONYMS

Acronym	Definition
AMC	AMC Engineering, PLLC
AWQS	Ambient Water Quality Standards
BCA	Brownfield Cleanup Agreement
BCP	Brownfield Cleanup Program
BTEX	Benzene, Toluene, Ethylbenzene and Xylene
CQMP	Construction Quality Management Plan
DUSR	Data Usability Statement Report
EBC	Environmental Business Consultants
FER	Final Engineering Report
HDPE	High Density Polyethylene
IRM	Interim Remedial Measure
NYC	New York City
NYCDEP	New York City Department of Environmental Protection
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
PS	Public School
PVC	Polyvinyl Chloride
RAO	Remedial Action Objectives
RAWP	Remedial Action Work Plan
RI	Remedial Investigation
RSCOs	Recommended Site Cleanup Objectives
SCG	Standards, Criteria, and Guidelines
SMMP	Soil/Materials Management Plan
SMP	Site Management Plan
SSDS	Sub-slab Depressurization System
SWPPP	Stormwater Pollution Prevention Plan
SVOCs	Semi-Volatile Organic Compounds
USEPA	United States Environmental Protection Agency
UST	Underground Storage Tank
VOCs	Volatile Organic Compounds

ES EXECUTIVE SUMMARY

The following provides a brief summary of the controls implemented for the Site, as well as the inspections, monitoring, maintenance and reporting activities required by this Site Management Plan:

Site Identification: Site No.: C244264
 376-378 Flushing Avenue, Brooklyn, NY

Institutional Controls:	1. The property may be used for unrestricted use;
	2. All ICs as listed in Section 3.2 are listed here.
	3. The use of groundwater underlying the property is prohibited without necessary water quality treatment as determined by the NYSDOH and New York City Department of Health and Mental Hygiene to render it safe for use as drinking water or for industrial purposes, and the user must first notify and obtain written approval to do so from the Department.
	4. Groundwater and other environmental or public health monitoring must be performed as defined in this SMP;
	5. Data and information pertinent to site management must be reported at the frequency and in a manner as defined in this SMP;
	6. All future activities that will disturb remaining contaminated material must be conducted in accordance with this SMP;
	7. Monitoring to assess the performance and effectiveness of the remedy must be performed as defined in this SMP;
	8. Access to the site must be provided to agents, employees or other representatives of the State of New York with reasonable prior notice to the property owner to assure compliance with the restrictions identified by the Environmental Easement.

Site Identification: Site No.: C244264
 376-378 Flushing Avenue, Brooklyn, NY

	9. The potential for vapor intrusion must be evaluated for any buildings developed in the area within the IC boundaries noted on Figure 6, and any potential impacts that are identified must be monitored or mitigated; and
	10. Vegetable gardens and farming on the site are prohibited;
Monitoring/Inspections:	
1. Groundwater Monitoring Wells MW-1 and MW-2	Quarterly
2. Site-wide Inspection	Annually
Evaluations:	
Climate Change Vulnerability Assessment	
Soil Vapor Intrusion Evaluation	Upon change in use/as needed
Reporting:	
1. Groundwater Monitoring Data	Quarterly
2. Periodic Review Report	Annually

Further descriptions of the above requirements are provided in detail in the latter sections of this Site Management Plan.

1.0 INTRODUCTION

1.1 General

This Site Management Plan (SMP) is a required element of the remedial program for the Former NY Cleaning and Dyeing Site located in Brooklyn, New York (hereinafter referred to as the “Site”). A Site Location Map can be found in **Figure 1**. The Site is currently enrolled in the New York State (NYS) Brownfield Cleanup Program (BCP) as Site No. C224264, which is administered by New York State Department of Environmental Conservation (NYSDEC).

Rose Castle Redevelopment II LLC entered into a Brownfield Cleanup Agreement (BCA) on February 23, 2018 with the NYSDEC to remediate the site. A figure showing the site location and boundaries of this site is provided in **Figure 2**. The boundaries of the site are more fully described in the metes and bounds site description that is part of the Environmental Easement provided in **Attachment C**.

After completion of the remedial work, some contamination remains at this site, which is hereafter referred to as “remaining contamination”. Institutional Controls (ICs) have been incorporated into the site remedy to control exposure to remaining contamination to ensure protection of public health and the environment. An Environmental Easement granted to the NYSDEC, and recorded with the NYC Office of the City Register, requires compliance with this SMP and all ICs placed on the site.

This SMP was prepared to manage remaining contamination at the site until the Environmental Easement is extinguished in accordance with ECL Article 71, Title 36. This plan has been approved by the NYSDEC, and compliance with this plan is required by the grantor of the Environmental Easement and the grantor’s successors and assigns. This SMP may only be revised with the approval of the NYSDEC.

It is important to note that:

- This SMP details the site-specific implementation procedures that are required by the Environmental Easement. Failure to properly implement the SMP is a violation of the Environmental Easement, which is grounds for revocation of the Certificate of Completion (COC);
- Failure to comply with this SMP is also a violation of Environmental Conservation Law, 6NYCRR Part 375 and the BCA (Index No. C224264-01-18) for the site, and thereby subject to applicable penalties.

All reports associated with the site can be viewed by contacting the NYSDEC or its successor agency managing environmental issues in New York State. A list of contacts for persons involved with the site is provided in **Attachment A** of this SMP.

This SMP was prepared by AMC Engineering, PLLC (AMC), on behalf of Rose Castle Redevelopment II LLC, in accordance with the requirements of the NYSDEC's DER-10 ("Technical Guidance for Site Investigation and Remediation"), dated May 2010, and the guidelines provided by the NYSDEC. This SMP addresses the means for implementing the ICs that are required by the Environmental Easement for the site.

1.2 Revisions

Revisions to this plan will be proposed in writing to the NYSDEC's project manager. Revisions will be necessary upon, but not limited to, the following occurring: post-remedial removal of contaminated sediment or soil, or other significant change to the site conditions. In accordance with the Environmental Easement for the site, the NYSDEC will provide a notice of any approved changes to the SMP, and append these notices to the SMP that is retained in its files.

1.3 Notifications

Notifications will be submitted by the property owner to the NYSDEC, as needed, in accordance with NYSDEC's DER – 10 for the following reasons:

- 60-day advance notice of any proposed changes in site use that are required under the terms of the BCA, 6NYCRR Part 375 and/or Environmental Conservation Law.
- 7-day advance notice of any field activity associated with the remedial program.

Any change in the ownership of the site or the responsibility for implementing this SMP will include the following notifications:

- At least 60 days prior to the change, the NYSDEC will be notified in writing of the proposed change. This will include a certification that the prospective purchaser/Remedial Party has been provided with a copy of the BCA, and all approved work plans and reports, including this SMP.
- Within 15 days after the transfer of all or part of the site, the new owner's name, contact representative, and contact information will be confirmed in writing to the NYSDEC.

Table 1 on the following page includes contact information for the above notification. The information on this table will be updated as necessary to provide accurate contact information. A full listing of site-related contact information is provided in **Attachment A**.

Table 1. Notifications*

Name	Contact Information
NYSDEC Project Manager: Wendi Zheng	(718) 482-7541 wendi.zheng@dec.ny.gov
NYSDEC Site Control: Kelly Lewandowski	(518) 402-9543 kelly.lewandowski@dec.ny.gov
NYSDEC Section Chief: Jane O’Connell	(718) 482-4599 jane.oconnell@dec.ny.gov
NYSDOH Project Manager: Kristin Kulow	(518) 402-7860 BEEI@health.ny.gov

* Note: Notifications are subject to change and will be updated as necessary.

2.0 SUMMARY OF PREVIOUS INVESTIGATIONS AND REMEDIAL ACTIONS

2.1 Site Location and Description

The site is located in 376-378 Flushing Avenue, Bedford Stuyvesant section of Brooklyn, Kings County, New York and is identified as Block 1884 and Lots 40 and 48 on the Brooklyn Tax Map (see **Figure 1**). The site is an approximately 0.882-acre area and is located on the southwest side of the intersection of Flushing Avenue and Franklin Avenue and is bounded by Flushing Avenue to the north, Little Nassau Street to the south, Franklin Avenue and a three-story commercial building to the east, and a residential apartment building to the west (see **Figure 2** – Site Layout Map). Figure is to include site boundary including tax parcels. The boundaries of the site are more fully described in **Attachment C**–Environmental Easement. The owner(s) of the site parcel(s) at the time of issuance of this SMP is/are:

Rose Castle Redevelopment II LLC
266 Broadway, Suite 301
Brooklyn, NY 11211

2.2 Physical Setting

2.2.1 Land Use

The Site consists of a building in development. The Site is zoned in the M1-2 – Light Manufacturing District with an R7A- Medium Density Contextual Residence District Overlay and is currently being redeveloped with the construction of a new 8-story mixed-use building. Site occupants will include a retail/commercial space and residential lobby on the first floor. Floors 2 through 8 will contain residential apartments.

The properties in the vicinity of the Site primarily include multi-family residential buildings with mixed-used properties (residential with first floor retail) along the main artery corridor of Flushing Avenue. Commercial/industrial properties, equipment yards, and warehouses are interspersed throughout the surrounding area to the south and west; and public institutions such as parks, schools, churches, and playgrounds are inter-dispersed throughout the area within a quarter mile of the Site in all directions.

2.2.2 Geology

The geologic setting of Long Island is well documented and consists of crystalline bedrock overlain by layers of unconsolidated deposits. According to geologic maps of the area created by the United States Geologic Survey (USGS), the bedrock in this area of Brooklyn is an igneous intrusive classified as the Ravenswood grano-diorite of middle Ordovician to middle Cambrian age. The depth to bedrock is greater than 100 feet below the surface. Unconsolidated sediments overlie the bedrock and consist of Pleistocene aged sand, gravel and silty clays, deposited by glacial-fluvial activity. Non-native fill materials consisting of dredge spoils, rubble and / or other materials have been historically used to reinforce and extend shoreline areas and to raise and improve the drainage of low-lying areas.

Prior to redevelopment activities, subsurface soils at the site include a silty non-native fill to approximately 12 feet below grade underlain by native brown-gray sandy clay to a depth of approximately 22 feet below grade. Soil at the site has been removed to a depth of 25 feet across the site as part of the redevelopment activities. The Site met Track 1 SCOs, as observed from sitewide endpoint sampling. This is discussed in greater detail in the FER.

2.2.3 Hydrogeology

Groundwater at the Site ranges from approximately 9 to 13 feet below the surface and generally flows in a southeasterly direction. According to the USGS topographic map for the area (Brooklyn Quadrangle), the elevation of the property is 16 feet above the National Geodetic Vertical Datum (NGVD). A groundwater contour map is shown in **Figure 3**.

2.3 **Investigation and Remedial History**

The following narrative provides a remedial history timeline and a brief summary of the available project records to document key investigative and remedial milestones for the Site. Full titles for each of the reports referenced below are provided in Section 8.0 - References.

2.3.1 Past Uses and Ownership

Previous owners and operators of the property are shown below. Information regarding ownership of the property was obtained from online property records maintained by the NYC Department of Finance Office of the City Register under its Automated City Register Information System (ACRIS).

The Requestor is in contract with the indirect owner to acquire property that includes the Site. Lotus Residences LLC is the current owner of the property and has owned Lots 40 and 48 since 2014. The buildings on the Site prior to redevelopment were a wood door and molding manufacturer and warehouse (Lot 40, p/o Lot 48) and a catering hall (p/o Lot 48). Lot 40 appears to have been redeveloped by 1928 with the existing one-story building identified as "Priemo Garage". By 1945 the building as used by Metropolitan Distributers for the storage of ice cream and delivery trucks. From 1928 to 1934 380 Flushing Avenue (Lot 48) is listed as an auto body fabricator while two 1-story buildings, identified as an auto body repair and a paper company, were located on the western portion of the Lot. A sheet metal works was identified on a portion of Lot 48 from 1928-1940.

By 1940, a commercial dry-cleaning plant (NY Cleaners and Dyeing) occupied all of Lot 48. Based on the 1966 Certificate of occupancy, describing Lot 40 as being used for commercial vehicle storage and trucking terminal, the lack of city directory listings for this lot between 1949 and 1992 and the history of common ownership with Lot 48 by Uniform Rentals Inc., it is probable that both lots were part of the NY Cleaners-Uniform Rental operation with lot 40 being used to store and service the company's vehicle fleet from 1949 through 1986-1987. Although not reflected in the Sanborn Maps, the City Directory listings identify 376 Flushing Ave. (lot 40) as Alexander Supply (door and molding warehouse) in 1997 and 378 Flushing Ave (portion of lot 48) as Exclusive millwork in 1992. Exclusive Door and molding currently occupies both 376 and 378 Flushing Avenue. Therefore, the laundry operations and fleet maintenance garage vacated prior to these dates, most likely in 1986-1987 when Uniform Rentals sold the lots.

Previous Owners – Lot 40

Dates	Name	Comments	Contact Info
Prior to 11/14/1977	Methodist Hospital of Brooklyn	Deed	506 6 th Street, Brooklyn
11/14/1977 to 2/3/1982	Beatrice Foods Co.(louis Sherry Ice Cream)	Deed	2 North LaSalle St, Chicago, IL 60602

2/3/1982 to 4/27/1982	Paz-Franklin Co.	Deed	12 Heyward Street, Brooklyn
4/27/1982 to 5/19/1986	Uniform Rental Corp.	Deed	380 Flushing Avenue, Brooklyn
5/19/1986 to 12/19/1986	Irving Sirotkin	Deed	389 Flushing Avenue, Brooklyn
12/19/1986 to 6/1/2013	Franklin Realty Corp.	Deed	40 Penn Street, Brooklyn
6/1/2013 to 3/6/2014	Franklin Realty Owners LLC	Deed	470 Kent Avenue, Suite 2, Brooklyn
3/6/2014 - present	Lotus Residences	Deed	56 Franklin Avenue, Brooklyn

Previous Owners – Lot 48

Dates	Name	Comments	Contact Info
9/28/1982	NYC Commissioner of Finance Property seized for taxes	Deed	Room 500, Municipal Building, Manhattan, New York
9/28/1982? to 2/13/1986	Uniform Rental Corp. - unclear when ownership began	Deed	380 Flushing Avenue, Brooklyn
2/13/1986 to 6/1/2013	Franklin Realty Corp.	Deed	470 Kent Avenue, Suite 2, Brooklyn
6/1/2013 to 3/6/2014	Franklin Realty Owners LLC	Deed	470 Kent Avenue, Suite 2, Brooklyn
3/6/2014 to present	Lotus Residences	Deed	56 Franklin Avenue, Brooklyn

Previous Operators – Lot 40

Dates	Name	Comments	Contact Info
1918	Residences (372) and storefronts	Sanborn Maps	372-376 Flushing Ave, Brooklyn
1928 -1949	372 Flushing - Preimo Garage (1928), Metropolitan Distributors (1945, 1949)	City Directory	372 Flushing Ave, Brooklyn
1935-199?	Private Garage	Sanborn Maps	372-376 Flushing Ave, Brooklyn
1966	Commercial Vehicle Storage and Trucking Terminal	Certificate of Occupancy	376 Flushing Ave, Brooklyn
1997, 2000	Alexander Supply	City Directories	376 Flushing Ave, Brooklyn
2005, 2010, 2014	Exclusive Door Co.	City Directories	376 Flushing Ave, Brooklyn

Previous Operators – Lot 48

Dates	Name	Comments	Contact Info
1928, 1934, 1940	Expert Sheet metal Works (30 Frank)	City Directories	30 Franklin Ave, Brooklyn
1928, 1934, 1940	Cafeteria / Restaurant (392 Flushing)	City Directories	392 Flushing Ave, Brooklyn
1928, 1934	Scholl Auto Bodies	City Directories	376-392 Flushing Ave, Brooklyn
1928	Horn Button Works (28 Franklin) Meyer & Co. Boilers (30 Franklin)	Certificate of Occupancy	328-30 Franklin Ave, Brooklyn
1940 - 1985	NY Cleaning and Dyeing Co. (1940, 1945, 1949) NY Cleaners Industries (1960, 1965, 1970, 1976, 1985) Triple A Maintenance (1973, 1976, 1985) Uniform Rental Division (1976, 1985) S&M Trucking (1980)	City Directories (1940, 1945, 1949, 1960, 1965, 1970, 1973, 1976, 1980, 1985) Certificates of Occupancy (1940, 1942, 1943, 1946, 1956, 1958)	380 Flushing Ave, Brooklyn
1976, 1985, 1992	Christian & Sons Cleaners and Uniforms	City Directories	24 Franklin Ave, Brooklyn
1992-2014	Rose Castle (1992, 1997, 2000, 2005) Rose Party Functions Corp (2010, 2014)	City Directories Certificates of Occupancy (1992, 1993, 1994)	380 Flushing Ave, Brooklyn

2.3.2 Phase I Reports

August 2015 – Phase I Environmental Site Assessment by Equity Environmental Engineering

A Phase I Environmental Site Assessment (ESA) was completed by Equity Environmental Engineering, in August of 2015. Equity Environmental Engineering was able to establish a history for the property dating back to 1887. The Site was developed since at least 1887 with multiple storefronts and residential dwellings. In 1935, the Site appeared to have been redeveloped with a one-story building on Lot 40 (identified as a parking garage), two one-story buildings (identified as an auto repair shop and a paper company) on the western portion of Lot 48; no significant changes were identified for the eastern portion of Lot 48. By 1947, a dry cleaner was added to the westernmost building on Lot 48 and the eastern portion of Lot 48 and the eastern portion of Lot 48 was redeveloped with a large one-story commercial building (pressing and shipping use). By 1965, a second story was added to the middle building on Lot 48. The property remained in this configuration through the present day.

Two gasoline underground storage tanks (USTs) were identified for the former parking garage on Lot 40 for the years 1935 through 2007. One gasoline UST was identified for the former shipping warehouse on the eastern portion of Lot 48 for the years 1965-1989.

Based upon reconnaissance of the subject and surrounding properties, interviews and review of historical records and regulatory agency databases, Equity Environmental Engineering noted the following recognized environmental conditions for the subject site.

- **Underground Storage Tanks** - Gasoline underground storage tanks were noted for the Site on historical Sanborn maps. Lot 40 was identified with two gasoline USTs for the years 1935-2007. One gasoline UST was identified on Lot 48 for the years 1965-1989. It was unknown whether the tanks were removed, if there were any releases to the Site from the tanks, or if the tanks were properly abandoned, removed, and/or disposed of.
- **Former Dry-Cleaning Operations** - Dry cleaning operations were noted for the western building on Lot 48 on historical Sanborn maps for the years 1947-1993. It

was unknown whether dry cleaning operations were performed on-site or whether it was a drop-off facility.

- **Former Auto Repair Use** – A portion of the western building on Lot 48 was identified as an auto repair shop on historical Sanborn maps for the year 1935.
- **Drum of Unknown Contents** – A corroded drum was observed within the warehouse of Lot 48. The drum was located next to the grease trap and is likely associated with the grease from the adjacent restaurant; however, this could not be confirmed.
- **Unidentified Pit** – A pit was observed in the southwest corner of Lot 48. Although the Phase I report identifies an approximate 2x2x2 ft pit located in the southwestern portion of Lot 48 as a REC. It appears that this was a former sump pit that may have been associated with the former washing machines identified for this portion of the property on the historical Sanborn maps.
- **Interior Staining** – An apparent grease staining was observed on the concrete floor of the warehouse on Lot 48 during the time of inspection. The report identifies that the staining is in the vicinity of the grease trap used for the catering kitchen in the adjacent building.

Areas of Concern (AOCs) identified for the Site include:

- 1) The presence of historical fill material ranging in depths from approximately 5 to 12ft bg.
- 2) The site was utilized by a dry cleaner on the western portion of Lot 48 from 1947-1993; and as a former auto repair for the year 1935.
- 3) The Site was identified with three underground storage tanks on historical Sanborn maps.

2.3.3 Remedial Investigation Reports

May 2017 – Remedial Investigation Report by EBC

The remedial investigation was performed in January 2017, as part of the Phase II Environmental Site Assessment. The investigation consisted of environmental sampling, field observations and measurements to determine the following:

- Local geologic/hydrogeologic conditions

- Definition of source areas
- Potential migration of contaminants from the site to surrounding areas
- Overall characterization of site-related contamination in all media

The information from the field investigation was used to develop a Remedial Action Work Plan to address onsite contamination.

Activities completed under the RI:

- Soil sampling and analysis for volatile and semi-volatile organic compounds (VOCs, SVOCs) in soil samples from ten (10) soil boring locations;
- The installation of four (4) temporary groundwater monitoring wells;
- The collection and analysis of four (4) groundwater samples for VOCs and SVOCs;
- Sampling for non-petroleum contaminants such as pesticides, PCBs, and metals in soil and groundwater including the analysis of soil and groundwater samples; and,
- The collection and analysis of soil vapor samples for VOCs.

The field work portion of the RI was conducted by Environmental Business Consultants (EBC) on January 12th, 13th, and 17th of 2017 during the Phase II Investigation, in accordance with the protocols and methods as established in the approved Remedial Investigation Workplan.

The results of the RI identified petroleum-impacted soil is present throughout both lots at depths 15 to 22 feet below surface grade and in shallow soil (0-10 ft) in the vicinity of the two former USTs on Lot 40 and the former UST area on Lot 48 as well as the southern portion of Lot 48. Fill materials are present throughout the site to depths to approximately 12-14 ft below grade. SVOCs including benz(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenz(a,h)anthracene, fluoranthene, indeno(1,2,3-cd)pyrene, phenanthrene and pyrene as well as the metals arsenic, barium, lead and mercury were reported above Restricted Residential use soil cleanup objectives (SCOs) in several of the shallow soil samples collected.

Groundwater was encountered approximately 9 to 13 feet below grade elevation. Petroleum related VOCs were detected in all four groundwater samples collected on-site. Petroleum related VOC concentrations ranged from 262 µg/L (GW4) to 3,280 µg/L (GW5). Benzene was detected in three of the groundwater samples. A 1.4-inch thick layer of free-phase product was detected in the water column sample in GW5. The highest concentrations of petroleum related VOCs were detected in GW5, which is located in the area of the former UST on Lot 48. No chlorinated VOCs were detected in any of the groundwater samples. SVOC and metal parameters were detected throughout the Site, with the highest concentrations located along the northern portion of Lot 48.

Multiple VOCs were detected above the laboratory method detection limit in each of the soil gas samples. Total petroleum related volatile organic compounds were generally moderate to high throughout the Site, with the highest concentrations detected in the southern portion of Lot 48. The total concentration of petroleum-related VOCs (BTEX) ranged from 4.26 µg/m³ (SV1) to 16,939 µg/m³ (SV4). Chlorinated VOCs (CVOCs) were reported in all ten soil gas samples. Trichloroethylene (TCE) (max. 145 µg/m³) was detected in four of the ten soil gas samples. Tetrachloroethene (PCE) was detected in all ten soil gas samples ranging in concentration from 1 µg/m³ to 485 µg/m³. 1,1,1-Trichloroethane (max. 27.7 µg/m³) was detected in two soil gas samples. The chlorinated VOC, carbon tetrachloride was not detected in any of the soil gas samples. The NYSDOH Final Guidance on Soil Vapor Intrusion (October 2006) notes monitoring is the recommended action for a PCE concentration above 100 µg/m³ in soil gas. The TCE and TCA concentrations are above the monitoring level ranges established within the NYSDOH Final Guidance on Soil Vapor Intrusion. Off-gassing of petroleum-related compounds was occurring in the mid-to-southern portions of the Site, as is evidenced by concentrations detected in soil gas samples SV4, SV5 and SV9.

The soil, soil vapor, and groundwater exceedances above Track 1 SCOs and NYSEC Groundwater Quality Standards, prior to remediation of the Site, are summarized in Figures 6-8.

2.3.4 Remedial Action

May 2018 – Remedial Action Work Plan by AMC

In response to the findings during the RI, a Remedial Action Work Plan (RAWP) was prepared by AMC in May 2018. The proposed remedy was a Track 1 alternative, which called for removal of any existing USTs; excavation across the Site to a depth of 25 feet below grade to meet Track 1 Unrestricted Use Soil Cleanup Objectives (SCOs) and applicable protection of groundwater SCOs; additional excavation where UUSCO exceedances were detected beyond 25ft bg; and removal of groundwater contamination through dewatering activities during excavation.

The Site achieved Track 1 SCOs, as proposed. Please refer to the Final Engineering Report (FER) for the detailed explanation of endpoint sampling and the findings.

2.4 Remedial Action Objectives

The Remedial Action Objectives (RAOs) for the Site as listed in the Decision Document dated May 7, 2018 are as follows:

2.4.1 GROUND WATER

RAOs for Public Health Protection

- Prevent ingestion of groundwater with contaminant levels exceeding drinking water standards.
- Prevent contact with, or inhalation of, volatiles from contaminated groundwater.

RAOs for Environmental Protection

- Restore ground water aquifer to pre-disposal/pre-release conditions, to the extent practicable.
- Remove the source of ground or surface water contamination.

2.4.2 SOIL

RAOs for Public Health Protection

- Prevent ingestion/direct contact with contaminated soil.

- Prevent inhalation of or exposure from contaminants volatilizing from contaminants in soil.

RAOs for Environmental Protection

- Prevent migration of contaminants that would result in groundwater or surface water contamination.

2.4.3 SOIL VAPOR

RAOs for Public Health Protection

- Mitigate impacts to public health resulting from existing, or the potential for, soil vapor intrusion into buildings at a site.

2.5 Remaining Contamination

Following completion of the remedial activities, the Site was determined to achieve Track 1 SCOs. This is discussed in further detail in the FER. However, the groundwater sample retrieved from off-site monitoring wells post-excavation demonstrated that there were a few compounds that exceeded the NYSDEC Groundwater Quality Standards. Because the sample was retrieved prior to the return to static conditions, the purpose of this SMP is to establish the sampling schedule and protocol for retrieval of representative samples that demonstrate that bulk reduction of groundwater contamination to asymptotic conditions has been achieved and the water table has returned to static conditions. The contaminants found in the post-excavation sampling event and the first round of sampling following the August 17, 2020 cessation of dewatering activities are discussed in the following section.

2.5.1 Groundwater

During the RI sampling event, VOCs, SVOCs, total and dissolved metals above NYSDEC Ambient Water Quality Standards (AWQS) were detected. There were a number of USTs found onsite, which accounted for the gasoline related VOCs detected within the groundwater samples. SVOC detections above AWQS were limited to polynuclear aromatic hydrocarbons (PAHs) and naphthalene. Several metals were also detected above AWQS.

Baseline groundwater samples were collected on June 25, 2019 and indicated exceedances of benzene (1.8µg/L), chloroform (16µg/L), and chloromethane (16µg/L) in MW2. There were no exceedances in MW1. The measured static water level from the top of casing

VOC concentrations of 2-Isopropyltoluene (12µg/L), isopropylbenzene (24µg/L), n-Propylbenzene (14µg/L), and sec-Butylbenzene (27µg/L) were detected in the groundwater sample from the monitoring well MW1 collected on April 3, 2020 after excavation was completed, in slight exceedance of AWQS. No other VOCS were detected in the groundwater sample. There were no exceedances measured in the groundwater sample for MW2.

Another round of sampling was completed on September 4, 2020 in accordance with the proposed SMP sampling schedule. VOC concentrations of 2-Isopropyltoluene (9.7µg/L), benzene (1.5µg/L), isopropylbenzene (17µg/L), n-Propylbenzene (11µg/L), and sec-Butylbenzene (24µg/L) were detected in the groundwater sample from the monitoring well MW-1. There were no exceedances detected in the groundwater sample for MW-2. **Table 2** summarizes the results of all samples of groundwater that exceed the SCGs before and after completion of the remedial action and **Figure 4** shows the exceedance map, as measured through the off-site monitoring wells MW-1 and MW-2.

As part of this SMP, additional groundwater sampling will occur at regular intervals after dewatering activities cease and groundwater levels return to static condition to verify that bulk reduction of groundwater contamination to asymptotic conditions has been achieved. Currently, MW-1 is not screened at the water table and therefore, would not provide representative samples of the groundwater conditions. Data collected on April 3, 2020 and September 4, 2020 are not valid and therefore, MW-1 will be reinstalled as part of the SMP, such that it is screened at the water table.

3.0 INSTITUTIONAL AND ENGINEERING CONTROL PLAN

3.1 General

Since remaining contamination exists at the site, Institutional Controls (ICs) are required to protect human health and the environment. This IC Plan describes the procedures for the implementation and management of all Ics at the site. The IC Plan is one component of the SMP and is subject to revision by the NYSDEC.

This plan provides:

- A description of all Ics on the site;
- The basic implementation and intended role of each IC;
- A description of the key components of the Ics set forth in the Environmental Easement;
- A description of the controls to be evaluated during each required inspection and periodic review;
- A description of plans and procedures to be followed for implementation of Ics; and
- Any other provisions necessary to identify or establish methods for implementing the Ics required by the site remedy, as determined by the NYSDEC.

3.2 Institutional Controls

A series of Ics is required by the Decision Document to: (1) prevent future exposure to remaining contamination; and, (2) limit the use and development of the site to Unrestricted uses only. Adherence to these Ics on the site is required by the Environmental Easement and will be implemented under this SMP. Ics identified in the Environmental Easement may not be discontinued without an amendment to or extinguishment of the Environmental Easement. The IC boundaries are shown on **Figure 9**. These Ics are:

- The property may be used for: unrestricted use;

-
- The use of groundwater underlying the property is prohibited without necessary water quality treatment as determined by the NYSDOH or the New York City Department of Health and Mental Hygiene to render it safe for use as drinking water or for industrial purposes, and the user must first notify and obtain written approval to do so from the Department.
 - Groundwater and other environmental or public health monitoring must be performed as defined in this SMP;
 - Data and information pertinent to site management must be reported at the frequency and in a manner as defined in this SMP;
 - All future activities that will disturb remaining contaminated material must be conducted in accordance with this SMP;
 - Monitoring to assess the performance and effectiveness of the remedy must be performed as defined in this SMP;
 - Access to the site must be provided to agents, employees or other representatives of the State of New York with reasonable prior notice to the property owner to assure compliance with the restrictions identified by the Environmental Easement.
 - The potential for vapor intrusion must be evaluated for any buildings developed in the area within the IC boundaries noted on **Figure 6**, and any potential impacts that are identified must be monitored or mitigated; and
 - Vegetable gardens and farming on the site are prohibited;

3.3 Site-Wide Inspection

Site-wide inspections will be performed at a minimum of once per year. Modification to the frequency or duration of the inspections will require approval from the NYSDEC. Site-wide inspections will also be performed after all severe weather conditions that may affect the remaining contamination at the site. A comprehensive site-wide inspection will be conducted and documented according to the SMP schedule, regardless of the frequency of the Periodic Review Report.

During an inspection, an inspection form will be completed as provided in Appendix I – Site Management Forms. The inspections will determine and document the following:

- Compliance with all Ics, including site usage;

- General site conditions at the time of the inspection;
- The site management activities being conducted including, where appropriate, confirmation sampling and a health and safety inspection; and
- If these controls continue to be protective of human health and the environment;
- Compliance with requirements of this SMP and the Environmental Easement;
- If site records are complete and up to date.

Reporting requirements are outlined in Section 6.0 of this plan.

Inspections will also be performed in the event of an emergency. An inspection of the site will be conducted within 5 days of the event to verify the effectiveness of the Ics implemented at the site by a qualified environmental professional, as determined by the NYSDEC. Written confirmation must be provided to the NYSDEC within 7 days of the event that includes a summary of actions taken, or to be taken, and the potential impact to the environment and the public.

4.0 PERIODIC ASSESSMENTS/EVALUATIONS

4.1 Climate Change Vulnerability Assessment

Increases in both the severity and frequency of storms/weather events, an increase in sea level elevations along with accompanying flooding impacts, shifting precipitation patterns and wide temperature fluctuation, resulting from global climactic change and instability, have the potential to significantly impact the performance, effectiveness and protectiveness of a given site and associated remedial systems. Vulnerability assessments provide information so that the site is prepared for the impacts of the increasing frequency and intensity of severe storms/weather events and associated flooding.

This section provides a summary of vulnerability assessments that will be conducted for the site during periodic assessments, and briefly summarizes the vulnerability of the site and/or engineering controls to severe storms/weather events and associated flooding.

The Site is located in the northern portion of Brooklyn, NY. It is located at an elevation of 16 feet above the National Geodetic Vertical Datum (NGVD), or approximately 16 feet above sea level. According to the FEMA Flood Map, this site is not located within a flood hazard area. The Site is served by the NYC Municipal sewer and the completed building will meet all NYC building codes for drainage. There is no potential for erosion, high wind, electricity, spill/containment release.

4.2 Soil Vapor Intrusion Evaluation

A soil vapor intrusion evaluation must be performed upon a change in use of the property that will result in occupancy of a previously unoccupied building or initial occupancy of a new building. The breadth of this evaluation will be determined based upon discussion with the NYSDEC Project manager and NYSDOH. Based upon these discussion and agency requirements, a work plan may need to be developed that requires that sampling be performed upon a change in use or as deemed necessary by the aforementioned entities. Upon completion of the evaluation, if an action is required, any actions taken or to be taken must be reflected in an updated SMP.

During the RI, soil vapor samples were retrieved at a depth of 8 fbg and groundwater was encountered between 9 to 13 fbg. As part of the Site remediation, the Site was excavated to a depth of approximately 25 fbg and achieved Track 1 SCOs. Additionally, a waterproofing membrane was installed on top of the rat slab prior to the pouring of the cellar slab to mitigate the possibility of vapor intrusion. Thus, there are no vapor intrusion concerns since the cellar slab, which is underlain with a waterproofing membrane, is approximately 12 feet below the water table and there is no potential for remaining soil vapor on-site.

5.0 MONITORING AND SAMPLING PLAN

5.1 General

This Monitoring and Sampling Plan describes the measures for evaluating the overall performance and effectiveness of the remedy. This Monitoring and Sampling Plan may only be revised with the approval of the NYSDEC. Details regarding the sampling procedures, data quality usability objectives, analytical methods, etc. for all samples collected as part of site management for the site are included in the Quality Assurance Project Plan provided in **Attachment F**.

This Monitoring and Sampling Plan describes the methods to be used for:

- Sampling and analysis of all appropriate media (i.e, groundwater);
- Assessing compliance with applicable NYSDEC standards, criteria and guidance (SCGs), particularly 6 NYCRR Part 703 groundwater standards; and
- Evaluating site information periodically to confirm that the remedy continues to be effective in protecting public health and the environment;

To adequately address these issues, this Monitoring and Sampling Plan provides information on:

- Sampling locations, protocol and frequency;
- Analytical sampling program requirements;
- Inspection and maintenance requirements for monitoring wells;
- Monitoring well decommissioning procedures; and
- Annual inspection and periodic certification.

The monitoring activities are described in greater in the following section and reporting requirements are provided in **Section 6.0** of this SMP.

5.1.1 Monitoring Wells associated with Monitored Bulk Asymptotic Attenuation

Groundwater monitoring activities to assess bulk asymptotic attenuation will continue, as determined by the NYSDEC with consultation with NYSDOH, until residual groundwater concentrations are found to be consistently below ambient water quality standards, the site SCGs, or have become asymptotic at an acceptable level over an extended period. In the event that monitoring data indicates that monitoring for bulk asymptotic attenuation may no longer be required, a proposal to discontinue the system will be submitted by the remedial party. Monitoring will continue until permission to discontinue is granted in writing by the NYSDEC. If groundwater contaminant levels become asymptotic at a level that is not acceptable to the NYSDEC, additional source removal, treatment and/or control measures will be evaluated.

5.2 Post-Remediation Media Monitoring and Sampling

Samples shall be collected from the existing monitoring wells on a routine quarterly basis until a bulk reduction to asymptotic concentrations has been demonstrated. Sampling locations, required analytical parameters, and schedule are provided in **Table 4** – Post Remediation Sampling Requirements and Schedule below. Modification to the frequency or sampling requirements will require approval from the NYSDEC.

Table 4. Post Remediation Sampling Requirements and Schedule

Sampling Location	Analytical Parameters	Schedule
	VOCs (EPA Method 8260)	
MW-1	X	Quarterly
MW-2	X	Quarterly

Detailed sample collection and analytical procedures and protocols are provided in **Attachment E** – Field Activities Plan and **Attachment F** – Quality Assurance Project Plan.

5.3 Groundwater Sampling

Groundwater monitoring will be performed quarterly to assess the performance of the remedy. Modification to the frequency or sampling requirements will require approval from the NYSDEC.

Table 5 summarizes the wells identification number, as well as the purpose, location, depths, diameter, and screened intervals of the wells. As part of the groundwater monitoring, the existing monitoring wells are sampled to evaluate the natural attenuation of the groundwater contamination.

Table 5. Monitoring Well Construction Details

Monitoring Well ID	Well Location	Well Diameter (inches)	Elevation (above mean sea level)			
			Casing	Surface	Screen Top	Screen Bottom
MW-1*	Downgradient	2	0 ft bgs	0 ft bgs	10 ft bgs	28 ft bgs
MW-2	Downgradient	2	0 ft bgs	0 ft bgs	10 ft bgs	28 ft bgs

*MW-1 is to be reinstalled to the same specifications as MW-2 so that it is screened at the water table.

Because the current MW-1 is not screened at the water table, MW-1 will be reinstalled as part of this SMP to the same specifications as MW-2. Monitoring well locations are shown on **Figure 3** and monitoring well construction logs are included in **Attachment D** of this document.

If biofouling or silt accumulation occurs in the on-site and/or off-site monitoring wells, the wells will be physically agitated/surged and redeveloped. Additionally,

monitoring wells will be properly decommissioned and replaced, if an event renders the wells unusable.

Repairs and/or replacement of wells in the monitoring well network will be performed based on assessments of structural integrity and overall performance.

The NYSDEC will be notified prior to any repair or decommissioning of any monitoring well for the purpose of replacement, and the repair or decommissioning and replacement process will be documented in the subsequent Periodic Review Report. Well decommissioning without replacement will be done only with the prior approval of the NYSDEC. Well abandonment will be performed in accordance with NYSDEC's guidance entitled "CP-43: Groundwater Monitoring Well Decommissioning Procedures." Monitoring wells that are decommissioned because they have been rendered unusable will be replaced in kind in the nearest available location, unless otherwise approved by the NYSDEC.

The sampling frequency may only be modified with the approval of the NYSDEC. This SMP will be modified to reflect changes in sampling plans approved by the NYSDEC.

Deliverables for the groundwater monitoring program are specified in **Section 6.0**—Reporting Requirements.

5.3.1 Monitoring and Sampling Protocol

All sampling activities will be recorded in a field book and associated sampling log as provided in **Attachment I** - Site Management Forms. Other observations (e.g., groundwater monitoring well integrity, etc.) will be noted on the sampling log. The sampling log will serve as the inspection form for the monitoring network. Additional detail regarding monitoring and sampling protocols are provided in the site-specific Field Sampling Plan provided as **Attachment E** of this document.

6.0 REPORTING REQUIREMENTS

6.1 Site Management Reports

All site management inspection and monitoring events will be recorded on the appropriate site management forms provided in **Attachment I**. These forms are subject to NYSDEC revision.

All applicable inspection forms and other records, including media sampling data generated for the site during the reporting period will be provided in electronic format to the NYSDEC in accordance with the requirements of **Table 6** and summarized in the Periodic Review Report.

Table 6. Schedule of Interim Monitoring/Inspection Reports

Task/Report	Reporting Frequency*
Groundwater Sampling Report	Quarterly
Periodic Review Report	Annually, or as otherwise determined by the Department

* The frequency of events will be conducted as specified until otherwise approved by the NYSDEC.

All interim monitoring/inspections reports will include, at a minimum:

- Date of event or reporting period;
- Name, company, and position of person(s) conducting monitoring/inspection activities;
- Description of the activities performed;
- Where appropriate, color photographs or sketches showing the approximate location of any problems or incidents noted (included either on the checklist/form or on an attached sheet);
- Type of samples collected (e.g., sub-slab vapor, indoor air, outdoor air, etc);

- Copies of all field forms completed (e.g., well sampling logs, chain-of-custody documentation, etc.);
- Sampling results in comparison to appropriate standards/criteria;
- A figure illustrating sample type and sampling locations;
- Copies of all laboratory data sheets and the required laboratory data deliverables required for all points sampled (to be submitted electronically in the NYSDEC-identified format);
- Any observations, conclusions, or recommendations; and
- A determination as to whether contaminant conditions have changed since the last reporting event.

Routine maintenance event reporting forms will include, at a minimum:

- Date of event;
- Name, company, and position of person(s) conducting maintenance activities;
- Description of maintenance activities performed;
- Any modifications to the system;
- Where appropriate, color photographs or sketches showing the approximate location of any problems or incidents noted (included either on the checklist/form or on an attached sheet); and,
- Other documentation such as copies of invoices for maintenance work, receipts for replacement equipment, etc., (attached to the checklist/form).

Non-routine maintenance event reporting forms will include, at a minimum:

- Date of event;
- Name, company, and position of person(s) conducting non-routine maintenance/repair activities;
- Description of non-routine activities performed;
- Where appropriate, color photographs or sketches showing the approximate location of any problems or incidents (included either on the form or on an attached sheet); and

- Other documentation such as copies of invoices for repair work, receipts for replacement equipment, etc. (attached to the checklist/form).

Data will be reported in digital format as determined by the NYSDEC. Currently, data is to be supplied electronically and submitted to the NYSDEC EQUIS™ database in accordance with the requirements found at this link <http://www.dec.ny.gov/chemical/62440.html>.

6.2 Periodic Review Report

A Periodic Review Report (PRR) will be submitted to the Department beginning 30 days after the initial 15 month certifying period. This initial certifying period commences upon issuance of the Certificate of Completion. After submittal of the initial Periodic Review Report, the next PRR shall be submitted annually to the Department or at another frequency as may be required by the Department. In the event that the site is subdivided into separate parcels with different ownership, a single Periodic Review Report will be prepared that addresses the site described in **Attachment C** - Environmental Easement. The report will be prepared in accordance with NYSDEC's DER-10 and submitted within 30 days of the end of each certification period. Media sampling results will also be incorporated into the Periodic Review Report. The report will include:

- Identification, assessment and certification of all ICs required by the remedy for the site.
- Results of the required annual site inspections and severe condition inspections, if applicable.
- All applicable site management forms and other records generated for the site during the reporting period in the NYSDEC-approved electronic format, if not previously submitted.
- A summary of any discharge monitoring data and/or information generated during the reporting period, with comments and conclusions.
- Data summary tables and graphical representations of contaminants of concern by media (groundwater, soil vapor, etc.), which include a listing of all compounds analyzed, along with the applicable standards, with all exceedances

highlighted. These will include a presentation of past data as part of an evaluation of contaminant concentration trends.

- Results of all analyses, copies of all laboratory data sheets, and the required laboratory data deliverables for all samples collected during the reporting period will be submitted in digital format as determined by the NYSDEC. Currently, data is supplied electronically and submitted to the NYSDEC EQUIS™ database in accordance with the requirements found at this link: <http://www.dec.ny.gov/chemical/62440.html>.
- A site evaluation, which includes the following:
 - The compliance of the remedy with the requirements of the site-specific RAWP, ROD or Decision Document;
 - Any new conclusions or observations regarding site contamination based on inspections or data generated by the Monitoring and Sampling Plan for the media being monitored;
 - Recommendations regarding any necessary changes to the remedy and/or Monitoring and Sampling Plan; and
 - Trends in contaminant levels in the affected media will be evaluated to determine if the remedy continues to be effective in achieving remedial goals as specified by the Decision Document.
 - The overall performance and effectiveness of the remedy.

6.2.1 Certification of Institutional Controls

Following the last inspection of the reporting period, a qualified environmental professional or Professional Engineer licensed to practice in New York State will prepare, and include in the Periodic Review Report, the following certification as per the requirements of NYSDEC DER-10:

“For each institutional control identified for the site, I certify that all of the following statements are true:

- *The institutional control employed at this site is unchanged from the date the control was put in place, or last approved by the Department;*
- *Nothing has occurred that would impair the ability of the control to protect the public health and environment;*

-
- *Nothing has occurred that would constitute a violation or failure to comply with any site management plan for this control;*
 - *Access to the site will continue to be provided to the Department to evaluate the remedy, including access to evaluate the continued maintenance of this control;*
 - *Use of the site is compliant with the environmental easement;*
 - *The engineering control systems are performing as designed and are effective;*
 - *The information presented in this report is accurate and complete.*
 - *The assumptions made in the qualitative exposure assessment remain valid.*

I certify that all information and statements in this certification form are true. I understand that a false statement made herein is punishable as a Class “A” misdemeanor, pursuant to Section 210.45 of the Penal Law. I, [name], of [business address], am certifying as [Owner/Remedial Party or Owner’s/Remedial Party’s Designated Site Representative]: [I have been authorized and designated by all site owners/remedial parties to sign this certification] for the site.”

The signed certification will be included in the Periodic Review Report.

The Periodic Review Report will be submitted, in electronic format, to the NYSDEC Central Office, Regional Office in which the site is located and the NYSDOH Bureau of Environmental Exposure Investigation. The Periodic Review Report may need to be submitted in hard-copy format, as requested by the NYSDEC project manager.

6.3 Corrective Measures Work Plan

If any component of the remedy is found to have failed, or if the periodic certification cannot be provided due to the failure of an institutional control, a Corrective Measures Work Plan will be submitted to the NYSDEC for approval. This plan will explain the failure and provide the details and schedule for performing work necessary to correct

the failure. Unless an emergency condition exists, no work will be performed pursuant to the Corrective Measures Work Plan until it has been approved by the NYSDEC.

7.0 REFERENCES

6NYCRR Part 375, Environmental Remediation Programs. December 14, 2006.

AMC Engineering, PLLC, *Remedial Action Work Plan, Former NY Cleaning and Dyeing Site, 376-378 Flushing Avenue, Brooklyn, NY, May 2018*

Environmental Business Consultants, *Remedial Investigation Report 376-378 Flushing Avenue Site, 376-378 Flushing Avenue, Brooklyn, NY, May 2017*

Equity Environmental Engineering, *Phase I Environmental Site Assessment, August 2015*

NYSDEC DER-10 – “Technical Guidance for Site Investigation and Remediation”.

NYSDEC, 1998. Ambient Water Quality Standards and Guidance Values and Groundwater Effluent Limitations Division of Water Technical and Operational Guidance Series (TOGS) 1.1.1. June 1998 (April 2000 addendum).

Tables

Table 2
 Groundwater Exceedance Summary

Compound	NYSDEC Groundwater Quality Standards µg/L	Ranges in Exceedances	Frequency of Detection	MW1*		MW1*	
				4/3/2020		9/4/2020	
				(µg/L)		(µg/L)	
				Results	RL	Results	RL
2-Isopropyltoluene	5	9.7-12	2	12	1.0	9.7	1.0
Benzene	1	1.5	1	-	-	1.5	0.70
Isopropylbenzene	5	17-24	2	24	1.0	17	1.0
n-Propylbenzene	5	11-14	2	14	1.0	11	1.0
sec-Butylbenzene	5	14-27	2	27	1.0	14	1.0

Notes:

*At the time of sampling, MW1 was not screened at the water table and therefore, is not representative of the groundwater conditions at the Site. MW1 will be reinstalled and sampling will be conducted through the reinstalled well as part of the SMP.

RL- Reporting Limit

Bold/highlighted- Indicated exceedance of the NYSDEC Groundwater Standard


Table 3
Measured Static Water Levels from MW2

Sampling Event Date	Static Water Level (from TOC) * (ft)
June 25, 2019	11.15
April 3, 2020	21.39
September 4, 2020	13.5

Notes:

*Static water levels are reported from MW2 since it was the only well that was screened at the water table during the time of sampling. As part of the SMP, MW1 will be reinstalled and sampling will be conducted through the reinstalled MW1 and existing MW2. These readings are also noted in the purge logs provided in Attachment D.

Figures

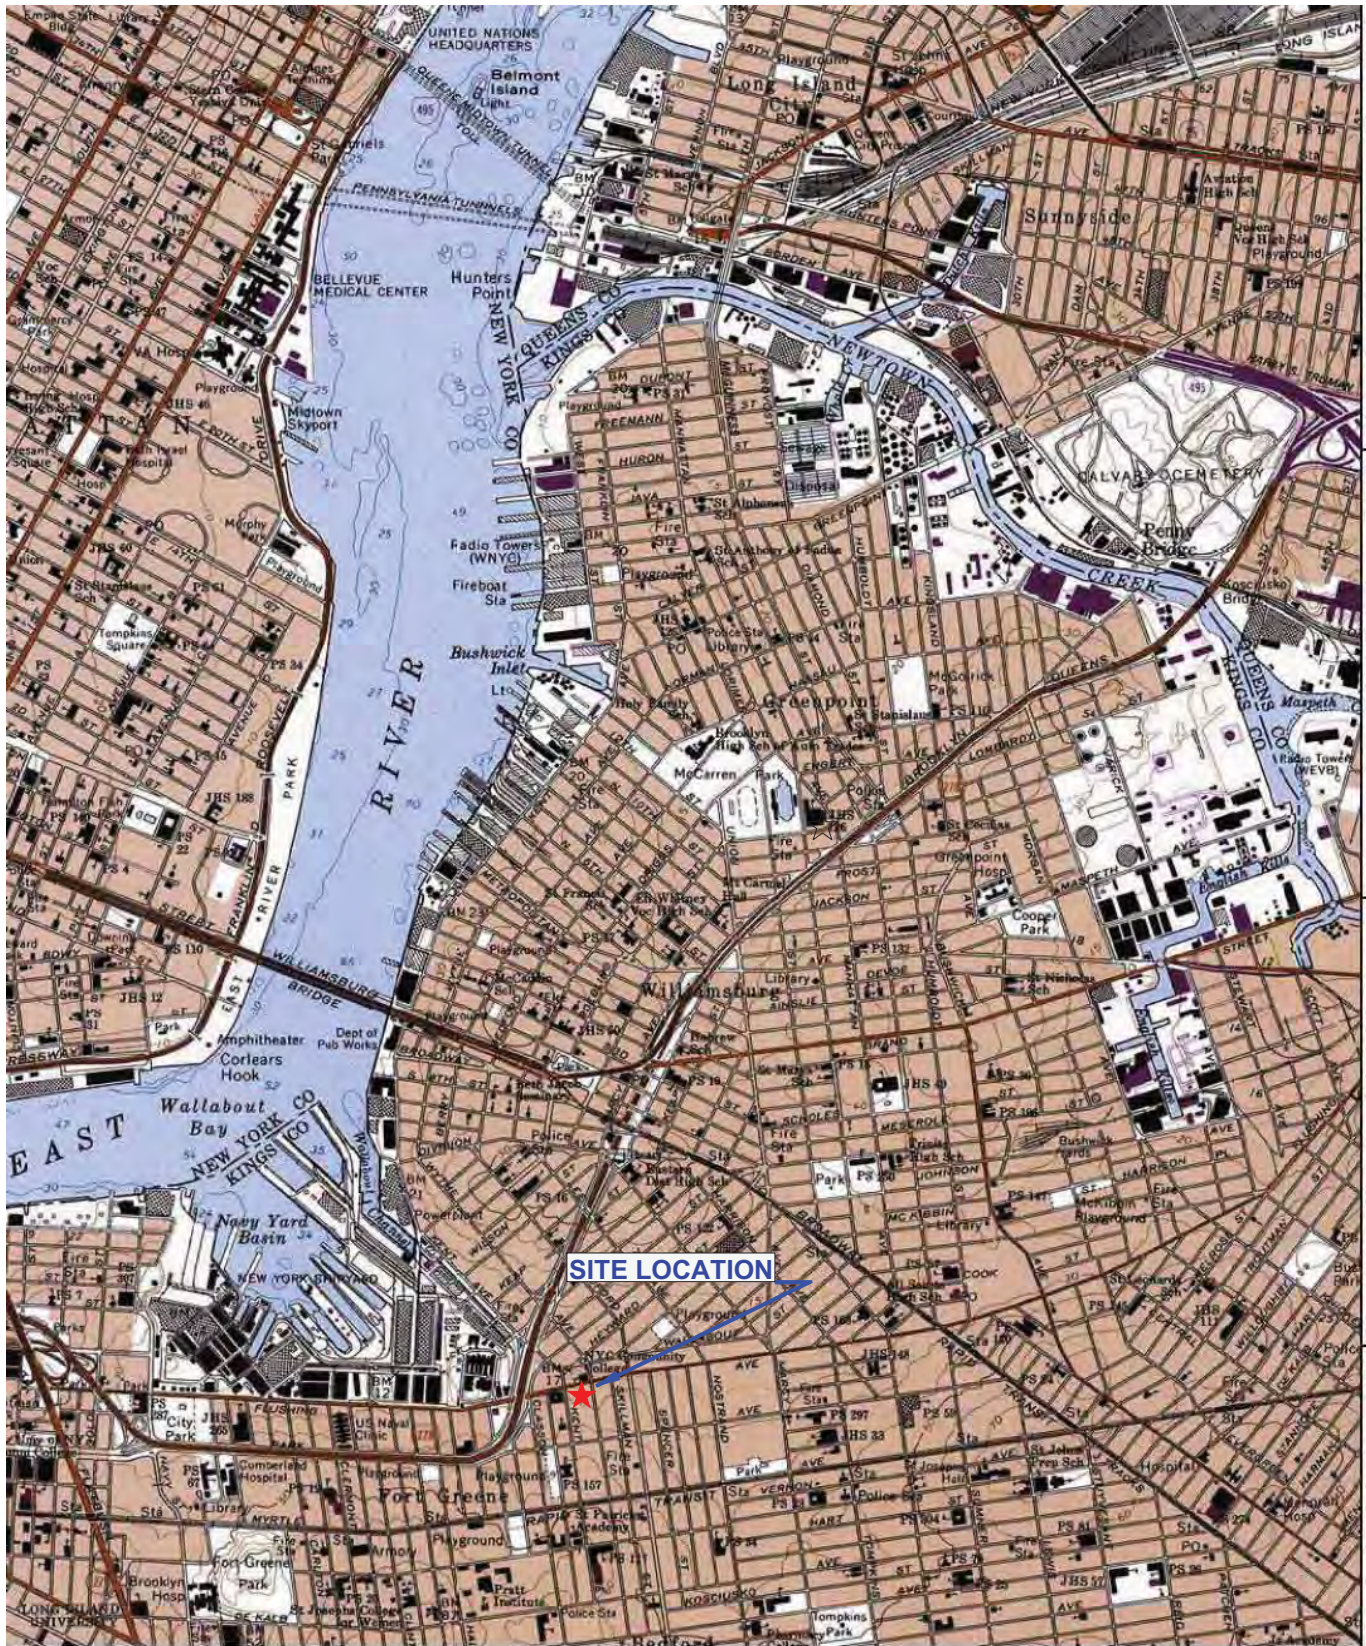


40°45.000' N
40°44.000' N
40°43.000' N
40°42.000' N

73°59.000' W


73°58.000' W

73°57.000' W


WGS84 73°56.000' W

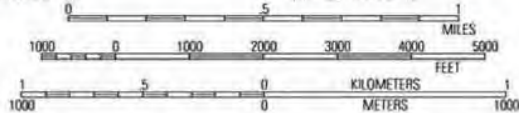


06/04/11

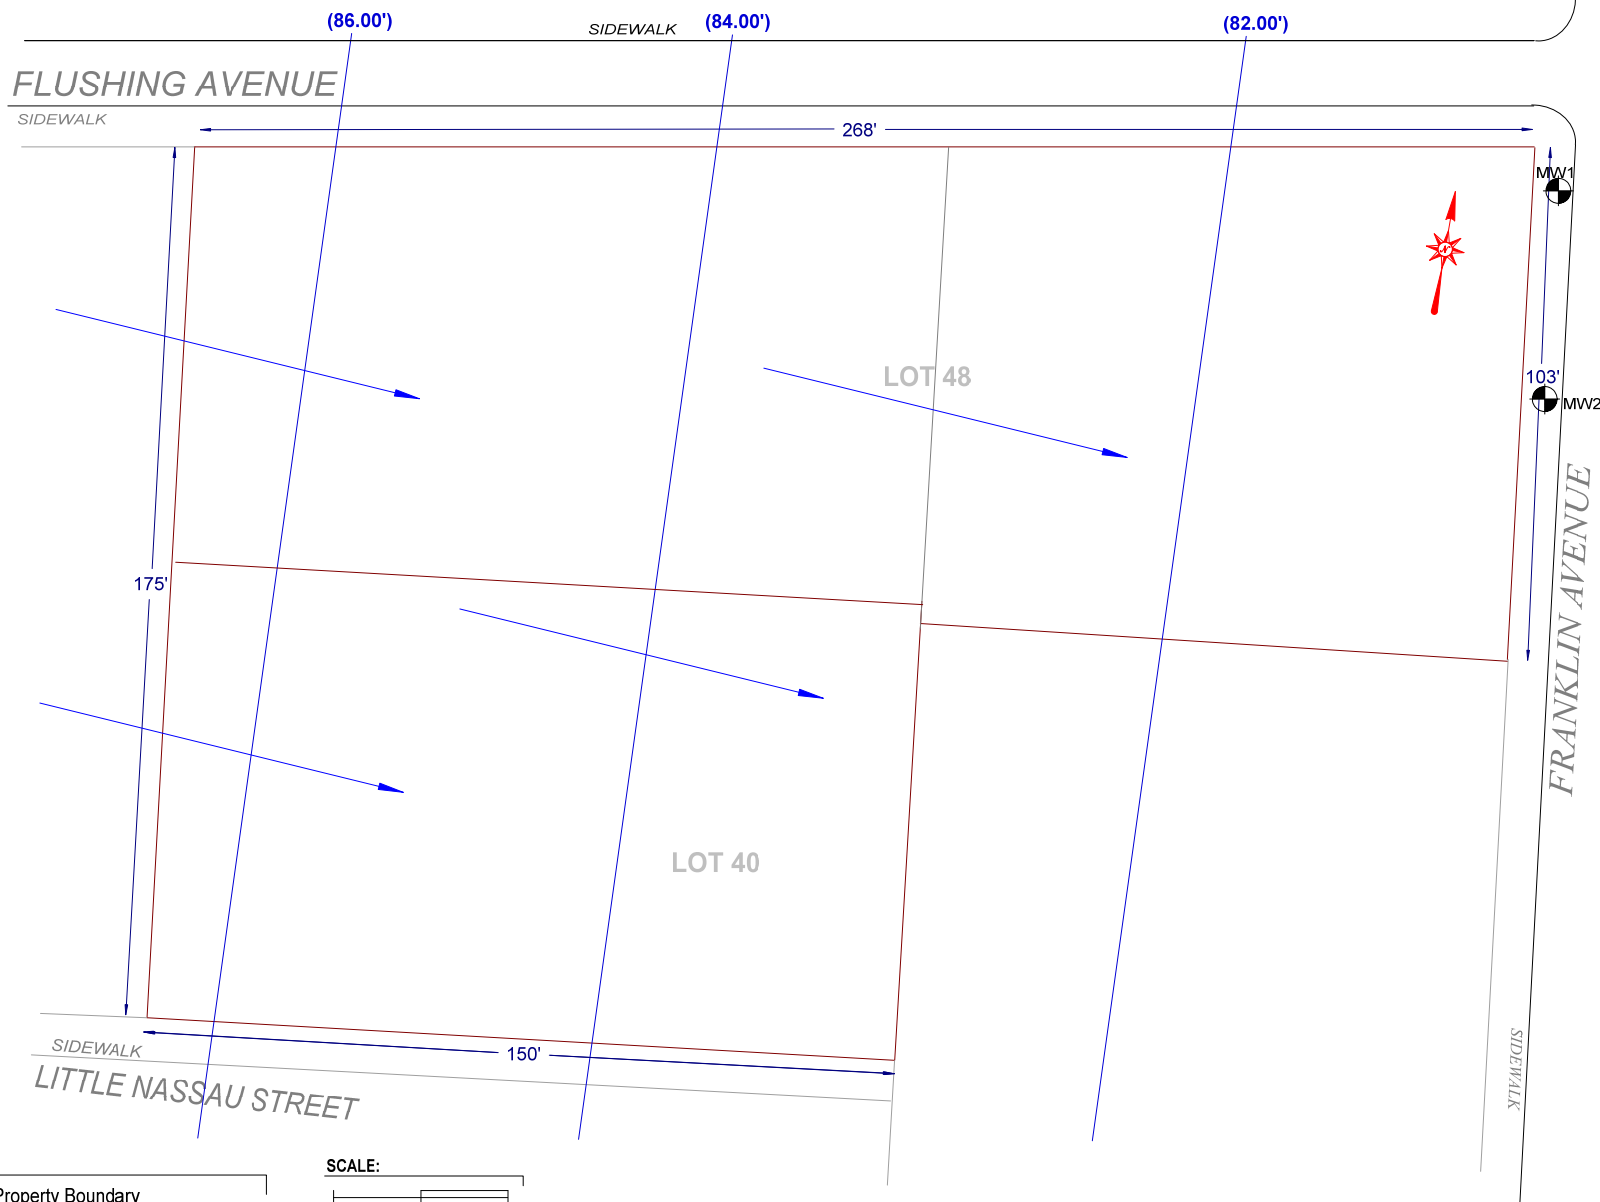

- KEY:**
- Property Boundary
 - Groundwater Sampling Location
 - ➔ Groundwater Flow Direction




<p>AMC Engineering, PLLC 18-36 42nd Street Astoria, NY 11105 Phone: (718)545-0474</p>	Date: 12/17/2020
	Figure 3: Groundwater Contour Map
	Former NY Cleaning and Dyeing Site 376-378 Flushing Avenue, Brooklyn, New York

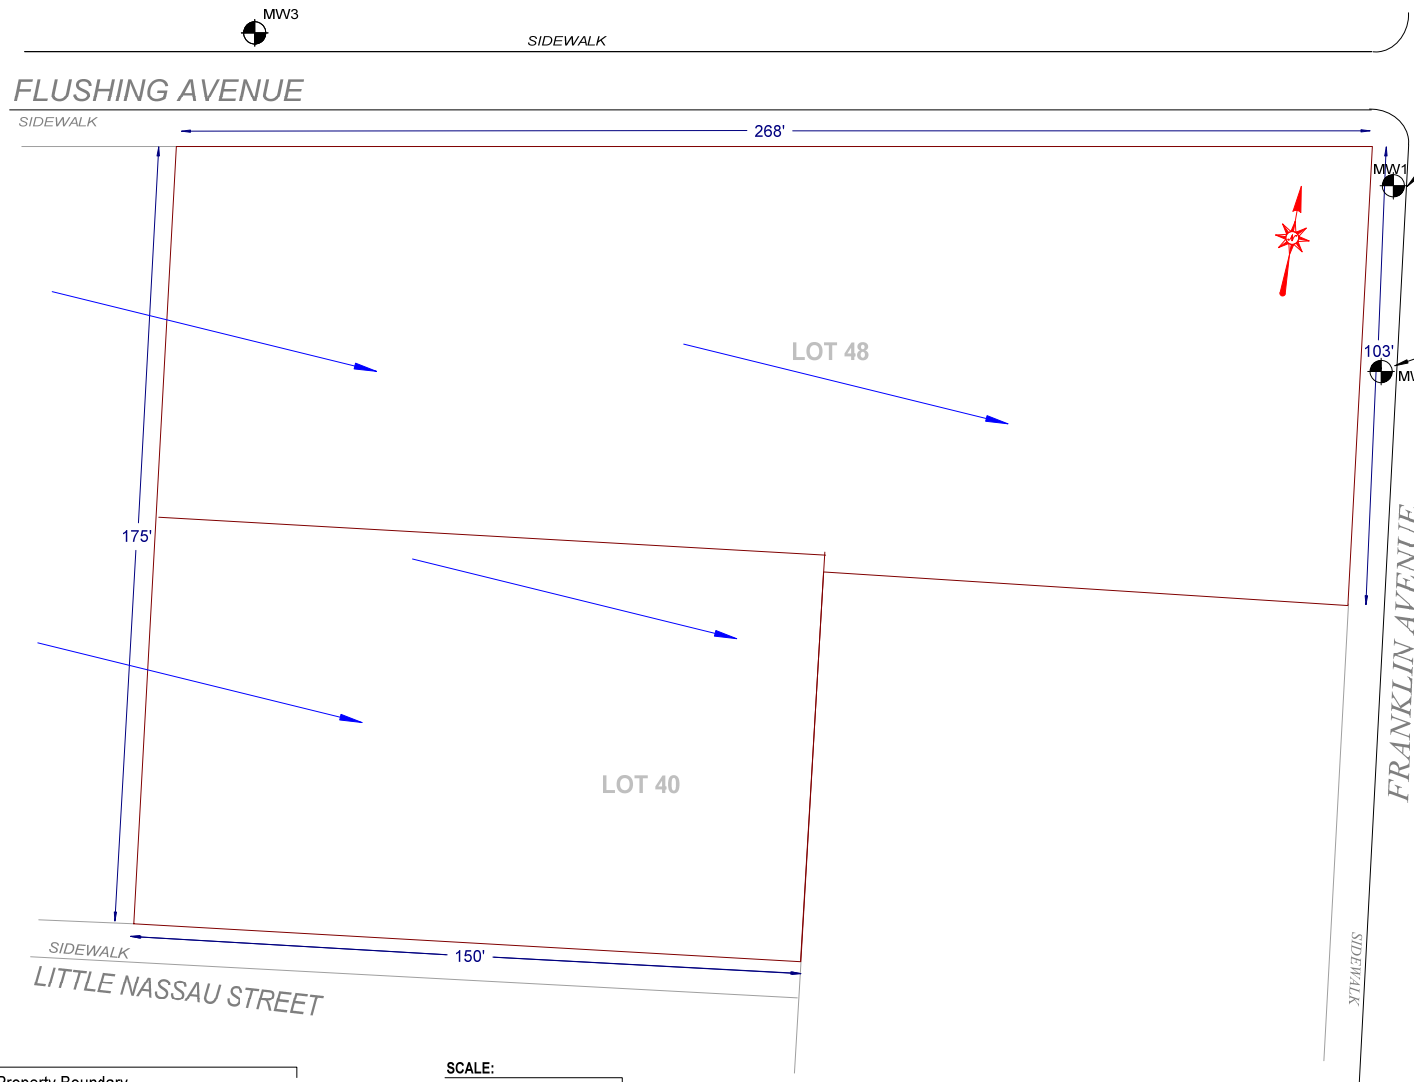


MW-1*		
VOCs (µg/L)	4/3/2020	9/4/2020
2-isopropyltoluene	12	9.7
Benzene	-	1.5
Isopropyltoluene	24	17
n-propylbenzene	14	11
sec-butylbenzene	27	14

MW-2		
	4/3/2020	9/4/2020
	No Exceedances	No Exceedances

- KEY:**
- Property Boundary
 - Groundwater Sampling Location
 - Exceedance of NYSDEC GW Standard
 - Groundwater Flow Direction




Note: Since MW1 was not screened at the water table at the time of sampling, the reported data is not representative of groundwater conditions at the Site. Therefore, as part of the SMP, MW1 will be reinstalled and data will be collected for MW1 once it is reinstalled.

 **AMC Engineering, PLLC**
 18-36 42nd Street
 Astoria, NY 11105
 Phone: (718)545-0474

Date: 12/14/2020
 Figure 4: Remaining Exceedances Above TOGS/WQ Standards
 Former NY Cleaning and Dyeing Site
 376-378 Flushing Avenue, Brooklyn, New York

FLUSHING AVENUE

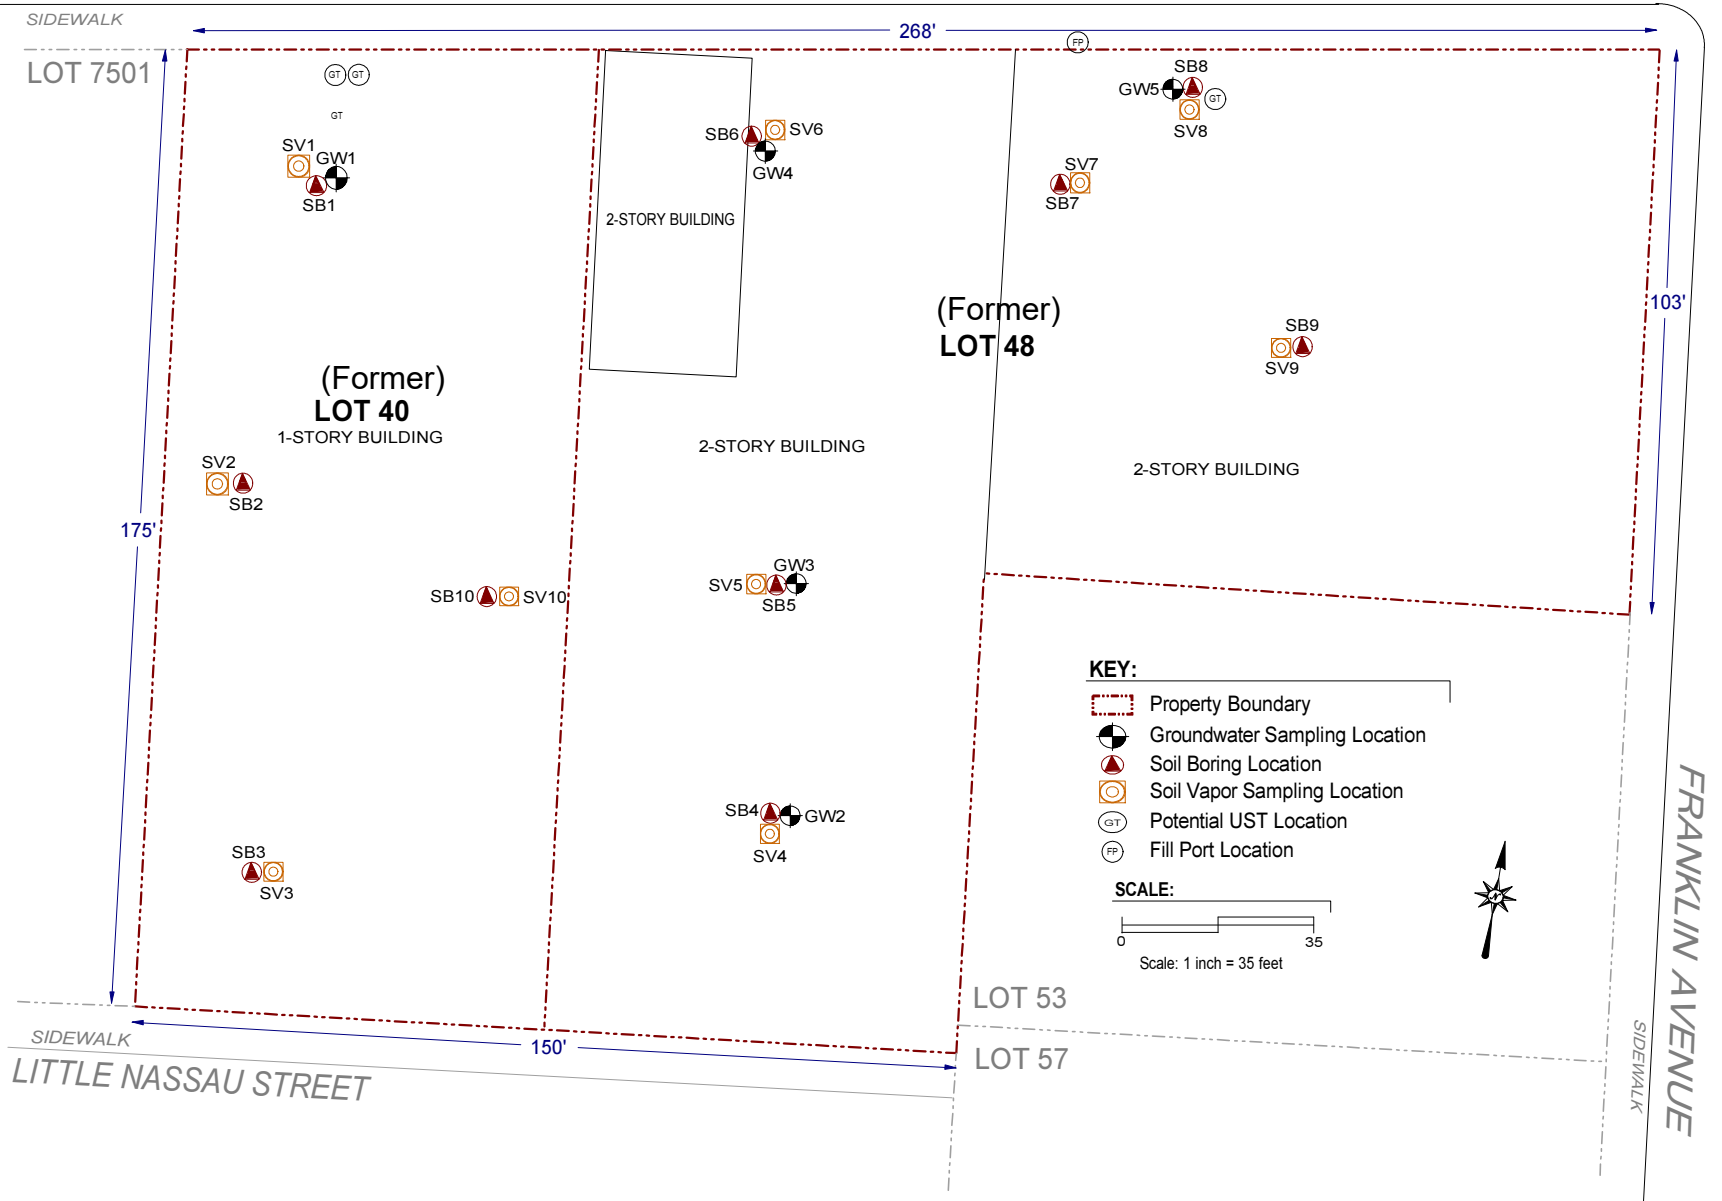

FLUSHING AVENUE

SIDEWALK

268'

LOT 7501



GW1 - 1/17/2017

VOCs (ug/L)	
1,2,4-Trimethylbenzene	440
1,3,5-Trimethylbenzene	97
2-Isopropyltoluene	6.9
Benzene	3.7
Ethylbenzene	88
Isopropylbenzene	33
m&p-Xylenes	190
Naphthalene	62
n-Butylbenzene	38
n-Propylbenzene	86
o-Xylene	62
sec-Butylbenzene	22
Toluene	33
SVOCs (ug/L)	
Naphthalene	51
Benz(a)anthracene	0.12
Benzo(b)fluoranthene	0.07
Benzo(k)fluoranthene	0.06
Chrysene	0.11
Total Metals (mg/L)	
Arsenic	0.098
Chromium	0.185
Copper	0.226
Iron	118
Lead	0.519
Manganese	2.27
Nickel	0.114
Sodium	9.51
Dissolved Metals (mg/L)	
Sodium	7.08

(Former)
LOT 40
1-STORY BUILDING

2-STORY BUILDING

GW4 - 1/17/2017

VOCs (ug/L)	
1,2,4-Trimethylbenzene	1,700
1,3,5-Trimethylbenzene	470
2-Isopropyltoluene	32
Benzene	53
Ethylbenzene	30
Isopropylbenzene	130
m&p-Xylenes	49
Naphthalene	150
n-Butylbenzene	70
n-Propylbenzene	240
o-Xylene	130
sec-Butylbenzene	79
tert-Butylbenzene	16
SVOCs (ug/L)	
Naphthalene	91
Total Metals (mg/L)	
Chromium	0.095
Iron	96.8
Lead	0.155
Manganese	0.773
Sodium	168
Dissolved Metals (mg/L)	
Sodium	159

GW5 - 1/17/2017

VOCs (ug/L)	
1,2,4-Trimethylbenzene	7,900
1,3,5-Trimethylbenzene	2,600
2-Isopropyltoluene	690
Bromomethane	120
Ethylbenzene	890
Isopropylbenzene	1,200
m&p-Xylenes	2,000
Naphthalene	1,100
n-Butylbenzene	3,400
n-Propylbenzene	2,500
o-Xylene	390
sec-Butylbenzene	2,600
tert-Butylbenzene	220
SVOCs (ug/L)	
Naphthalene	210
Total Metals (mg/L)	
Chromium	0.075
Copper	0.203
Iron	60.9
Lead	0.065
Magnesium	36.9
Manganese	0.887
Sodium	151
Dissolved Metals (mg/L)	
Sodium	144

LOT 48 (Former)

GW3 - 1/17/2017

VOCs (ug/L)	
1,2,4-Trimethylbenzene	1,100
1,3,5-Trimethylbenzene	280
2-Isopropyltoluene	32
Acetone	670
Benzene	56
Ethylbenzene	130
Isopropylbenzene	120
m&p-Xylenes	180
Methyl Ethyl Ketone	190
Naphthalene	290
n-Butylbenzene	86
n-Propylbenzene	200
o-Xylene	92
sec-Butylbenzene	87
tert-Butylbenzene	14
SVOCs (ug/L)	
Naphthalene	98
Total Metals (mg/L)	
Iron	4.23
Sodium	128
Dissolved Metals (mg/L)	
Sodium	128

175'

103'

SIDEWALK

LITTLE NASSAU STREET

150'

LOT 53


LOT 57

FRANKLIN AVENUE
SIDEWALK

KEY:

- Property Boundary
- Groundwater Sampling Location
- Soil Boring Location
- Soil Vapor Sampling Location
- Potential UST Location
- Fill Port Location

SCALE:



ENVIRONMENTAL BUSINESS CONSULTANTS

Phone 631.504.6000
Fax 631.924.2870

Figure No.
7

Site Name: **376-378 FLUSHING AVENUE**
 Site Address: **376-378 FLUSHING AVENUE, BROOKLYN, NY**
 Drawing Title: **GROUNDWATER EXCEEDANCES FIGURE**



FLUSHING AVENUE

SIDEWALK

LOT 7501

268'

103'

FRANKLIN AVENUE

LITTLE NASSAU STREET

SIDEWALK

SV5 - 1/17/2017	
1,2,4-Trimethylbenzene	963
1,3,5-Trimethylbenzene	1,270
4-Ethyltoluene	742
cis-1,2-Dichloroethene	395
Cyclohexane	1,000
Ethylbenzene	512
Heptane	359
Xylene (m&p)	1,920
Xylene (o)	833
Propylene	251
Tetrachloroethene	252
Toluene	152
Trichloroethene	145
Vinyl Chloride	358

SV6 - 1/17/2017	
1,1,1-Trichloroethane	22.7
Benzene	15.8
Carbon Disulfide	71.9
Cyclohexane	347
Ethylbenzene	20.9
Heptane	18.1
Hexane	52.5
Xylene (m&p)	29.4
Methyl Ethyl Ketone	53.6
Xylene (o)	18
Propylene	103
Tetrachloroethene	485
Tetrahydrofuran	71.6
Toluene	12.7
Vinyl Chloride	8.07

SV8 - 1/17/2017	
Benzene	200
Carbon Disulfide	613
Chloroform	24.6
Cyclohexane	1,180
Ethylbenzene	21.4
Heptane	696
Hexane	796
Xylene (m&p)	49.5
Methyl Ethyl Ketone	92.5
Xylene (o)	14
Propylene	249
Tetrachloroethene	33.3
Tetrahydrofuran	103
Toluene	51.2

SV1 - 1/17/2017	
1,3-Dichlorobenzene	1
Acetone	2.31
Xylene (m&p)	2.98
Methyl Ethyl Ketone	1.51
Tetrachloroethene	1
Toluene	1.28

SV7 - 1/17/2017	
Acetone	256
Benzene	58.7
Carbon Disulfide	153
Chloroform	11.5
Ethanol	15.8
Ethylbenzene	41.4
Heptane	43.8
Hexane	23.8
Xylene (m&p)	97.6
Methyl Ethyl Ketone	105
Xylene (o)	25.7
Propylene	17.1
Tetrachloroethene	138
Tetrahydrofuran	23.4
Toluene	57.2
Trichloroethene	19.7

SV2 - 1/17/2017	
Cyclohexane	2,240
Heptane	811
Tetrachloroethene	16.5

(Former) LOT 40
1-STORY BUILDING

(Former) LOT 48

2-STORY BUILDING

2-STORY BUILDING

2-STORY BUILDING


SV3 - 1/17/2017	
1,2-Dichloroethane	46.9
1,3-Dichlorobenzene	10.3
Benzene	74.7
Carbon Disulfide	67.5
cis-1,2-Dichloroethene	56.7
Cyclohexane	7,740
Ethanol	21.3
Ethylbenzene	24.6
Heptane	1,430
Hexane	10,700
Xylene (m&p)	41.9
Xylene (o)	15
Propylene	65.4
Tetrachloroethene	47
Tetrahydrofuran	23.8
Toluene	166
Vinyl Chloride	56.2

SV10 - 1/17/2017	
1,2,4-Trimethylbenzene	10.9
1,3-Dichlorobenzene	12
Benzene	140
Ethanol	14.3
Ethylbenzene	62.9
Heptane	1,440
Xylene (m&p)	219
Xylene (o)	117
Propylene	43
Tetrachloroethene	52.1
Toluene	45.6

SV4 - 1/17/2017	
1,1,1-Trichloroethane	27.7
1,1-Dichloroethane	566
1,2,4-Trimethylbenzene	191
1,3,5-Trimethylbenzene	270
4-Ethyltoluene	303
Benzene	149
Carbon Disulfide	11.5
Chloroethane	197
cis-1,2-Dichloroethene	95.5
Cyclohexane	1,350
Ethanol	22.6
Ethylbenzene	10,800
Heptane	3,380
Hexane	793
Isopropylbenzene	5,700
Xylene (m&p)	2,730
Methyl Ethyl Ketone	74.3
Xylene (o)	1,170
Propylene	308
Tetrachloroethene	43.3
Tetrahydrofuran	136
Toluene	2,090
trans-1,2-Dichloroethene	72.9
Trichloroethene	37.2
Vinyl Chloride	136

SV9 - 1/17/2017	
Benzene	178
Carbon Disulfide	299
cis-1,2-Dichloroethene	30.9
Cyclohexane	592
Ethanol	15.4
Ethylbenzene	621
Heptane	782
Hexane	359
Xylene (m&p)	768
Methyl Ethyl Ketone	54.5
Xylene (o)	48.6
Propylene	404
Tetrachloroethene	12.2
Tetrahydrofuran	10.6
Toluene	279
trans-1,2-Dichloroethene	29.3
Trichloroethene	171
Vinyl Chloride	129

- KEY:**
- Property Boundary
 - Soil Vapor Sampling Location
 - Groundwater Sampling Location
 - Soil Boring Location
 - Potential UST Location
 - Fill Port Location



<p>Phone 631.504.6000 Fax 631.924.2870</p>	<p>Figure No.</p> <p>8</p>	<p>Site Name: 376-378 FLUSHING AVENUE</p> <p>Site Address: 376-378 FLUSHING AVENUE, BROOKLYN, NY</p> <p>Drawing Title: SOIL GAS DETECTIONS</p>
--	--	---

FLUSHING AVENUE

SIDEWALK

268'

LOTS
1001-
1013



LOT 48


103'

FRANKLIN AVENUE


175'

LOT 40

KEY:

 Institutional Controls Boundary

SCALE:



Scale: 1 inch = 35 feet

Note: All ICs for this property are limited to within the property boundaries.

LOT 53

LOT 57

SIDEWALK

SIDEWALK

150'

LITTLE NASSAU STREET



AMC Engineering, PLLC
18-36 42nd Street
Astoria, NY 11105
Phone: (718)545-0474

Date: 07/29/2020

Figure 9: Institutional Control Boundaries

Former NY Cleaning and Dyeing Site
376-378 Flushing Avenue, Brooklyn, New York

ATTACHMENT A

Site Contacts

LIST OF SITE CONTACTS

Name	Phone/Email Address
<u>Site Owner and Remedial Party</u> Rose Castle Redevelopment II LLC 266 Broadway, Suite 301 Brooklyn, NY 11211	718-599-1145 zelig@riversideny.com
<u>Qualified Environmental Professional</u> Environmental Business Consultants Charles Sosik	631-504-6000 csosik@ebcincny.com
<u>NYSDEC DER Project Manager</u> Wendi Zheng	718-482-7541 wendi.zheng@dec.ny.gov
<u>NYSDEC Regional HW Engineer</u> Jane O'Connell NYSDEC Region 2	718 482-4599 jane.oconnell@dec.ny.gov
NYSDEC Site Control Kelly A. Lewandowski	kelly.lewandowski@dec.ny.gov
<u>Remedial Party Attorney</u> Freeborn & Peters LLP Jon Schuyler Brooks, Partner	646-993-4456 jbrooks@freeborn.com
<u>NYSDOH Project Manager</u> Kristin Kulow	518-402-7860 BEEI@health.ny.gov
<u>Remedial Engineer</u> AMC Engineering, PLLC Ariel Czemerinski	718-545-0474 ariel@amc-engineering.com

ATTACHMENT B
**Responsibilities of
Owner and Remedial Party**

Responsibilities

The responsibilities for implementing the Site Management Plan (“SMP”) for the Former NY Cleaning and Dyeing site (the “site”), number C224264, is assumed by the site owner(s) and Remedial Party, as defined below. The owner(s)/Remedial Party is/are currently listed as:

Rose Castle Redevelopment II LLC,
C/O Zelig Weiss,
266 Broadway, Suite 301
Brooklyn, NY 11211

(the “owner”).

Solely for the purposes of this document and based upon the facts related to a particular site and the remedial program being carried out, the term Remedial Party (“RP”) refers to any of the following: certificate of completion holder, volunteer, applicant, responsible party, and, in the event the New York State Department of Environmental Conservation (“NYSDEC”) is carrying out remediation or site management, the NYSDEC and/or an agent acting on its behalf. The RP is:

Rose Castle Redevelopment II LLC,
C/O Zelig Weiss,
266 Broadway, Suite 301
Brooklyn, NY 11211

Nothing on this page shall supersede the provisions of an Environmental Easement, Consent Order, Consent Decree, agreement, or other legally binding document that affects rights and obligations relating to the site.

Site Owner’s Responsibilities:

- 1) The owner shall follow the provisions of the SMP as they relate to future construction and excavation at the site.
- 2) In accordance with a periodic time frame determined by the NYSDEC, the owner shall periodically certify, in writing, that all Institutional Controls set forth in a(n)

Environmental Easement remain in place and continue to be complied with. The owner shall provide a written certification to the RP, upon the RP's request, in order to allow the RP to include the certification in the site's Periodic Review Report (PRR) certification to the NYSDEC.

- 3) In the event the site is delisted, the owner remains bound by the Environmental Easement and shall submit, upon request by the NYSDEC, a written certification that the Environmental Easement is still in place and has been complied with.
- 4) The owner shall grant access to the site to the RP and the NYSDEC and its agents for the purposes of performing activities required under the SMP and assuring compliance with the SMP.
- 5) The owner is responsible for assuring the security of the remedial components located on its property to the best of its ability. In the event that damage to the remedial components or vandalism is evident, the owner shall notify the site's RP and the NYSDEC in accordance with the timeframes indicated in Section 1.3-Notifications.
- 6) In the event some action or inaction by the owner adversely impacts the site, the owner must notify the site's RP and the NYSDEC in accordance with the time frame indicated in Section 1.3- Notifications and (ii) coordinate the performance of necessary corrective actions with the RP.
- 7) The owner must notify the RP and the NYSDEC of any change in ownership of the site property (identifying the tax map numbers in any correspondence) and provide contact information for the new owner of the site property. 6 NYCRR Part contains notification requirements applicable to any construction or activity changes and changes in ownership. Among the notification requirements is the following: Sixty days prior written notification must be made to the NYSDEC. Notification is to be submitted to the NYSDEC Division of Environmental Remediation's Site Control Section. Notification requirements for a change in use are detailed in Section 2.4 of the SMP. A 60-Day Advance Notification Form and Instructions are found at <http://www.dec.ny.gov/chemical/76250.html>.
- 8) In accordance with the tenant notification law, within 15 days of receipt, the owner must supply a copy of any vapor intrusion data, that is produced with respect to structures and that exceeds NYSDOH or OSHA guidelines on the site, whether produced by the NYSDEC, RP, or owner, to the tenants on the property. The owner must otherwise comply with the tenant and occupant notification provisions of Environmental Conservation Law Article 27, Title 24.

Remedial Party Responsibilities

- 1) The RP must follow the SMP provisions regarding any construction and/or excavation it undertakes at the site.
- 2) The RP shall report to the NYSDEC all activities required for remediation, operation, maintenance, monitoring, and reporting. Such reporting includes, but is not limited to, periodic review reports and certifications, electronic data deliverables, corrective action work plans and reports, and updated SMPs.
- 3) Before accessing the site property to undertake a specific activity, the RP shall provide the owner advance notification that shall include an explanation of the work expected to be completed. The RP shall provide to (i) the owner, upon the owner's request, (ii) the NYSDEC, and (iii) other entities, if required by the SMP, a copy of any data generated during the site visit and/or any final report produced.
- 4) If the NYSDEC determines that an update of the SMP is necessary, the RP shall update the SMP and obtain final approval from the NYSDEC. Within 5 business days after NYSDEC approval, the RP shall submit a copy of the approved SMP to the owner(s).
- 5) The RP shall notify the NYSDEC and the owner of any changes in RP ownership and/or control and of any changes in the party/entity responsible for the operation, maintenance, and monitoring of and reporting with respect to any remedial system (Engineering Controls). The RP shall provide contact information for the new party/entity. Such activity constitutes a Change of Use pursuant to 375-1.11(d) and requires 60-days prior notice to the NYSDEC. A 60-Day Advance Notification Form and Instructions are found at <http://www.dec.ny.gov/chemical/76250.html> .
- 6) Prior to a change in use that impacts the remedial system or requirements and/or responsibilities for implementing the SMP, the RP shall submit to the NYSDEC for approval an amended SMP.
- 7) Any change in use, change in ownership, change in site classification (*e.g.*, delisting), reduction or expansion of remediation, and other significant changes related to the site may result in a change in responsibilities and, therefore, necessitate an update to the SMP and/or updated legal documents. The RP shall contact the Department to discuss the need to update such documents.


Change in RP ownership and/or control and/or site ownership does not affect the RP's obligations with respect to the site unless a legally binding document executed by the NYSDEC releases the RP of its obligations.

Future site owners and RPs and their successors and assigns are required to carry out the activities set forth above.

ATTACHMENT C
Environmental Easement

**NYC DEPARTMENT OF FINANCE
OFFICE OF THE CITY REGISTER**

This page is part of the instrument. The City Register will rely on the information provided by you on this page for purposes of indexing this instrument. The information on this page will control for indexing purposes in the event of any conflict with the rest of the document.

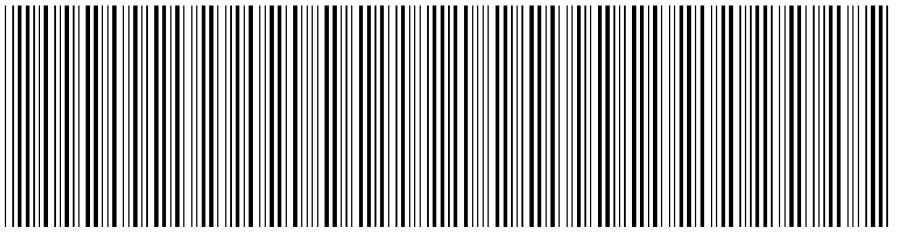

2020112500876001001E3CCF

RECORDING AND ENDORSEMENT COVER PAGE

PAGE 1 OF 10

Document ID: 2020112500876001

Document Date: 11-03-2020

Preparation Date: 11-25-2020

Document Type: EASEMENT

Document Page Count: 9

PRESENTER:

EXECUTIVE ABSTRACT GROUP, INC.
16 ISRAEL ZUPNICK DRIVE, SUITE 117
EAG-3509
MONROE, NY 10950
845-782-2400
MAIL@EXECUTIVE-ABSTRACT.COM

RETURN TO:

NEW YORK STATE DEPARTMENT OF
ENVIRONMENTAL
CONSERVATION
625 BRAODWAY, 14TH FLOOR
ALBANY, NY 12233

PROPERTY DATA

Borough	Block	Lot	Unit	Address
BROOKLYN	1884	40	Entire Lot	376 FLUSHING AVENUE

Property Type: COMMERCIAL REAL ESTATE

Borough	Block	Lot	Unit	Address
BROOKLYN	1884	48	Entire Lot	378 FLUSHING AVENUE

Property Type: COMMERCIAL REAL ESTATE

CROSS REFERENCE DATA

CRFN _____ or DocumentID _____ or _____ Year _____ Reel _____ Page _____ or File Number _____

PARTIES

GRANTOR/SELLER:

FLUSHING & LITTLE NASSAU LLC
266 BROADWAY, SUITE 301
BROOKLYN, NY 11211

GRANTEE/BUYER:

THE PEOPLE OF THE STATE OF NEW YORK
"NYSDEC", 625 BROADWAY
ALBANY, NY 12233

FEES AND TAXES

Mortgage :

Mortgage Amount: \$ 0.00

Taxable Mortgage Amount: \$ 0.00

Exemption:

TAXES: County (Basic): \$ 0.00

City (Additional): \$ 0.00

Spec (Additional): \$ 0.00

TASF: \$ 0.00

MTA: \$ 0.00

NYCTA: \$ 0.00

Additional MRT: \$ 0.00

TOTAL: \$ 0.00

Recording Fee: \$ 85.00

Affidavit Fee: \$ 0.00

Filing Fee:

\$ 100.00

NYC Real Property Transfer Tax:

\$ 0.00

NYS Real Estate Transfer Tax:

\$ 0.00

**RECORDED OR FILED IN THE OFFICE
OF THE CITY REGISTER OF THE**

CITY OF NEW YORK

Recorded/Filed 12-02-2020 16:18

City Register File No.(CRFN):

2020000341247



Annette McMill

City Register Official Signature

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

Office of the General Counsel
625 Broadway, 14th Floor, Albany, New York 12233-1500
P: (518) 402-9185 | F: (518) 402-9018
www.dec.ny.gov

November 4, 2020

SENT VIA USPS DELIVERY CONFIRMATION
(0306 3030 0002 7041 7686)

Riverside Developers USA, Inc.
Zelig Weiss
266 Broadway #301
Brooklyn, NY 11211

RE: Environmental Easement Package
Site Name: 376 and 378 Flushing Ave
Site C224264


Dear Mr. Weiss,

Enclosed please find a fully executed Environmental Easement, and TP-584 and NYC RPT tax forms required for recording.

Once the Environmental Easement is recorded, the local municipality will need to be notified via Certified Mail, Return Receipt Requested.

Please return to this office, copies of the recorded easement marked by the County Clerk's Office with the date and location of recording, and a certified copy of the municipal notices. The information from the recorded easement and notices are necessary to process the Certificate of Completion.

If you have any further questions or concerns relating to this matter, please contact our office at (518) 408-0409.

Sincerely,

Dale L. Thiel
Legal Assistant 2
Remediation
Bureau

ec: B. Burns, Esq., NYSDEC



**ENVIRONMENTAL EASEMENT GRANTED PURSUANT TO ARTICLE 71, TITLE 36
OF THE NEW YORK STATE ENVIRONMENTAL CONSERVATION LAW**

THIS INDENTURE made this 3rd day of November, 2020 between Owner, Flushing & Little Nassau LLC, having an office at 266 Broadway, Suite 301, Brooklyn, New York 11205, County of Kings, State of New York (the "Grantor"), and The People of the State of New York (the "Grantee."), acting through their Commissioner of the Department of Environmental Conservation (the "Commissioner", or "NYSDEC" or "Department" as the context requires) with its headquarters located at 625 Broadway, Albany, New York 12233,

WHEREAS, the Legislature of the State of New York has declared that it is in the public interest to encourage the remediation of abandoned and likely contaminated properties ("sites") that threaten the health and vitality of the communities they burden while at the same time ensuring the protection of public health and the environment; and

WHEREAS, the Legislature of the State of New York has declared that it is in the public interest to establish within the Department a statutory environmental remediation program that includes the use of Environmental Easements as an enforceable means of ensuring the performance of operation, maintenance, and/or monitoring requirements and the restriction of future uses of the land, when an environmental remediation project leaves residual contamination at levels that have been determined to be safe for a specific use, but not all uses, or which includes engineered structures that must be maintained or protected against damage to perform properly and be effective, or which requires groundwater use or soil management restrictions; and

WHEREAS, the Legislature of the State of New York has declared that Environmental Easement shall mean an interest in real property, created under and subject to the provisions of Article 71, Title 36 of the New York State Environmental Conservation Law ("ECL") which contains a use restriction and/or a prohibition on the use of land in a manner inconsistent with engineering controls which are intended to ensure the long term effectiveness of a site remedial program or eliminate potential exposure pathways to hazardous waste or petroleum; and

WHEREAS, Grantor, is the owner of real property located at the address of 33 Little Nassau Street (a/k/a 378 Flushing Avenue) and 376 Flushing Avenue (a/k/a 378 Flushing Avenue) in the City of New York, County of Kings and State of New York, known and designated on the tax map of the New York City Department of Finance as tax map parcel number: Block 1884 Lots 40 and 48, respectively, being the same as that property conveyed to Grantor by deed dated June 2, 2020 and recorded in the City Register of the City of New York as CRFN # 2020000192568. The property subject to this Environmental Easement (the "Controlled Property") comprises approximately 0.882 +/- acres, and is hereinafter more fully described in the Land Title Survey dated January 29, 2014 as amended August 19, 2020 prepared by Alexander Tsukerman, L.L.S. of Leonard J. Strandberg and Associates, Consulting Engineers and Land Surveyors, P.C., which will be attached to the Site Management Plan. The Controlled Property description is set forth in and attached hereto as Schedule A; and

WHEREAS, the Department accepts this Environmental Easement in order to ensure the protection of public health and the environment and to achieve the requirements for remediation established for the Controlled Property until such time as this Environmental Easement is

extinguished pursuant to ECL Article 71, Title 36; and

NOW THEREFORE, in consideration of the mutual covenants contained herein and the terms and conditions of Brownfield Cleanup Agreement Index Number: C224264-01-18, Grantor conveys to Grantee a permanent Environmental Easement pursuant to ECL Article 71, Title 36 in, on, over, under, and upon the Controlled Property as more fully described herein ("Environmental Easement").

1. Purposes. Grantor and Grantee acknowledge that the Purposes of this Environmental Easement are: to convey to Grantee real property rights and interests that will run with the land in perpetuity in order to provide an effective and enforceable means of encouraging the reuse and redevelopment of this Controlled Property at a level that has been determined to be safe for a specific use while ensuring the performance of operation, maintenance, and/or monitoring requirements; and to ensure the restriction of future uses of the land that are inconsistent with the above-stated purpose.

2. Institutional and Engineering Controls. The controls and requirements listed in the Department approved Site Management Plan ("SMP") including any and all Department approved amendments to the SMP are incorporated into and made part of this Environmental Easement. These controls and requirements apply to the use of the Controlled Property, run with the land, are binding on the Grantor and the Grantor's successors and assigns, and are enforceable in law or equity against any owner of the Controlled Property, any lessees and any person using the Controlled Property.

A. (1) The Controlled Property may be used for:

**Restricted Residential as described in 6 NYCRR Part 375-1.8(g)(2)(ii),
Commercial as described in 6 NYCRR Part 375-1.8(g)(2)(iii) and Industrial
as described in 6 NYCRR Part 375-1.8(g)(2)(iv)**

(2) All Engineering Controls must be operated and maintained as specified in the Site Management Plan (SMP);

(3) All Engineering Controls must be inspected at a frequency and in a manner defined in the SMP;

(4) The use of groundwater underlying the property is prohibited without necessary water quality treatment as determined by the NYSDOH or the New York City Department of Health and Mental Hygiene to render it safe for use as drinking water or for industrial purposes, and the user must first notify and obtain written approval to do so from the Department;

(5) Groundwater and other environmental or public health monitoring must be performed as defined in the SMP;

(6) Data and information pertinent to Site Management of the Controlled Property must be reported at the frequency and in a manner defined in the SMP;

(7) All future activities on the property that will disturb remaining contaminated material must be conducted in accordance with the SMP;

(8) Monitoring to assess the performance and effectiveness of the remedy must be performed as defined in the SMP;

(9) Operation, maintenance, monitoring, inspection, and reporting of any mechanical or physical components of the remedy shall be performed as defined in the SMP;

(10) Access to the site must be provided to agents, employees or other representatives of the State of New York with reasonable prior notice to the property owner to assure compliance with the restrictions identified by this Environmental Easement.

B. The Controlled Property shall not be used for Residential purposes as defined in 6NYCRR 375-1.8(g)(2)(i), and the above-stated engineering controls may not be discontinued without an amendment or extinguishment of this Environmental Easement.

C. The SMP describes obligations that the Grantor assumes on behalf of Grantor, its successors and assigns. The Grantor's assumption of the obligations contained in the SMP which may include sampling, monitoring, and/or operating a treatment system, and providing certified reports to the NYSDEC, is and remains a fundamental element of the Department's determination that the Controlled Property is safe for a specific use, but not all uses. The SMP may be modified in accordance with the Department's statutory and regulatory authority. The Grantor and all successors and assigns, assume the burden of complying with the SMP and obtaining an up-to-date version of the SMP from:

Site Control Section
Division of Environmental Remediation
NYSDEC
625 Broadway
Albany, New York 12233
Phone: (518) 402-9553

D. Grantor must provide all persons who acquire any interest in the Controlled Property a true and complete copy of the SMP that the Department approves for the Controlled Property and all Department-approved amendments to that SMP.

E. Grantor covenants and agrees that until such time as the Environmental Easement is extinguished in accordance with the requirements of ECL Article 71, Title 36 of the ECL, the property deed and all subsequent instruments of conveyance relating to the Controlled Property shall state in at least fifteen-point bold-faced type:

This property is subject to an Environmental Easement held by the New York State Department of Environmental Conservation pursuant to Title 36 of Article 71 of the Environmental Conservation Law.

F. Grantor covenants and agrees that this Environmental Easement shall be incorporated in full or by reference in any leases, licenses, or other instruments granting a right to use the Controlled Property.

G. Grantor covenants and agrees that it shall, at such time as NYSDEC may require, submit to NYSDEC a written statement by an expert the NYSDEC may find acceptable certifying under penalty of perjury, in such form and manner as the Department may require, that:

(1) the inspection of the site to confirm the effectiveness of the institutional and engineering controls required by the remedial program was performed under the direction of the individual set forth at 6 NYCRR Part 375-1.8(h)(3).

(2) the institutional controls and/or engineering controls employed at such site:

(i) are in-place;

(ii) are unchanged from the previous certification, or that any identified changes to the controls employed were approved by the NYSDEC and that all controls are in the Department-approved format; and

(iii) that nothing has occurred that would impair the ability of such control to protect the public health and environment;

(3) the owner will continue to allow access to such real property to evaluate the continued maintenance of such controls;

(4) nothing has occurred that would constitute a violation or failure to comply with any site management plan for such controls;

(5) the report and all attachments were prepared under the direction of, and reviewed by, the party making the certification;

(6) to the best of his/her knowledge and belief, the work and conclusions described in this certification are in accordance with the requirements of the site remedial program, and generally accepted engineering practices; and

(7) the information presented is accurate and complete.

3. Right to Enter and Inspect. Grantee, its agents, employees, or other representatives of the State may enter and inspect the Controlled Property in a reasonable manner and at reasonable times to assure compliance with the above-stated restrictions.

4. Reserved Grantor's Rights. Grantor reserves for itself, its assigns, representatives, and successors in interest with respect to the Property, all rights as fee owner of the Property, including:

A. Use of the Controlled Property for all purposes not inconsistent with, or limited by the terms of this Environmental Easement;

B. The right to give, sell, assign, or otherwise transfer part or all of the underlying fee interest to the Controlled Property, subject and subordinate to this Environmental Easement;

5. Enforcement

A. This Environmental Easement is enforceable in law or equity in perpetuity by Grantor, Grantee, or any affected local government, as defined in ECL Section 71-3603, against the owner of the Property, any lessees, and any person using the land. Enforcement shall not be defeated because of any subsequent adverse possession, laches, estoppel, or waiver. It is not a defense in any action to enforce this Environmental Easement that: it is not appurtenant to an

interest in real property; it is not of a character that has been recognized traditionally at common law; it imposes a negative burden; it imposes affirmative obligations upon the owner of any interest in the burdened property; the benefit does not touch or concern real property; there is no privity of estate or of contract; or it imposes an unreasonable restraint on alienation.

B. If any person violates this Environmental Easement, the Grantee may revoke the Certificate of Completion with respect to the Controlled Property.

C. Grantee shall notify Grantor of a breach or suspected breach of any of the terms of this Environmental Easement. Such notice shall set forth how Grantor can cure such breach or suspected breach and give Grantor a reasonable amount of time from the date of receipt of notice in which to cure. At the expiration of such period of time to cure, or any extensions granted by Grantee, the Grantee shall notify Grantor of any failure to adequately cure the breach or suspected breach, and Grantee may take any other appropriate action reasonably necessary to remedy any breach of this Environmental Easement, including the commencement of any proceedings in accordance with applicable law.

D. The failure of Grantee to enforce any of the terms contained herein shall not be deemed a waiver of any such term nor bar any enforcement rights.

6. Notice. Whenever notice to the Grantee (other than the annual certification) or approval from the Grantee is required, the Party providing such notice or seeking such approval shall identify the Controlled Property by referencing the following information:

County, NYSDEC Site Number, NYSDEC Brownfield Cleanup Agreement, State Assistance Contract or Order Number, and the County tax map number or the Liber and Page or computerized system identification number.

Parties shall address correspondence to: Site Number: C224264
Office of General Counsel
NYSDEC
625 Broadway
Albany New York 12233-5500

With a copy to: Site Control Section
Division of Environmental Remediation
NYSDEC
625 Broadway
Albany, NY 12233

All notices and correspondence shall be delivered by hand, by registered mail or by Certified mail and return receipt requested. The Parties may provide for other means of receiving and communicating notices and responses to requests for approval.

7. Recordation. Grantor shall record this instrument, within thirty (30) days of execution of this instrument by the Commissioner or her/his authorized representative in the office of the recording officer for the county or counties where the Property is situated in the manner prescribed by Article 9 of the Real Property Law.

8. Amendment. Any amendment to this Environmental Easement may only be executed by the Commissioner of the New York State Department of Environmental Conservation or the Commissioner's Designee, and filed with the office of the recording officer for the county or counties where the Property is situated in the manner prescribed by Article 9 of the Real Property Law.

9. Extinguishment. This Environmental Easement may be extinguished only by a release by the Commissioner of the New York State Department of Environmental Conservation, or the Commissioner's Designee, and filed with the office of the recording officer for the county or counties where the Property is situated in the manner prescribed by Article 9 of the Real Property Law.

10. Joint Obligation. If there are two or more parties identified as Grantor herein, the obligations imposed by this instrument upon them shall be joint and several.

11. Consistency with the SMP. To the extent there is any conflict or inconsistency between the terms of this Environmental Easement and the SMP, regarding matters specifically addressed by the SMP, the terms of the SMP will control.

Remainder of Page Intentionally Left Blank

IN WITNESS WHEREOF, Grantor has caused this instrument to be signed in its name.

Flushing & Little Nassau LLC:

By: [Signature]

Print Name: Zelig Weiss

Title: President Date: 10/26/20

Grantor's Acknowledgment

STATE OF NEW YORK)
) ss:
COUNTY OF)

On the 26th day of October, in the year 20 20, before me, the undersigned, personally appeared Zelig Weiss, personally known to me or proved to me on the basis of satisfactory evidence to be the individual(s) whose name is (are) subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their capacity(ies), and that by his/her/their signature(s) on the instrument, the individual(s), or the person upon behalf of which the individual(s) acted, executed the instrument.

[Signature]
Notary Public - State of New York

RACHEL FRANCOZ (MITTELMAN)
NOTARY PUBLIC, STATE OF NEW YORK
No. 01M6306050
Qualified in Kings County
Commission Expires June 16, 2022


Faint, illegible text at the top of the page, possibly a header or title.

Second section of faint, illegible text, possibly a paragraph or list.

Third section of faint, illegible text, possibly a paragraph or list.

Commission Expires June 16, 2022
Qualified in Kings County
No. 01M830930
NOTARY PUBLIC, STATE OF NEW YORK
RACHEL FRANCOZ (MITTELMAN)


THIS ENVIRONMENTAL EASEMENT IS HEREBY ACCEPTED BY THE PEOPLE OF THE STATE OF NEW YORK, Acting By and Through the Department of Environmental Conservation as Designee of the Commissioner,

By: 
Michael J. Ryan, Director
Division of Environmental Remediation

Grantee's Acknowledgment

STATE OF NEW YORK)
) ss:
COUNTY OF ALBANY)

On the 3rd day of November, in the year 2020 before me, the undersigned, personally appeared Michael J. Ryan, personally known to me or proved to me on the basis of satisfactory evidence to be the individual(s) whose name is (are) subscribed to the within instrument and acknowledged to me that he/she/ executed the same in his/her/ capacity as Designee of the Commissioner of the State of New York Department of Environmental Conservation, and that by his/her/ signature on the instrument, the individual, or the person upon behalf of which the individual acted, executed the instrument.

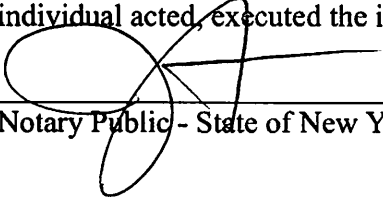

Notary Public - State of New York

JUSTIN F STENERSON
NOTARY PUBLIC, STATE OF NEW YORK
Registration No. 02ST6383061
Qualified in Ulster County
Commission Expires November 13, 2022

SCHEDULE "A" PROPERTY DESCRIPTION

**LEGAL AND EASEMENT DESCRIPTION FOR BLOCK 1884 LOT 40 & 48
(as 1 zoning Lot)**

All that certain plot, piece or parcel of land, with the buildings and improvements thereon erected, situate, lying and being in the Borough of Brooklyn, County of Kings, City and State of New York, bounded and described as follows:

BEGINNING at a point on the southerly side of Flushing Avenue distant 50.02 feet easterly from the corner formed by the intersection of the southerly side of Flushing Avenue with the easterly side of Kent Avenue;

THENCE easterly along the southerly side of Flushing Avenue, 268.85 feet;

THENCE southerly along the westerly side of Franklin Avenue, 102.75 feet;

THENCE westerly approximately parallel with Park Avenue, 118.25 feet;

THENCE southerly approximately parallel with Franklin Avenue, 90.75 feet;

THENCE westerly along with the northerly side of Little Nassau Street, 150.00 feet;

THENCE northerly approximately parallel with Kent Avenue, 174.64 feet, to the point or place of BEGINNING.

Containing an area of approximately 38,450.24 square feet or 0.882 acres more or less.

● TYPE OF PROPERTY (✓)	● TYPE OF INTEREST (✓)																				
<ul style="list-style-type: none"> a. <input type="checkbox"/> 1-3 family house b. <input type="checkbox"/> Individual residential condominium unit c. <input type="checkbox"/> Individual cooperative apartment d. <input type="checkbox"/> Commercial condominium unit e. <input type="checkbox"/> Commercial cooperative f. <input type="checkbox"/> 4 family dwelling g. <input type="checkbox"/> Apartment building h. <input type="checkbox"/> Office building i. <input type="checkbox"/> Industrial building j. <input type="checkbox"/> Utility k. <input checked="" type="checkbox"/> OTHER (describe): <u>MULTIPLE PROPERTIES</u> 	<p>Check box at LEFT if you intend to record a document related to this transfer. Check box at RIGHT if you do not intend to record a document related to this transfer.</p> <table style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%; text-align: left;">REC.</th> <th style="width:50%; text-align: right;">NON REC.</th> </tr> <tr> <td>a. <input type="checkbox"/> Fee.....</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>b. <input type="checkbox"/> Leasehold Grant</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>c. <input type="checkbox"/> Leasehold Assignment or Surrender</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>d. <input checked="" type="checkbox"/> Easement</td> <td style="text-align: right;"><input checked="" type="checkbox"/></td> </tr> <tr> <td>e. <input type="checkbox"/> Subterranean Rights</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>f. <input type="checkbox"/> Development Rights</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>g. <input type="checkbox"/> Stock</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>h. <input type="checkbox"/> Partnership Interest</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> <tr> <td>i. <input type="checkbox"/> OTHER. (describe):</td> <td style="text-align: right;"><input type="checkbox"/></td> </tr> </table>	REC.	NON REC.	a. <input type="checkbox"/> Fee.....	<input type="checkbox"/>	b. <input type="checkbox"/> Leasehold Grant	<input type="checkbox"/>	c. <input type="checkbox"/> Leasehold Assignment or Surrender	<input type="checkbox"/>	d. <input checked="" type="checkbox"/> Easement	<input checked="" type="checkbox"/>	e. <input type="checkbox"/> Subterranean Rights	<input type="checkbox"/>	f. <input type="checkbox"/> Development Rights	<input type="checkbox"/>	g. <input type="checkbox"/> Stock	<input type="checkbox"/>	h. <input type="checkbox"/> Partnership Interest	<input type="checkbox"/>	i. <input type="checkbox"/> OTHER. (describe):	<input type="checkbox"/>
REC.	NON REC.																				
a. <input type="checkbox"/> Fee.....	<input type="checkbox"/>																				
b. <input type="checkbox"/> Leasehold Grant	<input type="checkbox"/>																				
c. <input type="checkbox"/> Leasehold Assignment or Surrender	<input type="checkbox"/>																				
d. <input checked="" type="checkbox"/> Easement	<input checked="" type="checkbox"/>																				
e. <input type="checkbox"/> Subterranean Rights	<input type="checkbox"/>																				
f. <input type="checkbox"/> Development Rights	<input type="checkbox"/>																				
g. <input type="checkbox"/> Stock	<input type="checkbox"/>																				
h. <input type="checkbox"/> Partnership Interest	<input type="checkbox"/>																				
i. <input type="checkbox"/> OTHER. (describe):	<input type="checkbox"/>																				

SCHEDULE 1 - DETAILS OF CONSIDERATION

COMPLETE THIS SCHEDULE FOR ALL TRANSFERS AFTER COMPLETING THE APPROPRIATE SCHEDULES ON PAGES 5 THROUGH 12. ENTER "ZERO" ON LINE 11 IF THE TRANSFER REPORTED WAS WITHOUT CONSIDERATION.

1. Cash.....	● 1.		0 00
2. Purchase money mortgage.....	● 2.		0 00
3. Unpaid principal of pre-existing mortgage(s).....	● 3.		0 00
4. Accrued interest on pre-existing mortgage(s).....	● 4.		0 00
5. Accrued real estate taxes.....	● 5.		0 00
6. Amounts of other liens on property.....	● 6.		0 00
7. Value of shares of stock or of partnership interest received.....	● 7.		0 00
8. Value of real or personal property received in exchange.....	● 8.		0 00
9. Amount of Real Property Transfer Tax and/or other taxes or expenses of the grantor which are paid by the grantee.....	● 9.		0 00
10. Other (describe):	● 10.		0 00
11. TOTAL CONSIDERATION (add lines 1 through 10 - must equal amount entered on line 1 of Schedule 2) (see instructions).....	● 11.	\$	0 00

See instructions for special rules relating to transfers of cooperative units, liquidations, marital settlements and transfers of property to a business entity in return for an interest in the entity.

SCHEDULE 2 - COMPUTATION OF TAX

A. Payment	Pay amount shown on line 15 - See Instructions		Payment Enclosed
1. Total Consideration (from line 11, above).....	● 1.		0 00
2. Excludable liens (see instructions).....	● 2.		0 00
3. Consideration (line 1 less line 2).....	● 3.		0 00
4. Tax Rate (see instructions).....	● 4.		0 %
5. HDFC Exemption (see Schedule L, line 15)	● 5.		0 00
6. Consideration less HDFC Exemption (line 3 less line 5)	● 6.		0 00
7. Percentage change in beneficial ownership (see instructions)	● 7.		100 %
8. Taxable consideration (multiply line 6 by line 7).....	● 8.		0 00
9. Tax (multiply line 8 by line 4).....	● 9.		0 00
10. Credit (see instructions).....	● 10.		0 00
11. Transfer tax previously paid (see Schedule L, line 18).....	● 11.		0 00
12. Tax due (line 9 less line 10 and 11) (if the result is negative, enter zero).....	● 12.		0 00
13. Interest (see instructions).....	● 13.		0 00
14. Penalty (see instructions).....	● 14.		0 00
15. Total Tax Due (add lines 12, 13 and 14).....	● 15.	\$	0 00

GRANTOR'S ATTORNEY ▼



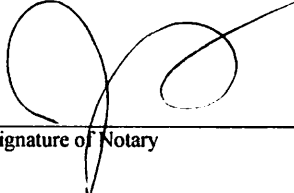



Name of Attorney Jon Schuyler Brooks		Telephone Number (646) 993-4456	
Address (number and street) 230 Park Avenue		City and State New York, NY	Zip Code 10169
EMPLOYER IDENTIFICATION NUMBER 36 - 3238755	OR	SOCIAL SECURITY NUMBER	

GRANTEE'S ATTORNEY ▼

Name of Attorney		Telephone Number ()	
Address (number and street)		City and State	Zip Code
EMPLOYER IDENTIFICATION NUMBER		OR	SOCIAL SECURITY NUMBER

CERTIFICATION ▼

I swear or affirm that this return, including any accompanying schedules, affidavits and attachments, has been examined by me and is, to the best of my knowledge, a true and complete return made in good faith, pursuant to Title 11, Chapter 21 of the Administrative Code and the regulations issued thereunder.

GRANTOR		GRANTEE	
Sworn to and subscribed to		Sworn to and subscribed to	
before me on this <u>3rd</u> day	85-1135749 EMPLOYER IDENTIFICATION NUMBER OR SOCIAL SECURITY NUMBER	before me on this <u>3rd</u> day	14-6013200 99-9999999 EMPLOYER IDENTIFICATION NUMBER OR SOCIAL SECURITY NUMBER
of <u>November</u> , 20 <u>20</u>	FLUSHING & LITTLE NASSAU LLC	of <u>November</u> , 20 <u>20</u>	NEW YORK STATE DEPARTMENT OF
	Name of Grantor		Name of Grantee
			
Signature of Notary	Signature of Grantor	Signature of Notary	Signature of Grantee
	RACHEL FRANCOZ (MITTELMAN) NOTARY PUBLIC, STATE OF NEW YORK No. 01MI6306050 Qualified in Kings County Commission Expires June 16, 2022		JUSTIN F STENERSON NOTARY PUBLIC, STATE OF NEW YORK Registration No. 02ST6383061 Qualified in Ulster County Commission Expires November 13, 2022



Department of Taxation and Finance

**Combined Real Estate Transfer Tax Return,
Credit Line Mortgage Certificate, and
Certification of Exemption from the
Payment of Estimated Personal Income
Tax for the Conveyance of Real Property
Located in New York City**

See Form TP-584-NYC-1, Instructions for Form TP-584-NYC, before completing this form. Print or type.

Schedule A – Information relating to conveyance

Grantor/Transferor <input type="checkbox"/> Individual <input type="checkbox"/> Corporation <input type="checkbox"/> Partnership <input type="checkbox"/> Estate/Trust <input type="checkbox"/> Single member LLC <input checked="" type="checkbox"/> Multi-member LLC <input type="checkbox"/> Other	Name (if individual, last, first, middle initial) (<input type="checkbox"/> mark an X if more than one grantor) FLUSHING & LITTLE NASSAU LLC	Social Security number (SSN) _____
	Mailing address 266 BROADWAY, SUITE 301	SSN _____
	City State ZIP code BROOKLYN NY 11211	Employer identification number (EIN) 85 1135749
	Single member's name if grantor is a single member LLC (see instructions)	Single member EIN or SSN _____
	Grantee/Transferee <input type="checkbox"/> Individual <input type="checkbox"/> Corporation <input type="checkbox"/> Partnership <input type="checkbox"/> Estate/Trust <input type="checkbox"/> Single member LLC <input type="checkbox"/> Multi-member LLC <input checked="" type="checkbox"/> Other	
Mailing address ENVIRONMENTAL CONSERVATION 625 BROADWAY		SSN _____
City State ZIP code ALBANY NY 12233		EIN 99 9999999
Single member's name if grantee is a single member LLC (see instructions)		Single member EIN or SSN _____

Location and description of property conveyed

Tax map designation – Section, block & lot (include dots and dashes)	SWIS code (six digits)	Street address	City, town, or village	County
3 - 1884 - 40	650000	376 FLUSHING AVENUE	NEW YORK	BROOKLYN / KINGS

Type of property conveyed (mark an X in applicable box)

1 <input type="checkbox"/> One- to three-family house 2 <input type="checkbox"/> Residential cooperative 3 <input type="checkbox"/> Residential condominium 4 <input type="checkbox"/> Vacant land 5 <input type="checkbox"/> Commercial/Industrial	6 <input type="checkbox"/> Apartment building 7 <input type="checkbox"/> Office building 8 <input type="checkbox"/> Four-family dwelling 9 <input checked="" type="checkbox"/> Other MULTIPLE PROPERTIES	Date of conveyance 10 27 2020 month day year <input type="checkbox"/> Contract executed on or before April 1, 2019 (see instructions)	Percentage of real property conveyed which is residential real property _____% (see instructions)
---	---	--	---

Condition of conveyance (mark all that apply)

a. <input checked="" type="checkbox"/> Conveyance of fee interest b. <input type="checkbox"/> Acquisition of a controlling interest (state percentage acquired _____%) c. <input type="checkbox"/> Transfer of a controlling interest (state percentage transferred _____%) d. <input type="checkbox"/> Conveyance to cooperative housing corporation e. <input type="checkbox"/> Conveyance pursuant to or in lieu of foreclosure or enforcement of security interest (attach Form TP-584.1, Schedule E)	f. <input type="checkbox"/> Conveyance which consists of a mere change of identity or form of ownership or organization (attach Form TP-584.1, Schedule F) g. <input type="checkbox"/> Conveyance for which credit for tax previously paid will be claimed (attach Form TP-584.1, Schedule G) h. <input type="checkbox"/> Conveyance of cooperative apartment(s) i. <input type="checkbox"/> Syndication j. <input type="checkbox"/> Conveyance of air rights or development rights k. <input type="checkbox"/> Contract assignment	l. <input type="checkbox"/> Option assignment or surrender m. <input type="checkbox"/> Leasehold assignment or surrender n. <input type="checkbox"/> Leasehold grant o. <input checked="" type="checkbox"/> Conveyance of an easement p. <input type="checkbox"/> Conveyance for which exemption from transfer tax claimed (complete Schedule B, Part 4) q. <input type="checkbox"/> Conveyance of property partly within and partly outside the state r. <input type="checkbox"/> Conveyance pursuant to divorce or separation s. <input type="checkbox"/> Other (describe) _____
---	--	---

For recording officer's use	Amount received	Date received	Transaction number
	Schedule B, Part 1 \$ _____		
	Schedule B, Part 2 \$ _____		
	Schedule B, Part 3 \$ _____		

TP - 584 Location and description of property conveyed

ATTACHMENT

Tax map designation			Address	City/village	Town	County
Section	Block	Lot				
3	1884	48	378 FLUSHING AVENUE	NEW YORK		BROOKLYN / KINGS

Schedule B – Real estate transfer tax return (Tax Law, Article 31)

Part 1 – Computation of tax due (in addition to the tax on line 4, you must compute the tax on lines 5a and 5b, if applicable)

1	Enter amount of consideration for the conveyance (if you are claiming a total exemption from tax, mark the exemption claimed box, enter consideration and proceed to Part 4) <input type="checkbox"/> Exemption claimed	1.	0 00
2	Continuing lien deduction (see instructions if property is taken subject to mortgage or lien)	2.	0 00
3	Taxable consideration (subtract line 2 from line 1)	3.	0 00
4	Tax: \$2 for each \$500, or fractional part thereof, of consideration on line 3	4.	0 00
5a	Tax: \$1.25 for each \$500, or fractional part thereof, of consideration for the conveyance of residential real property located in New York City if the amount on line 3 is \$3 million or more (see instructions)	5a.	0 00
5b	Tax: \$1.25 for each \$500, or fractional part thereof, of consideration for the conveyance of property located in New York City other than residential real property, if the amount on line 1 is \$2 million or more (see instructions)	5b.	0 00
6	Total before credit(s) claimed (add lines 4, 5a, and 5b)	6.	0 00
7	Amount of credit claimed for tax previously paid (see instructions and attach Form TP-584.1, Schedule G)	7.	0 00
8	Total tax due* (subtract line 7 from line 6)	8.	0 00

Part 2 – Computation of additional tax due on the conveyance of residential real property for \$1 million or more (see instructions)

1	Enter amount of consideration for conveyance (from Part 1, line 1)	1.	
2	Taxable consideration (multiply line 1 by the percentage of the premises which is residential real property, as shown in Schedule A)	2.	
3	Total additional transfer tax due* (multiply line 2 by 1% (.01))	3.	0 00

Part 3 – Computation of supplemental tax due on the conveyance of residential real property, or interest therein, located in New York City, for \$2 million or more (see instructions)

1	Enter amount of consideration for conveyance (from Part 1, line 1)	1.	
2	Taxable consideration (multiply line 1 by the percentage of the premises which is residential real property, as shown in Schedule A)	2.	
3	Total supplemental transfer tax due* (multiply line 2 by tax rate, see instruction for rates)	3.	0 00

* The total tax (from Part 1, line 8; Part 2, line 3; and Part 3, line 3 above) is due within 15 days from the date of conveyance.

Part 4 – Explanation of exemption claimed on Part 1, line 1 (mark any boxes that apply)

The conveyance of real property is exempt from the real estate transfer tax for the following reason:

- a. Conveyance is to the United Nations, the United States of America, New York State, or any of their instrumentalities, agencies, or political subdivisions (or any public corporation, including a public corporation created pursuant to agreement or compact with another state or Canada)..... a
- b. Conveyance is to secure a debt or other obligation..... b
- c. Conveyance is without additional consideration to confirm, correct, modify, or supplement a prior conveyance..... c
- d. Conveyance of real property is without consideration and not in connection with a sale, including conveyances conveying realty as bona fide gifts..... d
- e. Conveyance is given in connection with a tax sale..... e
- f. Conveyance is a mere change of identity or form of ownership or organization where there is no change in beneficial ownership. (This exemption cannot be claimed for a conveyance to a cooperative housing corporation of real property comprising the cooperative dwelling or dwellings.) Attach Form TP-584.1, Schedule F..... f
- g. Conveyance consists of deed of partition..... g
- h. Conveyance is given pursuant to the federal Bankruptcy Act..... h
- i. Conveyance consists of the execution of a contract to sell real property, without the use or occupancy of such property, or the granting of an option to purchase real property, without the use or occupancy of such property..... i
- j. Conveyance of an option or contract to purchase real property with the use or occupancy of such property where the consideration is less than \$200,000 and such property was used solely by the grantor as the grantor's personal residence and consists of a one-, two-, or three-family house, an individual residential condominium unit, or the sale of stock in a cooperative housing corporation in connection with the grant or transfer of a proprietary leasehold covering an individual residential cooperative apartment..... j
- k. Conveyance is not a conveyance within the meaning of Tax Law, Article 31, § 1401(e) (attach documents supporting such claim)..... k

Schedule C – Credit Line Mortgage Certificate (Tax Law, Article 11)

Complete the following only if the interest being transferred is a fee simple interest.

I (we) certify that: (mark an X in the appropriate box)



1. The real property being sold or transferred is not subject to an outstanding credit line mortgage.
2. The real property being sold or transferred is subject to an outstanding credit line mortgage. However, an exemption from the tax is claimed for the following reason:
 - a The transfer of real property is a transfer of a fee simple interest to a person or persons who held a fee simple interest in the real property (whether as a joint tenant, a tenant in common or otherwise) immediately before the transfer.
 - b The transfer of real property is (A) to a person or persons related by blood, marriage or adoption to the original obligor or to one or more of the original obligors or (B) to a person or entity where 50% or more of the beneficial interest in such real property after the transfer is held by the transferor or such related person or persons (as in the case of a transfer to a trustee for the benefit of a minor or the transfer to a trust for the benefit of the transferor).
 - c The transfer of real property is a transfer to a trustee in bankruptcy, a receiver, assignee, or other officer of a court.
 - d The maximum principal amount secured by the credit line mortgage is \$3,000,000 or more, and the real property being sold or transferred is **not** principally improved nor will it be improved by a one- to six-family owner-occupied residence or dwelling.

Note: for purposes of determining whether the maximum principal amount secured is \$3,000,000 or more as described above, the amounts secured by two or more credit line mortgages may be aggregated under certain circumstances. See TSB-M-96(6)-R for more information regarding these aggregation requirements.

- e Other (attach detailed explanation).
3. The real property being transferred is presently subject to an outstanding credit line mortgage. However, no tax is due for the following reason:
 - a A certificate of discharge of the credit line mortgage is being offered at the time of recording the deed.
 - b A check has been drawn payable for transmission to the credit line mortgagee or his agent for the balance due, and a satisfaction of such mortgage will be recorded as soon as it is available.
4. The real property being transferred is subject to an outstanding credit line mortgage recorded in _____ (insert liber and page or reel or other identification of the mortgage). The maximum principal amount of debt or obligation secured by the mortgage is _____. No exemption from tax is claimed and the tax of _____ is being paid herewith. (Make check payable to county clerk where deed will be recorded or, if the recording is to take place in New York City but not in Richmond County, make check payable to the **NYC Department of Finance**.)

Signature (both the grantor(s) and grantee(s) must sign)



The undersigned certify that the above information contained in schedules A, B, and C, including any return, certification, schedule, or attachment, is to the best of his/her knowledge, true and complete, and authorize the person(s) submitting such form on their behalf to receive a copy for purposes of recording the deed or other instrument effecting the conveyance.

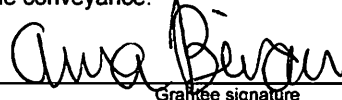 _____ Grantor signature	President _____ Title	 _____ Grantee signature	_____ Title
Grantor signature	Title	Grantee signature	Title

Reminder: Did you complete all of the required information in Schedules A, B, and C? Are you required to complete Schedule D? If you marked e, f, or g in Schedule A, did you complete Form TP-584.1? If the contract was executed prior to April 1, 2019, did you attach the necessary verification? Have you attached your check(s) made payable to the county clerk where recording will take place or, if the recording is in the New York City boroughs of Manhattan, Bronx, Brooklyn, or Queens, to the **NYC Department of Finance**? If no recording is required, send this return and your check(s), made payable to the **NYS Department of Taxation and Finance**, directly to the NYS Tax Department, RETT Return Processing, PO Box 5045, Albany NY 12205-0045. If not using U.S. Mail, see Publication 55, *Designated Private Delivery Services*.

Signature (both the grantor(s) and grantee(s) must sign)

The undersigned certify that the above information contained in schedules A, B, and C, including any return, certification, schedule, or attachment, is to the best of his/her knowledge, true and complete, and authorize the person(s) submitting such form on their behalf to receive a copy for purposes of recording the deed or other instrument effecting the conveyance.

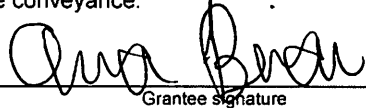 _____ Grantor signature	<i>President</i> _____ Title	 _____ Grantee signature	_____ Title
_____ Grantor signature	_____ Title	_____ Grantee signature	_____ Title

2020102700078301

Schedule D – Certification of exemption from the payment of estimated personal income tax (Tax Law, Article 22, § 663)

Complete the following only if a fee simple interest or a cooperative unit is being transferred by an individual or estate or trust.

If the property is being conveyed by a referee pursuant to a foreclosure proceeding, proceed to Part 2, mark the second box under Exemptions for nonresident transferor(s)/seller(s), and sign at bottom.

Part 1 – New York State residents

If you are a New York State resident transferor(s)/seller(s) listed in Form TP-584-NYC, Schedule A (or an attachment to Form TP-584-NYC), you must sign the certification below. If one or more transferors/sellers of the real property or cooperative unit is a resident of New York State, each resident transferor/seller must sign in the space provided. If more space is needed, photocopy this Schedule D and submit as many schedules as necessary to accommodate all resident transferors/sellers.

Certification of resident transferor(s)/seller(s)

This is to certify that at the time of the sale or transfer of the real property or cooperative unit, the transferor(s)/seller(s) as signed below was a resident of New York State, and therefore is not required to pay estimated personal income tax under Tax Law, § 663(a) upon the sale or transfer of this real property or cooperative unit.

Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date

Note: A resident of New York State may still be required to pay estimated tax under Tax Law, § 685(c), but not as a condition of recording a deed.

Part 2 – Nonresidents of New York State

If you are a nonresident of New York State listed as a transferor/seller in Form TP-584-NYC, Schedule A (or an attachment to Form TP-584-NYC) but are not required to pay estimated personal income tax because one of the exemptions below applies under Tax Law, § 663(c), mark the box of the appropriate exemption below. If any one of the exemptions below applies to the transferor(s)/seller(s), that transferor(s)/seller(s) is not required to pay estimated personal income tax to New York State under Tax Law, § 663. Each nonresident transferor/seller who qualifies under one of the exemptions below must sign in the space provided. If more space is needed, photocopy this Schedule D and submit as many schedules as necessary to accommodate all nonresident transferors/sellers.

If none of these exemption statements apply, you must complete Form IT-2663, *Nonresident Real Property Estimated Income Tax Payment Form*, or Form IT-2664, *Nonresident Cooperative Unit Estimated Income Tax Payment Form*. For more information, see *Payment of estimated personal income tax*, on Form TP-584-NYC-I, page 1.

Exemption for nonresident transferor(s)/seller(s)

This is to certify that at the time of the sale or transfer of the real property or cooperative unit, the transferor(s)/seller(s) (grantor) of this real property or cooperative unit was a nonresident of New York State, but is not required to pay estimated personal income tax under Tax Law, § 663 due to one of the following exemptions:

- The real property or cooperative unit being sold or transferred qualifies in total as the transferor's/seller's principal residence (within the meaning of Internal Revenue Code, section 121) from _____ Date to _____ Date (see instructions).
- The transferor/seller is a mortgagor conveying the mortgaged property to a mortgagee in foreclosure, or in lieu of foreclosure with no additional consideration.
- The transferor or transferee is an agency or authority of the United States of America, an agency or authority of the state of New York, the Federal National Mortgage Association, the Federal Home Loan Mortgage Corporation, the Government National Mortgage Association, or a private mortgage insurance company.

Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date

Certification of resident transferor(s)/seller(s)

This is to certify that at the time of the sale or transfer of the real property or cooperative unit, the transferor(s)/seller(s) as signed below was a resident of New York State, and therefore is not required to pay estimated personal income tax under Tax Law, section 663(a) upon the sale or transfer of this real property or cooperative unit.

Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date

Exemption for nonresident transferor(s)/seller(s)

This is to certify that at the time of the sale or transfer of the real property or cooperative unit, the transferor(s)/seller(s) (grantor) of this real property or cooperative unit was a nonresident of New York State, but is not required to pay estimated personal income tax under Tax Law, section 663 due to one of the following exemptions:

- The real property or cooperative unit being sold or transferred qualifies in total as the transferor's/seller's principal residence (within the meaning of Internal Revenue Code, section 121) from _____ Date to _____ Date (see instructions).
- The transferor/seller is a mortgagor conveying the mortgaged property to a mortgagee in foreclosure, or in lieu of foreclosure with no additional consideration.
- The transferor or transferee is an agency or authority of the United States of America, an agency or authority of the state of New York, the Federal National Mortgage Association, the Federal Home Loan Mortgage Corporation, the Government National Mortgage Association, or a private mortgage insurance company.

Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date
Signature	Print full name	Date



Real Estate Transfer Tax Return Schedule of Apportionment

For office use only

Attach this form to Form TP-584-NYC for the conveyance of multiple real properties located in New York City (NYC).

Print or type

Name of Grantor (as shown on Form TP-584-NYC) FLUSHING & LITTLE NASSAU LLC		Grantor's Social Security number or EIN 85-1135749	
Name of Grantee (as shown on Form TP-584-NYC) NEW YORK STATE DEPARTMENT OF		Grantee's Social Security number or EIN 99-9999999	
Location of property conveyed (as shown on Form TP-584-NYC; if multiple locations, list full address on each line in Schedule A, B, and C, column A) 376 FLUSHING AVENUE BROOKLYN NEW YORK			
Number of residential real properties located in NYC being conveyed 0	Number of real properties located in NYC other than residential real property being conveyed 2	Number of real properties located outside of NYC being conveyed 0	Total number of real properties being conveyed 2

Schedule A – Computation of additional base tax (Form TP-584-NYC, Schedule B, Part 1, lines 5a and 5b)

A Location of each real property located in NYC conveyed (if multiple units located in the same building list each unit separately)	B Portion of consideration (from Form TP-584-NYC, Schedule B, Part 1, line 1) allocated to each property	C Tax: \$1.25 for each \$500, or fractional part thereof, on each part thereof, on each residential property where the consideration in column B is \$3 million or more	D Tax: \$1.25 for each \$500, or fractional part thereof, on other than residential property where the consideration in column B is \$2 million or more
3 - 1884 - 40	0.00	0.00	0.00
3 - 1884 - 48	0.00	0.00	0.00
Total of column C. Enter here and on Form TP-584-NYC, Schedule B, Part 1, line 5a.		\$0.00	
Total of column D. Enter here and on Form TP-584-NYC, Schedule B, Part 1, line 5b.			\$0.00

Schedule B – Computation of additional tax (Form TP-584-NYC, Schedule B, Part 2, line 3)

A Location of each real property conveyed (if multiple units located in the same building list each unit separately)	B Portion of consideration (from Form TP-584-NYC, Schedule B, Part 1, line 1) allocated to each property	C Percentage of each premises which is residential real property	D Multiply the amount shown in column B by the percentage shown in column C.	E If consideration shown in column B is \$1 million or more, multiply column D by 1% (.01)
3 - 1884 - 40	0.00	0%	0.00	0.00
3 - 1884 - 48	0.00	0%	0.00	0.00
Total of column E. Enter here and on Form TP-584-NYC, Schedule B, Part 2, line 3.				\$0.00

Schedule C – Computation of supplemental tax (Form TP-584-NYC, Schedule B, part 3, line 3)

A Location of each real property located in NYC conveyed (if multiple units located in the same building list each unit separately)	B Portion of consideration (from Form TP-584-NYC, Schedule B, Part 1, line 1) allocated to each property	C Percentage of each premises which is residential real property	D Multiply the amount shown in column B by the percentage shown in column C.	E If consideration shown in column B is \$2 million or more, multiply column D by the applicable supplemental tax rate that corresponds with the consideration shown in column B
3 - 1884 - 40	0.00	0%	0.00	0.00
3 - 1884 - 48	0.00	0%	0.00	0.00
Total of column E. Enter here and on Form TP-584-NYC, Schedule B, Part 3, line 3.				\$0.00

ATTACHMENT D
**Monitoring Well Construction and Purge
Logs**

Monitoring Well Construction Logs



Mueser Rutledge Consulting Engineers

14 Penn Plaza - 225 West 34th Street
New York, NY 10122
T: 917 339-9300 F: 917 339-9400
www.mrce.com


PIEZOMETER RECORD

PIEZOMETER OR BORING NO. MR-1P
SHEET 3 OF 4
FILE NO. 12904
INSTALLATION DATE 01/27/2017
RES ENGR. R. TERRY

PROJECT: 378 FLUSHING
LOCATION: BROOKLYN, NEW YORK
PIEZOMETER LOCATION: BORING MR-1P

U. DASGUPTA
(5.4.18)

SEE SKETCH ON BACK

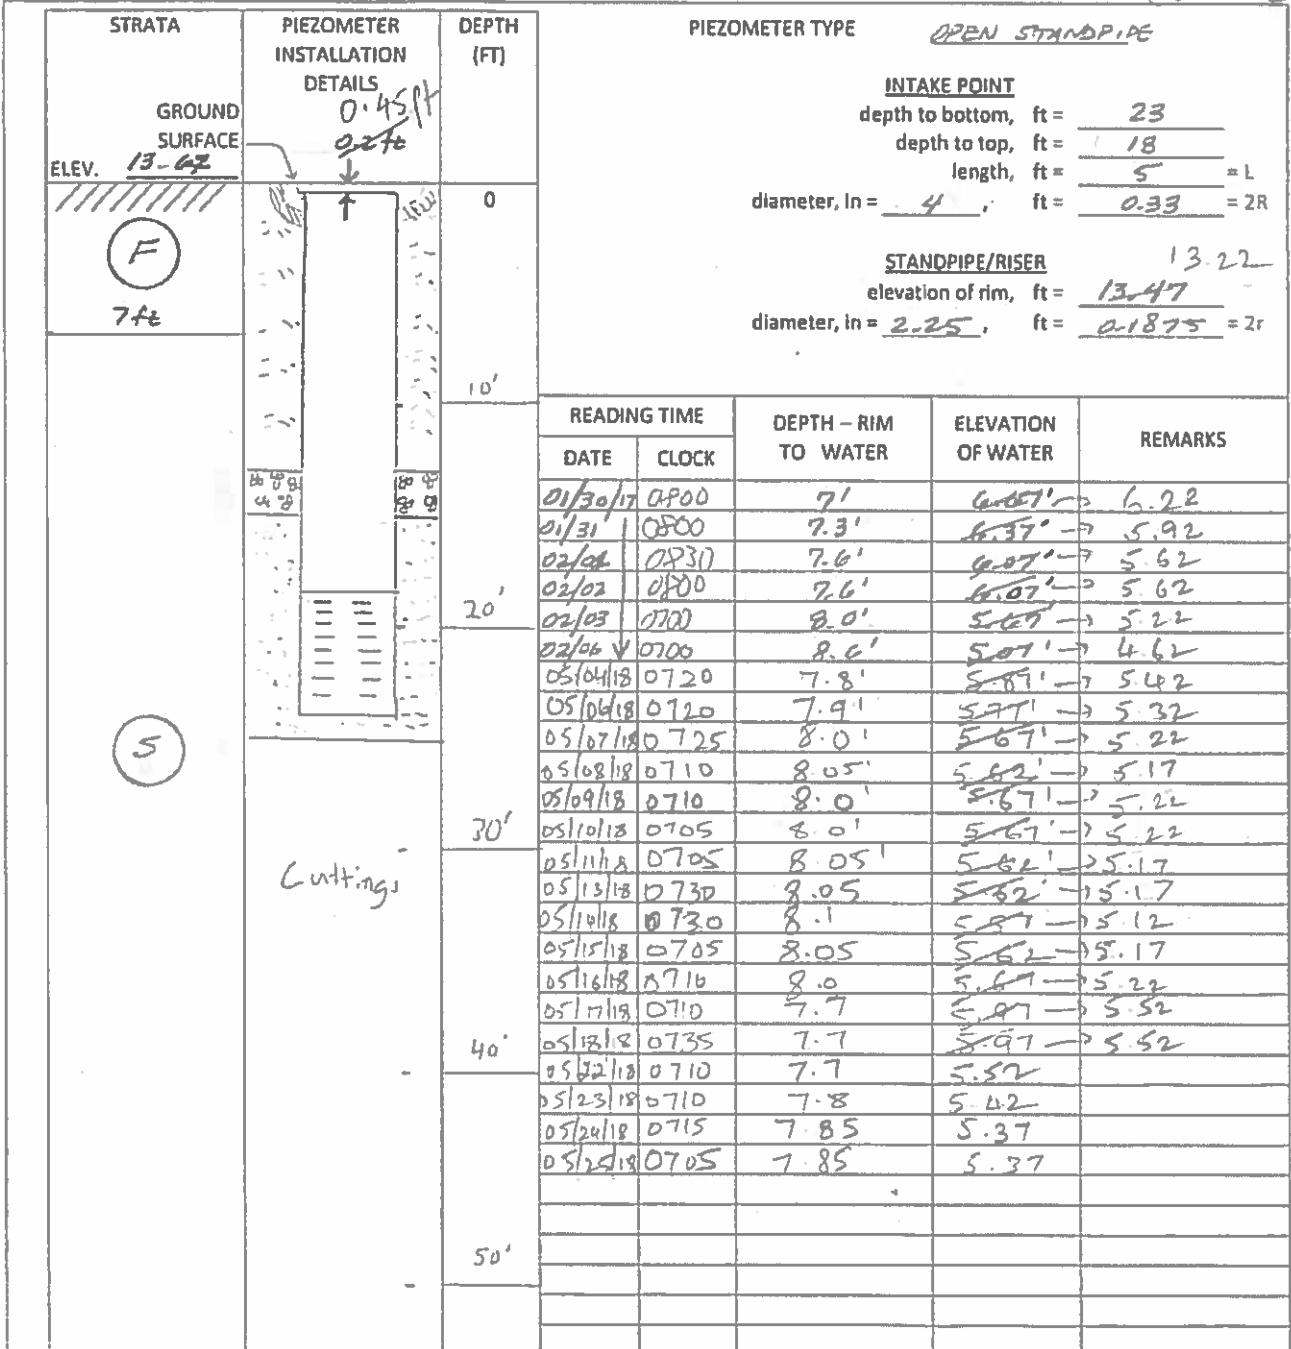

SAND
 GRAVEL

BENTONITE
 GROUT

GROUND SURFACE ELEV. 13.67

PIEZOMETER NO. MR-1P



ENVIRONMENTAL BUSINESS CONSULTANTS

GROUNDWATER MONITORING WELL

CONSTRUCTION LOG

MW2

Monitoring Well No.: MW2

Project: Former NY Cleaning and Dyeing
376-378 Flushing Avenue, Brooklyn, NY

Depth to Groundwater: 9.28ft Date: 6/21/2019

Installation Depth: 28 ft

Survey Point Elevation: N/A

Installation Date: June 20, 2019


Drilling Contractor: Big Apple

Installation Method: Geoprobe - Hollow Stem Auger

Water Removed During Development: N/A

Hydrogeologist: Tenzin Choeying

Company Name: EBC

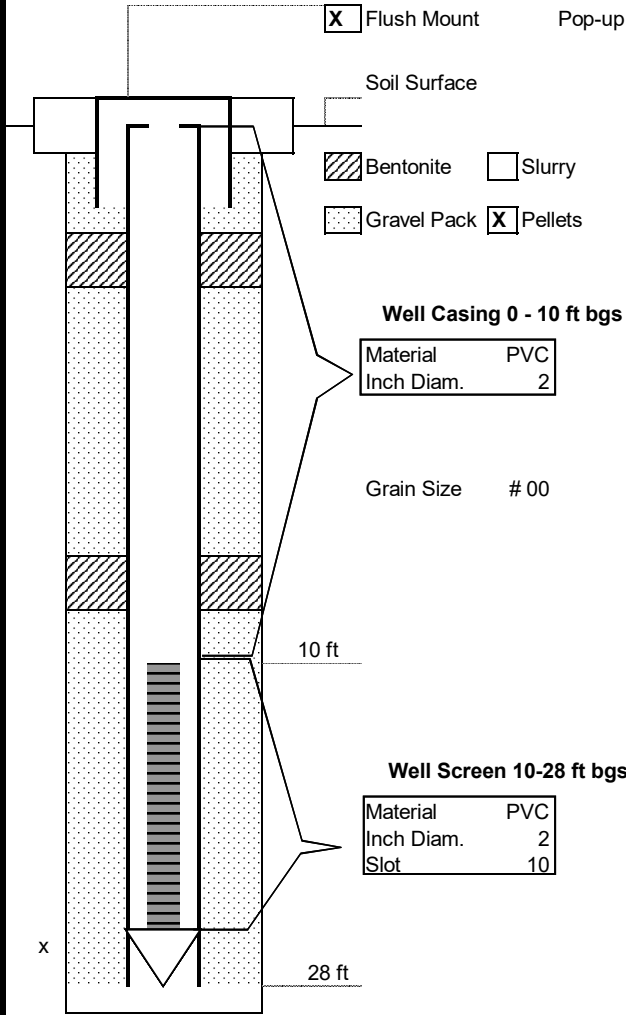


Note: Drawing is not to scale.
Depths are given in feet below land surface.

GROUNDWATER MONITORING WELL

CONSTRUCTION LOG

Well at 755 Kent Avenue

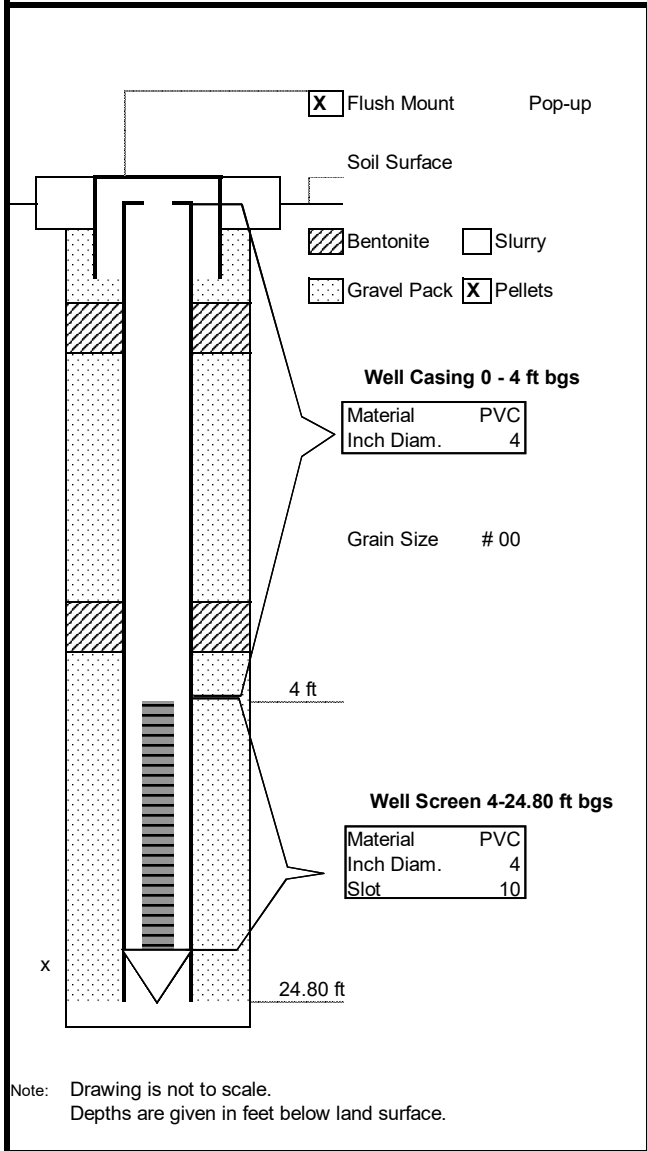

Monitoring Well No.: Well @ 755 Kent Avenue
75 feet in from the corner of Kent Ave and Flushing Avenue

Project: Former NY Cleaning and Dyeing
376-378 Flushing Avenue, Brooklyn, NY

Depth to Groundwater: 10.30 ft Date: 6/21/2019

Installation Depth: 24.80 ft

Survey Point Elevation: N/A

Installation Date: 6/19/2019

Drilling Contractor: Big Apple

Installation Method: Geoprobe - Hollow Stem Auger

Water Removed During Development: N/A

Hydrogeologist: Tenzin Choeying

Company Name: EBC

Note: Drawing is not to scale.
Depths are given in feet below land surface.

Monitoring Well Purge Logs



ENVIRONMENTAL BUSINESS CONSULTANTS

GROUNDWATER PURGE / SAMPLE LOGS
FORMER NY CLEANING AND DYEING SITE

Well I.D.: M121

Well Depth (from TOC): 22.8 ft

Static Water Level (from TOC): 10.6 ft

Height of Water in Well: 12.2 ft

Gallons of Water per Well Volume: _____

Flow Rate: 400ml/min.

Date: 6/25/2019

Equipment: Peristaltic Pump, U-52 Horiba

Time	Pump Rate	Gal. Removed	pH	Cond. (mS/cm)	Temp. (deg. C)	DO (mg/L)	ORP (mV)	Turbidity (NTU)	TDS	Comments
01.23	400ml/min	2.0	6.40	4.76	19.59	0.69	-35	8.0		light brown, turbid
01.29		0.5	6.90	4.63	16.27	0.0	-121	7.2		Clear
01.37	Y	1.7	6.95	4.74	15.97	0.0	-140	0.0		Clear
01.43		2.5	6.94	4.97	15.92	0.0	-144	0.2		Clear
01.49		3.3	6.93	5.13	15.84	0.0	-147	14.3		Clear
01.55		4.8	6.92	5.19	15.79	0.0	-148	9.0		Clear
02.05		5.7	6.92	5.25	15.85	0.0	-149	1.6		Clear / sampled

Note 400 ml = 0.11 gallons



ENVIRONMENTAL BUSINESS CONSULTANTS

GROUNDWATER PURGE / SAMPLE LOGS
FORMER NY CLEANING AND DYEING SITE

Well I.D.: MW2

Date: 6/25/2019

Well Depth (from TOC): 28.4 ft

Equipment: Peristaltic Pump, U-52 Horiba

Static Water Level (from TOC): 11.15 ft

Height of Water in Well: 17.25 ft

Gallons of Water per Well Volume: _____

Flow Rate: 400ml/min.

Time	Pump Rate	Gal. Removed	pH	Cond. (mS/cm)	Temp. (deg. C)	DO (mg/L)	ORP (mV)	Turbidity (NTU)	TDS	Comments
2.45	400ml/min	0.0	8.41	0.335	20.66	9.03	-89	0.0		Brown, muddy, turbid
2.48	↓	0.3	9.0	0.320	16.81	6.72	-149	0.0		Brown, muddy, turbid
2.55	↓	1.5	9.11	0.315	17.18	0.0	-198	0.0		Brown, muddy, turbid
2.59		2.0	9.17	0.359	18.06	0.0	-219	850		Brown, muddy, turbid
3.05		3.0	9.04	0.527	19.38	0.0	-226	0.0		Brown, muddy turbid
3.14		4.1	8.99	0.445	20.67	0.0	-229	800		Brown, muddy turbid
3.30		5.2	8.89	0.831	20.85	0.0	-135	0.0		Brown, muddy, light turbid
3.36		6.0	8.83	0.925	20.47	0.0	-234	800		light turbid
3.44		6.5	8.73	1.08	20.58	0.0	-232	800		light turbid
3.55		7.2	8.60	1.14	20.60	0.0	-229	800		light turbid
3.58		8.0	8.55	1.17	20.69	0.0	-228	0.0		light turbid / samples

Note 400 ml = 0.11 gallons



GROUNDWATER PURGE / SAMPLE LOGS
376 Flushing Avenue, Brooklyn, NY

ENVIRONMENTAL BUSINESS CONSULTANTS

Well I.D.: MW1

Date: 9/4/2020

Well Depth (from TOC): 22.80'

Equipment: Peristaltic pump, horiba

Static Water Level (from TOC): 12.24'

Height of Water in Well: 10.56

Gallons of Water per Well Volume: 1.72

Flow Rate:

Time	Pump Rate	Gal. Removed	pH	Cond. (mS/cm)	Temp. (deg. F)	DO (mg/L)	ORP (mV)	Turbidity (NTU)	TDS	Comments
10:15	380ml/min	0.0	6.94	3.93	20.25	4.73	-149	13.7		Clear
10:24		1.0	7.07	3.30	18.50	1.50	-187	13.6		clear
10:33		2.0	7.13	3.01	18.68	1.35	-197	7.6		Clear
10:42		3.0	7.14	2.82	18.67	1.36	-201	6.8		clear
10:51		4.0	7.14	2.63	18.69	1.32	-202	6.0		clear
11:00		5.0	7.14	2.71	18.65	1.50	-202	6.0		clear
11:09		6.0	7.14	2.70	18.65	1.29	-203	5.7		clear
11:18		7.0	7.14	2.67	18.65	1.27	-201	5.7		Clear
11:27		8.0	7.14	2.82	18.65	1.20	-201	5.7		Clear
11:36		9.0	7.14	2.63	18.65	1.19	-201	5.9		clear

Note 400 ml = 0.11 gallons

Sample @ 11:37 + Gw Duplicate



ENVIRONMENTAL BUSINESS CONSULTANTS

GROUNDWATER PURGE / SAMPLE LOGS

376 Flushing Avenue, Brooklyn, NY

Well I.D.: MW2

Date: 9/4/2020

Well Depth (from TOC): 28.60'

Equipment: Peristaltic pump, horiba

Static Water Level (from TOC): 13.50'

Height of Water in Well: 15.1

Gallons of Water per Well Volume: 2.46

Flow Rate:

Time	Pump Rate	Gal. Removed	pH	Cond. (mS/cm)	Temp. (deg. F)	DO (mg/L)	ORP (mV)	Turbidity (NTU)	TDS	Comments
8:29	380 ml/min	0.0	7.52	2.49	21.3	5.31	-205	191		Black / silty
8:48		2.0	7.06	2.68	18.44	1.70	-173	700		Light turbidity, brown
9:07		4.0	6.90	2.73	18.03	1.73	-147	437		-11-
9:26		6.0	7.01	2.62	17.66	1.16	-150	450		-11-
9:45		8.0	6.96	2.52	17.59	1.09	-144	525		-11-
9:54		9.0	6.92	2.46	17.57	1.01	-138	493		-11-
10:00		9.5	6.93	2.41	17.56	0.96	-141	301		-11-
10:03		10.0	6.93	2.34	17.56	0.97	-142	149		-11-

Note 400 ml = 0.11 gallons

Sample @ 10:04 + ms/mSD

ATTACHMENT E
Field Sampling Plan

**FIELD SAMPLING PLAN
FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
BROOKLYN, NEW YORK 11205**

Prepared on behalf of:

Rose Castle Redevelopment II LLC
266 Broadway, Suite 301
Brooklyn, NY 11211

Prepared by:



ENVIRONMENTAL BUSINESS CONSULTANTS

1808 MIDDLE COUNTRY ROAD

RIDGE, NY 11961

TABLE OF CONTENTS
376-378 FLUSHING AVENUE, BROOKLYN, NEW YORK
FIELD SAMPLING PLAN

1.0 INTRODUCTION 1
 1.1 General 1
2.0 SUMMARY OF REMEDIAL ACTIONS 3
 2.1 Remedial Actions Taken 3
 2.2 Remedial Action Objectives 4
 2.3 Remaining Contamination 5
 2.3.1 Groundwater 5
 2.4 Engineering Controls 5
 2.4.1 Monitoring Wells associated with Monitored Bulk Attenuation 5
3.1 Groundwater Monitoring and Sampling 6
 3.1.1 Groundwater Monitoring 6
 3.1.2 Sampling Procedure 6
3.2 Standard Protocol 7

1.0 INTRODUCTION

1.1 General

This Field Sampling Plan is a part of the Site Management Plan for the Site located at 376-378 Flushing Avenue, Brooklyn, New York (hereinafter referred to as the “Site”).

Rose Castle Redevelopment II, LLC (the Volunteer) entered into a Brownfield Cleanup Agreement with the New York State Department of Environmental Conservation (NYSDEC) in February 2, 2018 (and executed February 23, 2018) to remediate a 0.902-acre parcel located in Brooklyn, Kings County, New York (Site No. C224185). The Site was remediated to Restricted Residential Use and will be used for restricted residential use.

The Site address is 376-378 Flushing Avenue, Brooklyn, New York 11205. The Site is located on the southwest side of the intersection of Flushing Avenue and Franklin Avenue in Brooklyn, New York. The Site is designated as Block 1884 Lots 40 and 48 on the Brooklyn Tax Map. The Site consists of two tax parcels: Lot 40 is a rectangular-shaped lot extending from Flushing Avenue to Little Nassau Street, approximately 13,250 square feet (ft²) in size. Lot 48 is an irregular shaped lot with approximately 194 linear feet of street frontage along Flushing Avenue and 103 linear feet of street frontage along Franklin Avenue and is approximately 26,057 ft² in size.

The Site is bordered by Flushing Avenue to the north; Franklin Avenue and a three-story commercial building to the east; Little Nassau Street to the south; and residential apartment building to the west. The properties adjoining the Site and in the neighborhood surrounding the Site primarily include multi-family residential buildings with mixed-used properties (residential with first floor retail) along main artery corridors such as Flushing Avenue. Commercial/industrial properties, equipment yards, and warehouses are interspersed throughout the surrounding area to the south and west; and public institutions such as parks, schools, churches, and playgrounds are inter-dispersed throughout the area within a quarter mile of the Site in all directions.

After completion of the remedial work, some contamination was left at this site, which is hereafter referred to as “remaining contamination”. The Site will be limited to Restricted

Residential Use, groundwater use is prohibited, and future excavation will be handled as per the SMP. The Site will undergo continued groundwater monitoring until natural attenuation has been achieved. This Field Sampling Plan (FSP) outlines the necessary methods to monitor the onsite groundwater. This plan provides information on:

- Sampling locations, protocol, and frequency;
- Information on all designed monitoring systems;
- Analytical sampling program requirements;
- Annual inspection and periodic certification.

2.0 SUMMARY OF REMEDIAL ACTIONS

2.1 Remedial Actions Taken

As per the Remedial Action Work Plan accepted in May 2018, the Site has been excavated to a depth of 25 feet below grade. The Site underwent dewatering, which was proposed as a remedy for groundwater remediation. Dewatering activities are expected to continue for the duration of the redevelopment of the Site. There was a total of twenty fuel oil USTs of varying sizes removed from the Site.

Following groundwater sampling in April 6, 2020 from onsite monitoring wells MW-1 and MW-2, the DEC had asked that additional groundwater monitoring be performed on these wells until natural attenuation has been observed. Groundwater monitoring will not be discontinued unless prior written approval is granted by the NYSDEC. In the event that monitoring data indicates that monitoring for natural attenuation may no longer be required, a proposal to discontinue the system will be submitted by the remedial party. Monitoring will continue until permission to discontinue is granted in writing by the NYSDEC. If groundwater contaminant levels become asymptotic at a level that is not acceptable to the NYSDEC, additional source removal, treatment and/or control measures will be evaluated.

2.2 Remedial Action Objectives

The Remedial Action Objectives (RAOs) for the Site as listed in the Decision Document dated May 7, 2018 are as follows:

Groundwater

RAOs for Public Health Protection

- Prevent ingestion of groundwater with contaminant levels exceeding drinking water standards.
- Prevent contact with, or inhalation of, volatiles from contaminated groundwater.

RAOs for Environmental Protection

- Restore ground water aquifer to pre-disposal/pre-release conditions, to the extent practicable.
- Remove the source of ground or surface water contamination.

Soil

RAOs for Public Health Protection

- Prevent ingestion/direct contact with contaminated soil.
- Prevent inhalation of or exposure from contaminants volatilizing from contaminants in soil.

RAOs for Environmental Protection

- Prevent migration of contaminants that would result in groundwater or surface water contamination.

Soil Vapor

RAOs for Public Health Protection

- Mitigate impacts to public health resulting from existing, or the potential for, soil vapor intrusion into buildings at a site.

2.3 Remaining Contamination

2.3.1 Groundwater

VOC concentrations were detected in the groundwater samples from the monitoring wells MW1 and MW2 collected on April 3, 2020, at concentrations above the GQS.

2.4 Engineering Controls

2.4.1 Monitoring Wells associated with Monitored Bulk Attenuation

Groundwater monitoring activities to assess bulk attenuation will continue, as determined by the NYSDEC with consultation with NYSDOH, until residual groundwater concentrations are found to be consistently below ambient water quality standards, the site SCGs, or have become asymptotic at an acceptable level over an extended period. Groundwater samples will be taken from the existing monitoring wells, MW1 and MW2. In the event that monitoring data indicates that monitoring for bulk attenuation may no longer be required, a proposal to discontinue the system will be submitted by the remedial party. Monitoring will continue until permission to discontinue is granted in writing by the NYSDEC. If groundwater contaminant levels become asymptotic at a level that is not acceptable to the NYSDEC, additional source removal, treatment and/or control measures will be evaluated.

3.0 MONITORING PLAN AND SAMPLING PLAN

3.1 Groundwater Monitoring and Sampling

3.1.1 Groundwater Monitoring

Monitoring of groundwater conditions will be performed on a quarterly basis as identified in **Table 1** – Groundwater Monitoring Requirements and Schedule (see below). Modification to the frequency or sampling requirements will require approval from the NYSDEC. A visual inspection of the wells and the observations (e.g., well integrity, etc.) will be noted on the sampling log. The sampling log will serve as the inspection form for the monitoring network. The field sampler is expected to report on the entire site and take immediate action if necessary.

	Analytical Parameters	Schedule
		VOCs (EPA Method 8260B)
Monitoring Well #1	X	Quarterly
Monitoring Well #2	X	Quarterly

3.1.2 Sampling Procedure


Samples will be collected from the existing two (2) off-site monitoring wells. Prior to sampling, the well will be purged of the equivalent of four (4) well volumes. A representative groundwater sample will be collected from each of the two wells using a peristaltic pump and dedicated tubing. Collected samples will be appropriately packaged, placed in coolers. Samples will either be picked up at the Site by a laboratory-dispatched courier at the end of the day or transported back to the EBC office where they will be picked up the following day by the laboratory courier. All samples will be submitted to Phoenix Environmental Laboratories (Phoenix) of 587 East Middle Turnpike, Manchester, CT 06040, a New York State ELAP certified environmental laboratory (ELAP Certification No. 11301). Transport to the laboratory will be through a Phoenix courier under strict chain-of custody documentation. The samples will undergo laboratory analysis of VOCs by EPA Method 8260B. Note that baseline samples will be collected from the two downgradient wells before dewatering begins. Baseline samples from the monitoring wells will be analyzed for VOCs by EPA Method 8260B, 1,4-dioxane by EPA

Method 8260(SIM) and PFAS by EPA Method 537 or ISO 25101. See **Appendix A** for a sample chain of custody.

3.2 Standard Protocol

All sampling activities will be recorded in a field book and will be documented with photos. Other observations (e.g., well integrity, etc.) will be noted on the sampling log. The sampling log will serve as the inspection form for the monitoring network. The field sampler is expected to report on the entire site and take immediate action if necessary.

FIGURES

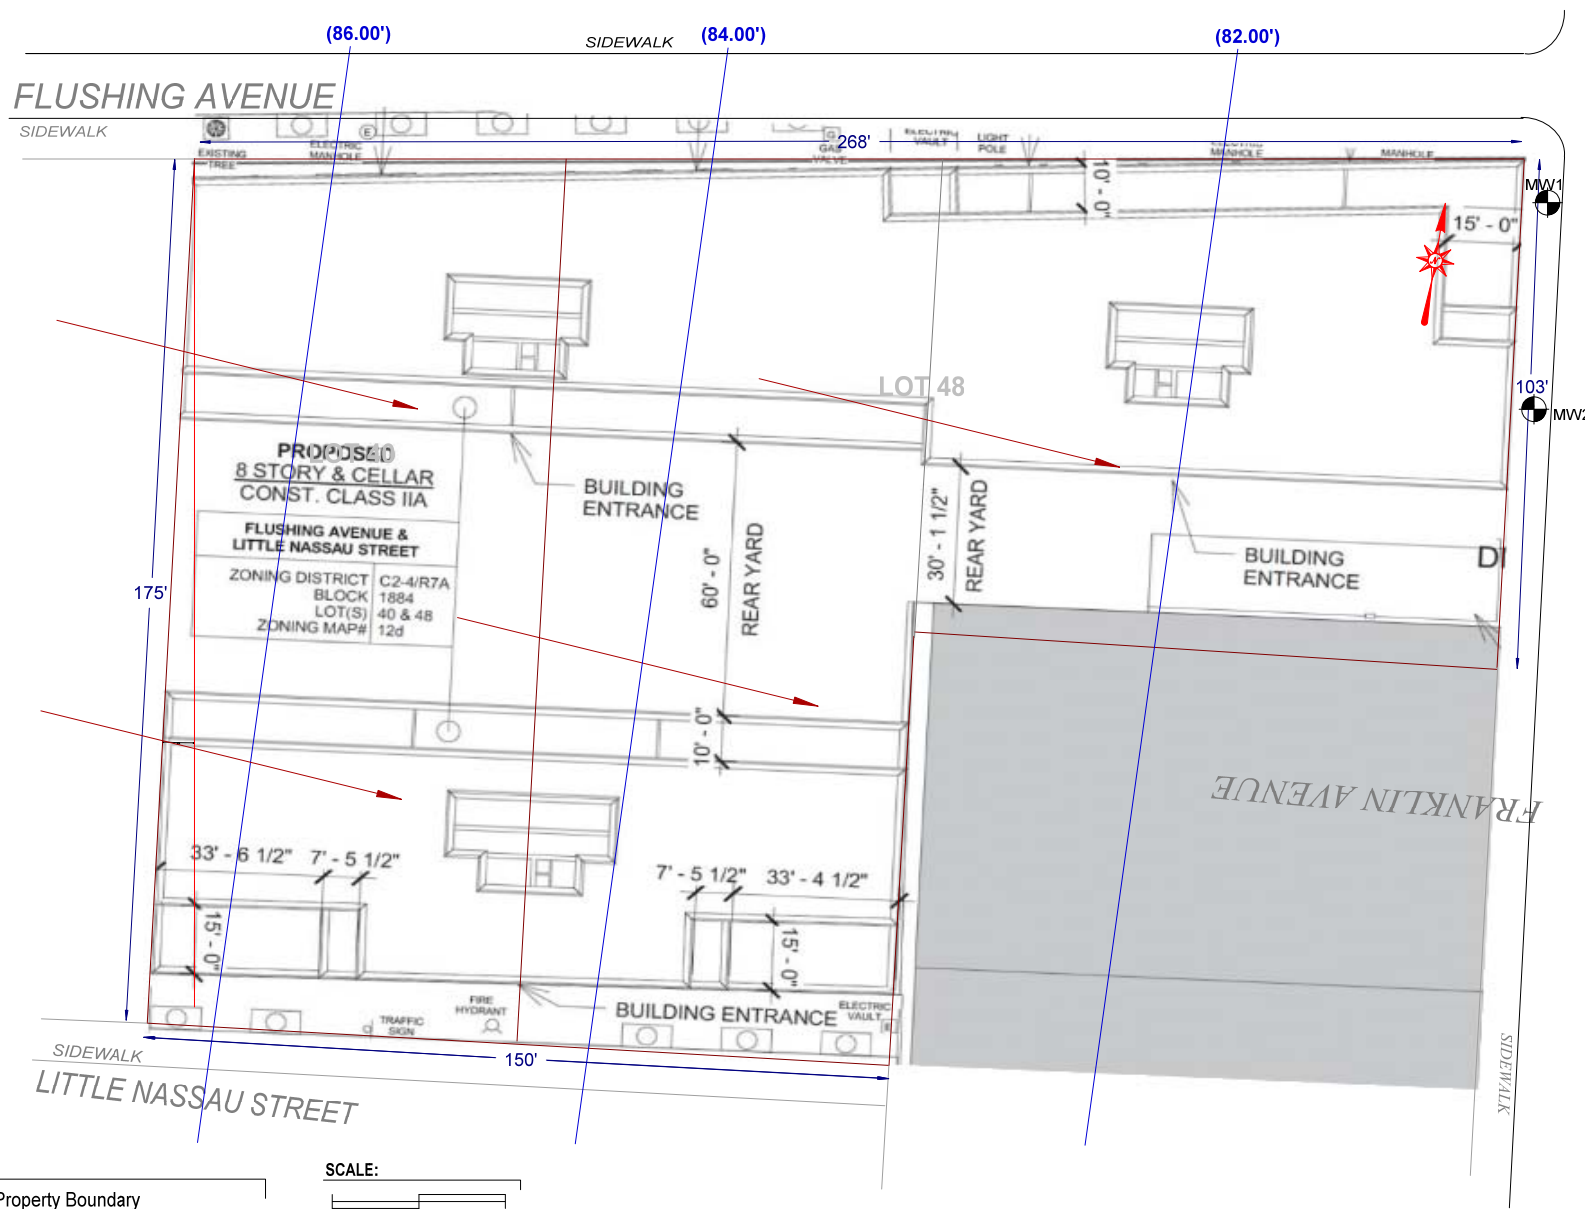

KEY:
 Property Boundary
 Groundwater Sampling Location

SCALE:

 Scale: 1 inch = 35 feet

 Phone 631.504.6000 Fax 631.924.2870	Figure No. 1	Site Name: Former NY Cleaning and Dyeing Site
		Site Address: 376-378 FLUSHING AVENUE, BROOKLYN, NY
		Drawing Title: Sampling Locations

APPENDIX A

Sample Chain of Custody



NY/NJ CHAIN OF CUSTODY RECORD

587 East Middle Turnpike, P.O. Box 370, Manchester, CT 06040
 Email: info@phoenixlabs.com Fax (860) 645-0823
Client Services (860) 645-8726

Coolant: Yes No
 IPK ICE
 Temp °C Pg of

Contact Options:

Fax: _____
 Phone: _____
 Email: _____

Customer: _____ Project: _____ Project P.O: _____
 Address: _____ Report to: _____
 Invoice to: _____
 QUOTE # : _____

Client Sample - Information - Identification

Sampler's Signature _____ Date: _____

Matrix Code:
 DW=Drinking Water GW=Ground Water SW=Surface Water WW=Waste Water
 RW=Raw Water SE=Sediment SL=Sludge S=Soil SD=Solid W=Wipe
 OIL=Oil B=Bulk L=Liquid

PHOENIX USE ONLY
 SAMPLE # Customer Sample Identification Sample Matrix Date Sampled Time Sampled

Analysis Request

										GL Amber 8 oz. w/H3PO4									
										Soil VOA Vials [] methanol [] H2O									
										GL Soil container () oz									
										40 ml VOA Vial [] As is [] HCl									
										GL Amber 1000ml [] As is [] H2SO4									
										PL As is [] 250ml [] 500ml [] 1000ml									
										PL H2SO4 [] 250ml [] 500ml									
										PL NaOH 250ml									
										PL HNO3 250ml									
										Bacteria Bottle withio									
										Bacteria Bottle as is									

Relinquished by:	Accepted by:	Date:	Time:	Turnaround: <input type="checkbox"/> 1 Day* <input type="checkbox"/> 2 Days* <input type="checkbox"/> 3 Days* <input type="checkbox"/> 5 Days <input type="checkbox"/> 10 Days <input type="checkbox"/> Other * SURCHARGE APPLIES	NJ <input type="checkbox"/> Res. Criteria <input type="checkbox"/> Non-Res. Criteria <input type="checkbox"/> Impact to GW Soil Cleanup Criteria <input type="checkbox"/> Impact to GW soil screen Criteria <input type="checkbox"/> GW Criteria	NY <input type="checkbox"/> TOGS GW <input type="checkbox"/> CP-51 SOIL <input type="checkbox"/> 375SCO Unrestricted Soil <input type="checkbox"/> 375SCO Residential Soil <input type="checkbox"/> 375SCO Residential Restricted Soil <input type="checkbox"/> 375SCO Commercial Soil <input type="checkbox"/> 375SCO Industrial Soil <input type="checkbox"/> Subpart 5 DW	Data Format <input type="checkbox"/> Phoenix Std Report <input type="checkbox"/> Excel <input type="checkbox"/> PDF <input type="checkbox"/> GIS/Key <input type="checkbox"/> EQUIS <input type="checkbox"/> NJ Hazsite EDD <input type="checkbox"/> NY EZ EDD (ASP) <input type="checkbox"/> Other _____	Data Package <input type="checkbox"/> NJ Redlined Deliv. * <input type="checkbox"/> NY Enhanced (ASP B) * <input type="checkbox"/> Other
Comments, Special Requirements or Regulations:				What State were samples collected? _____				

ATTACHMENT F
Quality Assurance Project Plan

**QUALITY ASSURANCE PROJECT PLAN
FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
BROOKLYN, NEW YORK 11205**

Prepared on behalf of:

Rose Castle Redevelopment II LLC
266 Broadway, Suite 301
Brooklyn, NY 11211

Prepared by:



Environmental Business Consultants

1808 Middle Country Road
Ridge, NY 11961

TABLE OF CONTENTS

QUALITY ASSURANCE PROJECT PLAN

Former NY Cleaning and Dyeing Site
376-378 Flushing Avenue, Brooklyn, NY

1.0 PROJECT ORGANIZATION AND RESPONSIBILITIES	1
1.1 Organization	1
2.0 QUALITY ASSURANCE PROJECT PLAN OBJECTIVES	2
2.1 Overview	2
2.2 QA/QC Requirements for Analytical Laboratory	2
2.2.1 Instrument calibration	2
2.2.2 Continuing Instrument calibration	2
2.2.3 Method Blanks	2
2.2.4 Trip Blanks	3
2.2.5 Surrogate Spike Analysis	3
2.2.6 Matrix Spike / Matrix Spike duplicate / Matrix Spike Blank	3
2.2.7 PFA Sampling Procedures	3
2.2.8 Equipment Decontamination Procedures	3
2.3 Accuracy	3
2.4 Precision	4
2.5 Sensitivity	4
2.6 Representativeness	4
2.7 Completeness	4
2.8 Laboratory Custody Procedures	5
3.0 ANALYTICAL PROCEDURES	6
3.1 Laboratory Analyses	6
4.0 DATA REDUCTION, VALIDATION, REVIEW. AND REPORTING	7
4.1 Overview	7
4.2 Data Reduction	7
4.3 Laboratory Data Reporting	7
5.0 CORRECTIVE ACTION	8

TABLES

Table 1	Analytical Summary Table
Table 2	Containers Preservatives and Holding Times

APPENDIX

APPENDIX A	Laboratory SOPs for PFA analysis
APPENDIX B	Validator Resume
APPENDIX C	Laboratory MDLs for PFAs in soil
APPENDIX D	Laboratory MDLs for PFAs in groundwater

1.0 INTRODUCTION

This Quality Assurance Project Plan (QAPP) has been prepared in accordance with DER-10 to detail procedures to be followed during the course of the sampling and analytical portion of the project, as required by the approved work plan.

To ensure the successful completion of the project each individual responsible for a given component of the project must be aware of the quality assurance objectives of his / her particular work and of the overall project. The EBC Project Director, Charles Sosik will be directly responsible to the client for the overall project conduct and quality assurance/quality control (QA/QC) for the project. The Project Director will be responsible for overseeing all technical and administrative aspects of the project and for directing QA/QC activities. Mr. Kevin Brussee (EBC) will serve as the Quality Assurance Officer (QAO) and in this role may conduct:

- conduct periodic field and sampling audits;
- interface with the analytical laboratory to resolve problems; and
- interface with the data validator and/or the preparer of the DUSR to resolve problems.

Chawinie Reilly will serve as the Project Manager and will be responsible for implementation of the Remedial Action Workplan and coordination with field sampling crews and subcontractors. Reporting directly to the Project Manager will be the Field Operations Officer, Thomas Gallo; who will serve as the on-Site qualified environmental professional who will record observations, direct the drilling crew and be responsible for the collection and handling of all samples.

1.1 Organization

Project QA will be maintained under the direction of the Project Manager, in accordance with this QAPP. QC for specific tasks will be the responsibility of the individuals and organizations listed below, under the direction and coordination of the Project Manager.

GENERAL RESPONSIBILITY	SCOPE OF WORK	RESPONSIBILITY OF QUALITY CONTROL
Field Operations	Supervision of Field Crew, sample collection and handling	T. Gallo, EBC
Project Manager	Implementation of the RAWP.	C. Reilly, EBC
Laboratory Analysis	Analysis of soil samples by NYSDEC ASP methods Laboratory	NYSDOH-Certified Laboratory; Phoenix Environmental Laboratories and Alpha Analytical, Inc
Data review	Review for completeness and compliance	3 rd party validation; KGS; Sherri Pullar

2.0 QUALITY ASSURANCE PROJECT PLAN OBJECTIVES

2.1 Overview

Overall project goals are defined through the development of Data Quality Objectives (DQOs), which are qualitative and quantitative Statements that specify the quality of the data required to support decisions; DQOs, as described in this section, are based on the end uses of the data as described in the work plan.

In this plan, Quality Assurance and Quality Control are defined as follows:

- Quality Assurance - The overall integrated program for assuring reliability of monitoring and measurement data.
- Quality Control - The routine application of procedures for obtaining prescribed standards of performance in the monitoring and measurement process.

2.2 QA / QC Requirements for Analytical Laboratory

Samples will be analyzed by a New York State Department of Health (NYSDOH) certified laboratory, certified in the appropriate categories. Data generated from the laboratory will be used to evaluate contaminants such as PCBs, pesticides, metals, semi-volatile organic compounds (SVOCs), volatile organic compounds (VOCs), 1,4-dioxane and PFAS in soil and volatile organic compounds (VOCs), 1,4-dioxane and PFAS in groundwater. The QA requirements for all subcontracted analytical laboratory work performed on this project are described below. QA elements to be evaluated include accuracy, precision, sensitivity, representativeness, and completeness. The data generated by the analytical laboratory for this project are required to be sensitive enough to achieve detection levels low enough to meet required quantification limits as specified in NYSDEC Analytical Services Protocol (NYSDEC ASP, 07/2005). The analytical results meeting the required quantification limits will provide data sensitive enough to meet the data quality objectives of this remedial program as described in the work plan. Reporting of the data must be clear, concise, and comprehensive. The QC elements that are important to this project are completeness of field data, sample custody, sample holding times, sample preservation, sample storage, instrument calibration and blank contamination.

2.2.1 Instrument Calibration

Calibration curves will be developed for each of the compounds to be analyzed. Standard concentrations and a blank will be used to produce the initial curves. The development of calibration curves and initial calibration response factors must be consistent with method requirements presented in NYSDEC ASP 07/2005.

2.2.2 Continuing Instrument Calibration

The initial calibration curve will be verified every 12 hrs by analyzing one calibration standard. The standard concentration will be the midpoint concentration of the initial calibration curve. The calibration check compound must come within 25% relative percent difference (RPD) of the average response factor obtained during initial calibration. If the RPD is greater than 25%, then corrective action must be taken as provided in the specific methodology.

2.2.3 Method Blanks

Method blank or preparation blank is prepared from an analyte-free matrix which includes the same reagents, internal standards and surrogate standards as the related samples. It is carried through the entire sample preparation and analytical procedure. A method blank analysis will be performed once for each 12 hr period during the analysis of samples for volatiles. An acceptable method blank will contain less than two (2) times the CRQL of methylene chloride, acetone and 2-butanone. For all other target compounds, the method blank must contain less than or equal to the CRQL of any single target compound. For non-target peaks in the method blank, the peak area must be less than 10 percent of the nearest internal standard. The method blank will be used to demonstrate the level of laboratory background and reagent contamination that might result from the analytical process itself.

2.2.4 Field Blanks / Trip Blanks.

Field blanks / rinsate blanks are samples which are obtained by running analyte free deionized water through or over decontaminated sampling equipment including pump tubing, scoops, augers etc. (bailer, pump, auger, etc.). These samples are used to determine if decontamination procedures have been adequate. Field / rinsate blanks will not be collected for soil or groundwater VOCs samples if dedicated or disposable sampling materials are used and changed between samples. Field / rinsate blanks will be collected for PFA groundwater water samples.

Trip blanks consist of a single set of sample containers filled at the laboratory with deionized, laboratory-grade water. The water used will be from the same source as that used for the laboratory method blank. The containers will be carried into the field and handled and transported in the same way as the samples collected that day. Analysis of the trip blank for VOCs is used to identify contamination from the air, shipping containers, or from other items coming in contact with the sample bottles. (The bottles holding the trip blanks will be not opened during this procedure.) A complete set of trip blanks will be provided with each shipment of samples to the certified laboratory.

2.2.5 Surrogate Spike Analysis

For organic analyses, all samples and blanks will be spiked with surrogate compounds before purging or extraction in order to monitor preparation and analyses of samples. Surrogate spike recoveries shall fall within the advisory limits in accordance with the NYSDEC ASP protocols for samples falling within the quantification limits without dilution.

2.2.6 Matrix Spike / Matrix Spike Duplicate / Matrix Spike Blank (MS/MSDIMSB) Analysis

MS, MSD and MSB analyses will be performed to evaluate the matrix effect of the sample upon the analytical methodology along with the precision of the instrument by measuring recoveries. The MS / MSD / MSB samples will be analyzed for each group of samples of a similar matrix at a rate of one for every 20 field samples. The RPD will be calculated from the difference between the MS and MSD. Matrix spike blank analysis will be performed to indicate the appropriateness of the spiking solution(s) used for the MS/MSD.

2.2.7 Sampling Procedures PFAs

The following sample container procedures will be followed:

- All PFA samples will be collected first on site

- Groundwater samples will be collected from the monitoring wells utilizing dedicated polyethylene tubing and a peristaltic pump
- All sample containers made of HDPE or polypropylene
- Caps are unlined and made of HDPE or polypropylene (no Teflon® -lined caps)

The following field clothing and PPE procedures will be followed:

- No clothing or boots containing Gore-Tex®
- All safety boots made from polyurethane and PVC
- No materials containing Tyvek®
- Do not use fabric softener on clothing to be worn in field
- Do not use cosmetics, moisturizers, hand cream, or other related products the morning of sampling
- Do not use unauthorized sunscreen or insect repellent
- Wet weather gear made of polyurethane and PVC only

The following field equipment procedures will be followed:

- Must not contain Teflon® (aka PTFE) or LDPE materials
- All sampling materials must be made from stainless steel, HDPE, acetate, silicon, or polypropylene
- No waterproof field books can be used
- No plastic clipboards, binders, or spiral hard cover notebooks can be used
- No adhesives (i.e. Post-It® Notes) can be used
- Sharpies and permanent markers not allowed; regular ball point pens are acceptable
- Aluminum foil must not be used
- Keep PFC samples in separate cooler, away from sampling containers that may contain PFAS
- Coolers filled with regular ice only - Do not use chemical (blue) ice packs or freezer packs

2.2.8 *Equipment Decontamination Procedures*

Decontamination of non-dedicated sampling equipment will consist of the following:

- Gently tap or scrape to remove adhered soil
- Rinse with PFAS free water
- Wash withalconox® detergent solution and scrub
- Rinse with PFAS free water
- Rinse with PFAS free water

2.3 Accuracy

Accuracy is defined as the nearness of a real or the mean (\bar{x}) of a set of results to the true value. Accuracy is assessed by means of reference samples and percent recoveries. Accuracy includes both precision and recovery and is expressed as percent recovery (% REC). The MS sample is used to

determine the percent recovery. The matrix spike percent recovery (% REC) is calculated by the following equation:

$$\%REC = \frac{SSR - SR}{SA} \times 100$$

Where:

SSR = spike sample results

SR = sample results

SA = spike added from spiking mix

2.4 Precision

Precision is defined as the measurement of agreement of a set of replicate results among themselves without a Precision is defined as the measurement of agreement of a set of replicate results among themselves without assumption of any prior information as to the true result. Precision is assessed by means of duplicate/replicate sample analyses.

Analytical precision is expressed in terms of RPD. The RPD is calculated using the following formula:

$$RPD = \frac{D^1 - D^2}{(D^1 + D^2)/2} \times 100$$

Where:

RPD = relative percent difference

D¹ = first sample value

D² = second sample value (duplicate)

2.5 Sensitivity

The sensitivity objectives for this plan require that data generated by the analytical laboratory achieve quantification levels low enough to meet the required detection limits specified by NYSDEC ASP and to meet all site-specific standards, criteria and guidance values (SGCs) established for this project.

2.6 Representativeness

Representativeness is a measure of the relationship of an individual sample taken from a particular site to the remainder of that site and the relationship of a small aliquot of the sample (i.e., the one used in the actual analysis) to the sample remaining on site. The representativeness of samples is assured by adherence to sampling procedures described in the Remedial Investigation Work Plan.

2.7 Completeness

Completeness is a measure of the quantity of data obtained from a measurement system as compared to the amount of data expected from the measurement system. Completeness is defined as the percentage of all results that are not affected by failing QC qualifiers, and should be between 70 and 100% of all analyses performed. The objective of completeness in laboratory reporting is to provide a thorough data support package. The laboratory data package provides documentation of sample analysis and results in the form of summaries, QC data, and raw analytical data. The laboratory will be required to submit data packages that follow NYSDEC ASP reporting format which, at a minimum, will include the following components:

1. All sample chain-of-custody forms.
2. The case narrative(s) presenting a discussion of any problems and/or procedural changes required during analyses. Also presented in the case narrative are sample summary forms.
3. Documentation demonstrating the laboratory's ability to attain the contract specified detection limits for all target analytes in all required matrices.
4. Tabulated target compound results and tentatively identified compounds.
5. Surrogate spike analysis results (organics).
6. Matrix spike/matrix spike duplicate/matrix spike blank results.
7. QC check sample and standard recovery results
8. Blank results (field, trip, and method).
9. Internal standard area and RT summary.

2.8 Laboratory Custody Procedures

The following elements are important for maintaining the field custody of samples:

- Sample identification
- Sample labels
- Custody records
- Shipping records
- Packaging procedures

Sample labels will be attached to all sampling bottles before field activities begin; each label will contain an identifying number. Each number will have a suffix that identifies the site and where the sample was taken. Approximate sampling locations will be marked on a map with a description of the sample location. The number, type of sample, and sample identification will be entered into the field logbook. A chain-of-custody form, initiated at the analytical laboratory will accompany the sample bottles from the laboratory into the field. Upon receipt of the bottles and cooler, the sampler will sign and date the first received blank space. After each sample is collected and appropriately identified, entries will be made on the chain-of-custody form that will include:

- Site name and address
- Samplers' names and signatures

3.0 ANALYTICAL PROCEDURES

3.1 Laboratory Analysis

Samples will be analyzed by the NYSDEC ASP laboratory for one or more of the following parameters:

- VOCs in soil / groundwater by USEPA Method 8260C
- SVOCs in soil by USEPA Method 8270D
- Target Analyte Metals 6010C in soil,
- Pesticides and PCBs in soil by USEPA Method 8081B/8082A,
- 1,4-dioxane in soil / groundwater by USEPA Method 8270 and USEPA Method 8270 SIM
- PFAS in soil / groundwater by EPA Method 537 Modified.

The list of 21 PFA compounds for analysis are:

1. Perfluorobutanesulfonic acid
2. Perfluorohexanesulfonic acid
3. Perfluoroheptanesulfonic acid
4. Perfluorooctanesulfonic acid
5. Perfluorodecanesulfonic acid
6. Perfluorobutanoic acid
7. Perfluoropentanoic acid
8. Perfluorohexanoic acid
9. Perfluoroheptanoic acid
10. Perfluorooctanoic acid
11. Perfluorononanoic acid
12. Perfluorodecanoic acid
13. Perfluoroundecanoic acid
14. Perfluorododecanoic acid
15. Perfluorotridecanoic acid
16. Perfluorotetradecanoic acid
17. 6:2 Fluorotelomer sulfonate
18. 8:2 Fluorotelomer sulfonate
19. Perfluorooctanesulfonamide
20. N-methyl perfluorooctanesulfonamidoacetic acid
21. N-ethyl perfluorooctanesulfonamidoacetic acid

If any modifications or additions to the standard procedures are anticipated, and if any nonstandard sample preparation or analytical protocol is to be used, the modifications and the nonstandard protocol will be explicitly defined and documented. Prior approval by EBC's PM will be necessary for any nonstandard analytical or sample preparation protocol used by the laboratory, i.e., dilution of samples or extracts by greater than a factor of five (5).

Laboratory SOPs for PFA analysis are included in Appendix A.

4.0 DATA REDUCTION, REVIEW, AND REPORTING

4.1 Overview

The process of data reduction, review, and reporting ensures the assessments or a conclusion based on the final data accurately reflects actual site conditions. This plan presents the specific procedures, methods, and format that will be employed for data reduction, review and reporting of each measurement parameter determined in the laboratory and field. Also described in this section is the process by which all data, reports, and work plans are proofed and checked for technical and numerical errors prior to final submission.

4.2 Data Reduction

Standard methods and references will be used as guidelines for data handling, reduction, validation, and reporting. All data for the project will be compiled and summarized with an independent verification at each step in the process to prevent transcription/typographical errors. Any computerized entry of data will also undergo verification review.

Sample analysis will be provided by a New York State certified environmental laboratory. The ELAP approved laboratory is required to hold ELAP certification for PFOA and PFOS in drinking water by EPA Method 537 or ISO 25101 for PFAS analysis. Laboratory reports will include ASP category B deliverables for use in the preparation of a data usability summary report (DUSR). All results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format. Analytical results shall be presented on standard NYSDEC ASP-B forms or equivalents, and include the dates the samples were received and analyzed, and the actual methodology used. Note that waste characterization samples (if collected) will be in results only format and will not be evaluated in the DUSR.

Laboratory QA/QC information required by the method protocols will be compiled, including the application of data QA/QC qualifiers as appropriate. In addition, laboratory worksheets, laboratory notebooks, chains-of-custody, instrument logs, standards records, calibration records, and maintenance records, as applicable, will be provided in the laboratory data packages to determine the validity of data. Specifics on internal laboratory data reduction protocols are identified in the laboratory's SOPs.

Following receipt of the laboratory analytical results by EBC, the data results will be compiled and presented in an appropriate tabular form. Where appropriate, the impacts of QA/QC qualifiers resulting from laboratory or external validation reviews will be assessed in terms of data usability. Resumes for validators is included in Appendix B.

4.3 Laboratory Data Reporting

All sample data packages submitted by the analytical laboratory will be required to be reported in conformance to the NYSDEC ASP (7/2005), Category B data deliverable requirements as applicable to the method utilized. All results will be provided in accordance with the NYSDEC Environmental Information Management System (EIMS) electronic data deliverable (EDD) format. Note that waste characterization samples will be in results only format and will not be evaluated in the DUSR.

Phoenix Environmental Laboratories has confirmed that reporting limits for 1,4-Dioxane in groundwater are at least 0.25 ug/L and 0.1 mg/Kg for soil.

Alpha Analytical, Inc has confirmed that reporting limits for PFAs for groundwater is at least 2ng/L and 1 ug/Kg for soil.

Laboratory MDLs for PFAs in soil and groundwater are included Appendix C and Appendix D.

**TABLE 1
SUMMARY OF
SAMPLING PROGRAM RATIONALE AND ANALYSIS**

Matrix	Location	Approximate Number of Samples	Frequency	Rationale for Sampling	Laboratory Analysis	Duplicates	Matrix Spikes	Spike Duplicates	Trip Blanks
Soil	Excavation Bottom	44	1 per 900 square feet	Endpoint verification	VOCs / SVOCs by 8260C / 8270 (PAHs), pesticides	1 per 20 samples	1 per 20 samples	1 per 20 samples	1 per trip
Soil	Excavation Bottom	11	25% of total End Points	Endpoint verification	PFAs by USEPA Method 537 Modified; 1,4-dioxane by USEPA Method 8270 SIM	1 per 20 samples	1 per 20 samples	1 per 20 samples	1 per trip
Soil	Excavated VOC Contaminated Soil	14	1 per 800 cy	Waste Characterization	VOCs EPA Method 8260C, pesticides and PCBs by EPA 8081B/8082A, other as per disposal facility	0	0	0	0
Soil	Excavated Historic Fill Material	26	1 per 800 cy	Waste Characterization	VOCs EPA Method 8260C, pesticides and PCBs by EPA 8081B/8082A, other as per disposal facility	0	0	0	0
Soil	Excavated Native Material	4	1 per 800 cy	Waste Characterization	VOCs EPA Method 8260C, pesticides and PCBs by EPA 8081B/8082A, other as per disposal facility	0	0	0	0
Water	Off site / Property Line Monitoring Wells (2)	2	2	To determine off site groundwater conditions	VOCs including 1,4-dioxane by 8270 SIM, PFAS by EPA method 537 Modified	1 per 20 samples	1 per 20 samples	1 per 20 samples	1 per trip

**TABLE 2
SAMPLE COLLECTION AND ANALYSIS PROTOCOLS**

Sample Type	Matrix Type	Sampling Device	Parameter	Sample Container	Sample Preservation	Number of Samples	Duplicates	MS/MSDs	Field and Trip Blanks	Analytical Method#	CRQL / MDLH	Holding Time
Grab	Soil	Scoop Direct into Jar/ VOAs	VOCs and 1,4 Dioxane	(1) 8 oz glass Jar and VOAs (2 low, 1 high)	Cool to 4° C	44	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 8260C; reporting limits to meet UUSCOs / USEPA Method 8270	Compound specific (1-5 ug/kg)	Holding time for VOCs is 48 hours. If the sample is extruded into a sealed vial and either frozen to -7°C or extruded into methanol the holding time is extended to 14 days; Holding time for 1,4- Dioxane is 14 days
Composite	Soil	Scoop Direct into Jar	SVOCs	(1) 4 oz glass jar	Cool to 4° C	44	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 8260D; reporting limits to meet UUSCOs	Compound specific (1-5 ug/kg)	14 day ext/40 days
Composite	Soil	Scoop Direct into Jar	Pesticides / PCBs	(1) 4 oz glass jar	Cool to 4° C	44	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 8081B/8082A; reporting limits to meet UUSCOs	Compound specific (1-5 ug/kg)	14 day ext/40 days
Composite	Soil	Scoop Direct into Jar	Metals	(1) 4 oz glass jar	Cool to 4° C	44	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	TAL Metals 6010; reporting limits to meet UUSCOs	Compound specific (0-1 mg/kg)	6 months, 28 days for Mercury
Grab	Water	Pump Tubing	VOCs and 1,4 Dioxane	(3) 40 ml Vials and 8oz amber w/NAHS04-Water	Cool to 4° C 1:1 HCL	2	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 8260C SIM Mode / USEPA Method 8270 SIM; reporting limits to meet UUSCOs	Compound specific (1-5 ug/L)	7 Days to extraction and 40 days following Extraction; holding time for VOCs is 14 days with preserved HCL.
Grab	Water	Pump Tubing	PFAS	250-mL HDPE Containers	Cool to 6° C	2	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 537 Modified	Compound specific (1-5 ng/L)	14 Days to extraction and 28 days following extraction
Grab	Soil	Scoop Direct into Jar	PFAS Target Analyte List	One 8 oz and one 2 oz HDPE Containers	Cool to 4° C	11	1 per 20 samples	1 per 20 Samples / 1 per 20 samples	1 each per trip	EPA Method 537 Modified	Compound specific (1 ug/kg)	14 days to extraction and 40 days following extraction

Notes:

All holding times listed are from Verified Time of Sample Receipt (VTSR) unless noted otherwise. * Holding time listed is from time of sample collection.

The number in parentheses in the "Sample Container" column denotes the number of containers needed.

Triple volume required when collected MS/MSD samples

Notes continued:

The number of trip blanks are estimated.

CRQL / MDL = Contract Required Quantitation Limit / Method Detection Limit.

CRQL/MDLH limits should be low enough to meet project objectives.

MCAWW = Methods for Chemical Analysis of Water and Wastes.

NA = Not available or not applicable.

APPENDIX A

Determination of Selected Perfluorinated Alkyl Substances in Cranberry Matrix by Solid Phase Extraction and Liquid Chromatography/Tandem Mass Spectrometry Isotope Dilution (LC/MS/MS)

Reference: EPA Method 537(modified), Version 1.1, September 2009, EPA Document #: EPA/600/R-08/09

Department of Defense, Quality Systems Manual for Environmental Laboratories, Version 5.1, .2017

1. Scope and Application

Matrices: Cranberry

Definitions: Refer to Alpha Analytical Quality Manual.

- 1.1 This is a liquid chromatography/tandem mass spectrometry (LC/MS/MS) method for the determination of selected perfluorinated alkyl substances (PFAS) in Non-Drinking Water Matrices. Accuracy and precision data have been generated in reagent water, and finished ground and surface waters for the compounds listed in Table 1.
- 1.2 The data report packages present the documentation of any method modification related to the samples tested. Depending upon the nature of the modification and the extent of intended use, the laboratory may be required to demonstrate that the modifications will produce equivalent results for the matrix. Approval of all method modifications is by one or more of the following laboratory personnel before performing the modification: Area Supervisor, Department Supervisor, Laboratory Director, or Quality Assurance Officer.
- 1.3 This method is restricted to use by or under the supervision of analysts experienced in the operation of the LC/MS/MS and in the interpretation of LC/MS/MS data. Each analyst must demonstrate the ability to generate acceptable results with this method by performing an initial demonstration of capability.

2. Summary of Method

- 2.1 A 3 µl injection is made into an LC equipped with a C18 column that is interfaced to an MS/MS. The analytes are separated and identified by comparing the acquired mass spectra and retention times to reference spectra and retention times for calibration standards acquired under identical LC/MS/MS conditions. The concentration of each analyte is determined by using the isotope dilution technique. Extracted Internal Standards (EIS) analytes are used to monitor the extraction efficiency of the method analytes.

2.2 Method Modifications from Reference

Cranberry matrix.

Table 1

Parameter	Acronym	CAS
PERFLUOROALKYL ETHER CARBOXYLIC ACIDS (PFECAs)		
Tetrafluoro-2-(heptafluoropropoxy)propanoic acid	HFPO-DA	62037-80-3
Dodecafluoro-3h-4,8-dioxanonoate	ADONA	958445-44-8
PERFLUOROALKYLCARBOXILIC ACIDS (PFCAs)		
Perfluorobutanoic acid	PFBA	375-22-4
Perfluoropentanoic acid	PFPeA	2706-90-3
Perfluorohexanoic acid	PFHxA *	307-24-4
Perfluoroheptanoic acid	PFHpA *	375-85-9
Perfluorooctanoic acid	PFOA *	335-67-1
Perfluorononanoic acid	PFNA *	375-95-1
Perfluorodecanoic acid	PFDA *	335-76-2
Perfluoroundecanoic acid	PFUnA *	2058-94-8
Perfluorododecanoic acid	PFDoA *	307-55-1
Perfluorotridecanoic acid	PFTTrDA *	72629-94-8
Perfluorotetradecanoic acid	PFTA *	376-06-7
Perfluorohexadecanoic acid	PFHxDA	67905-19-5
Perfluorooctadecanoic acid	PFODA	16517-11-6
PERFLUOROALKYLSULFONATES (PFASs)		
Perfluorobutanesulfonic acid	PFBS *	375-73-5
Perfluoropentanesulfonic acid	PFPeS	2706-91-4
Perfluorohexanesulfonic acid	PFHxS *	355-46-4
Perfluoroheptanesulfonic acid	PFHpS	375-92-8
Perfluorooctanesulfonic acid	PFOS *	1763-23-1
Perfluoronanesulfonic acid	PFNS	68259-12-1
Perfluorodecanesulfonic acid	PFDS	335-77-3
PERFLUOROCTANESULFONAMIDES (FOSAs)		
Perfluorooctanesulfonamide	PFOSA	754-91-6
TELOMER SULFONATES		
1H,1H,2H,2H-perfluorohexane sulfonate (4:2)	4:2FTS	27619-93-8
1H,1H,2H,2H-perfluorooctane sulfonate (6:2)	6:2FTS	27619-97-2
1H,1H,2H,2H-perfluorodecane sulfonate (8:2)	8:2FTS	39108-34-4
PERFLUOROCTANESULFONAMIDOACETIC ACIDS		
N-methyl perfluorooctanesulfonamidoacetic acid	NMeFOSAA *	2355-31-9
N-ethyl perfluorooctanesulfonamidoacetic acid	NEtFOSAA *	2991-50-6

* also reportable via the standard 537 method

3. Reporting Limits

For freeze dried samples, theoretical reporting limit for PFAS's is 1 ng/g.

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

4. Interferences

- 4.1** All glassware must be meticulously cleaned. Wash glassware with detergent and tap water, rinse with tap water, followed by a reagent water rinse. Non-volumetric glassware can be heated in a muffle furnace at 400 °C for 2 hours or solvent rinsed. Volumetric glassware should be solvent rinsed and not be heated in an oven above 120 °C. Store clean glassware inverted or capped. Do not cover with aluminum foil because PFAS's can be potentially transferred from the aluminum foil to the glassware.
- 4.1.1 NOTE:** PFAS standards, extracts and samples should not come in contact with any glass containers or pipettes as these analytes can potentially adsorb to glass surfaces. PFAS analyte and EIS standards commercially purchased in glass ampoules are acceptable; however, all subsequent transfers or dilutions performed by the analyst must be prepared and stored in polypropylene containers.
- 4.2** Method interferences may be caused by contaminants in solvents, reagents (including reagent water), sample bottles and caps, and other sample processing hardware that lead to discrete artifacts and/or elevated baselines in the chromatograms. The method analytes in this method can also be found in many common laboratory supplies and equipment, such as PTFE (polytetrafluoroethylene) products, LC solvent lines, methanol, aluminum foil, SPE sample transfer lines, etc. All items such as these must be routinely demonstrated to be free from interferences (less than 1/3 the RL for each method analyte) under the conditions of the analysis by analyzing laboratory reagent blanks as described in Section 9.2. **Subtracting blank values from sample results is not permitted.**
- 4.3** Matrix interferences may be caused by contaminants that are co-extracted from the sample. Humic and/or fulvic material can be co-extracted during SPE and high levels can cause enhancement and/or suppression in the electrospray ionization source or low recoveries on the SPE sorbent. Total organic carbon (TOC) is a good indicator of humic content of the sample.
- 4.4** SPE cartridges can be a source of interferences. The analysis of field and laboratory reagent blanks can provide important information regarding the presence or absence of such interferences. Brands and lots of SPE devices should be tested to ensure that contamination does not preclude analyte identification and quantitation.

5. Health and Safety

- 5.1** The toxicity or carcinogenicity of each reagent and standard used in this method is not fully established; however, each chemical compound should be treated as a potential health hazard. From this viewpoint, exposure to these chemicals must be reduced to the lowest possible level by whatever means available. A reference file of material safety data sheets is available to all personnel involved in the chemical analysis. Additional references to laboratory safety are available in the Chemical Hygiene Plan.
- 5.2** All personnel handling environmental samples known to contain or to have been in contact with municipal waste must follow safety practices for handling known disease causative agents.
- 5.3** PFOA has been described as "likely to be carcinogenic to humans." Pure standard materials and stock standard solutions of these method analytes should be handled with

suitable protection to skin and eyes, and care should be taken not to breathe the vapors or ingest the materials.

6. Sample Collection, Preservation, Shipping and Handling

6.1 Sample Collection

- 6.1.1 1 gram dried or larger volume adjusted for moisture content. (Cranberries average 10-20% solid) Samples must be collected in 250-mL high density polyethylene (HDPE) container with an unlined plastic screw cap.
- 6.1.2 The sample handler must wash their hands before sampling and wear nitrile gloves while filling and sealing the sample bottles. PFAS contamination during sampling can occur from a number of common sources, such as food packaging and certain foods and beverages. Proper hand washing and wearing nitrile gloves will aid in minimizing this type of accidental contamination of the samples.
- 6.1.3 After collecting the sample and cap the bottle. Keep the sample sealed from time of collection until extraction.

6.2 Sample Shipping

Samples must be chilled during shipment and must not exceed 10 °C during the first 48 hours after collection. Sample temperature must be confirmed to be at or below 10 °C when the samples are received at the laboratory. Samples stored in the lab must be held at or below 6 °C until extraction, but should not be frozen.

NOTE: Samples that are significantly above 10° C, at the time of collection, may need to be iced or refrigerated for a period of time, in order to chill them prior to shipping. This will allow them to be shipped with sufficient ice to meet the above requirements.

7. Equipment and Supplies

- 7.1 SAMPLE CONTAINERS – 250-mL high density polyethylene (HDPE) bottles fitted with unlined screw caps. Sample bottles must be discarded after use.
- 7.2 CENTRIFUGE TUBES – 15-mL conical polypropylene tubes with polypropylene screw caps for storing standard solutions and for collection of the extracts.
- 7.3 AUTOSAMPLER VIALS – Polypropylene 0.7-mL autosampler vials with polypropylene caps.
 - 7.3.1 NOTE: Polypropylene vials and caps are necessary to prevent contamination of the sample from PTFE coated septa. However, polypropylene caps do not reseal, so evaporation occurs after injection. Thus, multiple injections from the same vial are not possible.
- 7.4 POLYPROPYLENE GRADUATED CYLINDERS – Suggested sizes include 25, 50, 100 and 1000-mL cylinders.
- 7.5 Auto Pipets – Suggested sizes include 5, 10, 25, 50, 100, 250, 500 and 1000-µL syringes.
- 7.6 PLASTIC PIPETS – Polypropylene or polyethylene disposable pipets.

- 7.7** ANALYTICAL BALANCE – Capable of weighing to the nearest 0.0001 g.
- 7.8** Extract Clean-up Cartridge – 5 g 6ml SPE Cartridge containing graphitized polymer carbon
- 7.9** EXTRACT CONCENTRATION SYSTEM – Extracts are concentrated by evaporation with nitrogen using a water bath set no higher than 65 °C.
- 7.10** LABORATORY OR ASPIRATOR VACUUM SYSTEM – Sufficient capacity to maintain a vacuum of approximately 10 to 15 inches of mercury for extraction cartridges.
- 7.11** LIQUID CHROMATOGRAPHY (LC)/TANDEM MASS SPECTROMETER (MS/MS) WITH DATA SYSTEM
- 7.11.1** LC SYSTEM – Instrument capable of reproducibly injecting up to 10- μ L aliquots, and performing binary linear gradients at a constant flow rate near the flow rate used for development of this method (0.4 mL/min). The LC must be capable of pumping the water/methanol mobile phase without the use of a degasser which pulls vacuum on the mobile phase bottle (other types of degassers are acceptable). Degassers which pull vacuum on the mobile phase bottle will volatilize the ammonium acetate mobile phase causing the analyte peaks to shift to earlier retention times over the course of the analysis batch. The usage of a column heater is optional.
- NOTE: During the course of method development, it was discovered that while idle for more than one day, PFAS's built up in the PTFE solvent transfer lines. To prevent long delays in purging high levels of PFAS's from the LC solvent lines, they were replaced with PEEK tubing and the PTFE solvent frits were replaced with stainless steel frits. It is not possible to remove all PFAS background contamination, but these measures help to minimize their background levels.
- 7.11.2** LC/TANDEM MASS SPECTROMETER – The LC/MS/MS must be capable of negative ion electrospray ionization (ESI) near the suggested LC flow rate of 0.4 mL/min. The system must be capable of performing MS/MS to produce unique product ions for the method analytes within specified retention time segments. A minimum of 10 scans across the chromatographic peak is required to ensure adequate precision.
- 7.11.3** DATA SYSTEM – An interfaced data system is required to acquire, store, reduce, and output mass spectral data. The computer software should have the capability of processing stored LC/MS/MS data by recognizing an LC peak within any given retention time window. The software must allow integration of the ion abundance of any specific ion within specified time or scan number limits. The software must be able to calculate relative response factors, construct linear regressions or quadratic calibration curves, and calculate analyte concentrations.
- 7.11.4** ANALYTICAL COLUMN – An LC BEH C₁₈ column (2.1 x 50 mm) packed with 1.7 μ m d_p C₁₈ solid phase particles was used. Any column that provides adequate resolution, peak shape, capacity, accuracy, and precision (Sect. 9) may be used.

8. Reagents and Standards

- 8.1** GASES, REAGENTS, AND SOLVENTS – Reagent grade or better chemicals should be used.
- 8.1.1** REAGENT WATER – Purified water which does not contain any measurable quantities of any method analytes or interfering compounds greater than 1/3 the

RL for each method analyte of interest. Prior to daily use, at least 3 L of reagent water should be flushed from the purification system to rinse out any build-up of analytes in the system's tubing.

- 8.1.2 ACETONITRILE, CAS#: 75-05-8) – High purity, demonstrated to be free of analytes and interferences.
- 8.1.3 ACETIC ACID (H₃CCOOH, CAS#: 64-19-7) - High purity, demonstrated to be free of analytes and interferences.
- 8.1.4 Methanol/Water (80:20) – To prepare a 1 Liter bottle, mix 200 ml of REAGENT WATER with 800 ml of Methanol.
- 8.1.5 NITROGEN – Used for the following purposes: Nitrogen aids in aerosol generation of the ESI liquid spray and is used as collision gas in some MS/MS instruments. The nitrogen used should meet or exceed instrument manufacturer's specifications. In addition, Nitrogen is used to concentrate sample extracts (Ultra High Purity or equivalent).
- 8.1.6 ARGON – Used as collision gas in MS/MS instruments. Argon should meet or exceed instrument manufacturer's specifications. Nitrogen gas may be used as the collision gas provided sufficient sensitivity (product ion formation) is achieved.

8.2 STANDARD SOLUTIONS – When a compound purity is assayed to be 96% or greater, the weight can be used without correction to calculate the concentration of the stock standard. PFAS analyte and IS standards commercially purchased in glass ampoules are acceptable; however, all subsequent transfers or dilutions performed by the analyst must be prepared and stored in polypropylene containers. Standards for sample fortification generally should be prepared in the smallest volume that can be accurately measured to minimize the addition of excess organic solvent to aqueous samples.

NOTE: Stock standards (Sect. 8.2.1 and 8.2.3) are stored at ≤4 °C. Primary dilution standards (Sect. 8.2.2 and 8.2.4) are stored at room temperature to prevent adsorption of the method analytes onto the container surfaces that may occur when refrigerated. Storing the standards at room temperature will also minimize daily imprecision due to the potential of inadequate room temperature stabilization.

- 8.2.1 ISOTOPE DILUTION Extracted Internal Standard (ID EIS) STOCK SOLUTIONS - ID EIS stock standard solutions are stable for at least 6 months when stored at 4 °C. The stock solution is purchased at a concentration of 1000 ng/mL.
- 8.2.2 ISOTOPE DILUTION Extracted Internal Standard PRIMARY DILUTION STANDARD (ID EIS PDS) – Prepare the ID EIS PDS at a concentration of 500 ng/mL. The ID PDS is prepared in 80:20% (vol/vol) methanol:water. The ID PDS is stable for 6 months when stored at ≤4 °C.

Table 3

Isotope Labeled Standard	Conc. of EIS Stock (ng/mL)	Vol. of EIS Stock (mL)	Final Vol. of EIS PDS (mL)	Final Conc. of EIS PDS (ng/mL)
M4PFBA	1000	1.0	2.0	500

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

Isotope Labeled Standard	Conc. of EIS Stock (ng/mL)	Vol. of EIS Stock (mL)	Final Vol. of EIS PDS (mL)	Final Conc. of EIS PDS (ng/mL)
M5PFPeA	1000	1.0	2.0	500
M5PFHxA	1000	1.0	2.0	500
M4PFHpA	1000	1.0	2.0	500
M8PFOA	1000	1.0	2.0	500
M9PFNA	1000	1.0	2.0	500
M6PFDA	1000	1.0	2.0	500
M7PFUdA	1000	1.0	2.0	500
MPFDoA	1000	1.0	2.0	500
M2PFTeDA	1000	1.0	2.0	500
M2PFHxDA	50,000	.02	2.0	500
M8FOSA	1000	1.0	2.0	500
d3-N-MeFOSAA	1000	1.0	2.0	500
d5-N-EtFOSAA	1000	1.0	2.0	500
M3PFBS	929	1.0	2.0	464.5
M3PFHxS	946	1.0	2.0	473
M8PFOS	957	1.0	2.0	478.5
M2-4:2FTS	935	1.0	2.0	467.5
M2-6:2FTS	949	1.0	2.0	474.5
M2-8:2FTS	958	1.0	2.0	479
M3HFPO-DA	50,000	.4	2.0	10,000

8.2.3 ANALYTE STOCK STANDARD SOLUTION – Analyte stock standards are stable for at least 6 months when stored at 4 °C. When using these stock standards to prepare a PDS, care must be taken to ensure that these standards are at room temperature and adequately vortexed.

8.2.4 ANALYTE PRIMARY SPIKING STANDARD – Prepare the spiking standard at a concentration of 500 ng/mL in 80:20% (vol/vol) methanol:water. The spiking standard is stable for at least six months when stored at ≤4 °C.

Table 4

Analyte	Conc. of Stock (ng/mL)	Vol. of Stock (mL)	Final Vol. of IS PDS (mL)	Final Conc. of IS PDS (ng/mL)
HFPO-DA	50,000	.04	4	500
ADONA	50,000	.04	4	500
PFBA	2000	1	4	500
PFPeA	2000	1	4	500
PFHxA	2000	1	4	500
PFHpA	2000	1	4	500
PFOA	2000	1	4	500
PFNA	2000	1	4	500
PFDA	2000	1	4	500
PFUdA	2000	1	4	500
PFDoA	2000	1	4	500
PFTTrDA	2000	1	4	500
PFTeDA	2000	1	4	500
PFHxDA	50,000	.04	4	500

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

Analyte	Conc. of Stock (ng/mL)	Vol. of Stock (mL)	Final Vol. of IS PDS (mL)	Final Conc. of IS PDS (ng/mL)
PFODA	50,000	.04	4	500
FOSA	2000	1	4	500
N-MeFOSAA	2000	1	4	500
N-EtFOSAA	2000	1	4	500
L-PFBS	1770	1	4	442.5
L-PFPeS	1880	1	4	470
L-PFHxSK	1480	1	4	370
Br-PFHxSK	344	1	4	86
L-PFHpS	1900	1	4	475
L-PFOSK	1460	1	4	365
Br-PFOSK	391	1	4	97.75
L-PFNS	1920	1	4	480
L-PFDS	1930	1	4	482.5
4:2FTS	1870	1	4	467.5
6:2FTS	1900	1	4	475
8:2FTS	1920	1	4	480

- 8.2.5** LOW, MEDIUM AND HIGH LEVEL LCS – The LCS's will be prepared at the following concentrations and rotated per batch; 2 ng/L, 40 ng/L, 500 ng/l. The analyte PDS contains all the method analytes of interest at various concentrations in methanol containing 20% water. The analyte PDS has been shown to be stable for six months when stored at ≤4 °C.
- 8.2.6** Isotope Dilution Labeled Recovery Stock Solutions (ID REC) – ID REC Stock solutions are stable for at least 6 months when stored at 4 °C. The stock solution is purchased at a concentration of 1000 ng/mL.
- 8.2.7** Isotope Dilution Labeled Recovery Primary Dilution Standard (ID REC PDS) - Prepare the ID REC PDS at a concentration of 500 ng/mL. The ID REC PDS is prepared in 80:20% (vol/vol) methanol:water. The ID REC PDS is stable for at least six months when stored in polypropylene centrifuge tubes at ≤4 °C.

Table 5

Analyte	Conc. of REC Stock (ng/mL)	Vol. of REC Stock (mL)	Final Vol. of REC PDS (mL)	Final Conc. of REC PDS (ng/mL)
M2PFOA	2000	1	4	500
M2PFDA	2000	1	4	500
M3PFBA	2000	1	4	500
M4PFOS	2000	1	4	500

8.2.8 CALIBRATION STANDARDS (CAL) –

Current Concentrations (ng/mL): 0.5, 1.0, 5.0, 10.0, 50.0, 125, 150

Prepare the CAL standards over the concentration range of interest from dilutions of the analyte PDS in methanol containing 20% reagent water. 20 µl of the EIS PDS and REC PDS are added to the CAL standards to give a constant

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

concentration of 10 ng/ml. The lowest concentration CAL standard must be at or below the RL (2 ng/L), which may depend on system sensitivity. The CAL standards may also be used as CCVs (Sect. 9.8). To make calibration stock standards:

Table 6

Calibration Standard Concentration	24 compound stock added (ul)	PFHxDA Stock added (ul)	500 ng/ml PFHxDA dilution added (ul)	PFODA Stock added (ul)	500 ng/ml PFODA dilution added (ul)	ADONA Stock added (ul)	500 ng/ml ADONA dilution added (ul)	HFPO-DA Stock added (ul)	Final Volume in MeOH/H ₂ O (82:20)
.5 ng/g	6.25		25		25		25	8.33	25 mls
1 ng/g	12.5		50		50		50	16.65	10 mls
5 ng/g	25		100		100		100	33.3	10 mls
10 ng/g	125	5		5		5		100	25 mls
10 ng/g	250	10		10		10		200	10 mls
125 ng/g	625	25		25		25		500	10 mls
150 ng/g	750	30		30		30		600	10 mls

9. Quality Control

The laboratory must maintain records to document the quality of data that is generated. Ongoing data quality checks are compared with established performance criteria to determine if the results of analyses meet the performance characteristics of the method.

9.1 MINIMUM REPORTING LIMIT (MRL) CONFIRMATION

- 9.1.1 Fortify, extract, and analyze seven replicate LCSs at 2 ng/l. Calculate the mean measured concentration (*Mean*) and standard deviation for these replicates. Determine the Half Range for the prediction interval of results (HR_{PIR}) using the equation below

$$HR_{PIR} = 3.963s$$

Where:

s = the standard deviation

3.963 = a constant value for seven replicates.

- 9.1.2 Confirm that the upper and lower limits for the Prediction Interval of Result ($PIR = Mean \pm HR_{PIR}$) meet the upper and lower recovery limits as shown below

The Upper PIR Limit must be $\leq 150\%$ recovery.

$$\frac{Mean + HR_{PIR}}{Fortified\ Concentration} \times 100\% \leq 150\%$$

The Lower PIR Limit must be $\geq 50\%$ recovery.

$$\frac{Mean - HR_{PIR}}{Fortified\ Concentration} \times 100\% \geq 50\%$$

- 9.1.3 The RL is validated if both the Upper and Lower PIR Limits meet the criteria described above. If these criteria are not met, the RL has been set too low and must be determined again at a higher concentration.

9.2 Blank(s)

- 9.2.1 **METHOD BLANK (MB)** - A Method Blank (MB) is required with each extraction batch to confirm that potential background contaminants are not interfering with the identification or quantitation of method analytes. If more than 20 Field Samples are included in a batch, analyze an MB for every 20 samples. If the MB produces a peak within the retention time window of any analyte that would prevent the determination of that analyte, determine the source of contamination and eliminate the interference before processing samples. Background contamination must be reduced to an acceptable level before proceeding. Background from method analytes or other contaminants that interfere with the measurement of method analytes must be below the RL. If the method analytes are detected in the MB at concentrations equal to or greater than this level, then all data for the problem analyte(s) must be considered invalid for all samples in the extraction batch. Because background contamination is a significant problem for several method analytes, it is highly recommended that the analyst maintain a historical record of MB data.

9.3 Laboratory Control Sample (LCS) and Laboratory Control Sample Duplicates (LCSD)

- 9.3.1 An LCS is required with each extraction batch. The fortified concentration of the LCS may be rotated between low, medium, and high concentrations from batch to batch. The low concentration LCS must be as near as practical to, but no more than two times, the RL. Similarly, the high concentration LCS should be near the high end of the calibration range established during the initial calibration (Sect. 10.6). Results of the low-level LCS analyses must be 50-150% of the true value. Results of the medium and high-level LCS analyses must be 70-130% of the true value. Calculate the percent recovery (%R) for each analyte using the equation

$$\%R = \frac{A \times 100}{B}$$

Where:

A = measured concentration in the fortified sample

B = fortification concentration.

- 9.3.2 Where applicable, LCSD's are to be extracted and analyzed. The concentration and analyte recovery criteria for the LSD must be the same as the batch LCS. The RSD's must fall within $\leq 30\%$ of the true value for medium and high level replicates, and $\leq 50\%$ for low level replicates. Calculate the relative percent difference (RPD) for duplicate MSs (MS and MSD) using the equation

$$RPD = \frac{|LCS - LCSD|}{(LCS + LCSD) / 2} \times 100$$

- 9.3.3 If the LCS and or LCSD results do not meet these criteria for method analytes, then all data for the problem analyte(s) must be considered invalid for all samples in the extraction batch.

9.4 Labeled Recovery Standards (REC)

- 9.4.1 The analyst must monitor the peak areas of the REC(s) in all injections during each analysis day. The REC responses (peak areas) in any chromatographic run must be within laboratory generated control limits generated from the analysis of control spike samples. Default limits of 50-150% may be used for analytes until sufficient replicates have been analyzed to generate proper control limits. If the REC areas in a chromatographic run do not meet these criteria, inject a second aliquot of that extract into a new capped autosampler vial. Random evaporation losses have been observed with the polypropylene caps causing high REC(s) areas.
- 9.4.1.1 If the reinjected aliquot produces an acceptable REC response, report results for that aliquot.
- 9.4.1.2 If the reinjected extract fails again, the analyst should check the calibration by reanalyzing the most recently acceptable CAL standard. If the CAL standard fails the criteria of Section 9.8, recalibration is in order per Section 10.6. If the CAL standard is acceptable, extraction of the sample may need to be repeated provided the sample is still within the holding time. Otherwise, report results obtained from the reinjected extract, but annotate as suspect. Alternatively, collect a new sample and re-analyze.

9.5 Extracted Internal Standards (EIS)

- 9.5.1 The EIS standard is fortified into all samples, CCVs, MBs, LCSs, MSs, MSDs, FD, and FRB prior to extraction. It is also added to the CAL standards. The EIS is a means of assessing method performance from extraction to final chromatographic measurement. Calculate the recovery (%R) for the EIS using the following equation

$$\%R = (A / B) \times 100$$

Where:

A = calculated EIS concentration for the QC or Field Sample

B = fortified concentration of the EIS.

- 9.5.2 Default limits of 50-150% may be used for analytes until sufficient replicates have been analyzed to generate proper control limits. A low or high percent recovery for a sample, blank, or CCV does not require discarding the analytical data but it may indicate a potential problem with future analytical data. When EIS recovery from a sample, blank, or CCV are outside control limits, check 1) calculations to locate possible errors, 2) standard solutions for degradation, 3) contamination, and 4) instrument performance. For CCVs and QC elements spiked with all target analytes, if the recovery of the corresponding target analytes meet the acceptance criteria for the EIS in question, the data can be used but all potential biases in the recovery of the EIS must be documented in the sample report. If

the associated target analytes do not meet the acceptance criteria. The data must be reanalyzed.

9.6 Matrix Spike (MS)

9.6.1 Analysis of an MS is required in each extraction batch and is used to determine that the sample matrix does not adversely affect method accuracy. Assessment of method precision is accomplished by analysis of a Field Duplicate (FD) (Sect. 9.6); however, infrequent occurrence of method analytes would hinder this assessment. If the occurrence of method analytes in the samples is infrequent, or if historical trends are unavailable, a second MS, or MSD, must be prepared, extracted, and analyzed from a duplicate of the Field Sample. Extraction batches that contain MSDs will not require the extraction of a field sample duplicate. If a variety of different sample matrices are analyzed regularly, for example, drinking water from groundwater and surface water sources, method performance should be established for each. Over time, MS data should be documented by the laboratory for all routine sample sources.

9.6.2 Within each extraction batch, a minimum of one Field Sample is fortified as an MS for every 20 Field Samples analyzed. The MS is prepared by spiking a sample with an appropriate amount of the Analyte Stock Standard (Sect. 8.2.4). Use historical data and rotate through the low, mid and high concentrations when selecting a fortifying concentration. Calculate the percent recovery (%R) for each analyte using the equation

$$\%R = \frac{(A - B)}{C} \times 100$$

Where:

A = measured concentration in the fortified sample
B = measured concentration in the unfortified sample
C = fortification concentration.

9.6.3 Analyte recoveries may exhibit matrix bias. For samples fortified at or above their native concentration, recoveries should range between 50-150%, except for low-level fortification near or at the RL (within a factor of 2-times the RL concentration) where 50-150% recoveries are acceptable. If the accuracy of any analyte falls outside the designated range, and the laboratory performance for that analyte is shown to be in control in the LCS, the recovery is judged to be matrix biased. The result for that analyte in the unfortified sample is labeled suspect/matrix to inform the data user that the results are suspect due to matrix effects.

9.7 Laboratory Duplicate

9.7.1 FIELD DUPLICATE OR LABORATORY FORTIFIED SAMPLE MATRIX DUPLICATE (FD or MSD) – Within each extraction batch (not to exceed 20 Field Samples), a minimum of one FD or MSD must be analyzed. Duplicates check the precision associated with sample collection, preservation, storage, and laboratory procedures. If method analytes are not routinely observed in Field Samples, an MSD should be analyzed rather than an FD.

9.7.2 Calculate the relative percent difference (RPD) for duplicate measurements (FD1 and FD2) using the equation

$$RPD = \frac{|FD1 - FD2|}{(FD1 + FD2) / 2} \times 100$$

9.7.3 RPDs for FDs should be $\leq 30\%$. Greater variability may be observed when FDs have analyte concentrations that are within a factor of 2 of the RL. At these concentrations, FDs should have RPDs that are $\leq 50\%$. If the RPD of any analyte falls outside the designated range, and the laboratory performance for that analyte is shown to be in control in the CCV, the recovery is judged to be matrix biased. The result for that analyte in the unfortified sample is labeled suspect/matrix to inform the data user that the results are suspect due to matrix effects.

9.7.4 If an MSD is analyzed instead of a FD, calculate the relative percent difference (RPD) for duplicate MSs (MS and MSD) using the equation

$$RPD = \frac{|MS - MSD|}{(MS + MSD) / 2} \times 100$$

9.7.5 RPDs for duplicate MSs should be $\leq 30\%$ for samples fortified at or above their native concentration. Greater variability may be observed when MSs are fortified at analyte concentrations that are within a factor of 2 of the RL. MSs fortified at these concentrations should have RPDs that are $\leq 50\%$ for samples fortified at or above their native concentration. If the RPD of any analyte falls outside the designated range, and the laboratory performance for that analyte is shown to be in control in the LCSD where applicable, the result is judged to be matrix biased. If no LCSD is present, the associated MS and MSD are to be re-analyzed to determine if any analytical has occurred. If the resulting RPDs are still outside control limits, the result for that analyte in the unfortified sample is labeled suspect/matrix to inform the data user that the results are suspect due to matrix effects.

9.8 Initial Calibration Verification (ICV)

9.8.1 As part of the IDC (Sect. 13.2), each time a new Analyte Stock Standard solution (Sect. 8.2.4) is used, and at least quarterly, analyze a QCS sample from a source different from the source of the CAL standards. If a second vendor is not available, then a different lot of the standard should be used. The QCS should be prepared and analyzed just like a CCV. Acceptance criteria for the QCS are identical to the CCVs; the calculated amount for each analyte must be $\pm 30\%$ of the expected value. If measured analyte concentrations are not of acceptable accuracy, check the entire analytical procedure to locate and correct the problem.


9.9 Continuing Calibration Verification (CCV)

9.9.1 CCV Standards are analyzed at the beginning of each analysis batch, after every 10 Field Samples, and at the end of the analysis batch. See Section 10.7 for concentration requirements and acceptance criteria.

9.10 Method-specific Quality Control Samples

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

9.10.1 PEAK ASYMMETRY FACTOR – A peak asymmetry factor must be calculated using the equation below during the IDL and every time a calibration curve is generated. The peak asymmetry factor for the first two eluting peaks in a midlevel CAL standard (if only two analytes are being analyzed, both must be evaluated) must fall in the range of 0.8 to 1.5. Modifying the standard or extract composition to more aqueous content to prevent poor shape is not permitted. See guidance in Section 10.6.4.1 if the calculated peak asymmetry factors do not meet the criteria.

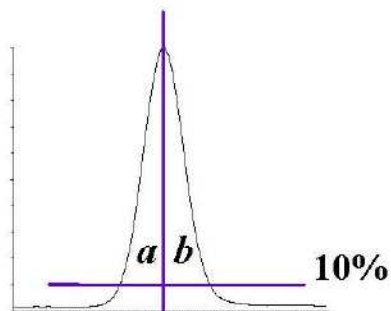

$$A_s = b / a$$

Where:

A_s = peak asymmetry factor

b = width of the back half of the peak measured (at 10% peak height) from the trailing edge of the peak to a line dropped perpendicularly from the peak apex

a = the width of the front half of the peak measured (at 10% peak height) from the leading edge of the peak to a line dropped perpendicularly from the apex.

9.11 Method Sequence

- CCV-LOW
- MB
- LCS
- LCSD
- MS
- Duplicate or MSD
- Field Samples (1-10)
- CCV-MID
- Field Samples (11-20)
- CCV-HIGH

10. Procedure

10.1 Equipment Set-up

10.1.1 This procedure may be performed manually or in an automated mode using a robotic or automatic sample preparation device. If an automated system is used to prepare samples, follow the manufacturer's operating instructions, but all extraction and elution steps must be the same as in the manual procedure. Extraction and/or elution steps may not be changed or omitted to accommodate

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

the use of an automated system. If an automated system is used, the MBs should be rotated among the ports to ensure that all the valves and tubing meet the MB requirements (Sect. 9.2).

10.1.2 Some of the PFAS's adsorb to surfaces, including polypropylene. Therefore, the aqueous sample bottles must be rinsed with the elution solvent (Sect 10.3.4) whether extractions are performed manually or by automation. The bottle rinse is passed through the cartridge to elute the method analytes and is then collected (Sect. 10.3.4).

10.1.3 NOTE: The SPE cartridges and sample bottles described in this section are designed as single use items and should be discarded after use. They may not be refurbished for reuse in subsequent analyses.

10.2 Sample Preparation and Extraction of Aqueous Samples

10.2.1 Samples are preserved, collected and stored as presented in Section 6.

The entire sample that is received must be sent through the SPE cartridge. In addition, the bottle must be solvent rinsed and this rinse must be sent through the SPE cartridge as well. The method blank (MB) and laboratory control sample (LCS) must be extracted in exactly the same manner (i.e., must include the bottle solvent rinse). It should be noted that a water rinse alone is not sufficient. This does not apply to samples with high concentrations of PFAS that are prepared using serial dilution and not SPE.

10.2.2 The MB, LCS and FRB may be prepared by measuring 250 mL of reagent water with a polypropylene graduated cylinder or filling a 250-mL sample bottle to near the top.

10.2.3 Adjust the sample pH to 3 by adding a 1:1 solution of acetic acid in water dropwise

10.2.4 Add 20 µL of 500 ng/ml solution of the EIS PDS (Sect. 8.2.2) to each sample and QC, cap and invert to mix. Allow to equilibrate for 15 minutes.

10.2.5 If the sample is an LCS, LCSD, MS, or MSD, add the necessary amount of analyte PDS (Sect. 8.2.4). Cap and invert each sample to mix.

10.3 Sample Prep and Extraction Protocol for Soils

10.3.1 1 gram of sample (measured to the nearest hundredth of a gram) is placed in a 15 ml polypropylene centrifuge tube. For laboratory control blanks and spikes, 2 grams of clean sand is used.

10.3.2 Add 20 µL of the EIS PDS (Sect. 8.2.2) to each sample and QC and allow to equilibrate for 15 minutes.

10.3.3 If the sample is an LCS, LCSD, MS, or MSD, add the necessary amount of analyte PDS (Sect. 8.2.4). Cap and invert each sample to mix.

10.3.4 To all samples, add 10 mls of acetonitrile till all visible clumps are broken up and allow to equilibrate. and vortex, cap and mix for 30 minutes using a shaker table

10.3.5 Add extraction salts (MgSO₄ and NaOAc) and vortex well

- 10.3.6 Shaker table for 30 minutes
- 10.3.7 Following mixing, sonicate each sample for 30 minutes
- 10.3.8 Centrifuge each sample for 5 minutes.
- 10.3.9 Remove liquid portion.
- 10.3.10 Add liquid to centrifuge tube containing additional MgSO₄, PSA and C18-EC and vortex.
- 10.3.11 Centrifuge and remove liquid portion.

10.4 Extract Clean-up

- 10.4.1 CARTRIDGE CLEAN-UP AND CONDITIONING –. Rinse each cartridge with 15 mL of acetonitrile and discard. If the cartridge goes dry during the conditioning phase, the conditioning must be started over. Attach the sample transfer tubes (Sect. 7.9.3), turn on the vacuum, and begin adding sample to the cartridge.
- 10.4.2 Adjust the vacuum so that the approximate flow rate is 1-2 mL/min. Do not allow the cartridge to go dry before all the sample has passed through.
- 10.4.3 SAMPLE BOTTLE AND CARTRIDGE RINSE – After the entire sample has passed through the cartridge, rinse the sample collection vial with two 1-mL aliquots of methanol and draw each aliquot through the cartridges. Draw air or nitrogen through the cartridge for 5 min at high vacuum (10-15 in. Hg).
- 10.4.4 If extracts are not to be immediately evaporated, cover collection tubes and store at ambient temperature till concentration.

10.5 Extract Concentration

- 10.5.1 Concentrate the extract to dryness under a gentle stream of nitrogen in a heated water bath (60-65 °C) to remove all the water/methanol mix. Add the appropriate amount of 80:20% (vol/vol) methanol:water solution and 20 µl of the ID REC PDS (Sect. 8.2.7) to the collection vial to bring the volume to 1 mL and vortex. Transfer a small aliquot with a plastic pipet (Sect. 7.6) to a polypropylene autosampler vial.

NOTE: It is recommended that the entire 1-mL aliquot not be transferred to the autosampler vial because the polypropylene autosampler caps do not reseal after injection. Therefore, do not store the extracts in the autosampler vials as evaporation losses can occur occasionally in these autosampler vials. Extracts can be split between 2 X 700 µl vials (Sect. 7.4).

10.6 Sample Volume Determination

- 10.6.1 If the level of the sample was marked on the sample bottle, use a graduated cylinder to measure the volume of water required to fill the original sample bottle to the mark made prior to extraction. Determine to the nearest 10 mL.
- 10.6.2 If using weight to determine volume, weigh the empty bottle to the nearest 10 g and determine the sample weight by subtraction of the empty bottle weight from the original sample weight (Sect. 10.2.2). Assume a sample density of 1.0 g/mL. In either case, the sample volume will be used in the final calculations of the analyte concentration (Sect. 11.2).

10.7 Initial Calibration - Demonstration and documentation of acceptable initial calibration is required before any samples are analyzed. After the initial calibration is successful, a CCV is required at the beginning and end of each period in which analyses are performed, and after every tenth Field Sample.

10.7.1 ESI-MS/MS TUNE

10.7.1.1 Calibrate the mass scale of the MS with the calibration compounds and procedures prescribed by the manufacturer.

10.7.1.2 Optimize the [M-H]⁻ for each method analyte by infusing approximately 0.5-1.0 µg/mL of each analyte (prepared in the initial mobile phase conditions) directly into the MS at the chosen LC mobile phase flow rate (approximately 0.4 mL/min). This tune can be done on a mix of the method analytes. The MS parameters (voltages, temperatures, gas flows, etc.) are varied until optimal analyte responses are determined. The method analytes may have different optima requiring some compromise between the optima.

10.7.1.3 Optimize the product ion for each analyte by infusing approximately 0.5-1.0 µg/mL of each analyte (prepared in the initial mobile phase conditions) directly into the MS at the chosen LC mobile phase flow rate (approximately 0.3 mL/min). This tune can be done on a mix of the method analytes. The MS/MS parameters (collision gas pressure, collision energy, etc.) are varied until optimal analyte responses are determined. Typically, the carboxylic acids have very similar MS/MS conditions and the sulfonic acids have similar MS/MS conditions.

10.7.2 Establish LC operating parameters that optimize resolution and peak shape. Modifying the standard or extract composition to more aqueous content to prevent poor shape is not permitted.

Cautions: LC system components, as well as the mobile phase constituents, contain many of the method analytes in this method. Thus, these PFAS's will build up on the head of the LC column during mobile phase equilibration. To minimize the background PFAS peaks and to keep background levels constant, the time the LC column sits at initial conditions must be kept constant and as short as possible (while ensuring reproducible retention times). In addition, prior to daily use, flush the column with 100% methanol for at least 20 min before initiating a sequence. It may be necessary on some systems to flush other LC components such as wash syringes, sample needles or any other system components before daily use.

10.7.3 Inject a mid-level CAL standard under LC/MS conditions to obtain the retention times of each method analyte. If analyzing for PFTA, ensure that the LC conditions are adequate to prevent co-elution of PFTA and the mobile phase interferants. These interferants have the same precursor and products ions as PFTA, and under faster LC conditions may co-elute with PFTA. Divide the chromatogram into retention time windows each of which contains one or more chromatographic peaks. During MS/MS analysis, fragment a small number of selected precursor ions ([M-H]⁻) for the analytes in each window and choose the most abundant product ion. For maximum sensitivity, small mass windows of ±0.5 daltons around the product ion mass were used for quantitation. If sufficient

sensitivity exists to meet the RL, wider mass ranges may be used to obtain more confirmation ions.

10.7.3.1 NOTE: As the NOTE in Section 10.6.4.1 indicates, PFOS has linear and branched isomers. There have been reports that not all the products ions in the linear PFOS are produced in all the branched PFOS isomers. (This phenomenon probably exists for PFHxS and PFBS also, although it has not been studied to date.) Thus, in an attempt to reduce PFOS bias, it is required that the m/z 499 \rightarrow m/z 80 transition be used as the quantitation transition. Some MS/MS instruments, such as conventional ion traps, may not be able to scan a product ion with such a wide mass difference from the precursor ion; therefore, they may not be used for this method if PFOS, PFBS, or PFHxS analysis is to be conducted. Literature reports indicate for the most abundant PFOS isomer, which is the linear isomer, that all the products ions obtained on an ion trap have less than 10% relative abundance. In addition, there is not a single ion trap MS/MS transition that encompasses the linear isomer and the majority of the branch isomers; thus, the bias would be unacceptably high.

10.7.4 Inject a mid-level CAL standard under optimized LC/MS/MS conditions to ensure that each method analyte is observed in its MS/MS window and that there are at least 10 scans across the peak for optimum precision.

10.7.4.1 If broad, split or fronting peaks are observed for the first two eluting chromatographic peaks (if only two analytes are being analyzed, both must be evaluated), change the initial mobile phase conditions to higher aqueous content until the peak asymmetry ratio for each peak is 0.8 – 1.5. The peak asymmetry factor is calculated as described in Section 9.9.1 on a mid-level CAL standard. The peak asymmetry factor must meet the above criteria for the first two eluting peaks during the IDL and every time a new calibration curve is generated. Modifying the standard or extract composition to more aqueous content to prevent poor shape is not permitted.

NOTE: PFHxS, PFOS, NMeFOSAA, and NEtFOSAA have multiple chromatographic peaks using the LC conditions in Table 5 due to chromatographic resolution of the linear and branched isomers of these compounds. Most PFAS's are produced by two different processes. One process gives rise to linear PFAS's only while the other process produces both linear and branched isomers. Thus, both branched and linear PFAS's can potentially be found in the environment. For the aforementioned compounds that give rise to more than one peak, all the chromatographic peaks observed in the standard must be integrated and the areas totaled. Chromatographic peaks in a sample must be integrated in the same way as the CAL standard.

10.7.5 Prepare a set of CAL standards as described in Section 8.2.5. The lowest concentration CAL standard must be at or below the RL (2 ng/L), which may depend on system sensitivity. It is recommended that at least four of the CAL standards are at a concentration greater than or equal to the RL.

10.7.6 The LC/MS/MS system is calibrated using the IS technique. Use the LC/MS/MS data system software to generate a linear regression or quadratic calibration

curve for each of the analytes. This curve **must always** be forced through zero and may be concentration weighted, if necessary. Forcing zero allows for a better estimate of the background levels of method analytes. A minimum of 5 levels are required for a linear calibration model and a minimum of 6 levels are required for a quadratic calibration model.

10.7.6.1 The isotopically labeled IS(s) in this method may undergo suppression in the ESI source if the concentration of the co-eluting unlabeled method analyte(s) is too high. The analyte concentration at which suppression may occur can vary depending on the instrument, LC conditions, ESI conditions, IS concentration, etc. To evaluate whether suppression is occurring during calibration, calculate the relative percent difference (RPD) between the high (H) and low (L) areas for each IS using the equation

$$RPD = \frac{(H - L)}{(H + L) / 2} \times 100$$

10.7.6.2 The RPD calculated above must be <20% for each IS during calibration. If the calculated RPD is >20% for any IS, the analyst must recalibrate at lower analyte concentrations until the IS RPDs are <20%.

10.7.7 CALIBRATION ACCEPTANCE CRITERIA – A linear fit is acceptable if the coefficient of determination (r^2) is greater than 0.99. When quantitated using the initial calibration curve, each calibration point, except the lowest point, for each analyte should calculate to be within 70-130% of its true value. The lowest CAL point should calculate to be within 50-150% of its true value. If these criteria cannot be met, the analyst will have difficulty meeting ongoing QC criteria. It is recommended that corrective action is taken to reanalyze the CAL standards, restrict the range of calibration, or select an alternate method of calibration (forcing the curve through zero is still required).

10.7.7.1 CAUTION: When acquiring MS/MS data, LC operating conditions must be carefully reproduced for each analysis to provide reproducible retention times. If this is not done, the correct ions will not be monitored at the appropriate times. As a precautionary measure, the chromatographic peaks in each window must not elute too close to the edge of the segment time window.

10.8 CONTINUING CALIBRATION CHECK (CCV) – Minimum daily calibration verification is as follows. Verify the initial calibration at the beginning and end of each group of analyses, and after every tenth sample during analyses. In this context, a “sample” is considered to be a Field Sample. MBs, CCVs, LCSs, MSs, FDs FRBs and MSDs are not counted as samples. The beginning CCV of each analysis batch must be at or below the RL in order to verify instrument sensitivity prior to any analyses. If standards have been prepared such that all low CAL points are not in the same CAL solution, it may be necessary to analyze two CAL standards to meet this requirement. Alternatively, the analyte concentrations in the analyte PDS may be customized to meet these criteria. Subsequent CCVs should alternate between a medium and Low concentration CAL standard.

10.8.1 Inject an aliquot of the appropriate concentration CAL standard and analyze with the same conditions used during the initial calibration.

- 10.8.2** Calculate the concentration of each analyte and EIS in the CCV. The calculated amount for each analyte for medium level CCVs must be within $\pm 30\%$ of the true value with an allowance of 10% of the reported analytes to be greater than 30%, but less than 40%. The calculated amount for each EIS must be within $\pm 50\%$ of the true value. The calculated amount for the lowest calibration point for each analyte must be within $\pm 50\%$. If these conditions do not exist, then all data for the problem analyte must be considered invalid, and remedial action should be taken (Sect. 10.7.4) which may require recalibration. Any Field or QC Samples that have been analyzed since the last acceptable calibration verification should be reanalyzed after adequate calibration has been restored, with the following exception. **If the CCV fails because the calculated concentration is greater than 130% (150% for the low-level CCV) for a particular method analyte, and Field Sample extracts show no detection for that method analyte, non-detects may be reported without re-analysis.**
- 10.8.3** REMEDIAL ACTION – Failure to meet CCV QC performance criteria may require remedial action. Major maintenance, such as cleaning the electrospray probe, atmospheric pressure ionization source, cleaning the mass analyzer, replacing the LC column, etc., requires recalibration (Sect 10.6) and verification of sensitivity by analyzing a CCV at or below the RL (Sect 10.7).

10.9 EXTRACT ANALYSIS

- 10.9.1** Establish operating conditions equivalent to those summarized in Tables 6-8 of Section 16. Instrument conditions and columns should be optimized prior to the initiation of the IDC.
- 10.9.2** Establish an appropriate retention time window for each analyte. This should be based on measurements of actual retention time variation for each method analyte in CAL standard solutions analyzed on the LC over the course of time. A value of plus or minus three times the standard deviation of the retention time obtained for each method analyte while establishing the initial calibration and completing the IDC can be used to calculate a suggested window size. However, the experience of the analyst should weigh heavily on the determination of the appropriate retention window size.
- 10.9.3** Calibrate the system by either the analysis of a calibration curve (Sect. 10.6) or by confirming the initial calibration is still valid by analyzing a CCV as described in Section 10.7. If establishing an initial calibration, complete the IDC as described in Section 13.2.
- 10.9.4** Begin analyzing Field Samples, including QC samples, at their appropriate frequency by injecting the same size aliquots under the same conditions used to analyze the CAL standards.
- 10.9.5** At the conclusion of data acquisition, use the same software that was used in the calibration procedure to identify peaks of interest in predetermined retention time windows. Use the data system software to examine the ion abundances of the peaks in the chromatogram. Identify an analyte by comparison of its retention time with that of the corresponding method analyte peak in a reference standard.
- 10.9.6** Comparison of the MS/MS mass spectra is not particularly useful given the limited ± 0.5 dalton mass range around a single product ion for each method analyte.

10.9.7 The analyst must not extrapolate beyond the established calibration range. If an analyte peak area exceeds the range of the initial calibration curve, the sample should be re-extracted with a reduced sample volume in order to bring the out of range target analytes into the calibration range. If a smaller sample size would not be representative of the entire sample, the following options is recommended. Re-extract an additional aliquot of sufficient size to insure that it is representative of the entire sample. Spike it with a higher concentration of internal standard. Prior to LC/MS analysis, dilute the sample so that it has a concentration of internal standard equivalent to that present in the calibration standard. Then, analyze the diluted extract.

11. Data Evaluation, Calculations and Reporting

11.1 Complete chromatographic resolution is not necessary for accurate and precise measurements of analyte concentrations using MS/MS. In validating this method, concentrations were calculated by measuring the product ions listed in Table 7.

11.2 Calculate analyte concentrations using the multipoint calibration established in Section 10.6. Do not use daily calibration verification data to quantitate analytes in samples. Adjust final analyte concentrations to reflect the actual sample volume determined in Section 10.6 where:

$$C_{ex} = (\text{Area of target analyte} * \text{Concentration of Labeled analog}) / (\text{area of labeled analog} * \text{CF})$$

$$C_s = (C_{ex} / \text{sample volume in ml}) * 1000$$

C_{ex} = The concentration of the analyte in the extract

CF = calibration factor from calibration.

11.3 Prior to reporting the data, the chromatogram should be reviewed for any incorrect peak identification or poor integration.

11.4 PFHxS, PFOS, PFOA, NMeFOSAA, and NEtFOSAA have multiple chromatographic peaks using the LC conditions in Table 5 due to the linear and branch isomers of these compounds (Sect. 10.6.4.1). The areas of all the linear and branched isomer peaks observed in the CAL standards for each of these analytes must be summed and the concentrations reported as a total for each of these analytes.

11.5 Calculations must utilize all available digits of precision, but final reported concentrations should be rounded to an appropriate number of significant figures (one digit of uncertainty), typically two, and not more than three significant figures.

12. Contingencies for Handling Out-of-Control Data or Unacceptable Data

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

- 12.1** Section 9.0 outlines sample batch QC acceptance criteria. If non-compliant organic compound results are to be reported, the Organic Section Head and/or the Laboratory Director, and the Operations Manager must approve the reporting of these results. The laboratory Project Manager shall be notified, and may choose to relay the non-compliance to the client, for approval, or other corrective action, such as re-sampling and re-analysis. The analyst, Data Reviewer, or Department Supervisor performing the secondary review initiates the project narrative, and the narrative must clearly document the non-compliance and provide a reason for acceptance of these results.
- 12.2** All results for the organic compounds of interest are reportable without qualification if extraction and analytical holding times are met, preservation requirements (including cooler temperatures) are met, all QC criteria are met, and matrix interference is not suspected during extraction or analysis of the samples. If any of the below QC parameters are not met, all associated samples must be evaluated for re-extraction and/or re-analysis.

13. Method Performance

13.1 Detection Limit Study (DL) / Limit of Detection Study (LOD) / Limit of Quantitation (LOQ)

- 13.1.1** The laboratory follows the procedure to determine the DL, LOD, and/or LOQ as outlined in Alpha SOP ID 1732. These studies performed by the laboratory are maintained on file for review.

13.2 Demonstration of Capability Studies

- 13.2.1** The IDC must be successfully performed prior to analyzing any Field Samples. Prior to conducting the IDC, the analyst must first generate an acceptable Initial Calibration following the procedure outlined in Section 10.6.
- 13.2.2** INITIAL DEMONSTRATION OF LOW SYSTEM BACKGROUND – Any time a new lot of SPE cartridges, solvents, centrifuge tubes, disposable pipets, and autosampler vials are used, it must be demonstrated that an MB is reasonably free of contamination and that the criteria in Section 9.2.1 are met. If an automated extraction system is used, an MB should be extracted on each port to ensure that all the valves and tubing are free from potential PFAS contamination.
- 13.2.3** INITIAL DEMONSTRATION OF PRECISION (IDP) – Prepare, extract, and analyze four to seven replicate LCSs fortified near the midrange of the initial calibration curve according to the procedure described in Section 10. Sample preservatives as described in Section 6.2.1 must be added to these samples. The relative standard deviation (RSD) of the results of the replicate analyses must be less than 20%.
- 13.2.4** INITIAL DEMONSTRATION OF ACCURACY (IDA) – Using the same set of replicate data generated for Section 13.2.3, calculate average recovery. The average recovery of the replicate values must be within $\pm 30\%$ of the true value.
- 13.2.5** INITIAL DEMONSTRATION OF PEAK ASYMMETRY FACTOR – Peak asymmetry factors must be calculated using the equation in Section 9.10.1 for the first two eluting peaks (if only two analytes are being analyzed, both must be evaluated) in a mid-level CAL standard. The peak asymmetry factors must fall in the range of 0.8 to 1.5. See guidance in Section 10.6.4.1 if the calculated peak asymmetry factors do not meet the criteria.

13.2.6 Refer to Alpha SOP ID 1739 for further information regarding IDC/DOC Generation.

13.2.7 The analyst must make a continuing, annual, demonstration of the ability to generate acceptable accuracy and precision with this method.

14. Pollution Prevention and Waste Management

14.1 Refer to Alpha's Chemical Hygiene Plan and Hazardous Waste Management and Disposal SOP for further pollution prevention and waste management information.

14.2 This method utilizes SPE to extract analytes from water. It requires the use of very small volumes of organic solvent and very small quantities of pure analytes, thereby minimizing the potential hazards to both the analyst and the environment as compared to the use of large volumes of organic solvents in conventional liquid-liquid extractions.

14.3 The analytical procedures described in this method generate relatively small amounts of waste since only small amounts of reagents and solvents are used. The matrices of concern are finished drinking water or source water. However, laboratory waste management practices must be conducted consistent with all applicable rules and regulations, and that laboratories protect the air, water, and land by minimizing and controlling all releases from fume hoods and bench operations. Also, compliance is required with any sewage discharge permits and regulations, particularly the hazardous waste identification rules and land disposal restrictions.

15. Referenced Documents

Chemical Hygiene Plan – ID 2124

SOP ID 1732 Detection Limit (DL), Limit of Detection (LOD) & Limit of Quantitation (LOQ) SOP

SOP ID 1739 Demonstration of Capability (DOC) Generation SOP

SOP ID 1728 Hazardous Waste Management and Disposal SOP

16. Attachments

Table 7: LC Method Conditions

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

Time (min)	2 mM Ammonium Acetate (5:95 MeOH/H ₂ O)	2 mM Ammonium Acetate (100% Methanol)
Initial	100.0	0.0
1.0	100.0	0.0
2.2	85.0	15.0
11	20.0	80.0
11.4	0.0	100.0
12.4	100.0	00.0
15.5	100.0	0.0
Waters Aquity UPLC ® BEHC ₁₈ 2.1 x 50 mm packed with 1.7 µm BEH C ₁₈ stationary phase Flow rate of 0.4 mL/min 2-5 µL injection		

Table 8: ESI-MS Method Conditions

ESI Conditions	
Polarity	Negative ion
Capillary needle voltage	.5 kV
Cone Gas Flow	20 L/hr
Nitrogen desolvation gas	1000 L/hr
Desolvation gas temp.	500 °C

Table 9: Method Analyte Source, Retention Times (RTs), and EIS References

#	Analyte	Transition	RT	IS	Type
1	M3PBA	216>171	2.65		REC
2	PFBA	213 > 169	2.65	2: M4PFBA	
3	M4PFBA	217 > 172	2.65	1: M3PBA	EIS
4	PFPeA	263 > 219	5.67	4: M5PFPEA	
5	M5PFPEA	268 > 223	5.66	1: M3PBA	EIS
6	PFBS	299 > 80	6.35	6: M3PFBS	
7	M3PFBS	302 > 80	6.35	1: M3PBA	EIS
8	FtS 4:2	327 > 307	7.47	9: M2-4:2FTS	
9	M2-4:2FTS	329 > 81	7.47	1: M3PBA	EIS
10	PFHxA	303 > 269	7.57	10: M5PFHxA	
11	M5PFHxA	318 > 273	7.57	1: M3PBA	EIS
12	PFPeS	349 > 80	7.88	18: M3PFHxS	
13	PFHpA	363 > 319	8.80	14: M4PFHpA	
14	M4PFHpA	367 > 322	8.80	1: M3PBA	EIS
15	L-PFHxS	399 > 80	8.94	18: M3PFHxS	
16	br-PFHxS	399 > 80	8.72	18: M3PFHxS	

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

#	Analyte	Transition	RT	IS	Type
17	PFHxS Total	399 > 80	8.94	18: M3PFHxS	
18	M3PFHxS	402 > 80	8.94	1: M3PBA	EIS
19	M2PFOA	415 > 370	9.7		REC
20	PFOA	413 > 369	9.7	23: M8PFOA	
21	br-PFOA	413 > 369	9.48	23: M8PFOA	
22	PFOA Total	413 > 369	9.7	23: M8PFOA	
23	M8PFOA	421 > 376	9.7	19: M2PFOA	EIS
24	FtS 6:2	427 > 407	9.66	25: M2-6:2FTS	
25	M2-6:2FTS	429 > 409	9.66	19: M2PFOA	EIS
26	PFHpS	449 > 80	9.78	33: M8PFOS	
27	PFNA	463 > 419	10.41	33: M8PFOS	
28	M9PFNA	472 > 427	10.41	19: PFOA	EIS
29	M2PFOS	501 > 80	10.45		REC
30	PFOS	499 > 80	10.45	33: M8PFOS	
31	br-PFOS	499 > 80	10.27	33: M8PFOS	
32	PFOS Total	499 > 80	10.45	33: M8PFOS	
33	M8PFOS	507 > 80	10.45	29: M4PFOS	EIS
34	FtS 8:2	527 > 507	10.99	38: M2-8:2FTS	
35	M2-8:2FTS	529 > 509	10.99	36: M2PFDA	EIS
36	M2PFDA	515 > 470	11.00		REC
37	PFDA	513 > 469	11.00	38: M6PFDA	
38	M6PFDA	519 > 474	11.00	36: M2PFDA	EIS
39	PFNS	549 > 80	11.02	38: M6PFDA	
40	NMeFOSAA	570 > 419	11.41	41: D3-NMeFOSAA	
41	d3-NMeFOSAA	573 > 419	11.41	36: M2PFDA	EIS
42	PFOSA	498 > 78	11.48	29: M8FOSA	
43	M8FOSA	506 > 78	11.48	19: M2PFOA	EIS
44	PFUnDA	563 > 519	11.51	41: M7-PFUODA	
45	M7-PFUODA	570 > 525	11.51	36: M2PFDA	EIS
46	PFDS	599 > 80	11.51	45: M7-PFUODA	
47	NEtFOSAA	584 > 419	11.68	48: d5-NEtFOSAA	
48	d5-NEtFOSAA	589 > 419	11.68	36: M2PFDA	EIS
49	PFDOA	613 > 569	11.96	50: MPFDOA	
50	MPFDOA	615 > 570	11.96	36: M2PFDA	EIS
51	PFTriA	663 > 619	12.34	50: MPFDOA	
52	PFTeA	713 > 669	12.6	53: M2PFTEDA	
53	M2PFTEDA	715 > 670	12.6	36: M2PFDA	EIS
54	M3HFPO-DA	329>285	7.97	1: M3PFBA	EIS
55	HFPO-DA	332>287	7.97	54: M3HFPO-DA	

Printouts of this document may be out of date and should be considered uncontrolled. To accomplish work, the published version of the document should be viewed online.

#	Analyte	Transition	RT	IS	Type
56	ADONA	377>251		23:M8PFOA	
57	PFHxDA	813>769	13.2	53:M2PFTEDA	
58	PFODA	913>869	13.5	53:M2PFTEDA	

APPENDIX B



Sherri Pullar

Project Scientist

EDUCATION

B.S., State University of New York, New Paltz, NY

TRAINING / CERTIFICATIONS

EPA Guidance on QAPP/eQAPP

Training in ADR and EDMS

DOD database training

WORK HISTORY

Years with firm: 10 years

Years Experience: 25 years

Sherri specializes in data validation of inorganic, organic, and wet chemistry data including PFAS and 1,4-dioxane (including ADR and EDMS). Sherri has extensive experience preparing, supporting, and developing numerous quality assurance project plans, sampling analysis plans, quality assurance sampling plans, precision, accuracy, reproducibility, completeness, and comparability reports, and standard operating procedures for field sampling, work plans, remedial investigations, feasibility studies, remedial actions, health and safety plans, and reviewing data packages for quality control and acceptability. Sherri has extensive experience with database entry for DOD and NJDEP.

BACKGROUND / EXPERIENCE

Environmental Business Consultants (EBC), Numerous Projects, Ridge, NY
Project Scientist. Worked on numerous sites with EBC to perform EPA Region II, level IV inorganic data validation, including metals and wet chemistry and organic data validation including volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), pesticides, PCSs, 1,4-dioxane, and PFOS in soil, sediment, groundwater, and air samples.

U.S. Navy, LTM, Former Naval Air Warfare Center Trenton, West Trenton NJ
Project Scientist. Performed inorganic data validation, including metals and wet chemistry and organic data validation including VOC and SVOC in groundwater, soil and air samples. Responsible for uploading data into Navy database.

U.S. Navy, LTM, Naval Weapons Industrial Reserve Plant NWIRP, Bedford MA
Project Scientist. Performed inorganic data validation, including metals and wet chemistry and organic data validation including VOC and SVOC in groundwater, soil and air samples. Responsible for uploading data into Navy database.


USACE New England District, LTM, Former Fort Devens, MA
Project Scientist. Performed organic data validation, including explosives and perchlorate using automated data validation (ADR) for groundwater and soil.

Northeastern Environmental Technologies (NEET), Numerous Projects, Ballston Spa, NY
Project Scientist. Worked on two sites with NEET to perform EPA Region II, level IV inorganic data validation, including metals and wet chemistry and organic data validation including volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), in soil, groundwater, and air samples.

U.S. Navy, LTM, Naval Weapons Industrial Reserve Plant NWIRP, Calverton, NY
Project Scientist. Performed inorganic data validation, including metals and wet chemistry and organic data validation including VOC and SVOC in groundwater and soil samples. Responsible for uploading data into Navy database.

Footc Mineral GMP, LTM, East Whiteland Township, PA. Project Scientist. Performed inorganic data validation, including metals and wet chemistry and organic data validation including VOC in groundwater samples. Responsible for uploading data into Navy database.

USACE New England District, LTM, Former Massachusetts Military Reservation, MA. Project Scientist. Performed organic data validation, including explosives and perchlorate and inorganic data validation, metals and wet chemistry using automated data validation (ADR) for soil and groundwater.

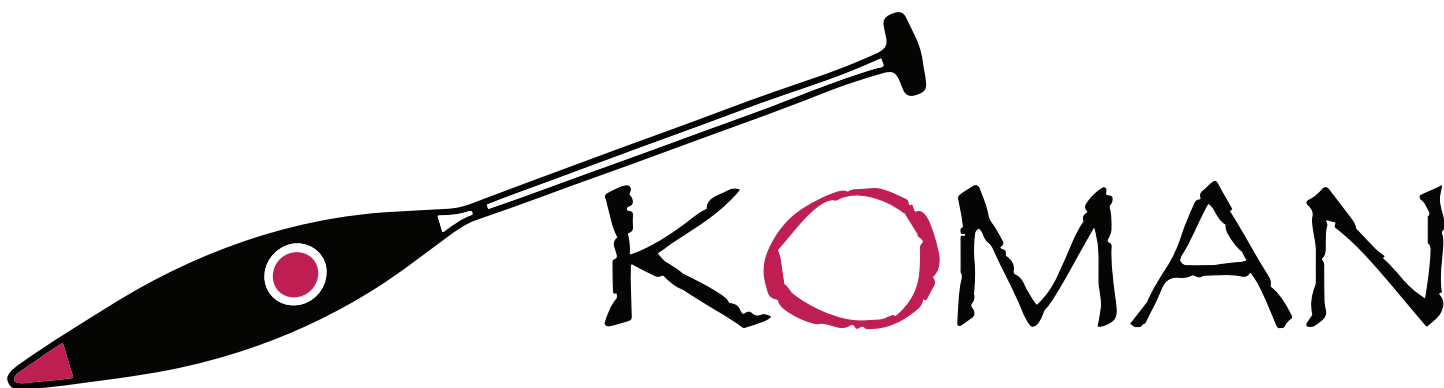

APPENDIX C

Laboratory MDL for PFAs in Soil



Date Created: 08/08/19
 Created By: Tom Tanico
 File: PM7147-1
 Page: 1

NY PFAAs via EPA 537(M)-Isotope Dilution (WATER)

Holding Time: 28 days
 Container/Sample Preservation: 1 - Plastic 8oz unpreserved

Analyte	CAS #	RL	MDL	Units	LCS Criteria	LCS RPD	MS Criteria	MS RPD	Duplicate RPD	Surrogate Criteria		
Perfluorobutanoic Acid (PFBA)	375-22-4	1	0.0227	ug/kg	71-135	30	71-135	30	30			
Perfluoropentanoic Acid (PFPeA)	2706-90-3	1	0.046	ug/kg	69-132	30	69-132	30	30			
Perfluorobutanesulfonic Acid (PFBS)	375-73-5	1	0.039	ug/kg	72-128	30	72-128	30	30			
Perfluorohexanoic Acid (PFHxA)	307-24-4	1	0.0525	ug/kg	70-132	30	70-132	30	30			
Perfluoroheptanoic Acid (PFHpA)	375-85-9	1	0.0451	ug/kg	71-131	30	71-131	30	30			
Perfluorohexanesulfonic Acid (PFHxS)	355-46-4	1	0.0605	ug/kg	67-130	30	67-130	30	30			
Perfluorooctanoic Acid (PFOA)	335-67-1	1	0.0419	ug/kg	69-133	30	69-133	30	30			
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2FTS)	27619-97-2	1	0.1795	ug/kg	64-140	30	64-140	30	30			
Perfluoroheptanesulfonic Acid (PFHpS)	375-92-8	1	0.1365	ug/kg	70-132	30	70-132	30	30			
Perfluorononanoic Acid (PFNA)	375-95-1	1	0.075	ug/kg	72-129	30	72-129	30	30			
Perfluorooctanesulfonic Acid (PFOS)	1763-23-1	1	0.13	ug/kg	68-136	30	68-136	30	30			
Perfluorodecanoic Acid (PFDA)	335-76-2	1	0.067	ug/kg	69-133	30	69-133	30	30			
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	39108-34-4	1	0.287	ug/kg	65-137	30	65-137	30	30			
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSA)	2355-31-9	1	0.2015	ug/kg	63-144	30	63-144	30	30			
Perfluoroundecanoic Acid (PFUnA)	2058-94-8	1	0.0468	ug/kg	64-136	30	64-136	30	30			
Perfluorodecanesulfonic Acid (PFDS)	335-77-3	1	0.153	ug/kg	59-134	30	59-134	30	30			
Perfluorooctanesulfonamide (FOSA)	754-91-6	1	0.098	ug/kg	67-137	30	67-137	30	30			
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	2991-50-6	1	0.0845	ug/kg	61-139	30	61-139	30	30			
Perfluorododecanoic Acid (PFDoA)	307-55-1	1	0.07	ug/kg	69-135	30	69-135	30	30			
Perfluorotridecanoic Acid (PFTriDA)	72629-94-8	1	0.2045	ug/kg	66-139	30	66-139	30	30			
Perfluorotetradecanoic Acid (PFTA)	376-06-7	1	0.054	ug/kg	69-133	30	69-133	30	30			

Please Note that the RL information provided in this table is calculated using a 100% Solids factor. (Soil/Solids only)
 Please Note that the information provided in this table is subject to change at anytime at the discretion of Alpha Analytical, Inc.



8 Walkup Drive, Westborough, Massachusetts 01581 • 508-898-9220 • www.alphalab.com

Westborough, MA • Mansfield, MA • Bangor, ME • Portsmouth, NH • Mahwah, NJ • Albany, NY • Buffalo, NY • Holmes, PA





Date Created: 08/08/19
 Created By: Tom Tanico
 File: PM7147-1
 Page: 2

NY PFAAs via EPA 537(M)-Isotope Dilution (WATER)

Holding Time: 28 days
 Container/Sample Preservation: 1 - Plastic 8oz unpreserved

Analyte	CAS #	RL	MDL	Units	LCS Criteria	LCS RPD	MS Criteria	MS RPD	Duplicate RPD	Surrogate Criteria		
PFOA/PFOS, Total		2	0.236	ng/l				30	30			
PFOA/PFOS, Total		1	0.0419	ug/kg				30	30			
Perfluoro[13C4]Butanoic Acid (MPFBA)	NONE										60-153	
Perfluoro[13C4]Butanoic Acid (MPFBA)	NONE										2-156	
Perfluoro[13C5]Pentanoic Acid (M5PFPEA)	NONE										16-173	
Perfluoro[13C5]Pentanoic Acid (M5PFPEA)	NONE										65-182	
Perfluoro[2,3,4-13C3]Butanesulfonic Acid (M3PFBS)	NONE										70-151	
Perfluoro[2,3,4-13C3]Butanesulfonic Acid (M3PFBS)	NONE										31-159	
Perfluoro[1,2,3,4,6-13C5]Hexanoic Acid (M5PFHxA)	NONE										61-147	
Perfluoro[1,2,3,4,6-13C5]Hexanoic Acid (M5PFHxA)	NONE										21-145	
Perfluoro[1,2,3,4-13C4]Heptanoic Acid (M4PFHpA)	NONE										30-139	
Perfluoro[1,2,3,4-13C4]Heptanoic Acid (M4PFHpA)	NONE										62-149	
Perfluoro[1,2,3-13C3]Hexanesulfonic Acid (M3PFHxS)	NONE										63-166	
Perfluoro[1,2,3-13C3]Hexanesulfonic Acid (M3PFHxS)	NONE										47-153	
Perfluoro[13C8]Octanoic Acid (M8PFOA)	NONE										36-149	
Perfluoro[13C8]Octanoic Acid (M8PFOA)	NONE										62-152	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Octanesulfonic Acid (M2-13C2)	NONE										1-244	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Octanesulfonic Acid (M2-13C2)	NONE										32-182	
Perfluoro[13C9]Nonanoic Acid (M9PFNA)	NONE										34-146	
Perfluoro[13C9]Nonanoic Acid (M9PFNA)	NONE										61-154	
Perfluoro[13C8]Octanesulfonic Acid (M8PFOS)	NONE										65-151	
Perfluoro[13C8]Octanesulfonic Acid (M8PFOS)	NONE										42-146	
Perfluoro[1,2,3,4,5,6-13C6]Decanoic Acid (M6PFDA)	NONE										65-150	
Perfluoro[1,2,3,4,5,6-13C6]Decanoic Acid (M6PFDA)	NONE										38-144	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Decanesulfonic Acid (M2-13C2)	NONE										25-186	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Decanesulfonic Acid (M2-13C2)	NONE										7-170	
N-Deuteriomethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										45-137	
N-Deuteriomethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										1-181	
Perfluoro[1,2,3,4,5,6,7-13C7]Undecanoic Acid (M7-PFUIDA)	NONE										40-144	
Perfluoro[1,2,3,4,5,6,7-13C7]Undecanoic Acid (M7-PFUIDA)	NONE										64-158	
Perfluoro[13C8]Octanesulfonamide (M8FOSA)	NONE										1-87	
Perfluoro[13C8]Octanesulfonamide (M8FOSA)	NONE										1-125	
N-Deuterioethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										23-146	
N-Deuterioethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										42-136	
Perfluoro[1,2-13C2]Dodecanoic Acid (MPFDOA)	NONE										56-148	
Perfluoro[1,2-13C2]Dodecanoic Acid (MPFDOA)	NONE										24-161	
Perfluoro[1,2-13C2]Tetradecanoic Acid (M2PFTEDA)	NONE										26-160	
Perfluoro[1,2-13C2]Tetradecanoic Acid (M2PFTEDA)	NONE										33-143	

Please Note that the RL information provided in this table is calculated using a 100% Solids factor. (Soil/Solids only)
 Please Note that the information provided in this table is subject to change at anytime at the discretion of Alpha Analytical, Inc.



8 Walkup Drive, Westborough, Massachusetts 01581 • 508-898-9220 • www.alphalab.com
 Westborough, MA • Mansfield, MA • Bangor, ME • Portsmouth, NH • Mahwah, NJ • Albany, NY • Buffalo, NY • Holmes, PA



APPENDIX D
Laboratory MDL for PFAs in Groundwater



Date Created: 08/08/19
 Created By: Tom Tanico
 File: PM7147-1
 Page: 1

NY PFAAs via EPA 537(M)-Isotope Dilution (WATER)

Holding Time: 28 days
 Container/Sample Preservation: 1 - Plastic 8oz unpreserved

Analyte	CAS #	RL	MDL	Units	LCS Criteria	LCS RPD	MS Criteria	MS RPD	Duplicate RPD	Surrogate Criteria		
Perfluorobutanoic Acid (PFBA)	375-22-4	2	0.408	ng/l	67-148	30	67-148	30	30			
Perfluoropentanoic Acid (PFPeA)	2706-90-3	2	0.396	ng/l	63-161	30	63-161	30	30			
Perfluorobutanesulfonic Acid (PFBS)	375-73-5	2	0.238	ng/l	65-157	30	65-157	30	30			
Perfluorohexanoic Acid (PFHxA)	307-24-4	2	0.328	ng/l	69-168	30	69-168	30	30			
Perfluoroheptanoic Acid (PFHpA)	375-85-9	2	0.2252	ng/l	58-159	30	58-159	30	30			
Perfluorohexanesulfonic Acid (PFHxS)	355-46-4	2	0.376	ng/l	69-177	30	69-177	30	30			
Perfluorooctanoic Acid (PFOA)	335-67-1	2	0.236	ng/l	63-159	30	63-159	30	30			
1H,1H,2H,2H-Perfluorooctanesulfonic Acid (6:2FTS)	27619-97-2	2	1.332	ng/l	49-187	30	49-187	30	30			
Perfluoroheptanesulfonic Acid (PFHpS)	375-92-8	2	0.688	ng/l	61-179	30	61-179	30	30			
Perfluorononanoic Acid (PFNA)	375-95-1	2	0.312	ng/l	68-171	30	68-171	30	30			
Perfluorooctanesulfonic Acid (PFOS)	1763-23-1	2	0.504	ng/l	52-151	30	52-151	30	30			
Perfluorodecanoic Acid (PFDA)	335-76-2	2	0.304	ng/l	63-171	30	63-171	30	30			
1H,1H,2H,2H-Perfluorodecanesulfonic Acid (8:2FTS)	39108-34-4	2	1.212	ng/l	56-173	30	56-173	30	30			
N-Methyl Perfluorooctanesulfonamidoacetic Acid (NMeFOSA)	2355-31-9	2	0.648	ng/l	60-166	30	60-166	30	30			
Perfluoroundecanoic Acid (PFUnA)	2058-94-8	2	0.26	ng/l	60-153	30	60-153	30	30			
Perfluorodecanesulfonic Acid (PFDS)	335-77-3	2	0.98	ng/l	38-156	30	38-156	30	30			
Perfluorooctanesulfonamide (FOSA)	754-91-6	2	0.58	ng/l	46-170	30	46-170	30	30			
N-Ethyl Perfluorooctanesulfonamidoacetic Acid (NEtFOSAA)	2991-50-6	2	0.804	ng/l	45-170	30	45-170	30	30			
Perfluorododecanoic Acid (PFDoA)	307-55-1	2	0.372	ng/l	67-153	30	67-153	30	30			
Perfluorotridecanoic Acid (PFTTrDA)	72629-94-8	2	0.3272	ng/l	48-158	30	48-158	30	30			
Perfluorotetradecanoic Acid (PFTA)	376-06-7	2	0.248	ng/l	59-182	30	59-182	30	30			

Please Note that the RL information provided in this table is calculated using a 100% Solids factor. (Soil/Solids only)
 Please Note that the information provided in this table is subject to change at anytime at the discretion of Alpha Analytical, Inc.



8 Walkup Drive, Westborough, Massachusetts 01581 • 508-898-9220 • www.alphalab.com

Westborough, MA • Mansfield, MA • Bangor, ME • Portsmouth, NH • Mahwah, NJ • Albany, NY • Buffalo, NY • Holmes, PA





Date Created: 08/08/19
 Created By: Tom Tanico
 File: PM7147-1
 Page: 2

NY PFAAs via EPA 537(M)-Isotope Dilution (WATER)

Holding Time: 28 days
 Container/Sample Preservation: 1 - Plastic 8oz unpreserved

Analyte	CAS #	RL	MDL	Units	LCS Criteria	LCS RPD	MS Criteria	MS RPD	Duplicate RPD	Surrogate Criteria		
PFOA/PFOS, Total		2	0.236	ng/l				30	30			
PFOA/PFOS, Total		1	0.0419	ug/kg				30	30			
Perfluoro[13C4]Butanoic Acid (MPFBA)	NONE										60-153	
Perfluoro[13C4]Butanoic Acid (MPFBA)	NONE										2-156	
Perfluoro[13C5]Pentanoic Acid (M5PFPEA)	NONE										16-173	
Perfluoro[13C5]Pentanoic Acid (M5PFPEA)	NONE										65-182	
Perfluoro[2,3,4-13C3]Butanesulfonic Acid (M3PFBS)	NONE										70-151	
Perfluoro[2,3,4-13C3]Butanesulfonic Acid (M3PFBS)	NONE										31-159	
Perfluoro[1,2,3,4,6-13C5]Hexanoic Acid (M5PFHxA)	NONE										61-147	
Perfluoro[1,2,3,4,6-13C5]Hexanoic Acid (M5PFHxA)	NONE										21-145	
Perfluoro[1,2,3,4-13C4]Heptanoic Acid (M4PFHpA)	NONE										30-139	
Perfluoro[1,2,3,4-13C4]Heptanoic Acid (M4PFHpA)	NONE										62-149	
Perfluoro[1,2,3-13C3]Hexanesulfonic Acid (M3PFHxS)	NONE										63-166	
Perfluoro[1,2,3-13C3]Hexanesulfonic Acid (M3PFHxS)	NONE										47-153	
Perfluoro[13C8]Octanoic Acid (M8PFOA)	NONE										36-149	
Perfluoro[13C8]Octanoic Acid (M8PFOA)	NONE										62-152	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Octanesulfonic Acid (M2-13C2)	NONE										1-244	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Octanesulfonic Acid (M2-13C2)	NONE										32-182	
Perfluoro[13C9]Nonanoic Acid (M9PFNA)	NONE										34-146	
Perfluoro[13C9]Nonanoic Acid (M9PFNA)	NONE										61-154	
Perfluoro[13C8]Octanesulfonic Acid (M8PFOS)	NONE										65-151	
Perfluoro[13C8]Octanesulfonic Acid (M8PFOS)	NONE										42-146	
Perfluoro[1,2,3,4,5,6-13C6]Decanoic Acid (M6PFDA)	NONE										65-150	
Perfluoro[1,2,3,4,5,6-13C6]Decanoic Acid (M6PFDA)	NONE										38-144	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Decanesulfonic Acid (M2-13C2)	NONE										25-186	
1H,1H,2H,2H-Perfluoro[1,2-13C2]Decanesulfonic Acid (M2-13C2)	NONE										7-170	
N-Deuteriomethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										45-137	
N-Deuteriomethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										1-181	
Perfluoro[1,2,3,4,5,6,7-13C7]Undecanoic Acid (M7-PFUIDA)	NONE										40-144	
Perfluoro[1,2,3,4,5,6,7-13C7]Undecanoic Acid (M7-PFUIDA)	NONE										64-158	
Perfluoro[13C8]Octanesulfonamide (M8FOSA)	NONE										1-87	
Perfluoro[13C8]Octanesulfonamide (M8FOSA)	NONE										1-125	
N-Deuterioethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										23-146	
N-Deuterioethylperfluoro-1-octanesulfonamidoacetic Acid (M8PFDOA)	NONE										42-136	
Perfluoro[1,2-13C2]Dodecanoic Acid (MPFDOA)	NONE										56-148	
Perfluoro[1,2-13C2]Dodecanoic Acid (MPFDOA)	NONE										24-161	
Perfluoro[1,2-13C2]Tetradecanoic Acid (M2PFTEDA)	NONE										26-160	
Perfluoro[1,2-13C2]Tetradecanoic Acid (M2PFTEDA)	NONE										33-143	

Please Note that the RL information provided in this table is calculated using a 100% Solids factor. (Soil/Solids only)
 Please Note that the information provided in this table is subject to change at anytime at the discretion of Alpha Analytical, Inc.



8 Walkup Drive, Westborough, Massachusetts 01581 • 508-898-9220 • www.alphalab.com
 Westborough, MA • Mansfield, MA • Bangor, ME • Portsmouth, NH • Mahwah, NJ • Albany, NY • Buffalo, NY • Holmes, PA



ATTACHMENT G **Health and Safety Plan**

**FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
BROOKLYN, NEW YORK
Block 1884, Lots 40 & 48**

**CONSTRUCTION
HEALTH AND SAFETY PLAN**

February 2018

Prepared for:
Riverside Developers USA, Inc.
266 Broadway, Suite 301
Brooklyn, New York 11211

Prepared by:
IBC
ENVIRONMENTAL BUSINESS CONSULTANTS
1808 Middle Country Road
Ridge, NY 11961

TABLE OF CONTENTS
CONSTRUCTION HEALTH AND SAFETY PLAN
376-378 FLUSHING AVENUE, BROOKLYN, NEW YORK

STATEMENT OF COMMITMENTSC-1

1.0 INTRODUCTION AND SITE ENTRY REQUIREMENTS..... 1

 1.1 Training Requirements 1

 1.2 Medical Monitoring Requirements..... 2

 1.3 Site Safety Plan Acceptance, Acknowledgment and Amendments..... 2

 1.4 Key Personnel - Roles and Responsibilities 2

2.0 SITE BACKGROUND AND SCOPE OF WORK 4

 2.1 Previous Investigations 4

 2.2 Redevelopment Plans 7

 2.3 Scope of Phase II Subsurface Investigation 7

3.0 HAZARD ASSESSMENT 9

 3.1 Physical Hazards..... 9

 3.1.1 *Tripping Hazards* 9

 3.1.2 *Climbing Hazards* 9

 3.1.3 *Cuts and Lacerations* 9

 3.1.4 *Lifting Hazards* 9

 3.1.5 *Utility Hazards*..... 9

 3.1.6 *Traffic Hazards* 9

 3.2 Work in Extreme Temperatures..... 9

 3.2.1 *Heat Stress* 10

 3.2.2 *Cold Exposure*..... 11

 3.3 Chemical Hazards..... 11

 3.3.1 *Respirable Dust*..... 12

 3.3.2 *Dust Control and Monitoring During Earthwork* 12

 3.3.3 *Organic Vapors* 12

4.0 PERSONAL PROTECTIVE EQUIPMENT 11

 4.1 Level D 11

 4.2 Level C 11

 4.3 Activity-Specific Levels of Personal Protection..... 12

5.0 AIR MONITORING AND ACTION LEVELS 15

 5.1 Air Monitoring Requirements 15

 5.2 Work Stoppage Responses 15

 5.3 Action Levels During Excavation Activities 15

6.0 SITE CONTROL..... 15

 6.1 Work Zones 15

 6.2 General Site Work 15

TABLE OF CONTENTS
CONSTRUCTION HEALTH AND SAFETY PLAN
376-378 FLUSHING AVENUE, BROOKLYN, NEW YORK

7.0	CONTINGENCY PLAN/EMERGENCY RESPONSE PLAN.....	16
7.1	Emergency Equipment On-site	16
7.2	Emergency Telephone Numbers.....	16
7.3	Personnel Responsibilities During an Emergency.....	16
7.4	Medical Emergencies.....	17
7.5	Fire or Explosion.....	17
7.6	Evacuation Routes	17
7.7	Spill Control Procedures.....	18
7.8	Vapor Release Plan.....	20

FIGURES

Figure 1 Route to Hospital (Appendix D)

APPENDICES

APPENDIX A	SITE SAFETY ACKNOWLEDGMENT FORM
APPENDIX B	SITE SAFETY PLAN AMENDMENTS
APPENDIX C	CHEMICAL HAZARDS
APPENDIX D	HOSPITAL INFORMATION, MAP AND FIELD ACCIDENT REPORT

STATEMENT OF COMMITMENT

This Construction Health and Safety Plan (CHASP) has been prepared to ensure that workers are not exposed to risks from hazardous materials during the Remedial Action at 376-378 Flushing Avenue, Brooklyn, NY

This CHASP, which applies to persons present at the site actually or potentially exposed to hazardous materials, describes emergency response procedures for actual and potential chemical hazards. This CHASP is also intended to inform and guide personnel entering the work area or exclusion zone. Persons are to acknowledge that they understand the potential hazards and the contents of this Health and Safety policy by signing off on receipt of their individual copy of the document. Contractors and suppliers are retained as independent contractors and are responsible for ensuring the health and safety of their own employees.

1.0 INTRODUCTION AND SITE ENTRY REQUIREMENTS

This document describes the health and safety guidelines developed by Environmental Business Consultants (EBC) for the planned Remedial Action at the 376-378 Flushing Avenue, Brooklyn, New York to protect on-site personnel, visitors, and the public from physical harm and exposure to hazardous materials or wastes during remedial activities. In accordance with the Occupational Safety and Health Administration (OSHA) 29 CFR Part 1910.120 Hazardous Waste Operations and Emergency Response Final rule, this CHASP, including the attachments, addresses safety and health hazards related to excavation, loading and other soil disturbance activities and is based on the best information available. The CHASP may be revised by EBC at the request of Riverside Developers USA, Inc. and/or a regulatory agency upon receipt of new information regarding site conditions. Changes will be documented by written amendments signed by EBC's project manager, site safety officer and/or the EBC health and safety consultant.

Work performed under the remedial action will not involve confined space entry since the excavations will be large and sloped back in accordance with NYCDOB shoring requirements and will not have a limited or restricted means for entry or exit.

1.1 Training Requirements

Personnel entering the exclusion zone or decontamination zone are required to be certified in health and safety practices for hazardous waste site operations as specified in the Federal OSHA Regulations CFR 1910.120e (revised 3/6/90).

Paragraph (e - 3) of the above referenced regulations requires that all on-site management personnel directly responsible for or who supervise employees engaged in hazardous waste operations, must initially receive 8 hours of supervisor training related to managing hazardous waste work. Paragraph (e - 8) of the above referenced regulations requires that workers and supervisors receive 8 hours of refresher training annually on the items specified in Paragraph (e-1) and/or (e-3).

Additionally all on-site personnel must receive adequate site-specific training in the form of an on-site Health and Safety briefing prior to participating in field work with emphasis on the following:

- Protection of the adjacent community from hazardous vapors and / or dust which may be released during intrusive activities.
- Identification of chemicals known or suspected to be present on-site and the health effects and hazards of those substances.
- The need for vigilance in personnel protection, and the importance of attention to proper use, fit and care of personnel protective equipment.
- Decontamination procedures.
- Site control including work zones, access and security.
- Hazards and protection against heat or cold.
- The proper observance of daily health and safety practices, such as entry and exit of work zones and site. Proper hygiene during lunch, break, etc.
- Emergency procedures to be followed in case of fire, explosion and sudden release of hazardous gases.

Health and Safety meetings will be conducted on a daily basis and will cover protective clothing and other equipment to be used that day, potential and chemical and physical hazards, emergency procedures, and conditions and activities from the previous day.

1.2 Medical Monitoring Requirements

Field personnel and visitors entering the exclusion zone or decontamination zone must have completed appropriate medical monitoring required under OSHA 29 CFR 1910.120(f) if respirators or other breathing related PPE is needed. Medical monitoring enables a physician to monitor each employee's health, physical condition, and his fitness to wear respiratory protective equipment and carry out on-site tasks.

1.3 Site Safety Plan Acceptance, Acknowledgment and Amendments

The project superintendent and the site safety officer are responsible for informing personnel (EBC employees and/or owner or owners representatives) entering the work area of the contents of this plan and ensuring that each person signs the safety plan acknowledging the on-site hazards and procedures required to minimize exposure to adverse effects of these hazards. A copy of the Acknowledgement Form is included in **Appendix A**.

Site conditions may warrant an amendment to the CHASP. Amendments to the CHASP are acknowledged by completing forms included in **Appendix B**.

1.4 Key Personnel - Roles and Responsibilities

Personnel responsible for implementing this Health and Safety Plan are:

Name	Title	Address	Contact Numbers
Keith Butler	EBC- Project Manager	1808 Middle Country Rd Ridge, NY 11961	(631) 504-6000
Kevin Waters	Health and Safety Officer	1808 Middle Country Rd Ridge, NY 11961	(631) 504-6000

The project manager is responsible for overall project administration and, with guidance from the site safety officer, for supervising the implementation of this CHASP. The site safety officer will conduct daily (tail gate or tool box) safety meetings at the project site and oversee daily safety issues. Each subcontractor and supplier (defined as an OSHA employer) is also responsible for the health and safety of its employees. If there is any dispute about health and safety or project activities, on-site personnel will attempt to resolve the issue. If the issue cannot be resolved at the site, then the project manager will be consulted.

The site safety officer is also responsible for coordinating health and safety activities related to hazardous material exposure on-site. The site safety officer is responsible for the following:

1. Educating personnel about information in this CHASP and other safety requirements to be observed during site operations, including, but not limited to, decontamination procedures, designation of work zones and levels of protection, air monitoring, fit testing, and emergency procedures dealing with fire and first aid.

2. Coordinating site safety decisions with the project manager.
3. Designating exclusion, decontamination and support zones on a daily basis.
4. Monitoring the condition and status of known on-site hazards and maintaining and implementing the air quality monitoring program specified in this CHASP.
5. Maintaining the work zone entry/exit log and site entry/exit log.
6. Maintaining records of safety problems, corrective measures and documentation of chemical exposures or physical injuries (the site safety officer will document these conditions in a bound notebook and maintain a copy of the notebook on-site).

The person who observes safety concerns and potential hazards that have not been addressed in the daily safety meetings should immediately report their observations/concerns to the site safety officer or appropriate key personnel.

2.0 SITE BACKGROUND AND SCOPE OF WORK

The street address for the Site is 376-378 Flushing Avenue, Brooklyn, NY. The Site is located in the Bedford Stuyvesant section of Kings County and is comprised of a two tax parcels totaling 39,307 square feet (0.902 acre). The Site consists of approximately 269 ft of street frontage along Flushing Avenue and approximately 103 ft of street frontage along Franklin Avenue. Currently the property is developed with four adjacent buildings. Lot 40 is developed with a one-story commercial building approximately 13,250 ft² in size, currently occupied by a door and molding company. Lot 48 is developed with three, two-story commercial buildings occupied by an approximate 11,932 ft² catering hall, an approximate 11,400 ft² warehouse for the door and molding company (on Lot 40), and an approximate 1,595 ft² office space.. These buildings are being demolished as part of the redevelopment of the Site.

2.1 Previous Investigations

2.1.1 April 2017 - Remedial Investigation Report (Environmental Business Consultants)

The field work portion of the RI was conducted by Environmental Business Consultants (EBC) on January 12th, 13th and 17th of 2017 during the Phase II investigation, in accordance with the protocols and methods as established in the approved Remedial Investigation Workplan.

Subsurface soils at the site include a silty non-native fill, fine to coarse sand and sandy silt to a depth of approximately 12 feet below grade followed by brown-gray sandy clay to a depth of at least 22 feet below grade.

Groundwater at the Site is present at a depth of approximately 9 to 13 feet below surface grade within the historic fill material and flows in an east/southeasterly direction.

The results of the RI identified petroleum contamination present across the Site to depths of at least 22 feet below grade. The release scenario is unknown but appears to be related to two former gasoline underground storage tanks (USTs) in the northern portion of Lot 40; and one gasoline UST in the northern portion of Lot 48. Petroleum VOCs appear to have been transferred to the groundwater through direct contact with impacted soil in the vicinity of the USTs.

Petroleum VOCs which transferred to the dissolved phase have been migrating with groundwater flow to the southeast. Free-phase petroleum product was identified in a groundwater sample collected closest to the approximate location of the former UST in Lot 48. Off-gassing of VOCs is significant in the southern portion of Lot 48, where BTEX concentrations were detected at high concentrations. Chlorinated VOCs were also present at elevated concentrations in soil vapor samples. The highest concentrations of CVOCs were found to be in the area of the former dry cleaning operation on Lot 48. No CVOC were detected in any of the soil or groundwater samples. Off-gassing of petroleum-related compounds is occurring in the mid-to-southern portions of the Site.

2.2 Redevelopment Plans

The Remedial Action to be performed under the RAWP is intended to make the Site protective of human health and the environment consistent with the contemplated end use. The proposed redevelopment plan and end use is described here to provide the basis for this assessment. The

Remedial Action contemplated under this RAWP may be implemented independent of the proposed redevelopment plan.

The Site will be redeveloped through the construction of a new 8-story mixed-use building. The building will have an approximate 39,307 ft² cellar which will be utilized for storage, mechanical rooms, and a ventilated parking garage. The cellar will have both stair and elevator access, and will require excavation of the entire property to a depth of approximately 25 feet below grade. The first floor will contain retail/commercial space as well as the residential lobby. Floors 2 through 8 will contain residential apartments.

2.3 Description of Remedial Action

The remedy recommended for the site is a Track 1 alternative (Alternative 1) which consists of the removal of the soils to Unrestricted Use SCOs and/or the applicable protection of groundwater SCOs, to a depth of 25 feet below grade. Additional excavation for VOCs exceeding UUSCOs will be completed to the extent practical with *in-situ* treatment with chemical oxidants applied if necessary. The Track 1 alternative also includes remediation of groundwater through dewatering during excavation activities. Over-excavated areas will be backfilled with either virgin mined materials, recycled materials or certified fill which meets the requirements of 6 NYCRR Part 375 -6.7(d)(1)(ii)(b). The remedy will include the following items:

1. Removal of underground storage tanks;
2. Excavation of soil/fill exceeding Track 1 Unrestricted Use and/or the applicable protection of groundwater SCOs as listed in Table 1 to a depth of 25 feet below grade;
3. Treatment of residual soil contamination via application of chemical oxidants if needed as a contingency;
4. Screening for indications of contamination (by visual means, odor, and monitoring with PID) of all excavated soil during any intrusive Site work;
5. Collection and analysis of end-point soil samples and post-remedial groundwater samples to evaluate the performance of the remedy with respect to attainment of unrestricted SCOs and groundwater standards;
6. Appropriate off-Site disposal of all material removed from the Site in accordance with all Federal, State and local rules and regulations for handling, transport, and disposal;
7. Import of materials to be used for backfill and cover in compliance with 6NYCRR Part 375-6.7(d)(1): (1) chemical limits and other specifications included in **Table 1**, (2) all Federal, State and local rules and regulations for handling and transport of material.
8. All liquids to be removed from the Site, including dewatering fluids, will be handled, transported and disposed in accordance with applicable laws and regulations;
9. If Track 1 cleanup is not achieved, implementation of a Site Management Plan (SMP) for long term maintenance of the Engineering Controls.
10. If Track 1 cleanup is not achieved, an Environmental Easement will be filed against the Site to ensure implementation of the SMP.

3.0 HAZARD ASSESSMENT

This section identifies the hazards associated with the proposed scope of work, general physical hazards that can be expected at most sites; and presents a summary of documented or potential chemical hazards at the site. Every effort must be made to reduce or eliminate these hazards. Those that cannot be eliminated must be guarded against using engineering controls and/or personal protective equipment.

3.1 Physical Hazards

3.1.1 Tripping Hazards

An area of risk associated with on-site activities are presented by uneven ground, concrete, curbstones or equipment which may be present at the site thereby creating a potential tripping hazard. During intrusive work, care should be taken to mark or remove any obstacles within the exclusion zone.

3.1.2 Climbing Hazards

During site activities, workers may have to work on excavating equipment by climbing. The excavating contractor will conform with any applicable NIOSH and OSHA requirements or climbing activities.

3.1.3 Cuts and Lacerations

Field activities that involve excavating activities usually involve contact with various types of machinery. A first aid kit approved by the American Red Cross will be available during all intrusive activities.

3.1.4 Lifting Hazards

Improper lifting by workers is one of the leading causes of industrial injuries. Field workers in the excavation program may be required to lift heavy objects. Therefore, all members of the field crew should be trained in the proper methods of lifting heavy objects. All workers should be cautioned against lifting objects too heavy for one person.

3.1.5 Utility Hazards

Before conducting any excavation, the excavation contractor will be responsible for locating and verifying all existing utilities at each excavation.

3.1.6 Traffic Hazards

All traffic, vehicular and pedestrian, shall be maintained and protected at all times consistent with local, state and federal agency regulations regarding such traffic and in accordance with NYCDOT guidelines. The excavation contractor shall carry on his operations without undue interference or delays to traffic. The excavation contractor shall furnish all labor, materials, guards, barricades, signs, lights, and anything else necessary to maintain traffic and to protect his work and the public, during operations.

3.2 Work in Extreme Temperatures

Work under extremely hot or cold weather conditions requires special protocols to minimize the chance that employees will be affected by heat or cold stress.

3.2.1 Heat Stress

The combination of high ambient temperature, high humidity, physical exertion, and personal protective apparel, which limits the dissipation of body heat and moisture, can cause heat stress.

The following prevention, recognition and treatment strategies will be implemented to protect personnel from heat stress. Personnel will be trained to recognize the symptoms of heat stress and to apply the appropriate treatment.

1. Prevention

- a. Provide plenty of fluids. Available in the support zone will be a 50% solution of fruit punch and water or plain water.
- b. Work in Pairs. Individuals should avoid undertaking any activity alone.
- c. Provide cooling devices. A spray hose and a source of water will be provided to reduce body temperature, cool protective clothing and/or act as a quick-drench shower in case of an exposure incident.
- d. Adjustment of the work schedule. As is practical, the most labor-intensive tasks should be carried out during the coolest part of the day.

2. Recognition and Treatment

a. Heat Rash (or prickly heat):

Cause: Continuous exposure to hot and humid air, aggravated by chafing clothing.

Symptoms: Eruption of red pimples around sweat ducts accompanied by intense itching and tingling.

Treatment: Remove source of irritation and cool skin with water or wet cloths.

b. Heat Cramps (or heat prostration)

Cause: Profuse perspiration accompanied by inadequate replenishment of body water and electrolytes.

Symptoms: Muscular weakness, staggering gait, nausea, dizziness, shallow breathing, pale and clammy skin, approximately normal body temperature.

Treatment: Perform the following while making arrangement for transport to a medical facility. Remove the worker to a contamination reduction zone. Remove protective clothing. Lie worker down on back in a cool place and raise feet 6 to 12 inches. Keep warm, but loosen all clothing. If conscious, provide sips of salt-water solution, using one teaspoon of salt in 12 ounces of water. Transport to a medical facility.

c. Heat Stroke

Cause: Same as heat exhaustion. This is also an extremely serious condition.

Symptoms: Dry hot skin, dry mouth, dizziness, nausea, headache, rapid pulse.

Treatment: Cool worker immediately by immersing or spraying with cool water or sponge bare skin after removing protective clothing. Transport to hospital.

3.2.2 Cold Exposure

Exposure to cold weather, wet conditions and extreme wind-chill factors may result in excessive loss of body heat (hypothermia) and /or frostbite. To guard against cold exposure and to prevent cold injuries, appropriate warm clothing should be worn, warm shelter must be readily available, rest periods should be adjusted as needed, and the physical conditions of on-site field personnel should be closely monitored. Personnel and supervisors working on-site will be made aware of the signs and symptoms of frost bite and hypothermia such as:

- Shivering;
- reduced blood pressure;
- reduced coordination;
- drowsiness;
- impaired judgment;
- fatigue;
- pupils dilated but reactive to light; and,
- numbing of the toes and fingers.

3.3 Chemical Hazards

The RI Investigation identified chlorinated and petroleum volatile organic compounds (VOCs) in soil, groundwater, and soil vapor. SVOCs, pesticides and metals were detected within the soil and groundwater at the Site.

Based on the findings of the Remedial Investigation and the inherent properties of impacted soil and free product within one of the wells, the following compounds are considered for the site as potential contaminants: petroleum VOCs, SVOCs, pesticides and heavy metals.

VOCs expected to be in the soil and groundwater includes the following:

1,2,4-Trimethylbenzene	Acetone	m&p-Xylenes	Bromomethane	n-butylbenzene
1,3,5-Trimethylbenzene	Benzene	Tert-butylbenzene	isopropylbenzene	Sec-butylbenzene
Ethylbenzene	Toluene	2-isopropyltoluene	Methyl ethyl ketone	n-propylbenzene
Naphthalene	o-Xylene			

SVOCs expected to be in the soil and groundwater includes the following:

Benz(a)anthracene	Benzo(k)fluoranthene	Fluoroanthene	Indeno(1,2,3-cd)pyrene	Naphthalene
Benzo(a)pyrene	Chrysene	Fluorene	pyrene	
Benzo(b)Fluoranthene	Dibenz(a,h)anthracene			

Pesticides expected to be in the soil and groundwater includes the following:

4,4'-DDD	4,4'-DDT	Dieldrin
----------	----------	----------

Metals expected to be present in the soil and groundwater includes the following:

Arsenic	Barium	Chromium	Copper	Iron	Lead
Magnesium	Manganese	Mercury	Nickel	Sodium	Zinc

The primary routes of exposure to these contaminants are inhalation, ingestion and absorption.

Appendix C includes information sheets for suspected chemicals that may be encountered at the site. Also included under the appendix are procedures for handling and storing the chemical oxidant. These procedures will be followed to protect workers and the public.

3.3.1 Respirable Dust

Dust may be generated from vehicular traffic and/or excavation activities. If visible observation detects elevated levels of dust, a program of wetting will be employed by the site safety officer. If elevated dust levels persist, the site safety office will employ dust monitoring using a particulate monitor (Miniram or equivalent). If monitoring detects concentrations greater than 150 µg/m³ over daily background, the site safety officer will take corrective actions as defined herein, including the use of water for dust suppression and if this is not effective, requiring workers to wear APRs with high efficiency particulate air (HEPA) cartridges.

Absorption pathways for dust and direct contact with soils or groundwater will be mitigated with the implementation of latex gloves, hand washing and decontamination exercises when necessary.

3.3.2 Dust Control and Monitoring During Earthwork

Dust generated during excavation activities or other earthwork may contain contaminants identified in soils at the site. Dust will be controlled by wetting the working surface with water. Calcium chloride may be used if the problem cannot be controlled with water. Air monitoring and dust control techniques are specified in a site specific Dust Control Plan (if applicable). Site

workers will not be required to wear APR's unless dust concentrations are consistently over 150 $\mu\text{g}/\text{m}^3$ over site-specific background in the breathing zone as measured by a dust monitor unless the site safety officer directs workers to wear APRs. The site safety officer will use visible dust as an indicator to implement the dust control plan.

3.3.3 *Organic Vapors*

Elevated levels of chlorinated VOCs were detected in soil, soil gas and groundwater samples collected during previous investigations at the site. Therefore, excavation activities may cause the release of organic vapors to the atmosphere. The site safety officer will periodically monitor organic vapors with a Photoionization Detector (PID) during excavation activities to determine whether organic vapor concentrations exceed action levels shown in Section 5 and/or the Community Air Monitoring Plan.

4.0 PERSONAL PROTECTIVE EQUIPMENT

Personal protective equipment (PPE) shall be selected in accordance with the site air monitoring program, OSHA 29 CFR 1910.120(c), (g), and 1910.132. Protective equipment shall be NIOSH approved and respiratory protection shall conform to OSHA 29 CFR Part 1910.133 and 1910.134 specifications; head protection shall conform to 1910.135; eye and face protection shall conform to 1910.133; and foot protection shall conform to 1910.136. The only true difference among the levels of protection from D thru B is the addition of the type of respiratory protection. **It is anticipated that work will be performed in Level D PPE.**

4.1 Level D

Level D PPE shall be donned when the atmosphere contains no known hazards and work functions preclude splashes, immersion, or the potential for inhalation of, or contact with, hazardous concentrations of harmful chemicals. Level D PPE consists of:

- standard work uniform, coveralls, or tyvek, as needed;
- steel toe and steel shank work boots;
- hard hat;
- gloves, as needed;
- safety glasses;
- hearing protection;
- equipment replacements are available as needed.

4.2 Level C

Level C PPE shall be donned when the concentrations of measured total organic vapors in the breathing zone exceed background concentrations (using a portable OVA, or equivalent), but are less than 5 ppm. The specifications on the APR filters used must be appropriate for contaminants identified or expected to be encountered. Level C PPE shall be donned when the identified contaminants have adequate warning properties and criteria for using APR have been met. Level C PPE consists of:

- chemical resistant or coated tyvek coveralls;
- steel-toe and steel-shank workboots;
- chemical resistant overboots or disposable boot covers;
- disposable inner gloves (surgical gloves);
- disposable outer gloves;
- full face APR fitted with organic vapor/dust and mist filters or filters appropriate for the identified or expected contaminants;
- hard hat;
- splash shield, as needed; and,
- ankles/wrists taped with duct tape.

The site safety officer will verify if Level C is appropriate by checking organic vapor concentrations using compound and/or class-specific detector tubes.

The exact PPE ensemble is decided on a site-by-site basis by the Site Safety Officer with the intent to provide the most protective and efficient worker PPE.

4.3 Activity-Specific Levels of Personal Protection

The required level of PPE is activity-specific and is based on air monitoring results (Section 4.0) and properties of identified or expected contaminants. **It is expected that site work will be performed in Level D.** If air monitoring results indicate the necessity to upgrade the level of protection engineering controls (i.e. Facing equipment away from the wind and placing site personnel upwind of drilling locations, active venting, etc.) will be implemented before requiring the use of respiratory protection.

5.0 AIR MONITORING AND ACTION LEVELS

29 CFR 1910.120(h) specifies that monitoring shall be performed where there may be a question of employee exposure to hazardous concentrations of hazardous substances in order to assure proper selection of engineering controls, work practices and personal protective equipment so that employees are not exposed to levels which exceed permissible exposure limits, or published exposure levels if there are no permissible exposure limits, for hazardous substances.

5.1 Air Monitoring Requirements

If excavation work is performed, air will be monitored for VOCs with a portable ION Science 3000EX photoionization detector, or the equivalent. If necessary, Lower Explosive Limit (LEL) and oxygen will be monitored with a Combustible Gas Indicator (CGI). If appropriate, fugitive dust will be monitored using a MiniRam Model PDM-3 aerosol monitor. Air will be monitored when any of the following conditions apply:

- initial site entry;
- during any work where a potential IDLH condition or flammable atmosphere could develop;
- excavation work begins on another portion of the site;
- contaminants, other than those previously identified, have been discovered;
- each time a different task or activity is initiated;
- during trenching and/or excavation work.

The designated site safety officer will record air monitoring data and ensure that air monitoring instruments are calibrated and maintained in accordance with manufacturer's specifications. Instruments will be zeroed daily and checked for accuracy. Monitoring results will be recorded in a field notebook and will be transferred to instrument reading logs.

5.2 Work Stoppage Responses

The following responses will be initiated whenever one or more of the action levels necessitating a work stoppage are exceeded:

- 1 The SSO will be consulted immediately
- 2 All personnel (except as necessary for continued monitoring and contaminant migration, if applicable) will be cleared from the work area (eg from the exclusion zone).
- 3 Monitoring will be continued until intrusive work resumes.

5.3 Action Levels During Excavation Activities

Instrument readings will be taken in the breathing zone above the excavation pit unless otherwise noted. Each action level is independent of all other action levels in determining responses.

Organic Vapors (PID)	LEL %	Responses
0-1 ppm above background	0%	<ul style="list-style-type: none"> • Continue excavating • Level D protection • Continue monitoring every 10 minutes
1-5 ppm Above Background, Sustained Reading	1-10%	<ul style="list-style-type: none"> • Continue excavating • Go to Level C protection or employ engineering controls • Continue monitoring every 10 minutes
5-25 ppm Above Background, Sustained Reading	10-20%	<ul style="list-style-type: none"> • Discontinue excavating, unless PID is only action level exceeded. • Level C protection or employ engineering controls • Continue monitoring for organic vapors 200 ft downwind • Continuous monitoring for LEL at excavation pit
>25 ppm Above Background, Sustained Reading	>20%	<ul style="list-style-type: none"> • Discontinue excavating • Withdraw from area, shut off all engine ignition sources. • Allow pit to vent • Continuous monitoring for organic vapors 200 ft downwind.

Notes: Air monitoring will occur in the breathing zone 30 inches above the excavation pit. Readings may also be taken in the excavation pit but will not be used for action levels.

If action levels for any one of the monitoring parameters are exceeded, the appropriate responses listed in the right hand column should be taken. If instrument readings do not return to acceptable levels after the excavation pit has been vented for a period of greater than one-half hour, a decision will then be made whether or not to seal the pit with suppressant foam.

If, during excavation activities, downwind monitoring PID readings are greater than 5 ppm above background for more than one-half hour, excavation will stop until sustained levels are less than 5 ppm (see Community Air Monitoring Plan).

6.0 SITE CONTROL

6.1 Work Zones

The primary purpose of site controls is to establish the perimeter of a hazardous area, to reduce the migration of contaminants into clean areas, and to prevent access or exposure to hazardous materials by unauthorized persons. When operations are to take place involving hazardous materials, the site safety officer will establish an exclusion zone, a decontamination zone, and a support zone. These zones "float" (move around the site) depending on the tasks being performed on any given day. The site safety officer will outline these locations before work begins and when zones change. The site safety officer records this information in the site log book. If contamination is encountered then the Site Safety officer will establish the zones as follows:

Tasks requiring OSHA 40-hour Hazardous Waste Operations and Emergency Response Operations training are carried out in the exclusion zone. The exclusion zone is defined by the site safety officer but will typically be a 50-foot area around work activities. Gross decontamination (as determined by the site Health and Safety Officer) is conducted in the exclusion zone; all other decontamination is performed in the decontamination zone or trailer.

Protective equipment is removed in the decontamination zone. Disposable protective equipment is stored in receptacles staged in the decontamination zone, and non-disposable equipment is decontaminated. All personnel and equipment exit the exclusion zone through the decontamination zone. If a decontamination trailer is provided the first aid equipment, an eye wash unit, and drinking water are kept in the decontamination trailer.

The support zone is used for vehicle parking, daily safety meetings, and supply storage. Eating, drinking, and smoking are permitted only in the support zone. When a decontamination trailer is not provided, the eye wash unit, first aid equipment, and drinking water are kept at a central location designated by the site safety officer.

6.2 General Site Work

A general excavation contractor may complete the site excavation/grading as needed for the footing installation, or as deemed necessary by the Interim Remedial Measure Work Plan and/or Project Manager. All onsite employees must have obtained OSHA 24-hour Hazardous Waste Operations and Emergency Response Operations training prior to performing soil disturbing activities.

7.0 CONTINGENCY PLAN/EMERGENCY RESPONSE PLAN

Site personnel must be prepared in the event of an emergency. Emergencies can take many forms: illnesses, injuries, chemical exposure, fires, explosions, spills, leaks, releases of harmful contaminants, or sudden changes in the weather.

Emergency telephone numbers and a map to the hospital will be posted in the command post. Site personnel should be familiar with the emergency procedures, and the locations of site safety, first aid, and communication equipment.

7.1 Emergency Equipment On-site

Private telephones:	Site personnel.
Two-way radios:	Site personnel where necessary.
Emergency Alarms:	On-site vehicle horns*.
First aid kits:	On-site, in vehicles or office.
Fire extinguisher:	On-site, in office or on equipment.

* Horns: Air horns will be supplied to personnel at the discretion of the project superintendent or site safety officer.

7.2 Emergency Telephone Numbers

General Emergencies	911
New York City Police	911
Woodhull Medical Center	1-718-963-8000
NYSDEC Spills Division	1-800-457-7362
NYSDEC Division of Env. Remediation	1-718-482-4900
NYCDEP	1-718-699-9811
NYC Department of Health	1-212-788-4711
NYC Fire Department	911
National Response Center	1-800-424-8802
Poison Control	1-212-340-4494
Site Safety Officer	1-631-504-6000
Alternate Site Safety Officer	1-631-504-6000

7.3 Personnel Responsibilities During an Emergency

The project manager is primarily responsible for responding to and correcting any emergency situations. However, in the absence of the project manager, the site safety officer shall act as the project manager's on-site designee and perform the following tasks:

- Take appropriate measures to protect personnel including: withdrawal from the exclusion zone, evacuate and secure the site, or upgrade/downgrade the level of protective clothing and respiratory protection;

Under extreme emergency conditions, evacuation is to be immediate without regard for equipment. The evacuation signal will be a continuous blast of a vehicle horn, if possible, and/or by verbal/radio communication. When evacuating the site, personnel will follow these instructions:

- Keep upwind of smoke, vapors, or spill location.
- Exit through the decontamination corridor if possible.
- If evacuation through the decontamination corridor is not possible, personnel should remove contaminated clothing once they are in a safe location and leave it near the exclusion zone or in a safe place.
- The site safety officer will conduct a head count to ensure that all personnel have been evacuated safely. The head count will be correlated to the site and/or exclusion zone entry/exit log.
- If emergency site evacuation is necessary, all personnel are to escape the emergency situation and decontaminate to the maximum extent practical.

7.7 Spill Control Procedures

Spills associated with site activities may be attributed to project equipment and include gasoline, diesel and hydraulic oil. In the event of a leak or a release, site personnel will inform their supervisor immediately, locate the source of spillage and stop the flow if it can be done safely. A spill containment kit including absorbent pads, booms and/or granulated speedy dry absorbent material will be available to site personnel to facilitate the immediate recovery of the spilled material. Daily inspections of site equipment components including hydraulic lines, fuel tanks, etc. will be performed by their respective operators as a preventative measure for equipment leaks and to ensure equipment soundness. In the event of a spill, site personnel will immediately notify the NYSDEC (1-800-457-7362), and a spill number will be generated.

7.8 Vapor Release Plan

If work zone organic vapor (excluding methane) exceeds 5 ppm, then a downwind reading will be made either 200 feet from the work zone or at the property line, whichever is closer. If readings at this location exceed 5 ppm over background, the work will be stopped.

If 5 ppm of VOCs are recorded over background on a PID at the property line, then an off-site reading will be taken within 20 feet of the nearest residential or commercial property, whichever is closer. If efforts to mitigate the emission source are unsuccessful for 30 minutes, then the designated site safety officer will:

- contact the local police;
- continue to monitor air every 30 minutes, 20 feet from the closest off-site property. If two successive readings are below 5 ppm (non-methane), off-site air monitoring will be halted.

- All property line and off site air monitoring locations and results associated with vapor releases will be recorded in the site safety log book.

APPENDIX A
SITE SAFETY ACKNOWLEDGEMENT FORM

DAILY BRIEFING SIGN-IN SHEET

Date: _____ Person Conducting Briefing: _____

Project Name and Location: _____

1. AWARENESS (topics discussed, special safety concerns, recent incidents, etc...):

2. OTHER ISSUES (HASP changes, attendee comments, etc...):

3. ATTENDEES (Print Name):

1.	11.
2.	12.
3.	13.
4.	14.
5.	15.
6.	16.
7.	17.
8.	18.
9.	19.
10.	20.

APPENDIX B
SITE SAFETY PLAN AMENDMENTS

SITE SAFETY PLAN AMENDMENT FORM

Site Safety Plan Amendment #: _____

Site Name: _____

Reason for Amendment: _____

Alternative Procedures: _____

Required Changes in PPE: _____

Project Superintendent (signature)

Date

Health and Safety Consultant (signature)

Date

Site Safety Officer (signature)

Date

APPENDIX C
CHEMICAL HAZARDS

CHEMICAL HAZARDS

The attached International Chemical Safety Cards are provided for contaminants of concern that have been identified in soils and/or groundwater at the site.

International Chemical Safety Cards

1,2,4-TRIMETHYLBENZENE

ICSC: 1433



Pseudocumene
 C_9H_{12}
 Molecular mass: 120,2

ICSC # 1433
 CAS # 95-63-6
 RTECS # [DC3325000](#)
 UN # 1993
 EC # 601-043-00-3
 March 06, 2002 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Alcohol-resistant foam, dry powder, carbon dioxide.
EXPLOSION	Above 44°C explosive vapour/air mixtures may be formed.	Above 44°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		PREVENT GENERATION OF MISTS!	
•INHALATION	Confusion. Cough. Dizziness. Drowsiness. Headache. Sore throat. Vomiting.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Redness. Dry skin.	Protective gloves.	Rinse skin with plenty of water or shower.
•EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	(See Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Personal protection: filter respirator for organic gases and vapours.	Fireproof. Separated from strong oxidants. Well closed. Keep in a well-ventilated room.	Xn symbol N symbol R: 10-20-36/37/38-51/53 S: 2-26-61 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1433

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

1,2,4-TRIMETHYLBENZENE

ICSC: 1433

I M P O R T A N T D A T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: The substance decomposes on burning producing toxic and irritating fumes Reacts violently with strong oxidants causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: (as mixed isomers) 25 ppm as TWA (ACGIH 2004). MAK: (as mixed isomers) 20 ppm 100 mg/m³ Peak limitation category: II(2) Pregnancy risk group: C (DFG 2004). OSHA PEL[†]: none NIOSH REL: TWA 25 ppm (125 mg/m³) NIOSH IDLH: N.D. See: IDLH INDEX</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C; on spraying or dispersing, however, much faster.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis. The substance may cause effects on the central nervous system</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. Lungs may be affected by repeated or prolonged exposure , resulting in chronic bronchitis The substance may have effects on the central nervous system blood See Notes.</p>
--	---	--

PHYSICAL PROPERTIES	<p>Boiling point: 169°C Melting point: -44°C Relative density (water = 1): 0.88 Solubility in water: very poor Relative vapour density (air = 1): 4.1</p>	<p>Relative density of the vapour/air-mixture at 20°C (air = 1): 1.01 Flash point: 44°C c.c. Auto-ignition temperature: 500°C Explosive limits, vol% in air: 0.9-6.4 Octanol/water partition coefficient as log Pow: 3.8</p>
--------------------------------	---	--

ENVIRONMENTAL DATA	<p>The substance is toxic to aquatic organisms. Bioaccumulation of this chemical may occur in fish.</p>	
-------------------------------	---	---

NOTES

Use of alcoholic beverages enhances the harmful effect. Depending on the degree of exposure, periodic medical examination is suggested. See also ICSC 1155 1,3,5-Trimethylbenzene (Mesitylene), ICSC 1362 1,2,3-Trimethylbenzene (Hemimellitene), ICSC 1389 Trimethylbenzene (mixed isomers). 1,3,5-Trimethylbenzene (Mesitylene) is classified as a marine pollutant.

Transport Emergency Card: TEC (R)-30GF1-III
NFPA Code: H0; F2; R0;

ADDITIONAL INFORMATION

ICSC: 1433	1,2,4-TRIMETHYLBENZENE
<small>(C) IPCS, CEC, 1994</small>	

IMPORTANT LEGAL NOTICE:	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
--	--

International Chemical Safety Cards

1,3,5-TRIMETHYLBENZENE

ICSC: 1155



Mesitylene
 C_9H_{12}
 Molecular mass: 120.2

ICSC # 1155
 CAS # 108-67-8
 RTECS # [OX6825000](#)
 UN # 2325
 EC # 601-025-00-5
 March 06, 2002 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Alcohol-resistant foam, dry powder, carbon dioxide.
EXPLOSION	Above 50°C explosive vapour/air mixtures may be formed.	Above 50°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		PREVENT GENERATION OF MISTS!	
•INHALATION	Confusion. Cough. Dizziness. Drowsiness. Headache. Sore throat. Vomiting.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Redness. Dry skin.	Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
•EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	(See Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants. Well closed. Keep in a well-ventilated room.	Marine pollutant. Xi symbol N symbol R: 10-37-51/53 S: 2-61 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1155

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

1,3,5-TRIMETHYLBENZENE

ICSC: 1155

I M P O R T A N T D A T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: The substance decomposes on burning producing toxic and irritating fumes. Reacts violently with strong oxidants causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV (as mixed isomers): 25 ppm; (ACGIH 2001). MAK (all isomers): 20 ppm; 100 mg/m³; class II 1 © (2001) OSHA PEL[†]: none NIOSH REL: TWA 25 ppm (125 mg/m³) NIOSH IDLH: N.D. See: IDLH INDEX</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C; on spraying or dispersing, however, much faster.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis. The substance may cause effects on the central nervous system.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. Lungs may be affected by repeated or prolonged exposure, resulting in chronic bronchitis. The substance may have effects on the central nervous system blood See Notes.</p>
--	---	---

PHYSICAL PROPERTIES	<p>Boiling point: 165°C Melting point: -45°C Relative density (water = 1): 0.86 Solubility in water: very poor Vapour pressure, kPa at 20°C: 0.25</p>	<p>Relative vapour density (air = 1): 4.1 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.01 Flash point: 50°C (c.c.) Auto-ignition temperature: 550°C Octanol/water partition coefficient as log Pow: 3.42</p>
--------------------------------	---	---

ENVIRONMENTAL DATA	<p>The substance is harmful to aquatic organisms. Bioaccumulation of this chemical may occur in fish.</p>	
-------------------------------	---	---

NOTES

Use of alcoholic beverages enhances the harmful effect. Depending on the degree of exposure, periodic medical examination is indicated. See ICSC 1433 1,2,4-Trimethylbenzene (Pseudocumene), ICSC 1362 1,2,3-Trimethylbenzene (Hemimellitene), ICSC 1389 Trimethylbenzene (mixed isomers).

Transport Emergency Card: TEC (R)-30S2325
NFPA Code: H0; F2; R0

ADDITIONAL INFORMATION

ICSC: 1155	1,3,5-TRIMETHYLBENZENE
<p>(C) IPCS, CEC, 1994</p>	

IMPORTANT LEGAL NOTICE:	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
--	--

International Chemical Safety Cards

BENZENE

ICSC: 0015



Cyclohexatriene
Benzol
C₆H₆
Molecular mass: 78.1

ICSC # 0015
CAS # 71-43-2
RTECS # [CY1400000](#)
UN # 1114
EC # 601-020-00-8
May 06, 2003 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive. Risk of fire and explosion: see Chemical Dangers.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Do NOT use compressed air for filling, discharging, or handling. Use non-sparking handtools. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		AVOID ALL CONTACT!	
•INHALATION	Dizziness. Drowsiness. Headache. Nausea. Shortness of breath. Convulsions. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	MAY BE ABSORBED! Dry skin. Redness. Pain. (Further see Inhalation).	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse skin with plenty of water or shower. Refer for medical attention.
•EYES	Redness. Pain.	Face shield, or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Abdominal pain. Sore throat. Vomiting. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Personal protection: complete protective clothing including self-contained breathing apparatus.	Fireproof. Separated from food and feedstuffs oxidants halogens	Do not transport with food and feedstuffs. Note: E F symbol T symbol R: 45-46-11-36/38-48/23/24/25-65 S: 53-45 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0015

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

BENZENE

ICSC: 0015

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: The vapour is heavier than air and may travel along the ground; distant ignition possible. As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts violently with oxidants, nitric acid, sulfuric acid and halogens causing fire and explosion hazard. Attacks plastic and rubber.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.5 ppm as TWA 2.5 ppm as STEL (skin) A1 BEI (ACGIH 2004). MAK: H Carcinogen category: 1 Germ cell mutagen group: 3A (DFG 2004). OSHA PEL: 1910.1028 TWA 1 ppm ST 5 ppm See Appendix F NIOSH REL: Ca TWA 0.1 ppm ST 1 ppm See Appendix A NIOSH IDLH: Ca 500 ppm See: 71432</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation through the skin and by ingestion</p> <p>INHALATION RISK: A harmful contamination of the air can be reached very quickly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract Swallowing the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis. The substance may cause effects on the central nervous system , resulting in lowering of consciousness Exposure far above the occupational exposure limit value may result in unconsciousness death</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the bone marrow immune system , resulting in a decrease of blood cells. This substance is carcinogenic to humans.</p>
---	--	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 80°C Melting point: 6°C Relative density (water = 1): 0.88 Solubility in water, g/100 ml at 25°C: 0.18 Vapour pressure, kPa at 20°C: 10 Relative vapour density (air = 1): 2.7</p>	<p>Relative density of the vapour/air-mixture at 20°C (air = 1): 1.2 Flash point: -11°C c.c. Auto-ignition temperature: 498°C Explosive limits, vol% in air: 1.2-8.0 Octanol/water partition coefficient as log Pow: 2.13</p>
-----------------------------------	--	---

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms.</p>	
----------------------------------	--	---

NOTES

Use of alcoholic beverages enhances the harmful effect. Depending on the degree of exposure, periodic medical examination is indicated. The odour warning when the exposure limit value is exceeded is insufficient.

Transport Emergency Card: TEC (R)-30S1114 / 30GF1-II
NFPA Code: H2; F3; R0

ADDITIONAL INFORMATION

--	--

ICSC: 0015	(C) IPCS, CEC, 1994	BENZENE
-------------------	---------------------	----------------

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

ACETONE

ICSC: 0087



2-Propanone
Dimethyl ketone
Methyl ketone
 C_3H_6O / CH_3COCH_3
Molecular mass: 58.1

ICSC # 0087
CAS # 67-64-1
RTECS # [AL3150000](#)
UN # 1090
EC # 606-001-00-8
April 22, 1994 Validated
Fi, review at IHE: 10/09/89



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, alcohol-resistant foam, water in large amounts, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Do NOT use compressed air for filling, discharging, or handling.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE			
•INHALATION	Sore throat. Cough. Confusion. Headache. Dizziness. Drowsiness. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Dry skin.	Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
•EYES	Redness. Pain. Blurred vision. Possible corneal damage.	Safety spectacles or face shield. Contact lenses should not be worn.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Nausea. Vomiting. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: self-contained breathing apparatus. Ventilation. Collect leaking liquid in sealable containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Then wash away with plenty of water.	Fireproof. Separated from strong oxidants. Store in an area without drain or sewer access.	F symbol Xi symbol R: 11-36-66-67 S: 2-9-16-26 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0087

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ACETONE

ICSC: 0087

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: The vapour is heavier than air and may travel along the ground; distant ignition possible.</p> <p>CHEMICAL DANGERS: The substance can form explosive peroxides on contact with strong oxidants such as acetic acid, nitric acid, hydrogen peroxide. Reacts with chloroform and bromoform under basic conditions, causing fire and explosion hazard. Attacks plastic.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 500 ppm as TWA, 750 ppm as STEL; A4 (not classifiable as a human carcinogen); BEI issued; (ACGIH 2004). MAK: 500 ppm 1200 mg/m³ Peak limitation category: I(2); Pregnancy risk group: D; (DFG 2006). OSHA PEL[±]: TWA 1000 ppm (2400 mg/m³) NIOSH REL: TWA 250 ppm (590 mg/m³) NIOSH IDLH: 2500 ppm 10%LEL See: 67641</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and through the skin.</p> <p>INHALATION RISK: A harmful contamination of the air can be reached rather quickly on evaporation of this substance at 20°C; on spraying or dispersing, however, much faster.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The vapour irritates the eyes and the respiratory tract. The substance may cause effects on the central nervous system , liver , kidneys and gastrointestinal tract .</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis. The substance may have effects on the blood and bone marrow .</p>
---	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 56°C Melting point: -95°C Relative density (water = 1): 0.8 Solubility in water: miscible Vapour pressure, kPa at 20°C: 24</p>	<p>Relative vapour density (air = 1): 2.0 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.2 Flash point: -18°C c.c. Auto-ignition temperature: 465°C Explosive limits, vol% in air: 2.2-13 Octanol/water partition coefficient as log Pow: -0.24</p>
-----------------------------------	--	--

<p>ENVIRONMENTAL DATA</p>	
----------------------------------	--

NOTES

Use of alcoholic beverages enhances the harmful effect.

Transport Emergency Card: TEC (R)-30S1090

NFPA Code: H 1; F 3; R 0;

Card has been partially updated in July 2007: see Occupational Exposure Limits.
Card has been partially updated in January 2008: see Storage.

ADDITIONAL INFORMATION

--	--

ICSC: 0087	ACETONE
(C) IPCS, CEC, 1994	

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

METHYL BROMIDE

ICSC: 0109



Bromomethane
 Monobromomethane
CH3Br
 Molecular mass: 94.9
 (cylinder)

ICSC # 0109
 CAS # 74-83-9
 RTECS # [PA4900000](#)
 UN # 1062
 EC # 602-002-00-2
 November 25, 2009 Validated
 Fi, review at IHE: 10/09/89



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible under specific conditions. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames. NO contact with aluminium, zinc, magnesium or pure oxygen.	Shut off supply; if not possible and no risk to surroundings, let the fire burn itself out; in other cases extinguish with appropriate extinguishing agent .
EXPLOSION	Risk of fire and explosion on contact with aluminium, zinc, magnesium or oxygen.		In case of fire: keep cylinder cool by spraying with water.
EXPOSURE		STRICT HYGIENE!	IN ALL CASES CONSULT A DOCTOR! FIRST AID: USE PERSONAL PROTECTION
•INHALATION	Cough. Sore throat. Dizziness. Headache. Abdominal pain. Vomiting. Weakness. Shortness of breath. Confusion. Hallucinations. Loss of speech. Incoordination. Convulsions. Symptoms may be delayed (see Notes).	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Half-upright position. Artificial respiration may be needed. Refer immediately for medical attention.
•SKIN	MAY BE ABSORBED! Tingling. Itching. Burning sensation. Redness. Blisters. Pain. ON CONTACT WITH LIQUID: FROSTBITE. (Further see Inhalation).	Cold-insulating gloves. Protective clothing.	Rinse skin with plenty of water or shower. ON FROSTBITE: rinse with plenty of water, do NOT remove clothes. Refer immediately for medical attention.
•EYES	Redness. Pain. Blurred vision. Temporary loss of vision.	Safety goggles , face shield or eye protection in combination with breathing protection.	Rinse with plenty of water (remove contact lenses if easily possible). Refer immediately for medical attention.
•INGESTION			

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Consult an expert! Personal protection: complete protective clothing including self-contained breathing apparatus. Ventilation. NEVER direct water	Fireproof if in building. Separated from strong oxidants, aluminium and cylinders containing oxygen. Cool. Ventilation along the floor.	T symbol N symbol R: 23/25-36/37/38-48/20-68-50-59

jet on liquid.

S: 1/2-15-27-36/39-38-45-59-61
 UN Hazard Class: 2.3
 Signal: Danger
 Cylinder-Skull-Health haz
 Contains gas under pressure; may explode if heated
 Toxic if inhaled (gas)
 Causes skin irritation
 Causes eye irritation
 Causes damage to lungs, kidneys and central nervous system if inhaled
 Causes damage to liver, kidneys and central nervous system through prolonged or repeated exposure if inhaled
 Harms public health and the environment by destroying ozone in the upper atmosphere

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0109

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

METHYL BROMIDE

ICSC: 0109

<p>I M P O R T A N T I N F O R M A T I O N</p>	<p>PHYSICAL STATE; APPEARANCE: ODOURLESS AND COLOURLESS COMPRESSED LIQUEFIED GAS.</p> <p>PHYSICAL DANGERS: The gas is heavier than air and may accumulate in lowered spaces causing a deficiency of oxygen.</p> <p>CHEMICAL DANGERS: The substance decomposes on heating producing <313353290toxic and corrosive fumes \including hydrogen bromide, bromine and carbon oxybromide. Reacts with strong oxidants. Attacks many metals in presence of water. Attacks aluminium, zinc and magnesium with formation of pyrophoric compounds, causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 1 ppm as TWA; (skin); A4 (not classifiable as a human carcinogen); (ACGIH 2009). MAK: skin absorption (H); Carcinogen category: 3B; BLW issued (DFG 2009). OSHA PEL[†]: C 20 ppm (80 mg/m³) skin NIOSH REL: Ca See Appendix A NIOSH IDLH: Ca 250 ppm See: 74839</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and through the skin , also as a vapour!</p> <p>INHALATION RISK: On loss of containment, a harmful concentration of this gas in the air will be reached very quickly.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance, as a liquid, is severely irritating to the skin and is irritating to the eyes and the respiratory tract. Inhalation may cause lung oedema (see Notes). Rapid evaporation of the liquid may cause frostbite. The substance may cause effects on the central nervous system , and kidneys. The effects may be delayed up to 48 hours. Exposure at high levels may result in death. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the central nervous system, Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 4°C Melting point: -94°C Relative density (water = 1): 1.7 at 0 C Solubility in water, g/100 ml at 20°C: 1.5 instead of Solubility in water, ml/100 ml at 20°C: 1.5 sister PI suggestion Vapour pressure, kPa at 20°C: 1893</p>	<p>Relative vapour density (air = 1): 3.3 Flash point: 194°C Auto-ignition temperature: 537°C Explosive limits, vol% in air: 10-16 Octanol/water partition coefficient as log Pow: 1.19</p>
	<p>The substance is toxic to aquatic organisms. This substance may be hazardous in the environment;</p>	



ENVIRONMENTAL DATA	special attention should be given to its impact on the ozone layer. This substance does enter the environment under normal use. Great care, however, should be given to avoid any additional release, e.g. through inappropriate disposal.
---------------------------	--

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. The symptoms of lung oedema often do not become manifest until a few hours have passed and they are aggravated by physical effort. Rest and medical observation are therefore essential. Toxic effects on the nervous system may be delayed for several hours. Immediate administration of an appropriate inhalation therapy by a doctor or a person authorized by him/her, should be considered. Turn leaking cylinder with the leak up to prevent escape of gas in liquid state. by IPCS Dec 09 - since inhal symptoms mentions delayed effects and these are not just pulmonary

NFPA Code: H 3; F 1; R 0;

ADDITIONAL INFORMATION

--	--

ICSC: 0109 **METHYL BROMIDE**

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.
--------------------------------	---

International Chemical Safety Cards

ETHYLBENZENE

ICSC: 0268



Ethylbenzol
Phenylethane
EB
 $C_8H_{10} / C_6H_5C_2H_5$
Molecular mass: 106.2

ICSC # 0268
CAS # 100-41-4
RTECS # [DA0700000](#)
UN # 1175
EC # 601-023-00-4
March 13, 1995 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Do NOT use compressed air for filling, discharging, or handling.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		PREVENT GENERATION OF MISTS!	
• INHALATION	Cough. Dizziness. Drowsiness. Headache.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain. Blurred vision.	Face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	(Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Give a slurry of activated charcoal in water to drink. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Collect leaking liquid in covered containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Personal protection: A filter respirator for organic gases and vapours.	Fireproof. Separated from strong oxidants.	F symbol Xn symbol R: 11-20 S: 2-16-24/25-29 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0268

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

ETHYLBENZENE

ICSC: 0268

I M P O R T A N T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID, WITH AROMATIC ODOUR.</p> <p>PHYSICAL DANGERS: The vapour mixes well with air, explosive mixtures are easily formed.</p> <p>CHEMICAL DANGERS: Reacts with strong oxidants. Attacks plastic and rubber.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 125 ppm as STEL A3 (confirmed animal carcinogen with unknown relevance to humans); BEI issued (ACGIH 2005). MAK: skin absorption (H); Carcinogen category: 3A; (DFG 2004). OSHA PEL: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 125 ppm (545 mg/m³) NIOSH IDLH: 800 ppm 10%LEL See: 100414</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its vapour, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract Swallowing the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis. The substance may cause effects on the central nervous system Exposure far above the OEL could cause lowering of consciousness.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis.</p>
--	---	--

PHYSICAL PROPERTIES	<p>Boiling point: 136°C Melting point: -95°C Relative density (water = 1): 0.9 Solubility in water, g/100 ml at 20°C: 0.015 Vapour pressure, kPa at 20°C: 0.9 Relative vapour density (air = 1): 3.7</p>	<p>Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 18°C c.c. Auto-ignition temperature: 432°C Explosive limits, vol% in air: 1.0-6.7 Octanol/water partition coefficient as log Pow: 3.2</p>
--------------------------------	--	--

ENVIRONMENTAL DATA	<p>The substance is harmful to aquatic organisms.</p>	
-------------------------------	---	---

NOTES

The odour warning when the exposure limit value is exceeded is insufficient.

Transport Emergency Card: TEC (R)-30S1175 or 30GF1-I+II
NFPA Code: H2; F3; R0

ADDITIONAL INFORMATION

--	--

ICSC: 0268 **ETHYLBENZENE**

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
--	--

International Chemical Safety Cards

CUMENE

ICSC: 0170



(1-Methylethyl)benzene
2-Phenylpropane
Isopropylbenzene
 C_9H_{12} / $C_6H_5CH(CH_3)_2$
Molecular mass: 120.2

ICSC # 0170
CAS # 98-82-8
RTECS # [GR8575000](#)
UN # 1918
EC # 601-024-00-X
April 13, 2000 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Above 31°C explosive vapour/air mixtures may be formed.	Above 31°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		PREVENT GENERATION OF MISTS!	
• INHALATION	Dizziness. Ataxia. Drowsiness. Headache. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	(See Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. Personal protection: filter respirator for organic gases and vapours.	Fireproof. Separated from strong oxidants, acids. Cool. Keep in the dark. Store only if stabilized.	Marine pollutant. Note: C Xn symbol N symbol R: 10-37-51/53-65 S: 2-24-37-61-62 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0170

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

CUMENE

ICSC: 0170

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts violently with acids and strong oxidants causing fire and explosion hazard. The substance can form explosive peroxides.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 50 ppm as TWA (ACGIH 2004). MAK: 50 ppm 250 mg/m³ Peak limitation category: II(4); skin absorption (H); Pregnancy risk group: C; (DFG 2004). OSHA PEL: TWA 50 ppm (245 mg/m³) skin NIOSH REL: TWA 50 ppm (245 mg/m³) skin NIOSH IDLH: 900 ppm 10%LEL See: 98828</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and through the skin.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin Swallowing the liquid may cause aspiration into the lungs with the risk of chemical pneumonitis. The substance may cause effects on the central nervous system Exposure far above the OEL may result in unconsciousness.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis.</p>
---	---	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 152°C Melting point: -96°C Relative density (water = 1): 0.90 Solubility in water: none Vapour pressure, Pa at 20°C: 427 Relative vapour density (air = 1): 4.2</p>	<p>Relative density of the vapour/air-mixture at 20°C (air = 1): 1.01 Flash point: 31°C c.c. Auto-ignition temperature: 420°C Explosive limits, vol% in air: 0.9-6.5 Octanol/water partition coefficient as log Pow: 3.66</p>
-----------------------------------	---	---

<p>ENVIRONMENTAL DATA</p>	<p>The substance is toxic to aquatic organisms.</p>	
----------------------------------	---	---

NOTES

Check for peroxides prior to distillation; eliminate if found.

Transport Emergency Card: TEC (R)-30S1918 or 30GF1-III
NFPA Code: H2; F3; R1

ADDITIONAL INFORMATION

--	--

ICSC: 0170 **CUMENE**

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

NAPHTHALENE

ICSC: 0667



Naphthene
C₁₀H₈

Molecular mass: 128.18

ICSC # 0667
 CAS # 91-20-3
 RTECS # [QJ0525000](#)
 UN # 1334 (solid); 2304 (molten)
 EC # 601-052-00-2
 April 21, 2005 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 80°C explosive vapour/air mixtures may be formed. Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST!	
•INHALATION	Headache. Weakness. Nausea. Vomiting. Sweating. Confusion. Jaundice. Dark urine.	Ventilation (not if powder), local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	MAY BE ABSORBED! (Further see Inhalation).	Protective gloves.	Rinse skin with plenty of water or shower.
•EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Abdominal pain. Diarrhoea. Convulsions. Unconsciousness. (Further see Inhalation).	Do not eat, drink, or smoke during work. Wash hands before eating.	Rest. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: filter respirator for organic gases and vapours. Do NOT let this chemical enter the environment. Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants, food and feedstuffs. Store in an area without drain or sewer access.	Do not transport with food and feedstuffs. Marine pollutant. Xn symbol N symbol R: 22-40-50/53 S: 2-36/37-46-60-61 UN Hazard Class: 4.1 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0667

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

NAPHTHALENE

ICSC: 0667

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: WHITE SOLID IN VARIOUS FORMS , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS: On combustion, forms irritating and toxic gases. Reacts with strong oxidants .</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 10 ppm as TWA; 15 ppm as STEL; (skin); A4 (not classifiable as a human carcinogen); (ACGIH 2005). MAK: skin absorption (H); Carcinogen category: 2; Germ cell mutagen group: 3B; (DFG 2004). OSHA PEL[†]: TWA 10 ppm (50 mg/m³) NIOSH REL: TWA 10 ppm (50 mg/m³) ST 15 ppm (75 mg/m³) NIOSH IDLH: 250 ppm See: 91203</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C. See Notes.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance may cause effects on the blood , resulting in lesions of blood cells (haemolysis) . See Notes. The effects may be delayed. Exposure by ingestion may result in death. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the blood , resulting in chronic haemolytic anaemia. The substance may have effects on the eyes , resulting in the development of cataract. This substance is possibly carcinogenic to humans.</p>
---	---	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 218°C</p> <p>Sublimation slowly at room temperature</p> <p>Melting point: 80°C</p> <p>Density: 1.16 g/cm³</p> <p>Solubility in water, g/100 ml at 25°C: none</p>	<p>Vapour pressure, Pa at 25°C: 11</p> <p>Relative vapour density (air = 1): 4.42</p> <p>Flash point: 80°C c.c.</p> <p>Auto-ignition temperature: 540°C</p> <p>Explosive limits, vol% in air: 0.9-5.9</p> <p>Octanol/water partition coefficient as log Pow: 3.3</p>
-----------------------------------	---	--

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms. The substance may cause long-term effects in the aquatic environment.</p>	
----------------------------------	--	---

NOTES

Some individuals may be more sensitive to the effect of naphthalene on blood cells.

Transport Emergency Card: TEC (R)-41S1334 (solid); 41GF1-II+III (solid); 41S2304 (molten)

NFPA Code: H2; F2; R0;

ADDITIONAL INFORMATION

ICSC: 0667	NAPHTHALENE
(C) IPCS, CEC, 1994	

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

Material Safety Data Sheet

Normal-Butylbenzene, 99+%

ACC# 55434

Section 1 - Chemical Product and Company Identification

MSDS Name: Normal-Butylbenzene, 99+%

Catalog Numbers: AC107850000, AC107850050, AC107850250, AC107850500, AC107851000, AC107852500
AC107852500

Synonyms: 1-Phenylbutane

Company Identification:

Acros Organics N.V.

One Reagent Lane

Fair Lawn, NJ 07410

For information in North America, call: 800-ACROS-01

For emergencies in the US, call CHEMTREC: 800-424-9300

Section 2 - Composition, Information on Ingredients

CAS#	Chemical Name	Percent	EINECS/ELINCS
104-51-8	n-Butylbenzene	>99	203-209-7

Section 3 - Hazards Identification

EMERGENCY OVERVIEW

Appearance: clear, colorless liquid. Flash Point: 59 deg C.

Warning! Flammable liquid and vapor. May cause eye and skin irritation. May cause respiratory and digestive tract irritation. The toxicological properties of this material have not been fully investigated.

Target Organs: Liver, nervous system.

Potential Health Effects

Eye: May cause eye irritation. The toxicological properties of this material have not been fully investigated.

Skin: May cause skin irritation. The toxicological properties of this material have not been fully investigated.

Ingestion: May cause gastrointestinal irritation with nausea, vomiting and diarrhea. The toxicological properties of this substance have not been fully investigated.

Inhalation: May cause respiratory tract irritation. The toxicological properties of this substance have not been fully investigated. Vapors may cause dizziness or suffocation.

Chronic: No information found.

Section 4 - First Aid Measures

Eyes: Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid immediately.

Skin: Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

Ingestion: Never give anything by mouth to an unconscious person. Get medical aid immediately. Do NOT induce vomiting. If conscious and alert, rinse mouth and drink 2-4 cupfuls of milk or water.

Inhalation: Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid.

Notes to Physician: Treat symptomatically and supportively.

Section 5 - Fire Fighting Measures

General Information: As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors may form an explosive mixture with air. During a fire, irritating and highly toxic gases may be generated by thermal decomposition or combustion. Will burn if involved in a fire. Use water spray to keep fire-exposed containers cool. Containers may explode in the heat of a fire. Flammable liquid and vapor. Vapors may be heavier than air. They can spread along the ground and collect in low or confined areas.

Extinguishing Media: For small fires, use dry chemical, carbon dioxide, water spray or alcohol-resistant foam. For large fires, use water spray, fog, or alcohol-resistant foam. Use water spray to cool fire-exposed containers. Water may be ineffective. Use agent most appropriate to extinguish fire. Do NOT use straight streams of water.

Flash Point: 59 deg C (138.20 deg F)

Autoignition Temperature: 412 deg C (773.60 deg F)

Explosion Limits, Lower: .80 vol %

Upper: 5.80 vol %

NFPA Rating: (estimated) Health: 1; Flammability: 2; Instability: 0

Section 6 - Accidental Release Measures

General Information: Use proper personal protective equipment as indicated in Section 8.

Spills/Leaks: Absorb spill with inert material (e.g. vermiculite, sand or earth), then place in suitable container. Clean up spills immediately, observing precautions in the Protective Equipment section. Remove all sources of ignition. Use a spark-proof tool. Provide ventilation. A vapor suppressing foam may be used to reduce vapors.

Section 7 - Handling and Storage

Handling: Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Ground and bond containers when transferring material. Use spark-proof tools and explosion proof equipment. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Keep away from heat, sparks and flame. Avoid ingestion and inhalation. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

Storage: Keep away from heat, sparks, and flame. Keep away from sources of ignition. Store in a tightly closed container. Store in a cool, dry, well-ventilated area away from incompatible substances. Flammables-area.

Section 8 - Exposure Controls, Personal Protection

Engineering Controls: Use adequate ventilation to keep airborne concentrations low. Use process enclosure, local exhaust ventilation, or other engineering controls to control airborne levels.

Exposure Limits

Chemical Name	ACGIH	NIOSH	OSHA - Final PELs
n-Butylbenzene	none listed	none listed	none listed

OSHA Vacated PELs: n-Butylbenzene: No OSHA Vacated PELs are listed for this chemical.

Personal Protective Equipment

Eyes: Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.

Skin: Wear appropriate protective gloves to prevent skin exposure.

Clothing: Wear appropriate protective clothing to prevent skin exposure.

Respirators: Wear a NIOSH/MSHA or European Standard EN 149 approved full-facepiece airline respirator in the positive pressure mode with emergency escape provisions. Follow the OSHA respirator regulations found in 29

CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

Section 9 - Physical and Chemical Properties

Physical State: Liquid

Appearance: clear, colorless

Odor: None reported.

pH: Not available.

Vapor Pressure: 1.33 hPa @ 23 C

Vapor Density: 4.6

Evaporation Rate: Not available.

Viscosity: Not available.

Boiling Point: 183 deg C @ 760.00mm Hg

Freezing/Melting Point: -88 deg C

Decomposition Temperature: > 183 deg C

Solubility: insoluble

Specific Gravity/Density: .8600g/cm³

Molecular Formula: C₁₀H₁₄

Molecular Weight: 134.22

Section 10 - Stability and Reactivity

Chemical Stability: Stable under normal temperatures and pressures.

Conditions to Avoid: Incompatible materials, ignition sources, excess heat, strong oxidants.

Incompatibilities with Other Materials: Oxidizing agents.

Hazardous Decomposition Products: Carbon monoxide, irritating and toxic fumes and gases, carbon dioxide.

Hazardous Polymerization: Has not been reported.

Section 11 - Toxicological Information

RTECS#:

CAS# 104-51-8: CY9070000

LD50/LC50:

Not available.

Carcinogenicity:

CAS# 104-51-8: Not listed by ACGIH, IARC, NTP, or CA Prop 65.

Epidemiology: No information available.

Teratogenicity: No information available.

Reproductive Effects: No information available.

Mutagenicity: No information available.

Neurotoxicity: No information available.

Other Studies:

Section 12 - Ecological Information

Ecotoxicity: No data available. No information available.

Environmental: Rapidly volatilizes into the atmosphere where it is photochemically degraded by hydroxyl radicals.

Physical: No information available.

Other: No information available.

Section 13 - Disposal Considerations

Chemical waste generators must determine whether a discarded chemical is classified as a hazardous waste. US EPA guidelines for the classification determination are listed in 40 CFR Parts 261.3. Additionally, waste generators must consult state and local hazardous waste regulations to ensure complete and accurate classification.

RCRA P-Series: None listed.

RCRA U-Series: None listed.

Section 14 - Transport Information

	US DOT	Canada TDG
Shipping Name:	BUTYL BENZENES	No information available.
Hazard Class:	3	
UN Number:	UN2709	
Packing Group:	III	

Section 15 - Regulatory Information

US FEDERAL

TSCA

CAS# 104-51-8 is listed on the TSCA inventory.

Health & Safety Reporting List

CAS# 104-51-8: Effective 6/1/87, Sunset 12/19/95

Chemical Test Rules

None of the chemicals in this product are under a Chemical Test Rule.

Section 12b

None of the chemicals are listed under TSCA Section 12b.

TSCA Significant New Use Rule

None of the chemicals in this material have a SNUR under TSCA.

CERCLA Hazardous Substances and corresponding RQs

None of the chemicals in this material have an RQ.

SARA Section 302 Extremely Hazardous Substances

None of the chemicals in this product have a TPQ.

SARA Codes

CAS # 104-51-8: immediate, fire.

Section 313 No chemicals are reportable under Section 313.

Clean Air Act:

This material does not contain any hazardous air pollutants.

This material does not contain any Class 1 Ozone depletors.

This material does not contain any Class 2 Ozone depletors.

Clean Water Act:

None of the chemicals in this product are listed as Hazardous Substances under the CWA.

None of the chemicals in this product are listed as Priority Pollutants under the CWA.

None of the chemicals in this product are listed as Toxic Pollutants under the CWA.

OSHA:

None of the chemicals in this product are considered highly hazardous by OSHA.

STATE

CAS# 104-51-8 can be found on the following state right to know lists: New Jersey, Pennsylvania, Massachusetts.

California Prop 65

California No Significant Risk Level: None of the chemicals in this product are listed.

European/International Regulations

European Labeling in Accordance with EC Directives

Hazard Symbols:

Not available.

Risk Phrases:

R 10 Flammable.

Safety Phrases:

S 16 Keep away from sources of ignition - No smoking.

S 24/25 Avoid contact with skin and eyes.

S 33 Take precautionary measures against static discharges.

S 37 Wear suitable gloves.

S 45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S 9 Keep container in a well-ventilated place.

S 28A After contact with skin, wash immediately with plenty of water

WGK (Water Danger/Protection)

CAS# 104-51-8: 1

Canada - DSL/NDSL

CAS# 104-51-8 is listed on Canada's DSL List.

Canada - WHMIS

This product has a WHMIS classification of B3, D2B.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations.

Canadian Ingredient Disclosure List

Section 16 - Additional Information

MSDS Creation Date: 4/15/1998

Revision #4 Date: 3/16/2007

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Fisher be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Fisher has been advised of the possibility of such damages.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Propylbenzene

Product Number : P52407
Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Combustible Liquid

Target Organs

Lungs, Eyes, Kidney

GHS Label elements, including precautionary statements

Pictogram



Signal word

Danger

Hazard statement(s)

H226 Flammable liquid and vapour.
H304 May be fatal if swallowed and enters airways.
H335 May cause respiratory irritation.
H401 Toxic to aquatic life.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/ physician.
P331 Do NOT induce vomiting.

HMIS Classification

Health hazard: 0
Chronic Health Hazard: *
Flammability: 2
Physical hazards: 0

NFPA Rating

Health hazard: 1
Fire: 2
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. May cause respiratory tract irritation.
Skin May be harmful if absorbed through skin. May cause skin irritation.
Eyes May cause eye irritation.

Ingestion

Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1-Phenylpropane

Formula : C₉H₁₂

Molecular Weight : 120.19 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Propylbenzene			
103-65-1	203-132-9	601-024-00-X	-

4. FIRST AID MEASURES**General advice**

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES**Personal precautions**

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE**Precautions for safe handling**

Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Store in cool place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

For prolonged or repeated contact use protective gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	liquid, clear
Colour	colourless

Safety data

pH	no data available
Melting point	-99 °C (-146 °F) - lit.
Boiling point	159 °C (318 °F) - lit.
Flash point	42.0 °C (107.6 °F) - closed cup
Ignition temperature	450 °C (842 °F)
Lower explosion limit	0.8 %(V)
Upper explosion limit	6 %(V)
Density	0.862 g/cm ³ at 25 °C (77 °F)
Water solubility	slightly soluble

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

11. TOXICOLOGICAL INFORMATION**Acute toxicity**

LD50 Oral - rat - 6,040 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity).

LC50 Inhalation - rat - 2 h - 65000 ppm

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

May be fatal if swallowed and enters airways.

Potential health effects

Inhalation	May be harmful if inhaled. May cause respiratory tract irritation.
Ingestion	Aspiration hazard if swallowed - can enter lungs and cause damage. May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. May cause skin irritation.
Eyes	May cause eye irritation.

Signs and Symptoms of Exposure

Damage to the lungs., To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: DA8750000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish LC50 - Oncorhynchus mykiss (rainbow trout) - 1.55 mg/l - 96.0 h

Toxicity to daphnia and other aquatic invertebrates. Immobilization EC50 - Daphnia magna (Water flea) - 2 mg/l - 24 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Avoid release to the environment.

13. DISPOSAL CONSIDERATIONS

Product

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propyl benzene
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 2364 Class: 3 Packing group: III EMS-No: F-E, S-D
Proper shipping name: PROPYLBENZENE
Marine pollutant: No

IATA

UN-Number: 2364 Class: 3 Packing group: III
Proper shipping name: n-Propylbenzene

15. REGULATORY INFORMATION

OSHA Hazards

Combustible Liquid

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard

Massachusetts Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

Pennsylvania Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

New Jersey Right To Know Components

Propylbenzene	CAS-No. 103-65-1	Revision Date 2007-03-01
---------------	---------------------	-----------------------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

International Chemical Safety Cards

o-XYLENE

ICSC: 0084



ortho-Xylene
 1,2-Dimethylbenzene
 o-Xylol
 $C_6H_4(CH_3)_2 / C_8H_{10}$
 Molecular mass: 106.2

ICSC # 0084
 CAS # 95-47-6
 RTECS # [ZE2450000](#)
 UN # 1307
 EC # 601-022-00-9
 August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 32°C explosive vapour/air mixtures may be formed.	Above 32°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants and strong acids .	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0084

European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

o-XYLENE

ICSC: 0084

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts with strong acids and strong oxidants .</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA; 150 ppm as STEL A4 (ACGIH 2001). BEI specified by (ACGIH 2001). EU OEL: 50 ppm as TWA; 100 ppm as STEL (skin) (EU 2000). OSHA PEL[†]: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin . The substance may cause effects on the central nervous system . If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system. Exposure to the substance may enhance hearing damage caused by exposure to noise. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
---	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 144°C Melting point: -25°C Relative density (water = 1): 0.88 Solubility in water: none Vapour pressure, kPa at 20°C: 0.7</p>	<p>Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 32°C c.c. Auto-ignition temperature: 463°C Explosive limits, vol% in air: 0.9-6.7 Octanol/water partition coefficient as log Pow: 3.12</p>
-----------------------------------	---	--

<p>ENVIRONMENTAL DATA</p>	<p>The substance is toxic to aquatic organisms.</p>	
----------------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0086 p-Xylene and 0085 m-Xylene.

Transport Emergency Card: TEC (R)-30S1307-III

NFPA Code: H 2; F 3; R 0;

Card has been partially updated in January 2008: see Occupational Exposure Limits.

ADDITIONAL INFORMATION

--	--

ICSC: 0084	o-XYLENE
(C) IPCS, CEC, 1994	

<p>IMPORTANT LEGAL</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only</p>
-------------------------------	--

NOTICE:

modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

p-XYLENE

ICSC: 0086



para-Xylene
1,4-Dimethylbenzene
p-Xylol
 $C_6H_4(CH_3)_2 / C_8H_{10}$
Molecular mass: 106.2

ICSC # 0086
CAS # 106-42-3
RTECS # [ZE2625000](#)
UN # 1307
EC # 601-022-00-9
August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 27°C explosive vapour/air mixtures may be formed.	Above 27°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants, strong acids	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0086

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

p-XYLENE

ICSC: 0086

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts with strong acids strong oxidants</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 150 ppm as STEL A4 (ACGIH 2001). BEI (ACGIH 2001). MAK: 100 ppm 440 mg/m³ Peak limitation category: II(2) skin absorption (H); Pregnancy risk group: D (DFG 2005). EU OEL: 50 ppm as TWA 100 ppm as STEL (skin) (EU 2000). OSHA PEL[±]: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
---	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 138°C Melting point: 13°C Relative density (water = 1): 0.86 Solubility in water: none Vapour pressure, kPa at 20°C: 0.9</p>	<p>Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 27°C c.c. Auto-ignition temperature: 528°C Explosive limits, vol% in air: 1.1-7.0 Octanol/water partition coefficient as log Pow: 3.15</p>
-----------------------------------	--	--

<p>ENVIRONMENTAL DATA</p>	<p>The substance is toxic to aquatic organisms.</p>	
----------------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0084 o-Xylene and 0085 m-Xylene.

Transport Emergency Card: TEC (R)-30S1307-III
NFPA Code: H 2; F 3; R 0;

ADDITIONAL INFORMATION

<p>ICSC: 0086</p>	<p>p-XYLENE</p>
<p>(C) IPCS, CEC, 1994</p>	

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

m-XYLENE

ICSC: 0085



meta-Xylene
1,3-Dimethylbenzene
m-Xylol
 $C_6H_4(CH_3)_2 / C_8H_{10}$
Molecular mass: 106.2

ICSC # 0085
CAS # 108-38-3
RTECS # [ZE2275000](#)
UN # 1307
EC # 601-022-00-9
August 03, 2002 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable.	NO open flames, NO sparks, and NO smoking.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 27°C explosive vapour/air mixtures may be formed.	Above 27°C use a closed system, ventilation, and explosion-proof electrical equipment. Prevent build-up of electrostatic charges (e.g., by grounding).	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE!	
• INHALATION	Dizziness. Drowsiness. Headache. Nausea.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Ventilation. Remove all ignition sources. Collect leaking and spilled liquid in sealable containers as far as possible. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT let this chemical enter the environment. (Extra personal protection: filter respirator for organic gases and vapours.)	Fireproof. Separated from strong oxidants strong acids	Note: C Xn symbol R: 10-20/21-38 S: 2-25 UN Hazard Class: 3 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0085

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

m-XYLENE

ICSC: 0085

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts with strong acids strong oxidants</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 100 ppm as TWA 150 ppm as STEL A4 (ACGIH 2001). BEI (ACGIH 2001). MAK: 100 ppm 440 mg/m³ Peak limitation category: II(2) skin absorption (H); Pregnancy risk group: D (DFG 2005). EU OEL: 50 ppm as TWA 100 ppm as STEL (skin) (EU 2000). OSHA PEL[±]: TWA 100 ppm (435 mg/m³) NIOSH REL: TWA 100 ppm (435 mg/m³) ST 150 ppm (655 mg/m³) NIOSH IDLH: 900 ppm See: 95476</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the skin The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
---	---	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 139°C Melting point: -48°C Relative density (water = 1): 0.86 Solubility in water: none Vapour pressure, kPa at 20°C: 0.8</p>	<p>Relative vapour density (air = 1): 3.7 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.02 Flash point: 27°C c.c. Auto-ignition temperature: 527°C Explosive limits, vol% in air: 1.1-7.0 Octanol/water partition coefficient as log Pow: 3.20</p>
-----------------------------------	---	--

<p>ENVIRONMENTAL DATA</p>	<p>The substance is toxic to aquatic organisms.</p>	
----------------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. The recommendations on this Card also apply to technical xylene. See ICSC 0084 o-Xylene and 0086 p-Xylene.

NFPA Code: H 2; F 3; R 0;
Transport Emergency Card: TEC (R)-30S1307-III

ADDITIONAL INFORMATION

ICSC: 0085	m-XYLENE
(C) IPCS, CEC, 1994	

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : sec-Butylbenzene

Product Number : B90408
Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION**Emergency Overview****OSHA Hazards**

Combustible Liquid, Irritant

GHS Label elements, including precautionary statements

Pictogram



Signal word Warning

Hazard statement(s)

H226 Flammable liquid and vapour.
H315 + H320 Causes skin and eye irritation.
H401 Toxic to aquatic life.

Precautionary statement(s)

P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

HMIS Classification

Health hazard: 2
Flammability: 2
Physical hazards: 0

NFPA Rating

Health hazard: 2
Fire: 2
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin May be harmful if absorbed through skin. Causes skin irritation.
Eyes Causes eye irritation.
Ingestion May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 2-Phenylbutane

Formula : C₁₀H₁₄
Molecular Weight : 134.22 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
sec-Butylbenzene			
135-98-8	205-227-0	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Store in cool place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form liquid, clear

Colour colourless

Safety data

pH no data available

Melting point 75.5 °C (167.9 °F) - lit.

Boiling point 173 - 174 °C (343 - 345 °F) - lit.

Flash point 52.0 °C (125.6 °F) - closed cup

Ignition temperature 418 °C (784 °F)

Lower explosion limit 0.8 %(V)

Density 0.863 g/mL at 25 °C (77 °F)

Water solubility no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

Vapours may form explosive mixture with air.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

11. TOXICOLOGICAL INFORMATION

Acute toxicity

LD50 Dermal - rabbit - > 13,792 mg/kg

Skin corrosion/irritation

Skin - rabbit - irritating - 24 h

Serious eye damage/eye irritation

Eyes - rabbit - Mild eye irritation - 24 h

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Ingestion	May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: CY9100000

12. ECOLOGICAL INFORMATION**Toxicity**

no data available

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

Product

This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2709 Class: 3 Packing group: III

Proper shipping name: Butyl benzenes

Marine pollutant: No

Poison Inhalation Hazard: No

IMDG

UN-Number: 2709 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant: No

IATA

UN-Number: 2709 Class: 3 Packing group: III

Proper shipping name: Butylbenzenes

15. REGULATORY INFORMATION

OSHA Hazards

Combustible Liquid, Irritant

DSL Status

This product contains the following components that are not on the Canadian DSL nor NDSL lists.

sec-Butylbenzene	CAS-No. 135-98-8
------------------	---------------------

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

No components are subject to the Massachusetts Right to Know Act.

Pennsylvania Right To Know Components

sec-Butylbenzene	CAS-No. 135-98-8	Revision Date
------------------	---------------------	---------------

New Jersey Right To Know Components

sec-Butylbenzene	CAS-No. 135-98-8	Revision Date
------------------	---------------------	---------------

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION

Further information

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : *tert*-Butylbenzene

Product Number : B90602
Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # : (314) 776-6555

2. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 2-Methyl-2-phenylpropane

Formula : C₁₀H₁₄
Molecular Weight : 134.22 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
tert-Butylbenzene			
98-06-6	202-632-4	-	-

3. HAZARDS IDENTIFICATION**Emergency Overview****OSHA Hazards**

Flammable Liquid, Irritant

HMIS Classification

Health Hazard: 2
Flammability: 3
Physical hazards: 0

NFPA Rating

Health Hazard: 2
Fire: 3
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin May be harmful if absorbed through skin. Causes skin irritation.
Eyes Causes eye irritation.
Ingestion May be harmful if swallowed.

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Do NOT induce vomiting. Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Flammable properties

Flash point 34.0 °C (93.2 °F) - closed cup

Ignition temperature 450 °C (842 °F)

Suitable extinguishing media

For small (incipient) fires, use media such as "alcohol" foam, dry chemical, or carbon dioxide. For large fires, apply water from as far as possible. Use very large quantities (flooding) of water applied as a mist or spray; solid streams of water may be ineffective. Cool all affected containers with flooding quantities of water.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Further information

Use water spray to cool unopened containers.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Beware of vapours accumulating to form explosive concentrations. Vapours can accumulate in low areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods for cleaning up

Contain spillage, and then collect with non-combustible absorbent material, (e.g. sand, earth, diatomaceous earth, vermiculite) and place in container for disposal according to local / national regulations (see section 13). Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Handling

Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.

Keep away from sources of ignition - No smoking. Take measures to prevent the build up of electrostatic charge.

Storage

Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Store in cool place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Where risk assessment shows air-purifying respirators are appropriate use a full-face respirator with multi-purpose combination (US) or type ABEK (EN 14387) respirator cartridges as a backup to engineering controls. If the respirator is the sole means of protection, use a full-face supplied air respirator. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves.

Eye protection

Face shield and safety glasses

Skin and body protection

Choose body protection according to the amount and concentration of the dangerous substance at the work place.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form liquid, clear

Colour colourless

Safety data

pH no data available

Melting point -58 °C (-72 °F) - lit.

Boiling point 169 °C (336 °F) - lit.

Flash point 34.0 °C (93.2 °F) - closed cup

Ignition temperature 450 °C (842 °F)

Lower explosion limit 0.8 %(V)

Density 0.867 g/mL at 25 °C (77 °F)

Water solubility no data available

Partition coefficient:
n-octanol/water log Pow: 3.80

10. STABILITY AND REACTIVITY

Storage stability

Stable under recommended storage conditions.

Conditions to avoid

Heat, flames and sparks.

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Hazardous reactions

Vapours may form explosive mixture with air.

11. TOXICOLOGICAL INFORMATION**Acute toxicity**

LD50 Oral - rat - 3,045 mg/kg

Remarks: Behavioral:Somnolence (general depressed activity). Behavioral:Tremor. Gastrointestinal:Changes in structure or function of salivary glands.

Irritation and corrosion

no data available

Sensitisation

no data available

Chronic exposure

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Potential Health Effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Skin	May be harmful if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.
Ingestion	May be harmful if swallowed.

Additional Information

RTECS: CY9120000

12. ECOLOGICAL INFORMATION**Elimination information (persistence and degradability)**

no data available

Ecotoxicity effects

Toxicity to fish	LC0 - Leuciscus idus (Golden orfe) - 44 mg/l - 48 h
	LC50 - Leuciscus idus (Golden orfe) - 65 mg/l - 48 h
Toxicity to daphnia and other aquatic	LC50 - Daphnia magna (Water flea) - 41 mg/l - 24 h

invertebrates.

Further information on ecology

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

Product

Burn in a chemical incinerator equipped with an afterburner and scrubber but exert extra care in igniting as this material is highly flammable. This combustible material may be burned in a chemical incinerator equipped with an afterburner and scrubber. Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2709 Class: 3 Packing group: III

Proper shipping name: Butyl benzenes

Marine pollutant: No

Poison Inhalation Hazard: No

IMDG

UN-Number: 2709 Class: 3 Packing group: III EMS-No: F-E, S-D

Proper shipping name: BUTYLBENZENES

Marine pollutant: No

IATA

UN-Number: 2709 Class: 3 Packing group: III

Proper shipping name: Butylbenzenes

15. REGULATORY INFORMATION

OSHA Hazards

Flammable Liquid, Irritant

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Fire Hazard, Acute Health Hazard

Massachusetts Right To Know Components

tert-Butylbenzene

CAS-No.
98-06-6

Revision Date
1993-04-24

Pennsylvania Right To Know Components

tert-Butylbenzene

CAS-No.
98-06-6

Revision Date
1993-04-24

New Jersey Right To Know Components

tert-Butylbenzene

CAS-No.
98-06-6

Revision Date
1993-04-24

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth, or any other reproductive defects.

16. OTHER INFORMATION

Further information

Copyright 2009 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

International Chemical Safety Cards

TOLUENE

ICSC: 0078



Methylbenzene
Toluol
Phenylmethane
 $C_6H_5CH_3 / C_7H_8$
Molecular mass: 92.1

ICSC # 0078
CAS # 108-88-3
RTECS # [XS5250000](#)
UN # 1294
EC # 601-021-00-3
October 10, 2002 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable.	NO open flames, NO sparks, and NO smoking.	Powder, AFFF, foam, carbon dioxide.
EXPLOSION	Vapour/air mixtures are explosive.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Prevent build-up of electrostatic charges (e.g., by grounding). Do NOT use compressed air for filling, discharging, or handling. Use non-sparking handtools.	In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION	Cough. Sore throat. Dizziness. Drowsiness. Headache. Nausea. Unconsciousness.	Ventilation, local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
•SKIN	Dry skin. Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention.
•EYES	Redness. Pain.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Burning sensation. Abdominal pain. (Further see Inhalation).	Do not eat, drink, or smoke during work.	Rinse mouth. Do NOT induce vomiting. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area in large spill! Consult an expert in large spill! Remove all ignition sources. Ventilation. Collect leaking liquid in sealable containers. Absorb remaining liquid in sand or inert absorbent and remove to safe place. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Personal protection: self-contained breathing apparatus	Fireproof. Separated from strong oxidants.	F symbol Xn symbol R: 11-38-48/20-63-65-67 S: 2-36/37-46-62 UN Hazard Class: 3 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0078

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

TOLUENE

ICSC: 0078

I M P O R T A N T D A T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS LIQUID, WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: The vapour mixes well with air, explosive mixtures are formed easily. As a result of flow, agitation, etc., electrostatic charges can be generated.</p> <p>CHEMICAL DANGERS: Reacts violently with strong oxidants causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 50 ppm as TWA (skin) A4 BEI issued (ACGIH 2004). MAK: 50 ppm 190 mg/m³ H Peak limitation category: II(4) Pregnancy risk group: C (DFG 2004). OSHA PEL[†]: TWA 200 ppm C 300 ppm 500 ppm (10-minute maximum peak) NIOSH REL: TWA 100 ppm (375 mg/m³) ST 150 ppm (560 mg/m³) NIOSH IDLH: 500 ppm See: 108883</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air can be reached rather quickly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes and the respiratory tract The substance may cause effects on the central nervous system If this liquid is swallowed, aspiration into the lungs may result in chemical pneumonitis. Exposure at high levels may result in cardiac dysrhythmia and unconsciousness.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The liquid defats the skin. The substance may have effects on the central nervous system Exposure to the substance may enhance hearing damage caused by exposure to noise. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
PHYSICAL PROPERTIES	Boiling point: 111°C Melting point: -95°C Relative density (water = 1): 0.87 Solubility in water: none Vapour pressure, kPa at 25°C: 3.8 Relative vapour density (air = 1): 3.1	Relative density of the vapour/air-mixture at 20°C (air = 1): 1.01 Flash point: 4°C c.c. Auto-ignition temperature: 480°C Explosive limits, vol% in air: 1.1-7.1 Octanol/water partition coefficient as log Pow: 2.69
ENVIRONMENTAL DATA	The substance is toxic to aquatic organisms.	
NOTES		
Depending on the degree of exposure, periodic medical examination is suggested. Use of alcoholic beverages enhances the harmful effect. <div style="text-align: right;"> Transport Emergency Card: TEC (R)-30S1294 NFPA Code: H 2; F 3; R 0; </div>		
ADDITIONAL INFORMATION		
ICSC: 0078	(C) IPCS, CEC, 1994	TOLUENE


IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZ(a)ANTHRACENE

ICSC: 0385



1,2-Benzoanthracene
Benzo(a)anthracene
2,3-Benzphenanthrene
Naphthanthracene
 $C_{18}H_{12}$
Molecular mass: 228.3

ICSC # 0385
CAS # 56-55-3
RTECS # [CV9275000](#)
EC # 601-033-00-9
October 23, 1995 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.		Water spray, powder. In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety goggles face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: complete protective clothing including self-contained breathing apparatus.	Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0385


Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZ(a)ANTHRACENE

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS TO YELLOW BROWN FLUORESCENT FLAKES OR POWDER.</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS:</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: A2 (suspected human carcinogen); (ACGIH 2004). MAK: Carcinogen category: 2 (as pyrolysis product of organic materials) (DFG 2005).</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE:</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is probably carcinogenic to humans.</p>
--	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Sublimation point: 435°C Melting point: 162°C Relative density (water = 1): 1.274 Solubility in water: none</p>	<p>Vapour pressure, Pa at 20°C: 292 Octanol/water partition coefficient as log Pow: 5.61</p>
-----------------------------------	--	--

<p>ENVIRONMENTAL DATA</p>	<p>Bioaccumulation of this chemical may occur in seafood.</p>	
----------------------------------	---	---

NOTES

This substance is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, it may be encountered as a laboratory chemical in its pure form. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home. Tetraphene is a common name. Card has been partly updated in October 2005 and August 2006: see sections Occupational Exposure Limits, EU classification.

ADDITIONAL INFORMATION

ICSC: 0385

BENZ(a)ANTHRACENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(a)PYRENE

ICSC: 0104



Benz(a)pyrene
3,4-Benzopyrene
Benzo(d,e,f)chrysene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0104
CAS # 50-32-8
RTECS # [DJ3675000](#)
EC # 601-032-00-3
October 17, 2005 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray, foam, powder, carbon dioxide.
EXPLOSION			
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	AVOID ALL CONTACT! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
•SKIN	MAY BE ABSORBED!	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES		Safety goggles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work.	Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Personal protection: complete protective clothing including self-contained breathing apparatus. Do NOT let this chemical enter the environment. Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants.	T symbol N symbol R: 45-46-60-61-43-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK


ICSC: 0104

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

<p>I M P O R T A N T A D D I T I O N</p>	<p>PHYSICAL STATE; APPEARANCE: PALE-YELLOW CRYSTALS</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: Reacts with strong oxidants causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: Exposure by all routes should be carefully controlled to levels as low as possible A2 (suspected human carcinogen); (ACGIH 2005). MAK: Carcinogen category: 2; Germ cell mutagen group: 2; (DFG 2005).</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol, through the skin and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE:</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is carcinogenic to humans. May cause heritable genetic damage to human germ cells. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
--	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 496°C Melting point: 178.1°C Density: 1.4 g/cm³</p>	<p>Solubility in water: none (<0.1 g/100 ml) Vapour pressure : negligible Octanol/water partition coefficient as log Pow: 6.04</p>
-----------------------------------	--	---

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms. Bioaccumulation of this chemical may occur in fish, in plants and in molluscs. The substance may cause long-term effects in the aquatic environment.</p>	
----------------------------------	---	---

NOTES

Do NOT take working clothes home. Benzo(a)pyrene is present as a component of polycyclic aromatic hydrocarbons (PAHs) in the environment, usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco.

ADDITIONAL INFORMATION

--	--

ICSC: 0104

BENZO(a)PYRENE

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

BENZO(b)FLUORANTHENE

ICSC: 0720



Benz(e)acephenanthrylene
2,3-Benzofluoranthene
Benzo(e)fluoranthene
3,4-Benzofluoranthene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0720
CAS # 205-99-2
RTECS # [CU1400000](#)
EC # 601-034-00-4
March 25, 1999 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0720

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(b)FLUORANTHENE

ICSC: 0720

I	PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body ²³⁵ by inhalation
----------	---	--

M
P
O
R
T
A
N
T
D
A
T
A

PHYSICAL DANGERS:

CHEMICAL DANGERS:

Upon heating, toxic fumes are formed.

OCCUPATIONAL EXPOSURE LIMITS:

TLV: A2 (suspected human carcinogen); (ACGIH 2004).

MAK:

Carcinogen category: 2;

(DFG 2004).

of its aerosol and through the skin.

INHALATION RISK:

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.

EFFECTS OF SHORT-TERM EXPOSURE:

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

This substance is possibly carcinogenic to humans. May cause genetic damage in humans.

PHYSICAL PROPERTIES

Boiling point: 481°C
Melting point: 168°C
Solubility in water:
none

Octanol/water partition coefficient as log Pow: 6.12

ENVIRONMENTAL DATA

This substance may be hazardous to the environment; special attention should be given to air quality and water quality.



NOTES

Benzo(b)fluoranthene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco. ACGIH recommends environment containing benzo(b)fluoranthene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m³. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.

ADDITIONAL INFORMATION

ICSC: 0720

BENZO(b)FLUORANTHENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(k)FLUORANTHENE

ICSC: 0721



Dibenzo(b,jk)fluorene
8,9-Benzofluoranthene
11,12-Benzofluoranthene
 $C_{20}H_{12}$
Molecular mass: 252.3

ICSC # 0721
CAS # 207-08-9
RTECS # [DF6350000](#)
EC # 601-036-00-5
March 25, 1999 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0721

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

BENZO(k)FLUORANTHENE

ICSC: 0721

I	PHYSICAL STATE; APPEARANCE: YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and through the skin.
M		237

P
O
R
T
A
N
T
D
A
T
A

PHYSICAL DANGERS:

CHEMICAL DANGERS:

Upon heating, toxic fumes are formed.

OCCUPATIONAL EXPOSURE LIMITS:

TLV not established.

MAK:

Carcinogen category: 2;
(DFG 2004).

INHALATION RISK:

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.

EFFECTS OF SHORT-TERM EXPOSURE:

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

This substance is possibly carcinogenic to humans.

PHYSICAL PROPERTIES

Boiling point: 480°C
Melting point: 217°C
Solubility in water:
none

Octanol/water partition coefficient as log Pow: 6.84

ENVIRONMENTAL DATA

This substance may be hazardous to the environment; special attention should be given to air quality and water quality. Bioaccumulation of this chemical may occur in crustacea and in fish.



NOTES

Benzo(k)fluoranthene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco. ACGIH recommends environment containing benzo(k)fluoranthene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m³. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.

ADDITIONAL INFORMATION

ICSC: 0721

BENZO(k)FLUORANTHENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

CHRYSENE

ICSC: 1672



Benzoaphenanthrene
1,2-Benzophenanthrene
1,2,5,6-Dibenzonaphthalene
 $C_{18}H_{12}$
Molecular mass: 228.3

ICSC # 1672
CAS # 218-01-9
RTECS # [GC0700000](#)
UN # 3077
EC # 601-048-00-0
October 12, 2006 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray. Dry powder. Foam. Carbon dioxide.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety goggles	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: P3 filter respirator for toxic particles. Do NOT let this chemical enter the environment. Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants, Provision to contain effluent from fire extinguishing. Store in an area without drain or sewer access.	T symbol N symbol R: 45-68-50/53 S: 53-45-60-61 UN Hazard Class: 9 UN Packing Group: III Signal: Warning Aqua-Cancer Suspected of causing cancer Very toxic to aquatic life with long lasting effects Very toxic to aquatic life

SEE IMPORTANT INFORMATION ON BACK


International Chemical Safety Cards

CHRYSENE

ICSC: 1672

I M P O R T A N T D A T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS TO BEIGE CRYSTALS OR POWDER</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS: The substance decomposes on burning producing toxic fumes Reacts violently with strong oxidants</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: A3 (confirmed animal carcinogen with unknown relevance to humans); (ACGIH 2006). MAK not established.</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed</p> <p>EFFECTS OF SHORT-TERM EXPOSURE:</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: This substance is possibly carcinogenic to humans.</p>
---	--	---

PHYSICAL PROPERTIES	Boiling point: 448°C Melting point: 254 - 256°C Density: 1.3 g/cm ³	Solubility in water: very poor Octanol/water partition coefficient as log Pow: 5.9
--------------------------------	---	--

ENVIRONMENTAL DATA	The substance is very toxic to aquatic organisms. Bioaccumulation of this chemical may occur in seafood. It is strongly advised that this substance does not enter the environment.	
-------------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home. This substance does not usually occur as a pure substance but as a component of polyaromatic hydrocarbon (PAH) mixtures. Human population studies have associated PAH's exposure with cancer and cardiovascular diseases.

Transport Emergency Card: TEC (R)-90GM7-III

ADDITIONAL INFORMATION

--	--

ICSC: 1672

CHRYSENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.
--	---

International Chemical Safety Cards

DIBENZO(a,h)ANTHRACENE

ICSC: 0431



1,25,6-Dibenzanthracene
 $C_{22}H_{14}$
 Molecular mass: 278.4

ICSC # 0431
 CAS # 53-70-3
 RTECS # [HN2625000](#)
 EC # 601-041-00-2
 October 23, 1995 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Water spray, powder.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN	Redness. Swelling. Itching.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness.	Face shield or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth.
SPILLAGE DISPOSAL		STORAGE	PACKAGING & LABELLING
Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: P3 filter respirator for toxic particles.		Well closed.	T symbol N symbol R: 45-50/53 S: 53-45-60-61
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0431		Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

DIBENZO(a,h)ANTHRACENE

ICSC: 0431

<p>I</p> <p>M</p> <p>P</p> <p>O</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALLINE POWDER.</p> <p>PHYSICAL DANGERS:</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration</p>
---	---	---

R
T
A
N
T
D
A
T
A

CHEMICAL DANGERS:

of airborne particles can, however, be reached quickly.

OCCUPATIONAL EXPOSURE LIMITS:

TLV not established.

EFFECTS OF SHORT-TERM EXPOSURE:

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

The substance may have effects on the skin, resulting in photosensitization. This substance is probably carcinogenic to humans.

PHYSICAL PROPERTIES

Boiling point: 524°C
Melting point: 267°C
Relative density (water = 1): 1.28

Solubility in water:
none
Octanol/water partition coefficient as log Pow: 6.5

ENVIRONMENTAL DATA

Bioaccumulation of this chemical may occur in seafood.



NOTES

This is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, it may be encountered as a laboratory chemical in its pure form. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken. Do NOT take working clothes home. DBA is a commonly used name. This substance is one of many polycyclic aromatic hydrocarbons (PAH).

ADDITIONAL INFORMATION

ICSC: 0431

DIBENZO(a,h)ANTHRACENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Fluoranthene

Product Number : 423947
Brand : Aldrich

Supplier : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation
Product Safety - Americas Region
1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Harmful by ingestion., Carcinogen

GHS Classification

Acute toxicity, Oral (Category 4)
Acute toxicity, Dermal (Category 5)
Acute aquatic toxicity (Category 1)
Chronic aquatic toxicity (Category 1)

GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)

H302 : Harmful if swallowed.
H313 : May be harmful in contact with skin.
H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P273 : Avoid release to the environment.
P501 : Dispose of contents/ container to an approved waste disposal plant.

HMIS Classification

Health hazard: 1
Chronic Health Hazard: *
Flammability: 1
Physical hazards: 0

NFPA Rating

Health hazard: 1
Fire: 1
Reactivity Hazard: 0

Potential Health Effects

Inhalation	May be harmful if inhaled. May cause respiratory tract irritation.
Skin	Harmful if absorbed through skin. May cause skin irritation.
Eyes	May cause eye irritation.
Ingestion	Harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : Benzo[j,k]fluorene

Formula : C₁₆H₁₀

Molecular Weight : 202.25 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Fluoranthene			
206-44-0	205-912-4	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Avoid breathing dust.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

For nuisance exposures use type P95 (US) or type P1 (EU EN 143) particle respirator. For higher level protection use type OV/AG/P99 (US) or type ABEK-P2 (EU EN 143) respirator cartridges. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Safety glasses with side-shields conforming to EN166 Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

Complete suit protecting against chemicals, The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	solid
Colour	no data available

Safety data

pH	no data available
Melting point/freezing point	Melting point/range: 105 - 110 °C (221 - 230 °F) - lit.
Boiling point	384 °C (723 °F) - lit.
Flash point	198.0 °C (388.4 °F) - closed cup
Ignition temperature	no data available
Autoignition temperature	no data available
Lower explosion limit	no data available
Upper explosion limit	no data available
Vapour pressure	no data available
Density	no data available
Water solubility	no data available
Partition coefficient: n-octanol/water	no data available
Relative vapour density	no data available
Odour	no data available

Odour Threshold no data available

Evaporation rate no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

no data available

Conditions to avoid

no data available

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

Other decomposition products - no data available

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

LD50 Oral - rat - 2,000 mg/kg

Inhalation LC50

no data available

Dermal LD50

LD50 Dermal - rabbit - 3,180 mg/kg

Other information on acute toxicity

no data available

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

Laboratory experiments have shown mutagenic effects.

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Fluoranthene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: Reasonably anticipated to be human carcinogens. (Fluoranthene)

Reasonably anticipated to be a human carcinogen (Fluoranthene)

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. May cause respiratory tract irritation.
Ingestion	Harmful if swallowed.
Skin	Harmful if absorbed through skin. May cause skin irritation.
Eyes	May cause eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Synergistic effects

no data available

Additional Information

RTECS: LL4025000

12. ECOLOGICAL INFORMATION

Toxicity

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 0.0077 mg/l - 96 h NOEC - Cyprinodon variegatus (sheepshead minnow) - 560 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates.	Immobilization EC50 - Daphnia magna (Water flea) - > 0.005 - < 0.01 mg/l - 3 d Immobilization EC50 - Daphnia magna (Water flea) - 0.78 mg/l - 20 h NOEC - Daphnia magna (Water flea) - 0.085 mg/l - 48 h

Persistence and degradability

no data available

Bioaccumulative potential

no data available

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

no data available

13. DISPOSAL CONSIDERATIONS

Product

Offer surplus and non-recyclable solutions to a licensed disposal company. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Fluoranthene)
Reportable Quantity (RQ): 100 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

Not dangerous goods

IATA

Not dangerous goods

15. REGULATORY INFORMATION

OSHA Hazards

Harmful by ingestion., Carcinogen

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

The following components are subject to reporting levels established by SARA Title III, Section 313:

	CAS-No.	Revision Date
Fluoranthene	206-44-0	2007-03-01

SARA 311/312 Hazards

Acute Health Hazard, Chronic Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Fluoranthene	206-44-0	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Fluoranthene	206-44-0	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Fluoranthene	206-44-0	2007-03-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Fluoranthene	206-44-0	1990-01-01

16. OTHER INFORMATION

Further information

Copyright 2011 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Fluorene

Product Number : 46880
Brand : Aldrich
Product Use : For laboratory research purposes.

Supplier : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Manufacturer : Sigma-Aldrich Corporation
3050 Spruce St.
St. Louis, Missouri 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # (For both supplier and manufacturer) : (314) 776-6555

Preparation Information : Sigma-Aldrich Corporation
Product Safety - Americas Region
1-800-521-8956

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

No known OSHA hazards

GHS Classification

Acute aquatic toxicity (Category 1)

Chronic aquatic toxicity (Category 1)

GHS Label elements, including precautionary statements

Pictogram



Signal word : Warning

Hazard statement(s)

H410 : Very toxic to aquatic life with long lasting effects.

Precautionary statement(s)

P273 : Avoid release to the environment.

P501 : Dispose of contents/ container to an approved waste disposal plant.

HMIS Classification

Health hazard: 1

Flammability: 1

Physical hazards: 0

NFPA Rating

Health hazard: 1

Fire: 1

Reactivity Hazard: 0

Potential Health Effects

Inhalation : May be harmful if inhaled. May cause respiratory tract irritation.

Skin : May be harmful if absorbed through skin. May cause skin irritation.

Eyes
Ingestion

May cause eye irritation.
May be harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Formula : C₁₃H₁₀
Molecular Weight : 166.22 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Fluorene			
86-73-7	201-695-5	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance.

If inhaled

If breathed in, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Flush eyes with water as a precaution.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

Hazardous combustion products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Avoid dust formation. Avoid breathing vapors, mist or gas. Ensure adequate ventilation.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Sweep up and shovel. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Contains no substances with occupational exposure limit values.

Personal protective equipment

Respiratory protection

Respiratory protection is not required. Where protection from nuisance levels of dusts are desired, use type N95 (US) or type P1 (EN 143) dust masks. Use respirators and components tested and approved under appropriate government standards such as NIOSH (US) or CEN (EU).

Hand protection

Handle with gloves. Gloves must be inspected prior to use. Use proper glove removal technique (without touching glove's outer surface) to avoid skin contact with this product. Dispose of contaminated gloves after use in accordance with applicable laws and good laboratory practices. Wash and dry hands.

Eye protection

Use equipment for eye protection tested and approved under appropriate government standards such as NIOSH (US) or EN 166(EU).

Skin and body protection

Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place. The type of protective equipment must be selected according to the concentration and amount of the dangerous substance at the specific workplace.

Hygiene measures

Handle in accordance with good industrial hygiene and safety practice. Wash hands before breaks and at the end of workday.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Form	crystalline
Colour	white

Safety data

pH	no data available
Melting/freezing point	Melting point/range: 113 - 115 °C (235 - 239 °F) Melting point/range: 111 - 114 °C (232 - 237 °F) - lit.
Boiling point	298 °C (568 °F) - lit.
Flash point	151.0 °C (303.8 °F) - closed cup
Ignition temperature	no data available
Autoignition temperature	no data available
Lower explosion limit	no data available
Upper explosion limit	no data available
Vapour pressure	no data available
Density	no data available
Water solubility	no data available
Partition coefficient: n-octanol/water	no data available
Relative vapour density	no data available
Odour	no data available

Odour Threshold no data available

Evaporation rate no data available

10. STABILITY AND REACTIVITY

Chemical stability

Stable under recommended storage conditions.

Possibility of hazardous reactions

no data available

Conditions to avoid

no data available

Materials to avoid

Strong oxidizing agents

Hazardous decomposition products

Hazardous decomposition products formed under fire conditions. - Carbon oxides

11. TOXICOLOGICAL INFORMATION

Acute toxicity

Oral LD50

Inhalation LC50

no data available

Dermal LD50

no data available

Other information on acute toxicity

LD50 Intraperitoneal - mouse - > 2.0 mg/kg

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Fluorene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

Teratogenicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

no data available

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. May cause respiratory tract irritation.
Ingestion	May be harmful if swallowed.
Skin	May be harmful if absorbed through skin. May cause skin irritation.
Eyes	May cause eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Synergistic effects

no data available

Additional Information

RTECS: LL5670000

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish	LC50 - Fish - 0.82 mg/l - 96 h
Toxicity to daphnia and other aquatic invertebrates.	Remarks: no data available
Toxicity to algae	EC50 - Algae - 3.4 mg/l - 96 h

Persistence and degradability**Bioaccumulative potential**

Bioaccumulation	Oncorhynchus mykiss (rainbow trout) - 24 h Bioconcentration factor (BCF): 512
-----------------	--

Mobility in soil

Adsorbs on soil.

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic life with long lasting effects.

no data available

13. DISPOSAL CONSIDERATIONS**Product**

Offer surplus and non-recyclable solutions to a licensed disposal company.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION**DOT (US)**

Not dangerous goods

IMDG

UN-Number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
 Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Fluorene)
 Marine pollutant: Marine pollutant

IATA

UN-Number: 3077 Class: 9 Packing group: III
 Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Fluorene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION**OSHA Hazards**

No known OSHA hazards

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

No SARA Hazards

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Fluorene	86-73-7	2007-03-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Fluorene	86-73-7	2007-03-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Fluorene	86-73-7	2007-03-01

California Prop. 65 Components

This product does not contain any chemicals known to State of California to cause cancer, birth defects, or any other reproductive harm.

16. OTHER INFORMATION**Further information**

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

International Chemical Safety Cards

INDENO(1,2,3-cd)PYRENE

ICSC: 0730



o-Phenylene pyrene
2,3-Phenylene pyrene
 $C_{22}H_{12}$
Molecular mass: 276.3

ICSC # 0730
CAS # 193-39-5
RTECS # [NK9300000](#)
March 25, 1999 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE			In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment.	Provision to contain effluent from fire extinguishing. Well closed.	R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0730

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

INDENO(1,2,3-cd)PYRENE

ICSC: 0730

I	PHYSICAL STATE; APPEARANCE: YELLOW CRYSTALS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and through the skin.
M	PHYSICAL DANGERS:	INHALATION RISK:
P		

O
R
T
A
N
T
D
A
T
A

CHEMICAL DANGERS:
Upon heating, toxic fumes are formed.

OCCUPATIONAL EXPOSURE LIMITS:
TLV not established.
MAK:
Carcinogen category: 2;
(DFG 2004).

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.

EFFECTS OF SHORT-TERM EXPOSURE:

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:
This substance is possibly carcinogenic to humans.

PHYSICAL PROPERTIES

Boiling point: 536°C
Melting point: 164°C
Solubility in water:
none

Octanol/water partition coefficient as log Pow: 6.58

ENVIRONMENTAL DATA

This substance may be hazardous to the environment; special attention should be given to air quality and water quality. Bioaccumulation of this chemical may occur in fish.



NOTES

Indeno(1,2,3-cd)pyrene is present as a component of polycyclic aromatic hydrocarbons (PAH) content in the environment usually resulting from the incomplete combustion or pyrolysis of organic matters, especially fossil fuels and tobacco. ACGIH recommends environment containing Indeno(1,2,3-c,d)pyrene should be evaluated in terms of the TLV-TWA for coal tar pitch volatile, as benzene soluble 0.2 mg/m³. Insufficient data are available on the effect of this substance on human health, therefore utmost care must be taken.

ADDITIONAL INFORMATION

ICSC: 0730

INDENO(1,2,3-cd)PYRENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

NAPHTHALENE

ICSC: 0667



Naphthene
C₁₀H₈

Molecular mass: 128.18

ICSC # 0667
CAS # 91-20-3
RTECS # QJ0525000
UN # 1334 (solid); 2304 (molten)
EC # 601-052-00-2
April 21, 2005 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Above 80°C explosive vapour/air mixtures may be formed. Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION	Headache. Weakness. Nausea. Vomiting. Sweating. Confusion. Jaundice. Dark urine.	Ventilation (not if powder), local exhaust, or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	MAY BE ABSORBED! (Further see Inhalation).	Protective gloves.	Rinse skin with plenty of water or shower.
• EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Diarrhoea. Convulsions. Unconsciousness. (Further see Inhalation).	Do not eat, drink, or smoke during work. Wash hands before eating.	Rest. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Personal protection: filter respirator for organic gases and vapours. Do NOT let this chemical enter the environment. Sweep spilled substance into covered containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place.	Separated from strong oxidants, food and feedstuffs. Store in an area without drain or sewer access.	Do not transport with food and feedstuffs. Marine pollutant. Xn symbol. N symbol. R: 22-40-50/53. S: 2-36/37-46-60-61. UN Hazard Class: 4.1. UN Packing Group: III.

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0667

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

NAPHTHALENE

ICSC: 0667

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: WHITE SOLID IN VARIOUS FORMS , WITH CHARACTERISTIC ODOUR.</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS: On combustion, forms irritating and toxic gases. Reacts with strong oxidants</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 10 ppm as TWA 15 ppm as STEL (skin) A4 (not classifiable as a human carcinogen); (ACGIH 2005). MAK: skin absorption (H); Carcinogen category: 2; Germ cell mutagen group: 3B; (DFG 2004). OSHA PEL[†]: TWA 10 ppm (50 mg/m³) NIOSH REL: TWA 10 ppm (50 mg/m³) ST 15 ppm (75 mg/m³) NIOSH IDLH: 250 ppm See: 91203</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation, through the skin and by ingestion.</p> <p>INHALATION RISK: A harmful contamination of the air will be reached rather slowly on evaporation of this substance at 20°C. See Notes.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance may cause effects on the blood , resulting in lesions of blood cells (haemolysis) See Notes. The effects may be delayed. Exposure by ingestion may result in death. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the blood , resulting in chronic haemolytic anaemia. The substance may have effects on the eyes , resulting in the development of cataract. This substance is possibly carcinogenic to humans.</p>
---	--	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 218°C Sublimation slowly at room temperature Melting point: 80°C Density: 1.16 g/cm³ Solubility in water, g/100 ml at 25°C: none</p>	<p>Vapour pressure, Pa at 25°C: 11 Relative vapour density (air = 1): 4.42 Flash point: 80°C c.c. Auto-ignition temperature: 540°C Explosive limits, vol% in air: 0.9-5.9 Octanol/water partition coefficient as log Pow: 3.3</p>
-----------------------------------	---	---

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms. The substance may cause long-term effects in the aquatic environment.</p>	
----------------------------------	--	---

NOTES

Some individuals may be more sensitive to the effect of naphthalene on blood cells.
 Transport Emergency Card: TEC (R)-41S1334 (solid); 41GF1-II+III (solid); 41S2304 (molten)
 NFPA Code: H2; F2; R0;

ADDITIONAL INFORMATION

--	--

ICSC: 0667 **NAPHTHALENE**

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : Phenanthrene

Product Number : 695114
Brand : Aldrich

Company : Sigma-Aldrich
3050 Spruce Street
SAINT LOUIS MO 63103
USA

Telephone : +1 800-325-5832
Fax : +1 800-325-5052
Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Harmful by ingestion., Irritant

Other hazards which do not result in classification

Photosensitizer.

GHS Label elements, including precautionary statements

Pictogram



Signal word

Warning

Hazard statement(s)

H302 Harmful if swallowed.
H315 Causes skin irritation.
H319 Causes serious eye irritation.
H335 May cause respiratory irritation.
H400 Very toxic to aquatic life.
H413 May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)

P261 Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.
P273 Avoid release to the environment.
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

HMIS Classification

Health hazard: 2
Flammability: 0
Physical hazards: 0

NFPA Rating

Health hazard: 2
Fire: 0
Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. Causes respiratory tract irritation.
Skin May be harmful if absorbed through skin. Causes skin irritation.

Eyes
Ingestion

Causes eye irritation.
Harmful if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Formula : C₁₄H₁₀
Molecular Weight : 178.23 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
Phenanthrene			
85-01-8	201-581-5	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid dust formation. Avoid breathing dust. Ensure adequate ventilation.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

Handle and store under inert gas.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value	Control	Update	Basis
------------	---------	-------	---------	--------	-------

Acute toxicity

LD50 Oral - mouse - 700.0 mg/kg

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

Causes photosensitivity. Exposure to light can result in allergic reactions resulting in dermatologic lesions, which can vary from sunburnlike responses to edematous, vesiculated lesions, or bullae

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that is not classifiable as to its carcinogenicity based on its IARC, ACGIH, NTP, or EPA classification.

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

IARC: 3 - Group 3: Not classifiable as to its carcinogenicity to humans (Phenanthrene)

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (Globally Harmonized System)

Inhalation - May cause respiratory irritation.

Specific target organ toxicity - repeated exposure (Globally Harmonized System)

no data available

Aspiration hazard

no data available

Potential health effects

Inhalation	May be harmful if inhaled. Causes respiratory tract irritation.
Ingestion	Harmful if swallowed.
Skin	May be harmful if absorbed through skin. Causes skin irritation.
Eyes	Causes eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

12. ECOLOGICAL INFORMATION**Toxicity**

Toxicity to fish	LC50 - Oncorhynchus mykiss (rainbow trout) - 3.2 mg/l - 96.0 h
	LC100 - other fish - 1.5 mg/l - 1.0 h
Toxicity to daphnia	EC50 - Daphnia magna (Water flea) - 0.86 mg/l - 24 h

and other aquatic invertebrates.

EC50 - Daphnia magna (Water flea) - 0.38 mg/l - 48 h

Toxicity to algae EC50 - Chlorella vulgaris (Fresh water algae) - 1.20 mg/l - 3 h

Persistence and degradability

Biodegradability Result: 55 - 95 % - Partially biodegradable.

Bioaccumulative potential

Bioaccumulation Pimephales promelas (fathead minnow) - 28 d
Bioconcentration factor (BCF): 5,100

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic organisms.

13. DISPOSAL CONSIDERATIONS

Product

Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substances, solid, n.o.s. (Phenanthrene)
Reportable Quantity (RQ): 5000 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 3077 Class: 9 Packing group: III EMS-No: F-A, S-F
Proper shipping name: ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (Phenanthrene)
Marine pollutant: No

IATA

UN-Number: 3077 Class: 9 Packing group: III
Proper shipping name: Environmentally hazardous substance, solid, n.o.s. (Phenanthrene)

Further information

EHS-Mark required (ADR 2.2.9.1.10, IMDG code 2.10.3) for single packagings and combination packagings containing inner packagings with Dangerous Goods > 5L for liquids or > 5kg for solids.

15. REGULATORY INFORMATION

OSHA Hazards

Harmful by ingestion., Irritant

DSL Status

All components of this product are on the Canadian DSL list.

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

	CAS-No.	Revision Date
Phenanthrene	85-01-8	2007-07-01

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

	CAS-No.	Revision Date
Phenanthrene	85-01-8	2007-07-01

Pennsylvania Right To Know Components

	CAS-No.	Revision Date
Phenanthrene	85-01-8	2007-07-01

New Jersey Right To Know Components

	CAS-No.	Revision Date
Phenanthrene	85-01-8	2007-07-01

California Prop. 65 Components

	CAS-No.	Revision Date
WARNING! This product contains a chemical known to the State of California to cause cancer. Phenanthrene	85-01-8	1990-01-01

16. OTHER INFORMATION**Further information**

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only. The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

International Chemical Safety Cards

PYRENE

ICSC: 1474



Benzo (d,e,f) phenanthrene
beta-Pyrene
 $C_{16}H_{10}$
Molecular mass: 202.26

ICSC # 1474
CAS # 129-00-0
RTECS # [UR2450000](#)
November 27, 2003 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames, NO sparks, and NO smoking.	Water spray, carbon dioxide, dry powder, alcohol-resistant foam, foam.
EXPLOSION			
EXPOSURE			
• INHALATION		Avoid inhalation of dust	Fresh air, rest.
• SKIN	Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness.	Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Do NOT induce vomiting. Give plenty of water to drink. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder Do NOT let this chemical enter the environment. (Extra personal protection: P2 filter respirator for harmful particles.)	Separated from strong oxidants. Keep in a well-ventilated room.	Do not transport with food and feedstuffs. R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1474

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

PYRENE

ICSC: 1474

I M	PHYSICAL STATE; APPEARANCE: YELLOW COLOURLESS SOLID IN VARIOUS FORMS	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation through the skin and by ingestion	266
------------	--	---	-----

P
O
R
T
A
N
T

D
A
T
A

PHYSICAL DANGERS:

CHEMICAL DANGERS:

The substance decomposes on heating producing irritating fumes

OCCUPATIONAL EXPOSURE LIMITS:

TLV not established.
MAK not established.

INHALATION RISK:

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.

EFFECTS OF SHORT-TERM EXPOSURE:

Exposure to sun may provoke an irritating effect of pyrene on skin and lead to chronic skin discoloration.

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

PHYSICAL PROPERTIES

Boiling point: 404°C
Melting point: 151°C
Density: 1.27 g/cm³

Solubility in water: 0.135 mg/l at 25°C
Vapour pressure, Pa at °C: 0.08
Octanol/water partition coefficient as log Pow: 4.88

ENVIRONMENTAL DATA

Bioaccumulation of this chemical may occur in crustacea, in fish, in milk, in algae and in molluscs. It is strongly advised that this substance does not enter the environment.



NOTES

Pyrene is one of many polycyclic aromatic hydrocarbons - standards are usually established for them as mixtures, e.g., coal tar pitch volatiles. However, pyrene may be encountered as a laboratory chemical in its pure form. Health effects of exposure to the substance have not been investigated adequately. See ICSC 1415 Coal-tar pitch.

ADDITIONAL INFORMATION

ICSC: 1474

PYRENE

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

1. PRODUCT AND COMPANY IDENTIFICATION

Product name : 4,4'-DDD PESTANAL,250 MG (2,2-BIS(4-CHL&

Product Number : 35486
 Brand : Fluka

Company : Sigma-Aldrich
 3050 Spruce Street
 SAINT LOUIS MO 63103
 USA

Telephone : +1 800-325-5832
 Fax : +1 800-325-5052
 Emergency Phone # : (314) 776-6555

2. HAZARDS IDENTIFICATION

Emergency Overview

OSHA Hazards

Toxic by ingestion, Harmful by skin absorption., Possible carcinogen.

GHS Label elements, including precautionary statements

Pictogram



Signal word Danger

Hazard statement(s)

H301 Toxic if swallowed.
 H312 Harmful in contact with skin.
 H351 Suspected of causing cancer.
 H400 Very toxic to aquatic life.
 H413 May cause long lasting harmful effects to aquatic life.

Precautionary statement(s)

P273 Avoid release to the environment.
 P280 Wear protective gloves/protective clothing.
 P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.

HMIS Classification

Health hazard: 2
 Chronic Health Hazard: *
 Flammability: 0
 Physical hazards: 0

NFPA Rating

Health hazard: 2
 Fire: 0
 Reactivity Hazard: 0

Potential Health Effects

Inhalation May be harmful if inhaled. May cause respiratory tract irritation.
Skin Harmful if absorbed through skin. May cause skin irritation.
Eyes May cause eye irritation.
Ingestion Toxic if swallowed.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Synonyms : 1,1-Dichloro-2,2-bis(4-chlorophenyl)ethane
4,4'-DDD
TDE

Formula : C₁₄H₁₀Cl₄
Molecular Weight : 320.04 g/mol

CAS-No.	EC-No.	Index-No.	Concentration
2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane			
72-54-8	200-783-0	-	-

4. FIRST AID MEASURES

General advice

Consult a physician. Show this safety data sheet to the doctor in attendance. Move out of dangerous area.

If inhaled

If breathed in, move person into fresh air. If not breathing give artificial respiration. Consult a physician.

In case of skin contact

Wash off with soap and plenty of water. Consult a physician.

In case of eye contact

Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.

If swallowed

Never give anything by mouth to an unconscious person. Rinse mouth with water. Consult a physician.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media

Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.

Special protective equipment for fire-fighters

Wear self contained breathing apparatus for fire fighting if necessary.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

Use personal protective equipment. Avoid dust formation. Avoid breathing dust. Ensure adequate ventilation. Evacuate personnel to safe areas.

Environmental precautions

Prevent further leakage or spillage if safe to do so. Do not let product enter drains. Discharge into the environment must be avoided.

Methods and materials for containment and cleaning up

Pick up and arrange disposal without creating dust. Keep in suitable, closed containers for disposal.

7. HANDLING AND STORAGE

Precautions for safe handling

Avoid contact with skin and eyes. Avoid formation of dust and aerosols.

Provide appropriate exhaust ventilation at places where dust is formed. Normal measures for preventive fire protection.

Conditions for safe storage

Keep container tightly closed in a dry and well-ventilated place.

Acute toxicity

LD50 Oral - Hamster - > 5,000 mg/kg

TDLo Oral - Human - 428.5 mg/kg

Remarks: Endocrine:Adrenal cortex hypoplasia.

TDLo Oral - rat - 6,000 mg/kg

Remarks: Cardiac:Other changes. Gastrointestinal:Other changes. Kidney, Ureter, Bladder:Changes in both tubules and glomeruli.

TDLo Oral - rat - 14 mg/kg

Remarks: Liver:Changes in liver weight. Endocrine:Estrogenic. Musculoskeletal:Other changes.

TDLo Oral - rat - 2,100 mg/kg

Remarks: Behavioral:Altered sleep time (including change in righting reflex).

LD50 Dermal - rabbit - 1,200 mg/kg

Remarks: Behavioral:Excitement. Behavioral:Convulsions or effect on seizure threshold. Skin irritation

Skin corrosion/irritation

no data available

Serious eye damage/eye irritation

no data available

Respiratory or skin sensitization

no data available

Germ cell mutagenicity

no data available

Carcinogenicity

This product is or contains a component that has been reported to be possibly carcinogenic based on its IARC, ACGIH, NTP, or EPA classification.

Limited evidence of carcinogenicity in animal studies

IARC: No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

NTP: No component of this product present at levels greater than or equal to 0.1% is identified as a known or anticipated carcinogen by NTP.

OSHA: No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by OSHA.

Reproductive toxicity

no data available

Specific target organ toxicity - single exposure (GHS)

no data available

Specific target organ toxicity - repeated exposure (GHS)

no data available

Aspiration hazard

no data available

Potential health effects**Inhalation**

May be harmful if inhaled. May cause respiratory tract irritation.

Ingestion

Toxic if swallowed.

Skin

Harmful if absorbed through skin. May cause skin irritation.

Eyes May cause eye irritation.

Signs and Symptoms of Exposure

To the best of our knowledge, the chemical, physical, and toxicological properties have not been thoroughly investigated.

Additional Information

RTECS: KI0700000

12. ECOLOGICAL INFORMATION

Toxicity

Toxicity to fish	LC50 - other fish - 1.18 - 9 mg/l - 96.0 h LC50 - Lepomis macrochirus (Bluegill) - 0.04 - 0.05 mg/l - 96.0 h LC50 - Oncorhynchus mykiss (rainbow trout) - 0.06 - 0.09 mg/l - 96.0 h LC50 - Pimephales promelas (fathead minnow) - 3.47 - 5.58 mg/l - 96.0 h
Toxicity to daphnia and other aquatic invertebrates.	EC50 - Daphnia pulex (Water flea) - 0.01 mg/l - 48 h

Persistence and degradability

no data available

Bioaccumulative potential

Indication of bioaccumulation.

Mobility in soil

no data available

PBT and vPvB assessment

no data available

Other adverse effects

An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

13. DISPOSAL CONSIDERATIONS

Product

Observe all federal, state, and local environmental regulations. Contact a licensed professional waste disposal service to dispose of this material. Dissolve or mix the material with a combustible solvent and burn in a chemical incinerator equipped with an afterburner and scrubber.

Contaminated packaging

Dispose of as unused product.

14. TRANSPORT INFORMATION

DOT (US)

UN-Number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solids, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Reportable Quantity (RQ): 1 lbs
Marine pollutant: No
Poison Inhalation Hazard: No

IMDG

UN-Number: 2811 Class: 6.1 Packing group: III EMS-No: F-A, S-A
Proper shipping name: TOXIC SOLID, ORGANIC, N.O.S. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)
Marine pollutant: No

IATA

UN-Number: 2811 Class: 6.1 Packing group: III
Proper shipping name: Toxic solid, organic, n.o.s. (2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane)

15. REGULATORY INFORMATION

OSHA Hazards

Toxic by ingestion, Harmful by skin absorption., Possible carcinogen.

DSL Status

This product contains the following components that are not on the Canadian DSL nor NDSL lists.

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8
---	--------------------

SARA 302 Components

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

SARA 313 Components

SARA 313: This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

SARA 311/312 Hazards

Acute Health Hazard

Massachusetts Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date
---	--------------------	---------------

Pennsylvania Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date
---	--------------------	---------------

New Jersey Right To Know Components

2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date
---	--------------------	---------------

California Prop. 65 Components

WARNING! This product contains a chemical known to the State of California to cause cancer. 2,2-bis(4-Chlorophenyl)-1,1-dichloro-ethane	CAS-No. 72-54-8	Revision Date
--	--------------------	---------------

16. OTHER INFORMATION

Further information

Copyright 2010 Sigma-Aldrich Co. License granted to make unlimited paper copies for internal use only.

The above information is believed to be correct but does not purport to be all inclusive and shall be used only as a guide. The information in this document is based on the present state of our knowledge and is applicable to the product with regard to appropriate safety precautions. It does not represent any guarantee of the properties of the product. Sigma-Aldrich Co., shall not be held liable for any damage resulting from handling or from contact with the above product. See reverse side of invoice or packing slip for additional terms and conditions of sale.

International Chemical Safety Cards

DDT

ICSC: 0034



Dichlorodiphenyltrichloroethane
 1,1,1-Trichloro-2,2-bis(p-chlorophenyl)ethane
 2,2-bis(p-Chlorophenyl)-1,1,1-trichloroethane
 1,1'-(2,2,2-Trichloroethylidene)bis(4-chlorobenzene)
 p,p'-DDT
 $C_{14}H_9Cl_5$
 Molecular mass: 354.5



ICSC # 0034
 CAS # 50-29-3
 RTECS # [KJ3325000](#)
 UN # 2761
 EC # 602-045-00-7
 April 20, 2004 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible. Liquid formulations containing organic solvents may be flammable. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames.	Powder, water spray, foam, carbon dioxide.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST! STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
•INHALATION	Cough.	Local exhaust or breathing protection.	Fresh air, rest.
•SKIN		Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness.	Safety goggles, or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Tremors. Diarrhoea. Dizziness. Headache. Vomiting. Numbness. Paresthesias. Hyperexcitability. Convulsions.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Give a slurry of activated charcoal in water to drink. Rest. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Do NOT let this chemical enter the environment. Sweep spilled substance into sealable non-metallic containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Personal protection: P3 filter respirator for toxic particles.	Provision to contain effluent from fire extinguishing. Separated from iron, aluminum and its salts, food and feedstuffs See Chemical Dangers.	Do not transport with food and feedstuffs. Severe marine pollutant. T symbol N symbol R: 25-40-48/25-50/53 S: 1/2-22-36/37-45-60-61 UN Hazard Class: 6.1 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0034

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values. 274


International Chemical Safety Cards

DDT

ICSC: 0034

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALS WHITE POWDER. TECHNICAL PRODUCT IS WAXY SOLID.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: On combustion, forms toxic and corrosive fumes including hydrogen chloride. Reacts with aluminium and iron.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 1 mg/m³ as TWA A3 (ACGIH 2004). MAK: 1 mg/m³ H Peak limitation category: II(8) (DFG 2003). OSHA PEL: TWA 1 mg/m³ skin NIOSH REL: Ca TWA 0.5 mg/m³ See Appendix A NIOSH IDLH: Ca 500 mg/m³ See: 50293</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly especially if powdered.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: May cause mechanical irritation. The substance may cause effects on the central nervous system, resulting in convulsions and respiratory depression. Exposure at high levels may result in death. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the central nervous system and liver. This substance is possibly carcinogenic to humans. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
---	---	---

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 260°C Melting point: 109°C Density: 1.6 g/cm³</p>	<p>Solubility in water: poor Octanol/water partition coefficient as log Pow: 6.36</p>
-----------------------------------	--	---

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms. This substance may be hazardous to the environment; special attention should be given to birds. Bioaccumulation of this chemical may occur along the food chain, for example in milk and aquatic organisms. This substance does enter the environment under normal use. Great care, however, should be given to avoid any additional release, e.g. through inappropriate disposal.</p>	
----------------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. Carrier solvents used in commercial formulations may change physical and toxicological properties. Do NOT take working clothes home. Consult national legislation. Agritan, Azotox, Anofex, Ixodex, Gesapon, Gesarex, Gesarol, Guesapon, Clofenotane, Zeidane, Dicophane, Neocid are trade names.

Transport Emergency Card: TEC (R)-61GT7-III

ADDITIONAL INFORMATION

ICSC: 0034

DDT

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

DIELDRIN

ICSC: 0787



1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-endo-1,4-exo- 5,8-dimethanonaphthalene
3,4,5,6,9,9-Hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aalpha,2beta,2alpha,3beta,6beta,6aalpha,7beta,7aalpha)-2,7,3,6-
dimethanonaphth(2,3-b)oxirene

HEOD

$C_{12}H_8Cl_6O$

Molecular mass: 380.9

ICSC # 0787

CAS # 60-57-1

RTECS # [IO1750000](#)

UN # 2761

EC # 602-049-00-9

March 26, 1998 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Liquid formulations containing organic solvents may be flammable. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: all extinguishing agents allowed.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST! STRICT HYGIENE! AVOID EXPOSURE OF ADOLESCENTS AND CHILDREN!	
•INHALATION	(See Ingestion).	Ventilation (not if powder).	Fresh air, rest. Refer for medical attention.
•SKIN	MAY BE ABSORBED! See Ingestion.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention.
•EYES		Safety goggles, or face shield.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Convulsions. Dizziness. Headache. Nausea. Vomiting. Muscle twitching.	Do not eat, drink, or smoke during work. Wash hands before eating.	Give a slurry of activated charcoal in water to drink. Do NOT induce vomiting. Rest. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Do NOT wash away into sewer. Sweep spilled substance into sealable containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. (Extra personal protection: chemical protection suit including self-contained breathing apparatus).	Provision to contain effluent from fire extinguishing. Separated from food and feedstuffs and incompatible materials: See Chemical Dangers. Well closed. Keep in a well-ventilated room. Store in an area without drain or sewer access.	Do not transport with food and feedstuffs. Severe marine pollutant. T+ symbol N symbol R: 25-27-40-48/25-50/53 S: 1/2-22-36/37-45-60-61 UN Hazard Class: 6.1 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

276


International Chemical Safety Cards

DIELDRIN

ICSC: 0787

I M P O R T A N T D A T A	<p>PHYSICAL STATE; APPEARANCE: COLOURLESS CRYSTALS</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: The substance decomposes on heating producing toxic fumes including hydrogen chloride. Reacts with oxidants and acids. Attacks metal due to the slow formation of hydrogen chloride in storage.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV (as TWA): 0.25 mg/m³, A4 (skin) (ACGIH 1997). MAK: (Inhalable fraction) 0.25 mg/m³ : Peak limitation category: II(8) skin absorption (H); (DFG 2007). OSHA PEL: TWA 0.25 mg/m³ skin NIOSH REL: Ca TWA 0.25 mg/m³ skin See Appendix A NIOSH IDLH: Ca 50 mg/m³ See: 60571</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body through the skin and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly on spraying.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance may cause effects on the central nervous system, resulting in convulsions. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance accumulates in the human body. Cumulative effects are possible: see Acute Hazards/Symptoms.</p>
---	--	--

PHYSICAL PROPERTIES	Melting point: 175-176°C Density: 1.7 g/cm ³ Solubility in water: none	Vapour pressure, Pa at 20°C: 0.0004 Octanol/water partition coefficient as log Pow: 6.2
----------------------------	---	--

ENVIRONMENTAL DATA	<p>The substance is very toxic to aquatic organisms. This substance may be hazardous to the environment; special attention should be given to honey bees, birds. In the food chain important to humans, bioaccumulation takes place, specifically in aquatic organisms. It is strongly advised not to let the chemical enter into the environment because it persists in the environment. The substance may cause long-term effects in the aquatic environment. Avoid release to the environment in circumstances different to normal use.</p>	
---------------------------	--	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. If the substance is formulated with solvent(s) also consult the card(s) (ICSC) of the solvent(s). Carrier solvents used in commercial formulations may change physical and toxicological properties. Do NOT take working clothes home. Alvit, Dieldrex, Dieldrite, Illoxol, Octalox, Panoram, and Quintox are trade names. Also consult ICSC #0774, Aldrin.

Transport Emergency Card: TEC (R)-61G41b.

Card has been partially updated in August 2007: see Storage, Occupational Exposure Limits.

ADDITIONAL INFORMATION

--	--

ICSC: 0787

DIELDRIN

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
--------------------------------	--

International Chemical Safety Cards

ARSENIC

ICSC: 0013



Grey arsenic
As
Atomic mass: 74.9

ICSC # 0013
CAS # 7440-38-2
RTECS # [CG0525000](#)
UN # 1558
EC # 033-001-00-X

October 18, 1999 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames. NO contact with strong oxidizers. NO contact with hot surfaces.	Powder, water spray, foam, carbon dioxide.
EXPLOSION	Risk of fire and explosion is slight when exposed to hot surfaces or flames in the form of fine powder or dust.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST! AVOID ALL CONTACT! AVOID EXPOSURE OF (PREGNANT) WOMEN!	IN ALL CASES CONSULT A DOCTOR!
•INHALATION	Cough. Sore throat. Shortness of breath. Weakness. See Ingestion.	Closed system and ventilation.	Fresh air, rest. Artificial respiration may be needed. Refer for medical attention.
•SKIN	Redness.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
•EYES	Redness.	Face shield or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Abdominal pain. Diarrhoea. Nausea. Vomiting. Burning sensation in the throat and chest. Shock or collapse. Unconsciousness.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Sweep spilled substance into sealable containers. Carefully collect remainder, then remove to safe place. Chemical protection suit including self-contained breathing apparatus. Do NOT let this chemical enter the environment.	Separated from strong oxidants, acids, halogens, food and feedstuffs. Well closed.	Do not transport with food and feedstuffs. Marine pollutant. T symbol N symbol R: 23/25-50/53 S: 1/2-20/21-28-45-60-61 UN Hazard Class: 6.1 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0013

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

ARSENIC

ICSC: 0013

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: ODOURLESS, BRITTLE, GREY, METALLIC-LOOKING CRYSTALS.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: Upon heating, toxic fumes are formed. Reacts violently with strong oxidants and halogens, causing fire and explosion hazard. Reacts with acids to produce</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.01 mg/m³ as TWA A1 (confirmed human carcinogen); BEI issued (ACGIH 2004). MAK: Carcinogen category: 1; Germ cell mutagen group: 3A; (DFG 2004). OSHA PEL: 1910.1018 TWA 0.010 mg/m³ NIOSH REL: Ca C 0.002 mg/m³ 15-minute See Appendix A NIOSH IDLH: Ca 5 mg/m³ (as As) See: 7440382</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly, when dispersed.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes the skin and the respiratory tract. The substance may cause effects on the gastrointestinal tract cardiovascular system central nervous system kidneys , resulting in severe gastroenteritis, loss of fluid, and electrolytes, cardiac disorders shock convulsions and kidney impairment Exposure above the OEL may result in death. The effects may be delayed. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis. The substance may have effects on the mucous membranes, skin, peripheral nervous system liver bone marrow , resulting in pigmentation disorders, hyperkeratosis, perforation of nasal septum, neuropathy, liver impairment anaemia This substance is carcinogenic to humans. Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
---	--	--

<p>PHYSICAL PROPERTIES</p>	<p>Sublimation point: 613°C Density: 5.7 g/cm³</p>	<p>Solubility in water: none</p>
-----------------------------------	---	--------------------------------------

<p>ENVIRONMENTAL DATA</p>	<p>The substance is toxic to aquatic organisms. It is strongly advised that this substance does not enter the environment.</p>	
----------------------------------	--	---

NOTES

The substance is combustible but no flash point is available in literature. Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home. Refer also to cards for specific arsenic compounds, e.g., Arsenic pentoxide (ICSC 0377), Arsenic trichloride (ICSC 0221), Arsenic trioxide (ICSC 0378), Arsine (ICSC 0222).

Transport Emergency Card: TEC (R)-61GT5-II

ADDITIONAL INFORMATION

ICSC: 0013 **ARSENIC**

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

BARIUM SULFATE

ICSC: 0827



Barium sulphate
Blanc fixe
Artificial barite
BaSO₄

Molecular mass: 233.43

ICSC # 0827

CAS # 7727-43-7

RTECS # [CR0600000](#)

October 20, 1999 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
• EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.
SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING	
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Personal protection: P1 filter respirator for inert particles.		R: S:	
SEE IMPORTANT INFORMATION ON BACK			
ICSC: 0827	Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.		

International Chemical Safety Cards

BARIUM SULFATE

ICSC: 0827

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: ODOURLESS TASTELESS, WHITE OR YELLOWISH CRYSTALS OR POWDER.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: Reacts violently with aluminium powder.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 10 mg/m³ as TWA; (ACGIH 2004). MAK: (Inhalable fraction) 4 mg/m³; (Respirable fraction) 1.5 mg/m³; (DFG 2004). OSHA PEL[†]: TWA 15 mg/m³ (total) TWA 5 mg/m³ (resp) NIOSH REL: TWA 10 mg/m³ (total) TWA 5 mg/m³ (resp) NIOSH IDLH: N.D. See: IDLH INDEX</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a nuisance-causing concentration of airborne particles can, however, be reached quickly.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE:</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Lungs may be affected by repeated or prolonged exposure to dust particles, resulting in baritosis (a form of benign pneumoconiosis).</p>
<p>PHYSICAL PROPERTIES</p>	<p>Melting point (decomposes): 1600°C Density: 4.5 g/cm³ Solubility in water: none</p>	
<p>ENVIRONMENTAL DATA</p>		
<p>NOTES</p>		
<p>Occurs in nature as the mineral barite; also as barytes, heavy spar. Card has been partly updated in October 2005. See section Occupational Exposure Limits.</p>		
<p>ADDITIONAL INFORMATION</p>		
<p>ICSC: 0827</p>	<p>(C) IPCS, CEC, 1994</p>	<p>BARIUM SULFATE</p>
<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>	

International Chemical Safety Cards

CHROMIUM

ICSC: 0029



Chrome
Cr
Atomic mass: 52.0
(powder)

ICSC # 0029
CAS # 7440-47-3
RTECS # [GB4200000](#)
October 27, 2004 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible under specific conditions.	No open flames if in powder form.	In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION		Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION	Cough.	Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves.	Remove contaminated clothes. Rinse skin with plenty of water or shower.
• EYES	Redness.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Personal protection: P2 filter respirator for harmful particles.		R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0029

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

CHROMIUM

ICSC: 0029

I	PHYSICAL STATE; APPEARANCE: GREY POWDER	ROUTES OF EXPOSURE:
M	PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.	INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed.
P		282

O
R
T
A
N
T
D
A
T
A

CHEMICAL DANGERS:

Chromium is a catalytic substance and may cause reaction in contact with many organic and inorganic substances , causing fire and explosion hazard.

EFFECTS OF SHORT-TERM EXPOSURE:

May cause mechanical irritation to the eyes and the respiratory tract.

OCCUPATIONAL EXPOSURE LIMITS:

TLV: (as Cr metal, Cr(III) compounds) 0.5 mg/m³ as TWA A4 (ACGIH 2004).
MAK not established.

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

OSHA PEL*: TWA 1 mg/m³ [See Appendix C](#) *Note: The PEL also applies to insoluble chromium salts.

NIOSH REL: TWA 0.5 mg/m³ [See Appendix C](#)

NIOSH IDLH: 250 mg/m³ (as Cr) See: [7440473](#)

PHYSICAL PROPERTIES

Boiling point: 2642°C
Melting point: 1900°C
Density: 7.15 g/cm³

Solubility in water:
none

ENVIRONMENTAL DATA

NOTES

The surface of the chromium particles is oxidized to chromium(III)oxide in air. See ICSC 1531 Chromium(III) oxide.

ADDITIONAL INFORMATION

ICSC: 0029

CHROMIUM

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

COPPER

ICSC: 0240



Cu
(powder)

ICSC # 0240
CAS # 7440-50-8
RTECS # [GL5325000](#)
September 24, 1993 Validated

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Special powder, dry sand, NO other agents.
EXPLOSION			
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION	Cough. Headache. Shortness of breath. Sore throat.	Local exhaust or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN	Redness.	Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES	Redness. Pain.	Safety goggles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers. Carefully collect remainder. Then remove to safe place. (Extra personal protection: P2 filter respirator for harmful particles).	Separated from - See Chemical Dangers.	R: S:

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0240

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

COPPER

ICSC: 0240

<p>I</p> <p>M</p> <p>P</p>	<p>PHYSICAL STATE; APPEARANCE: RED POWDER, TURNS GREEN ON EXPOSURE TO MOIST AIR.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS:</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.</p>
---	---	--

O
R
T
A
N
T
D
A
T
A

Shock-sensitive compounds are formed with acetylenic compounds, ethylene oxides and azides. Reacts with strong oxidants like chlorates, bromates and iodates, causing explosion hazard.

EFFECTS OF SHORT-TERM EXPOSURE:
Inhalation of fumes may cause metal fume fever. See Notes.

OCCUPATIONAL EXPOSURE LIMITS:
TLV: 0.2 mg/m³ fume (ACGIH 1992-1993).
TLV (as Cu, dusts & mists): 1 mg/m³ (ACGIH 1992-1993).
Intended change 0.1 mg/m³
Inhal.,
A4 (not classifiable as a human carcinogen);
MAK: 0.1 mg/m³ (Inhalable fraction)
Peak limitation category: II(2) Pregnancy risk group: D (DFG 2005).
OSHA PEL*: TWA 1 mg/m³ *Note: The PEL also applies to other copper compounds (as Cu) except copper fume.
NIOSH REL*: TWA 1 mg/m³ *Note: The REL also applies to other copper compounds (as Cu) except Copper fume.
NIOSH IDLH: 100 mg/m³ (as Cu) See: [7440508](https://www.cdc.gov/niosh/ttl/7440508/)

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:
Repeated or prolonged contact may cause skin sensitization.

PHYSICAL PROPERTIES	Boiling point: 2595°C Melting point: 1083°C Relative density (water = 1): 8.9	Solubility in water: none
----------------------------	---	------------------------------

ENVIRONMENTAL DATA	
---------------------------	--

NOTES

The symptoms of metal fume fever do not become manifest until several hours.

ADDITIONAL INFORMATION

--	--

ICSC: 0240

COPPER

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

IRON (III)-o-ARSENITE, PENTAHYDRATE

ICSC: 1241



Ferric arsenite
 $As_2Fe_2O_6 \cdot Fe_2O_3 \cdot 5H_2O$
 Molecular mass: 607.3

ICSC # 1241
 CAS # 63989-69-5
 RTECS # [NO4600000](#)
 UN # 1607
 EC # 033-002-00-5
 October 27, 1994 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION			
EXPOSURE		AVOID ALL CONTACT!	IN ALL CASES CONSULT A DOCTOR!
•INHALATION	Cough. Shortness of breath. Sore throat. Weakness. See Ingestion.	Avoid inhalation of fine dust and mist. Closed system and ventilation.	Fresh air, rest. Artificial respiration may be needed. Refer for medical attention.
•SKIN	Redness. Burning sensation.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
•EYES	Redness. Pain.	Safety goggles or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Abdominal pain. Burning sensation. Diarrhoea. Nausea. Vomiting.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Induce vomiting (ONLY IN CONSCIOUS PERSONS!). Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Vacuum spilled material. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment. Personal protection: P3 filter respirator for toxic particles.	Separated from food and feedstuffs .	Unbreakable packaging; put breakable packaging into closed unbreakable container. Do not transport with food and feedstuffs. Marine pollutant. Note: A, 1 T symbol N symbol R: 23/25-50/53 S: 1/2-20/21-28-45-60-61 UN Hazard Class: 6.1 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1241

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

IRON (III)-o-ARSENITE, PENTAHYDRATE

ICSC: 1241

<p>I</p> <p>M</p> <p>P</p> <p>O</p> <p>R</p> <p>T</p> <p>A</p> <p>N</p> <p>T</p> <p>D</p> <p>A</p> <p>T</p> <p>A</p>	<p>PHYSICAL STATE; APPEARANCE: BROWN POWDER.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: The substance decomposes on heating or on burning producing toxic fumes of arsenic and iron.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: (as As) 0.01 mg/m³ as TWA; A1 (confirmed human carcinogen); BEI issued; (ACGIH 2004). MAK: Carcinogen category: 1; Germ cell mutagen group: 3A; (DFG 2004).</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed, especially if powdered.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the eyes , the skin and the respiratory tract . The substance may cause effects on the nervous system, liver, skin, kidneys and gastrointestinal tract , resulting in kidney impairment, neuropathy, severe gastroenteritis, degenerative liver damage and dermatitis. Exposure may result in death. The effects may be delayed. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis, grey skin and hyperkeratosis. The substance may have effects on the nervous system,liver,cardiovascular system and respiratory tract , resulting in neuropathy, gangrene, degenerative liver damage and perforation of nasal septum. This substance is carcinogenic to humans.</p>
---	--	---

PHYSICAL PROPERTIES	Solubility in water: none
----------------------------	---------------------------

ENVIRONMENTAL DATA	This substance may be hazardous to the environment; special attention should be given to plants, air quality and water quality. It is strongly advised that this substance does not enter the environment.	
---------------------------	--	---

NOTES

Do NOT take working clothes home. See also ICSC0013 Arsenic. Card has been partly updated in April and October 2005. See sections Occupational Exposure Limits, EU classification, Emergency Response.

Transport Emergency Card: TEC (R)-61GT5-II

ADDITIONAL INFORMATION

ICSC: 1241	IRON (III)-o-ARSENITE, PENTAHYDRATE
(C) IPCS, CEC, 1994	

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.
--------------------------------	---

International Chemical Safety Cards

LEAD

ICSC: 0052



Lead metal
Plumbum
Pb
Atomic mass: 207.2
(powder)

ICSC # 0052
CAS # 7439-92-1
RTECS # [OF7525000](#)
October 08, 2002 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE	See EFFECTS OF LONG-TERM OR REPEATED EXPOSURE.	PREVENT DISPERSION OF DUST! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION		Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Give plenty of water to drink. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers; if appropriate, moisten first to prevent dusting. Carefully collect remainder, then remove to safe place. Do NOT let this chemical enter the environment. Personal protection: P3 filter respirator for toxic particles.	Separated from food and feedstuffs incompatible materials See Chemical Dangers.	R: S:

SEE IMPORTANT INFORMATION ON BACK


ICSC: 0052

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

<p>I M P O R T A N T T A D A</p>	<p>PHYSICAL STATE; APPEARANCE: BLUISH-WHITE OR SILVERY-GREY SOLID IN VARIOUS FORMS. TURNS TARNISHED ON EXPOSURE TO AIR.</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS: On heating, toxic fumes are formed. Reacts with oxidants. Reacts with hot concentrated nitric acid, boiling concentrated hydrochloric acid and sulfuric acid. Attacked by pure water and by weak organic acids in the presence of oxygen.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.05 mg/m³ A3 (confirmed animal carcinogen with unknown relevance to humans); BEI issued (ACGIH 2004). MAK: Carcinogen category: 3B; Germ cell mutagen group: 3A; (DFG 2004). EU OEL: as TWA 0.15 mg/m³ (EU 2002). OSHA PEL*: 1910.1025 TWA 0.050 mg/m³ See Appendix C *Note: The PEL also applies to other lead compounds (as Pb) -- see Appendix C. NIOSH REL*: TWA 0.050 mg/m³ See Appendix C *Note: The REL also applies to other lead compounds (as Pb) -- see Appendix C. NIOSH IDLH: 100 mg/m³ (as Pb) See: 7439921</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion.</p> <p>INHALATION RISK: A harmful concentration of airborne particles can be reached quickly when dispersed, especially if powdered.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE:</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the blood bone marrow central nervous system peripheral nervous system kidneys , resulting in anaemia, encephalopathy (e.g., convulsions), peripheral nerve disease, abdominal cramps and kidney impairment. Causes toxicity to human reproduction or development.</p>
---	--	---

PHYSICAL PROPERTIES	Boiling point: 1740°C Melting point: 327.5°C	Density: 11.34 g/cm ³ Solubility in water: none
----------------------------	---	---

ENVIRONMENTAL DATA	Bioaccumulation of this chemical may occur in plants and in mammals. It is strongly advised that this substance does not enter the environment.	
---------------------------	---	---

NOTES

Depending on the degree of exposure, periodic medical examination is suggested. Do NOT take working clothes home.
 Transport Emergency Card: TEC (R)-51S1872

ADDITIONAL INFORMATION

--	--

ICSC: 0052	LEAD
(C) IPCS, CEC, 1994	

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.
--------------------------------	---

International Chemical Safety Cards

MAGNESIUM (POWDER)

ICSC: 0289



Mg
Atomic mass: 24.30

ICSC # 0289
CAS # 7439-95-4
RTECS # [OM2100000](#)
UN # 1418
EC # 012-001-00-3 (pyrophoric)
April 12, 2000 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames, NO sparks, and NO smoking. NO contact with moisture, acids, halogens and many other substances.	Special powder, dry sand, NO other agents. NO water.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Do NOT expose to friction or shock. Prevent build-up of electrostatic charges (e.g., by grounding).	
EXPOSURE		PREVENT DISPERSION OF DUST!	
• INHALATION	Cough. Laboured breathing. Headache. Dullness. Weakness. Fever or elevated body temperature.		
• SKIN			
• EYES	Redness. Pain.	Safety goggles.	
• INGESTION	Abdominal pain. Diarrhoea.	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Do NOT wash away into sewer. Sweep spilled substance into containers. Carefully collect remainder, then remove to safe place. Personal protection: P2 filter respirator for harmful particles.	Fireproof. Separated from strong oxidants, acids. Dry.	Airtight. F symbol R: 15-17 S: 2-7/8-43 UN Hazard Class: 4.3 UN Subsidiary Risks: 4.2 UN Packing Group: II

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0289

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

MAGNESIUM (POWDER)

ICSC: 0289

I M	PHYSICAL STATE; APPEARANCE: GREY POWDER	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation.
------------	---	--

P
O
R
T
A
N
T
D
A
T
A

PHYSICAL DANGERS:

Dust explosion possible if in powder or granular form, mixed with air. If dry, it can be charged electrostatically by swirling, pneumatic transport, pouring, etc.

INHALATION RISK:

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly.

CHEMICAL DANGERS:

The substance may spontaneously ignite on contact with air or moisture producing irritating or toxic fumes Reacts violently with strong oxidants. Reacts violently with many substances causing fire and explosion hazard. Reacts with acids and water forming flammable/explosive gas (hydrogen - see ICSC0001) causing fire and explosion hazard.

EFFECTS OF SHORT-TERM EXPOSURE:

Inhalation of fumes may cause metal fume fever.

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

OCCUPATIONAL EXPOSURE LIMITS:

TLV not established.
MAK not established.

PHYSICAL PROPERTIES

Boiling point: 1100°C
Melting point: 651°C
Density: 1.7 g/cm³

Solubility in water: none
Auto-ignition temperature: 473°C
Explosive limits, vol% in air: see Notes

ENVIRONMENTAL DATA

NOTES

Burns with an intense flame. In order to prevent eye injury do not look directly at magnesium fires. Reacts violently with fire extinguishing agents such as water, carbon dioxide and powder. Explosive limits, vol% in air: (LEL) 0.03 kg/m³.

Transport Emergency Card: TEC (R)-43GWS-II+III
NFPA Code: H0; F1; R2;

ADDITIONAL INFORMATION

ICSC: 0289

MAGNESIUM (POWDER)

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

MANGANESE

ICSC: 0174


Mn
Atomic mass: 54.9
(powder)

ICSC # 0174
CAS # 7439-96-5
RTECS # [OO9275000](#)
November 27, 2003 Validated

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Combustible.	NO open flames.	Dry sand, special powder.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST! AVOID EXPOSURE OF (PREGNANT) WOMEN!	
• INHALATION	Cough.	Local exhaust or breathing protection.	Fresh air, rest. Refer for medical attention.
• SKIN		Protective gloves.	Rinse and then wash skin with water and soap.
• EYES		Safety goggles, or eye protection in combination with breathing protection if powder.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea.	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Sweep spilled substance into containers. Carefully collect remainder, then remove to safe place. (Extra personal protection: P2 filter respirator for harmful particles.)	Separated from acids. Dry.	

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0174

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

MANGANESE


ICSC: 0174

I	PHYSICAL STATE; APPEARANCE: GREY - WHITE POWDER PHYSICAL DANGERS:	ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its aerosol and by ingestion.
----------	---	--

292

<p>M P O R T A N T D A T A</p>	<p>Dust explosion possible if in powder or granular form, mixed with air.</p> <p>CHEMICAL DANGERS: Reacts slowly with water more rapidly with steam and acids forming flammable/explosive gas (hydrogen - see ICSC0001) causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.2 mg/m³ (as TWA); (ACGIH 2003). MAK: (Inhalable fraction) 0.5 mg/m³; Pregnancy risk group: C; (DFG 2007). OSHA PEL*: C 5 mg/m³ *Note: Also see specific listings for Manganese cyclopentadienyl tricarbonyl and Methyl cyclopentadienyl manganese tricarbonyl. NIOSH REL*: TWA 1 mg/m³ ST 3 mg/m³ *Note: Also see specific listings for Manganese cyclopentadienyl tricarbonyl, Methyl cyclopentadienyl manganese tricarbonyl, and Manganese tetroxide. NIOSH IDLH: 500 mg/m³ (as Mn) See: 7439965</p>	<p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The aerosol is irritating to the respiratory tract .</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the lungs and central nervous system , resulting in increased susceptibility to bronchitis, pneumonitis and neurologic, neuropsychiatric disorders (manganism). Animal tests show that this substance possibly causes toxicity to human reproduction or development.</p>
--	---	--

PHYSICAL PROPERTIES	Boiling point: 1962°C Melting point: 1244°C Density: 7.47 g/cm ³	Solubility in water: none
----------------------------	---	------------------------------

ENVIRONMENTAL DATA	This substance may be hazardous in the environment; special attention should be given to aquatic organisms.	
---------------------------	---	--

NOTES
Depending on the degree of exposure, periodic medical examination is suggested. The recommendations on this Card also apply to ferro manganese.

ADDITIONAL INFORMATION
(Empty space for additional information)

ICSC: 0174	MANGANESE
(C) IPCS, CEC, 1994	

IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.
--------------------------------	---

International Chemical Safety Cards

MERCURY

ICSC: 0056



Quicksilver
Liquid silver
Hg
Atomic mass: 200.6

ICSC # 0056
CAS # 7439-97-6
RTECS # [OV4550000](#)
UN # 2809
EC # 080-001-00-0
April 22, 2004 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Not combustible. Gives off irritating or toxic fumes (or gases) in a fire.		In case of fire in the surroundings: use appropriate extinguishing media.
EXPLOSION	Risk of fire and explosion.		In case of fire: keep drums, etc., cool by spraying with water.
EXPOSURE		STRICT HYGIENE! AVOID EXPOSURE OF (PREGNANT) WOMEN! AVOID EXPOSURE OF ADOLESCENTS AND CHILDREN!	IN ALL CASES CONSULT A DOCTOR!
•INHALATION	Abdominal pain. Cough. Diarrhoea. Shortness of breath. Vomiting. Fever or elevated body temperature.	Local exhaust or breathing protection.	Fresh air, rest. Artificial respiration if indicated. Refer for medical attention.
•SKIN	MAY BE ABSORBED! Redness.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap. Refer for medical attention.
•EYES		Face shield, or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION		Do not eat, drink, or smoke during work. Wash hands before eating.	Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area in case of a large spill! Consult an expert! Ventilation. Collect leaking and spilled liquid in sealable non-metallic containers as far as possible. Do NOT wash away into sewer. Do NOT let this chemical enter the environment. Chemical protection suit including self-contained breathing apparatus.	Provision to contain effluent from fire extinguishing. Separated from food and feedstuffs Well closed.	Special material. Do not transport with food and feedstuffs. T symbol N symbol R: 23-33-50/53 S: 1/2-7-45-60-61 UN Hazard Class: 8 UN Packing Group: III

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0056

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.


International Chemical Safety Cards

MERCURY

ICSC: 0056

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: ODOURLESS, HEAVY AND MOBILE SILVERY LIQUID METAL.</p> <p>PHYSICAL DANGERS:</p> <p>CHEMICAL DANGERS: Upon heating, toxic fumes are formed. Reacts violently with ammonia and halogens causing fire and explosion hazard. Attacks aluminium and many other metals forming amalgams.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV: 0.025 mg/m³ as TWA (skin) A4 BEI issued (ACGIH 2004). MAK: 0.1 mg/m³ Sh Peak limitation category: II(8) Carcinogen category: 3B (DFG 2003). OSHA PEL[±]: C 0.1 mg/m³ NIOSH REL: Hg Vapor: TWA 0.05 mg/m³ skin Other: C 0.1 mg/m³ skin NIOSH IDLH: 10 mg/m³ (as Hg) See: 7439976</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of its vapour and through the skin, also as a vapour!</p> <p>INHALATION RISK: A harmful contamination of the air can be reached very quickly on evaporation of this substance at 20°C.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: The substance is irritating to the skin. Inhalation of the vapours may cause pneumonitis. The substance may cause effects on the central nervous system and kidneys. The effects may be delayed. Medical observation is indicated.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: The substance may have effects on the central nervous system kidneys, resulting in irritability, emotional instability, tremor, mental and memory disturbances, speech disorders. Danger of cumulative effects. Animal tests show that this substance possibly causes toxic effects upon human reproduction.</p>
---	---	--

<p>PHYSICAL PROPERTIES</p>	<p>Boiling point: 357°C Melting point: -39°C Relative density (water = 1): 13.5 Solubility in water: none</p>	<p>Vapour pressure, Pa at 20°C: 0.26 Relative vapour density (air = 1): 6.93 Relative density of the vapour/air-mixture at 20°C (air = 1): 1.009</p>
-----------------------------------	---	--

<p>ENVIRONMENTAL DATA</p>	<p>The substance is very toxic to aquatic organisms. In the food chain important to humans, bioaccumulation takes place, specifically in fish.</p>	
----------------------------------	--	---

NOTES

Depending on the degree of exposure, periodic medical examination is indicated. No odour warning if toxic concentrations are present. Do NOT take working clothes home.

Transport Emergency Card: TEC (R)-80GC9-II+III

ADDITIONAL INFORMATION

--	--

ICSC: 0056

MERCURY

(C) IPCS, CEC, 1994

<p>IMPORTANT LEGAL NOTICE:</p>	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
---------------------------------------	--

International Chemical Safety Cards

NICKEL

ICSC: 0062



Ni
Atomic mass: 58.7
(powder)

ICSC # 0062
CAS # 7440-02-0
RTECS # [QR5950000](#)
EC # 028-002-00-7
October 17, 2001 Peer reviewed

TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Flammable as dust. Toxic fumes may be released in a fire.		Dry sand. NO carbon dioxide. NO water.
EXPLOSION	Finely dispersed particles form explosive mixtures in air.	Prevent deposition of dust; closed system, dust explosion-proof electrical equipment and lighting.	
EXPOSURE		PREVENT DISPERSION OF DUST! AVOID ALL CONTACT!	
• INHALATION	Cough. Shortness of breath.	Local exhaust or breathing protection.	Fresh air, rest.
• SKIN		Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse and then wash skin with water and soap.
• EYES		Safety spectacles, or eye protection in combination with breathing protection.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION		Do not eat, drink, or smoke during work.	Rinse mouth.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Vacuum spilled material. Carefully collect remainder, then remove to safe place. Personal protection: P2 filter respirator for harmful particles.	Separated from strong acids.	Xn symbol R: 40-43 S: 2-22-36

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0062

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

NICKEL

ICSC: 0062

I	<p>PHYSICAL STATE; APPEARANCE: SILVERY METALLIC SOLID IN VARIOUS FORMS.</p> <p>PHYSICAL DANGERS:</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation of the dust.</p>
---	--	--

M
P
O
R
T
A
N
T
D
A
T
A

Dust explosion possible if in powder or granular form, mixed with air.

CHEMICAL DANGERS:

Reacts violently, in powder form, with titanium powder and potassium perchlorate, and oxidants such as ammonium nitrate, causing fire and explosion hazard. Reacts slowly with non-oxidizing acids and more rapidly with oxidizing acids. Toxic gases and vapours (such as nickel carbonyl) may be released in a fire involving nickel.

OCCUPATIONAL EXPOSURE LIMITS:

TLV:
(Inhalable fraction)
1.5 mg/m³ as TWA A5 (not suspected as a human carcinogen); (ACGIH 2004).
MAK: (Inhalable fraction) sensitization of respiratory tract and skin (Sah);
Carcinogen category: 1;
(DFG 2004).
OSHA PEL*†: TWA 1 mg/m³ *Note: The PEL does not apply to Nickel carbonyl.
NIOSH REL*: Ca TWA 0.015 mg/m³ [See Appendix A](#)
*Note: The REL does not apply to Nickel carbonyl.
NIOSH IDLH: Ca 10 mg/m³ (as Ni) See: [7440020](#)

INHALATION RISK:

Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.

EFFECTS OF SHORT-TERM EXPOSURE:

May cause mechanical irritation. Inhalation of fumes may cause pneumonitis.

EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:

Repeated or prolonged contact may cause skin sensitization. Repeated or prolonged inhalation exposure may cause asthma. Lungs may be affected by repeated or prolonged exposure. This substance is possibly carcinogenic to humans.

PHYSICAL PROPERTIES

Boiling point: 2730°C
Melting point: 1455°C
Density: 8.9 g/cm³

Solubility in water:
none

ENVIRONMENTAL DATA

NOTES

At high temperatures, nickel oxide fumes will be formed. Depending on the degree of exposure, periodic medical examination is suggested. The symptoms of asthma often do not become manifest until a few hours have passed and they are aggravated by physical effort. Rest and medical observation are therefore essential. Anyone who has shown symptoms of asthma due to this substance should avoid all further contact with this substance.

ADDITIONAL INFORMATION

ICSC: 0062

NICKEL

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:

Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

SODIUM

ICSC: 0717



Natrium
Na
Atomic mass: 23.0

ICSC # 0717
CAS # 7440-23-5
RTECS # [VY0686000](#)
UN # 1428
EC # 011-001-00-0
April 06, 2006 Validated



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable. Many reactions may cause fire or explosion. Gives off irritating or toxic fumes (or gases) in a fire.	NO contact with water, acid(s) or halogens . NO open flames, NO sparks, and NO smoking.	Special powder, dry sand, NO other agents.
EXPLOSION	Risk of fire and explosion. on contact with acid(s) , halogens , water .		Combat fire from a sheltered position.
EXPOSURE			
•INHALATION	Cough. Sore throat. Burning sensation.	Closed system and ventilation.	Fresh air, rest. Half-upright position. Artificial respiration may be needed. Refer for medical attention.
•SKIN	Pain. Blisters. Serious skin burns.	Protective gloves. Protective clothing.	Remove contaminated clothes. Rinse skin with plenty of water or shower. Refer for medical attention.
•EYES	Severe deep burns. loss of vision.	Face shield .	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
•INGESTION	Burning sensation. Shock or collapse.	Do not eat, drink, or smoke during work.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Evacuate danger area! Consult an expert! Chemical protection suit including self-contained breathing apparatus. Cover the spilled material with dry powder.	Fireproof. Keep under mineral oil. Dry. Well closed.	Airtight. Unbreakable packaging; put breakable packaging into closed unbreakable container. F symbol C symbol R: 14/15-34 S: (1/2)-5 -8-43-45 UN Hazard Class: 4.3 UN Packing Group: I Signal: Danger Flame-Corr In contact with water releases flammable gases which may ignite spontaneously Causes severe skin burns and eye damage

SEE IMPORTANT INFORMATION ON BACK

ICSC: 0717

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

SODIUM

ICSC: 0717

I M P O R T A N T D A T A	PHYSICAL STATE; APPEARANCE: SILVERY SOLID IN VARIOUS FORMS	ROUTES OF EXPOSURE: Serious local effects by all routes of exposure.
	PHYSICAL DANGERS:	INHALATION RISK:
	CHEMICAL DANGERS: Reacts violently with water , causing fire and explosion hazard . The substance decomposes rapidly under the influence of air and moisture , forming flammable/explosive gas (Hydrogen - see ICSC0001) .	EFFECTS OF SHORT-TERM EXPOSURE: See ICSC 0360 (Sodium hydroxide)
	OCCUPATIONAL EXPOSURE LIMITS: TLV not established. MAK not established.	EFFECTS OF LONG-TERM OR REPEATED EXPOSURE:
PHYSICAL PROPERTIES	Boiling point: 880°C Melting point: 97.4°C Density: 0.97 g/cm ³	Solubility in water: reaction Vapour pressure, Pa at 20°C: negligible Auto-ignition temperature: 120-125°C
ENVIRONMENTAL DATA		
NOTES		
Sodium is always kept under mineral oil. Reacts violently with fire extinguishing agents such as water and carbon dioxide . <div style="text-align: right;"> Transport Emergency Card: TEC (R)-43S1428a NFPA Code: H3; F3; R2; </div>		
ADDITIONAL INFORMATION		
<div style="display: flex; justify-content: space-between;"> ICSC: 0717 SODIUM </div> <p style="text-align: center;">(C) IPCS, CEC, 1994</p>		
IMPORTANT LEGAL NOTICE:	Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.	

International Chemical Safety Cards

ZINC POWDER

ICSC: 1205



Blue powder
Merrillite
Zn
Atomic mass: 65.4
(powder)

ICSC # 1205
CAS # 7440-66-6
RTECS # ZG8600000
UN # 1436 (zinc powder or dust)
EC # 030-001-00-1
October 24, 1994 Peer reviewed



TYPES OF HAZARD/ EXPOSURE	ACUTE HAZARDS/ SYMPTOMS	PREVENTION	FIRST AID/ FIRE FIGHTING
FIRE	Highly flammable. Many reactions may cause fire or explosion. Gives off irritating or toxic fumes (or gases) in a fire.	NO open flames, NO sparks, and NO smoking. NO contact with acid(s), base (s) and incompatible substances (see Chemical Dangers).	Special powder, dry sand, NO other agents. NO water.
EXPLOSION	Risk of fire and explosion on contact with acid(s), base(s), water and incompatible substances.	Closed system, ventilation, explosion-proof electrical equipment and lighting. Prevent build-up of electrostatic charges (e.g., by grounding). Prevent deposition of dust.	In case of fire: cool drums, etc., by spraying with water but avoid contact of the substance with water.
EXPOSURE		PREVENT DISPERSION OF DUST! STRICT HYGIENE!	
• INHALATION	Metallic taste and metal fume fever. Symptoms may be delayed (see Notes).	Local exhaust.	Fresh air, rest. Refer for medical attention.
• SKIN	Dry skin.	Protective gloves.	Rinse and then wash skin with water and soap.
• EYES		Safety spectacles.	First rinse with plenty of water for several minutes (remove contact lenses if easily possible), then take to a doctor.
• INGESTION	Abdominal pain. Nausea. Vomiting.	Do not eat, drink, or smoke during work. Wash hands before eating.	Rinse mouth. Refer for medical attention.

SPILLAGE DISPOSAL	STORAGE	PACKAGING & LABELLING
Extinguish or remove all ignition sources. Do NOT wash away into sewer. Sweep spilled substance into containers. then remove to safe place. Personal protection: self-contained breathing apparatus.	Fireproof. Separated from acids, bases oxidants Dry.	Airtight. F symbol N symbol R: 15-17-50/53 S: 2-7/8-43-46-60-61 UN Hazard Class: 4.3 UN Subsidiary Risks: 4.2

SEE IMPORTANT INFORMATION ON BACK

ICSC: 1205

Prepared in the context of cooperation between the International Programme on Chemical Safety & the Commission of the European Communities (C) IPCS CEC 1994. No modifications to the International version have been made except to add the OSHA PELs, NIOSH RELs and NIOSH IDLH values.

International Chemical Safety Cards

ZINC POWDER

ICSC: 1205

<p>I M P O R T A N T D A T A</p>	<p>PHYSICAL STATE; APPEARANCE: ODOURLESS GREY TO BLUE POWDER.</p> <p>PHYSICAL DANGERS: Dust explosion possible if in powder or granular form, mixed with air. If dry, it can be charged electrostatically by swirling, pneumatic transport, pouring, etc.</p> <p>CHEMICAL DANGERS: Upon heating, toxic fumes are formed. The substance is a strong reducing agent and reacts violently with oxidants. Reacts with water and reacts violently with acids and bases forming flammable/explosive gas (hydrogen - see ICSC0001) Reacts violently with sulfur, halogenated hydrocarbons and many other substances causing fire and explosion hazard.</p> <p>OCCUPATIONAL EXPOSURE LIMITS: TLV not established.</p>	<p>ROUTES OF EXPOSURE: The substance can be absorbed into the body by inhalation and by ingestion.</p> <p>INHALATION RISK: Evaporation at 20°C is negligible; a harmful concentration of airborne particles can, however, be reached quickly when dispersed.</p> <p>EFFECTS OF SHORT-TERM EXPOSURE: Inhalation of fumes may cause metal fume fever. The effects may be delayed.</p> <p>EFFECTS OF LONG-TERM OR REPEATED EXPOSURE: Repeated or prolonged contact with skin may cause dermatitis.</p>
---	---	---

PHYSICAL PROPERTIES	<p>Boiling point: 907°C Melting point: 419°C Relative density (water = 1): 7.14</p>	<p>Solubility in water: reaction Vapour pressure, kPa at 487°C: 0.1 Auto-ignition temperature: 460°C</p>
----------------------------	---	--

ENVIRONMENTAL DATA	
---------------------------	--

NOTES

Zinc may contain trace amounts of arsenic, when forming hydrogen, may also form toxic gas arsine (see ICSC 0001 and ICSC 0222). Reacts violently with fire extinguishing agents such as water, halons, foam and carbon dioxide. The symptoms of metal fume fever do not become manifest until several hours later. Rinse contaminated clothes (fire hazard) with plenty of water.

Transport Emergency Card: TEC (R)-43GWS-II+III
NFPA Code: H0; F1; R1;

ADDITIONAL INFORMATION

--	--

ICSC: 1205

ZINC POWDER

(C) IPCS, CEC, 1994

IMPORTANT LEGAL NOTICE:	<p>Neither NIOSH, the CEC or the IPCS nor any person acting on behalf of NIOSH, the CEC or the IPCS is responsible for the use which might be made of this information. This card contains the collective views of the IPCS Peer Review Committee and may not reflect in all cases all the detailed requirements included in national legislation on the subject. The user should verify compliance of the cards with the relevant legislation in the country of use. The only modifications made to produce the U.S. version is inclusion of the OSHA PELs, NIOSH RELs and NIOSH IDLH values.</p>
--------------------------------	--

ATTACHMENT H
Community Air Monitoring Plan

COMMUNITY AIR MONITORING PLAN
FORMER NY CLEANING AND DYEING SITE
376-378 FLUSHING AVENUE
Brooklyn, NY

JANUARY - 2018

TABLE OF CONTENTS
COMMUNITY AIR MONITORING PLAN
Former NY Cleaning and Dyeing Site
376-378 Flushing Avenue, Brooklyn, NY

1.0	INTRODUCTION	1
1.1	Regulatory Requirements	1
2.0	AIR MONITORING	2
2.1	Meteorological Data	2
2.2	Community Air Monitoring Requirements	2
3.0	VOC MONITORING, RESPONSE LEVELS, AND ACTIONS	4
3.1	Potential Corrective Measures and VOC Suppression Techniques	4
4.0	PARTICULATE MONITORING	5
4.1	Potential Particulate Suppression Techniques.....	5
5.0	DATA QUALITY ASSURANCE	7
5.1	Calibration	7
5.2	Operations.....	7
5.3	Data Review.....	7
6.0	RECORDS AND REPORTING	8

APPENDICES

Appendix A Action Limit Report

1.0 INTRODUCTION

This Community Air Monitoring Plan (CAMP) has been prepared for the excavation and building activities to be performed under Remedial Action Work Plan (RAWP) at 376-378 Flushing Avenue, in Brooklyn, NY. The CAMP provides measures for protection for the downwind community (i.e., off-site receptors including residences, businesses, and on-site workers not directly involved in the investigation activities) from potential airborne contaminant releases resulting from remedial activities at the site.

Compliance with this CAMP is required during all activities associated with soil disturbance activities that have the potential to generate airborne particulate matter and volatile organic compounds (VOCs). These activities include excavation and loading of affected soil. This CAMP has been prepared to ensure that remedial activities do not adversely affect passersby, residents, or workers in the area immediately surrounding the Site and to preclude or minimize airborne migration of site-related contaminants to off-site areas.

1.1 Regulatory Requirements

This CAMP was established in accordance with the following requirements:

- New York State Department of Health's (NYSDOH) Generic Community Air Monitoring Plan as presented in DER-10 Technical Guidance for Site Investigation and Remediation (NYSDEC May 3, 2010). This guidance specifies that a community air-monitoring program shall be implemented to protect the surrounding community and to confirm that the work does not spread contamination off-site through the air;

2.0 AIR MONITORING

Petroleum volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), metals and pesticides are the constituents of concern at the Site. The appropriate method to monitor air for these constituents during remediation activities is through real-time VOC and air particulate (dust) monitoring.

2.1 Meteorological Data

At a minimum, wind direction will be evaluated at the start of each workday, noon of each workday, and the end of each workday. These readings will be utilized to position the monitoring equipment in appropriate upwind and downwind locations.

2.2 Community Air Monitoring Requirements

To establish ambient air background concentrations, air will be monitored at several locations around the site perimeter before activities begin. These points will be monitored periodically in series during the site work. When the excavation area is within 20 feet of potentially exposed populations or occupied structures, the perimeter monitoring points will be located to represent the nearest potentially exposed individuals at the downwind location and will take into account the locations of ventilation system intakes of nearby structures.

Fugitive respirable dust will be monitored using a MiniRam Model PDM-3 aerosol monitor (or equivalent). Air will be monitored for VOCs with a portable Ionscience 3000 photoionization detector (PID), or equivalent. All air monitoring data will be documented in a site log book by the designated site safety officer. The site safety officer or delegate must ensure that air monitoring instruments are calibrated and maintained in accordance with manufacturer's specifications. All instruments will be zeroed daily and checked for accuracy. A daily log will be kept. If additional monitoring is required, the protocols will be developed and appended to this plan

- Special Requirements for Work Within 20 Feet of Potentially Exposed Individuals or Structures

When work areas are within 20 feet of potentially exposed populations or occupied structures, the continuous monitoring locations for VOCs and particulates must reflect the nearest potentially exposed individuals and the location of ventilation system intakes for nearby structures. The use of engineering controls such as vapor/dust barriers, temporary negative-pressure enclosures, or special ventilation devices should be considered to prevent exposures related to the work activities and to control dust and odors. Consideration should be given to implementing the planned activities when potentially exposed populations are at a minimum, such as during weekends or evening hours in non-residential settings.

If total VOC concentrations opposite the walls of occupied structures or next to intake vents exceed 1 ppm, monitoring should occur within the occupied structure(s). Background readings in the occupied spaces must be taken prior to commencement of the planned work. Any unusual background readings should be discussed with NYSDOH prior to commencement of the work. If total particulate concentrations opposite the walls of occupied structures or next to intake vents exceed 150 mcg/m³, work activities should be suspended until controls are implemented and are

successful in reducing the total particulate concentration to 150 mcg/m³ or less at the monitoring point.

Depending upon the nature of contamination and remedial activities, other parameters (e.g., explosivity, oxygen, hydrogen sulfide, carbon monoxide) may also need to be monitored. Response levels and actions should be pre-determined, as necessary, for each site.

3.0 VOC MONITORING, RESPONSE LEVELS, AND ACTIONS

Volatile organic compounds (VOCs) will be monitored at the two building entrance locations and active ventilation discharge point on an hourly basis or as otherwise specified. Upwind concentrations should be measured at the start of each workday and periodically thereafter to establish background conditions. The monitoring work should be performed using equipment appropriate to measure the types of contaminants known or suspected to be present.

The equipment should be calibrated at least daily for the contaminant(s) of concern or for an appropriate surrogate. The equipment should be capable of calculating 15-minute running average concentrations, which will be compared to the levels specified below.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the work area or exclusion zone exceeds 5 parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below 5 ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the work area or exclusion zone persist at levels in excess of 5 ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below 5 ppm over background for the 15-minute average.
- If the organic vapor level is above 25 ppm at the perimeter of the work area, activities must be shutdown. All 15-minute readings must be recorded and be available for State (DEC and DOH) personnel to review. Instantaneous readings, if any, used for decision purposes should also be recorded.

All readings will be recorded and made available for NYSDEC and NYSDOH personnel to review. If an exceedance of the Action Limits occurs, an Action Limit Report, as shown in Appendix A, will be completed.

3.1 Potential Corrective Measures and VOC Suppression Techniques

If the 15-minute integrated VOC level at the downwind location persists at a concentration that exceeds the upwind level by more than 5 ppm but less than 25 ppm during remediation activities, then vapor suppression techniques will be employed. The following techniques, or others, may be employed to mitigate the generation and migration of fugitive organic vapors:

- limiting the excavation size;
- limiting the drop-height when loading soil into trucks;
- spraying chemical odorants onto the soil;
- covering soil stockpiles with 6-mil plastic sheeting or tarps;
- hauling waste materials in properly tarped containers; and/or
- applying vapor suppressant foam.

4.0 PARTICULATE MONITORING

Air monitoring for particulates (i.e., dust) will be performed continuously during excavation and loading activities using both air monitoring equipment and visual observation at upwind and downwind locations. Monitoring equipment capable of measuring particulate matter smaller than 10 microns (PM₁₀) and capable of integrating (averaging) over periods of 15 minutes or less will be set up at upwind (i.e., background) and downwind locations, at heights approximately four to five feet above land surface (i.e., the breathing zone). Monitoring equipment will be MIE Data Ram monitors, or equivalent. The audible alarm on the particulate monitoring device will be set at 90 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$). This setting will allow proactive evaluation of worksite conditions prior to reaching the action level of $100 \mu\text{g}/\text{m}^3$ above background. The monitors will be calibrated at least once per day prior to work activities and recalibrated as needed thereafter. In addition, fugitive dust migration will be visually assessed during all intrusive work activities.

The following summarizes particulate action levels and the appropriate responses:

- If the downwind PM-10 particulate level is $100 \mu\text{g}/\text{m}^3$ greater than background (upwind perimeter) for the 15-minute period, or if airborne dust is observed leaving the work area, then dust suppression techniques must be employed. Work may continue with dust suppression techniques provided that downwind PM-10 particulate levels do not exceed $150 \mu\text{g}/\text{m}^3$ above the upwind level and provided that no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than $150 \mu\text{g}/\text{m}^3$ above the upwind level, work must be stopped and an evaluation of activities initiated. Work can resume provided that dust suppression measures (as described in Section 2.3.1 below) and other controls are successful in reducing the downwind PM-10 particulate concentration to within $150 \mu\text{g}/\text{m}^3$ of the upwind level and in preventing visible dust migration.

All readings will be recorded and be available for NYSDEC and NYSDOH personnel to review. If an exceedance of the Action Limits occurs, an Action Limit Report as shown in **Appendix A** will be completed.

4.1 Potential Particulate Suppression Techniques

If the integrated particulate level at the downwind location exceeds the upwind level by more than $100 \mu\text{g}/\text{m}^3$ at any time during remediation activities, then dust suppression techniques will be employed. The following techniques, or others, may be employed to mitigate the generation and migration of fugitive dusts:

- limiting the excavation size;
- backfilling the excavation;
- spraying water onto the excavation faces and equipment;
- covering soil stockpiles with 8-mil plastic sheeting;
- hauling waste materials in properly tarped containers; and/or
- limiting vehicle speeds onsite.

Work may continue with dust suppression techniques provided that downwind PM₁₀ levels are not more than 150 µg/m³ greater than the upwind levels.

There may also be situations where the dust is generated by remediation activities and migrates to downwind locations, but is not detected by the monitoring equipment at or above the action level. Therefore, if dust is observed leaving the working area, dust suppression techniques such as those listed above will be employed.

If dust suppression techniques do not lower particulates to below 150 µg/m³, or visible dust persists, work will be suspended until appropriate corrective measures are identified and implemented to remedy the situation.

All air monitoring readings will be recorded in the field logbook and will be available for the NYSDEC and NYSDOH personnel to review.

5.0 DATA QUALITY ASSURANCE

5.1 Calibration

Instrument calibration shall be documented on instrument calibration and maintenance sheets or in the designated field logbook. All instruments shall be calibrated as required by the manufacturer. Calibration checks may be used during the day to confirm instrument accuracy. Duplicate readings may be taken to confirm individual instrument response.

5.2 Operations

All instruments shall be operated in accordance with the manufacturer's specifications. Manufacturers' literature, including an operations manual for each piece of monitoring equipment will be maintained on-site by the SSO for reference.

5.3 Data Review

The SSO will interpret all monitoring data based the established criteria and his/her professional judgment. The SSO shall review the data with the PM to evaluate the potential for worker exposure, upgrades/downgrades in level of protection, comparison to direct reading instrumentation and changes in the integrated monitoring strategy.

Monitoring and sampling data, along with all sample documentation will be periodically reviewed by the PM.

6.0 RECORDS AND REPORTING

All air readings must be recorded on daily air monitoring log sheets and made available for review by personnel from NYSDEC and NYSDOH.

ATTACHMENT I
Site Management Forms

SITE INSPECTION CHECKLIST

Site Inspection Checklist
376-378 Flushing Avenue
Brooklyn, NY

Date: _____ Time: _____

Inspector Name/Organization: _____

Visual Inspection of Groundwater Monitoring Wells

Inspect surrounding concrete pad, well cover, and well casing

WELL ID	Conditions			Replace Well Cap?		Replace Well Lock?		Comments
	Concrete Pad	Well Cover	Well Casing	YES	NO	YES	NO	
MW1				YES	NO	YES	NO	
MW2				YES	NO	YES	NO	

Repairs Needed and/or Maintenance at this time?

Signature: _____ Date: _____

ATTACHMENT J
Permit or Permit Equivalent

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

Division of Environmental Remediation, Region 2
47-40 21st Street, Long Island City, NY 11101
P: (718) 482-4995
www.dec.ny.gov

PERMIT EQUIVALENT
Under the Environmental Conservation Law (ECL)

Facility Information

Permit Equivalent Issued to:

Zelig Weiss
Rose Castle Redevelopment II LLC
266 Broadway, Suite 301
Brooklyn, NY 11211

Facility Name / Site Code:

Former NY Cleaning and Dyeing / C224264

Facility Location:

376-378 Flushing Avenue
Brooklyn, NY 11205

Facility Principal Reference Point:

Latitude: 40.698200000 Longitude: -73.959730556
(40°41'53.5200"N -73°57'35.0300"W)

Authorized Activity: Install and operate a temporary dewatering system to facilitate remedial excavation at 376-378 Flushing Avenue Brooklyn, NY with a maximum withdrawal of 2,692,800 gallons per day. The pumped groundwater is to be directed and treated to one 18,000 gallon settling tank and 10,000 gallon settling tank (Adler or equivalent) before discharging into a new sewer connection which will tie into one existing 72" sanitary sewer located on Flushing Avenue and into one existing 12" sanitary sewer located on Little Nassau Street. The applicant obtained approval from NYCDEP Bureau of Wastewater Treatment (BWT) on July 30, 2019 for discharging into the sanitary sewers.

Permit Equivalent Authorizations

Long Island Well - Under Article 15, Title 15

Permit Equivalent ID: BCP Site # C224264
New Permit Equivalent Effective Date: 08/22/2019 Expiration Date: 08/22/2020

NYSDEC Approval

By acceptance of this Permit Equivalent, the Applicant agrees that the Permit Equivalent is contingent upon strict compliance with the ECL, all applicable regulations, and all conditions included as part of this Permit Equivalent.

Permit Equivalent Administrator: Jane H. O'Connell, P.G., Regional Hazardous Waste Remediation Engineer



Authorized Signature: _____ Date 08/22/19



Permit Equivalent Components

LONG ISLAND WELL PERMIT EQUIVALENT SPECIAL CONDITIONS APPLY TO THIS
AUTHORIZED PERMIT EQUIVALENT

LONG ISLAND WELL PERMIT EQUIVALENT SPECIAL CONDITIONS

1. **Conformance with Plans** All activities authorized by the Brownfield Cleanup Agreement for this Permit Equivalent must be in strict conformance with the approved plans submitted by the applicant or applicant's agent as part of the Permit Equivalent application. Such approval plans were prepared by AMC Engineering, PLLC for Rose Castle Redevelopment II LLC.
2. **Conformance with Plans - Addenda** In addition to plans referenced in the Condition titled "Conformance with Plans," the activities authorized by this Permit Equivalent must be in strict conformance with the following approved plans and/or submissions made as part of the Permit Equivalent application:
 - A. Existing Long Island Well Permit Equivalent issued by the Department on June 25, 2019; and
 - B. Modification Request Application Package of the existing Long Island Well Permit [Equivalent] received on August 4, 2019.
3. **Dewatering Wells, Pumps, Pump Capacities and Maximum Withdrawal** This permit authorizes the following:
 - Dewatering Wellpoints – 138
 - Installed Pumps – 2
 - Pump Capacity – 1870 GPM
 - Maximum Withdrawal – 2,692,800 gallons per day (GPD) or 1870 GPM
4. **Point of Discharge (POD)** The groundwater from the wellpoints feed into an 8" PVC header pipe, which empties into one 18,000 gallon settling tank and a 10,000 gal settling tank (Adler or equivalent). The effluent from the tanks will be gravity-discharged into one of two locations: a) through a new proposed 10" connection on Lot 48, which feeds into the 72" combined sewer on Flushing Avenue, or b) through a new proposed 6" connection on Lot 40, which feeds into the 12" combined sewer on Little Nassau Street.
5. **Daily Pump Log** A daily pump log in gallons per day (GPD) must be kept at the project site at all times. The pump log must be made available to authorized representatives of the Department during pumping operations.
6. **Handling of Contaminated Groundwater** The applicant is fully responsible for proper handling and all costs associated with the proper sampling, treatment and disposal of any contaminated groundwater.
7. **Well Driller Registration** The dewatering operation shall be performed by well drillers duly registered in accordance with Section 15-1525 of the Environmental Conservation Law of the State of New York.

8. Notice of Intent to Commence Work At least five (5) days prior to commencement of the authorized activity, applicant must complete and submit the attached "Notice of Intent to Commence Work" to NYSDEC Division of Environmental Remediation, 47-40 21st Street, Long Island City, NY 11101 (Attention: Wendi Zheng).

9. Additional Permit Conditions Permit conditions outlined in the Comments and Conditions Letter issued by the Department on May 3, 2019 will be implemented prior to beginning pumping operations and will continue until pumping operations ceases:

A. Daily Monitoring Using Sentry Wells:

- The applicant will install a sentinel monitoring well on the north side of Flushing Avenue approximately 75 feet east of the corner of the new building constructed on the Former Arkansas Company, Inc. BCP site. The well should be screened across the observed water table and should be constructed with at least 15 feet of screen below the observed water table. The well should be 4" in diameter to allow for NAPL recovery if necessary. Applicant will arrange for surveying of the well elevation in the same datum as the existing wells.

B. Contingency Plan:

- Should NAPL be observed to have migrated into the sentinel well following the initiation of dewatering on the site, the Department will identify any specific actions to abate or mitigate the movement of contamination, which shall be undertaken by the applicant.

10. As per NYCDEP- BWT approval letter dated July 19, 2019 (File# C-6629), the owner or its authorized is required to collect quarterly samples of the groundwater after the pretreatment system and to analyze for the NYCDEP discharge parameters. Please submit copy of quarterly sampling report to the NYSDEC Project Manager.

11. The applicant shall notify the Region of any existing condition, anticipated design change, or construction activity that is causing or would appear to result in non-compliance with the permit conditions.

12. Any increase in the number of wellpoints, pumps and/or pump capacity must be authorized, in writing, by the NYSDEC Project Manager. Depending on site conditions, a reduction in the number of wells or pumps does not require authorization. An increase to the maximum withdrawal rate authorized requires a permit modification.

GENERAL CONDITIONS - Apply to ALL Authorized Permit Equivalents:

1. Facility Inspection by The Department: The Brownfield Cleanup Program site or facility, including relevant records, is subject to inspection at reasonable hours and intervals by an authorized representative of the Department of Environmental Conservation (the Department) to determine whether the applicant is complying with this Permit Equivalent and the ECL. Such representative may order the work suspended pursuant to ECL 71- 0301 and SAPA 401(3).

The applicant shall provide a person to accompany the Department's representative during an inspection to the Permit Equivalent area when requested by the Department.

A copy of this Permit Equivalent, including all referenced maps, drawings and special conditions, must be available for inspection by the Department at all times at the project site or facility. Failure to produce a copy of the Permit Equivalent upon request by a Department representative is a violation of this Permit Equivalent.

2. Relationship of this Permit Equivalent to Other Department Orders and Determinations
Unless expressly provided for by the Department, issuance of this Permit Equivalent does not modify, supersede or rescind any order or determination previously issued by the Department or any of the terms, conditions or requirements contained in such order or determination.

3. Applications For Permit Equivalent Renewals, Modifications or Transfers The applicant must submit a separate written application to the Department for Permit Equivalent renewal, modification or transfer of this Permit Equivalent. Such application must include any forms or supplemental information the Department requires. Any renewal, modification or transfer granted by the Department must be in writing. Submission of applications for Permit Equivalent renewal, modification or transfer are to be submitted to:

Jane O' Connell, P.G., Regional Hazardous Waste Remediation Engineer
NYSDEC REGION 2 HEADQUARTERS
47-40 21ST ST
LONG ISLAND CITY, NY 11101 -5407

4. Submission of Renewal Application The applicant must submit a renewal application at least 30 days before Permit Equivalent expiration for the following Permit Equivalent authorizations: Long Island Well.

5. Permit Equivalent Modifications, Suspensions and Revocations by the Department The Department reserves the right to modify, suspend or revoke this Permit Equivalent. The grounds for modification, suspension or revocation include:

- a. materially false or inaccurate statements in the Permit Equivalent application or supporting papers;
- b. failure by the applicant to comply with any terms or conditions of the Permit Equivalent;
- c. exceeding the scope of the project as described in the Permit Equivalent application;
- d. newly discovered material information or a material change in environmental conditions, relevant technology or applicable law or regulations since the issuance of the existing Permit Equivalent;

e. noncompliance with previously issued Permit Equivalent conditions, orders of the commissioner, any provisions of the Environmental Conservation Law or regulations of the Department related to the permitted activity.

6. Permit Equivalent Transfer Permit Equivalents are transferrable unless specifically prohibited by statute, regulation or another Permit Equivalent condition. Applications for Permit Equivalent transfer should be submitted prior to actual transfer of ownership.

NOTIFICATION OF OTHER PERMITTEE OBLIGATIONS
--

Item A: Applicant Accepts Legal Responsibility and Agrees to Indemnification

The applicant, excepting state or federal agencies, expressly agrees to indemnify and hold harmless the Department of Environmental Conservation of the State of New York, its representatives, employees, and agents ("the Department") for all claims, suits, actions, and damages, to the extent attributable to the applicant's acts or omissions in connection with the applicant's undertaking of activities in connection with, or operation and maintenance of, the facility or facilities authorized by the Permit Equivalent whether in compliance or not in compliance with the terms and conditions of the Permit Equivalent. This indemnification does not extend to any claims, suits, actions, or damages to the extent attributable to the Department's own negligent or intentional acts or omissions, or to any claims, suits, or actions naming the Department and arising under Article 78 of the New York Civil Practice Laws and Rules or any citizen suit or civil rights provision under federal or state laws.

Item B: Applicant's Contractors to Comply with Permit Equivalent

The applicant is responsible for informing its independent contractors, employees, agents and assigns of their responsibility to comply with this Permit Equivalent, including all special conditions while acting as the applicant's agent with respect to the authorized activities, and such persons shall be subject to the same sanctions for violations of the Environmental Conservation Law as those prescribed for the applicant.

Item C: Applicant Responsible for Obtaining Other Required Permit Equivalents

The applicant is responsible for obtaining any other Permit Equivalents, approvals, lands, easements and rights-of-way that may be required to carry out the activities that are authorized by this Permit Equivalent.

Item D: No Right to Trespass or Interfere with Riparian Rights

This Permit Equivalent does not convey to the applicant any right to trespass upon the lands or interfere with the riparian rights of others in order to perform the authorized work nor does it authorize the impairment of any rights, title, or interest in real or personal property held or vested in a person not a party to the Permit Equivalent.

NOTICE OF INTENT TO COMMENCE WORK

Date: _____

Wendi Zheng
Division of Environmental Remediation
NYSDEC Region 2 Office
47-40 21st Street
Long Island City, NY 11101

Re: NYSDEC Permit Equivalent Site Code – C224264
Former NY Cleaning and Dyeing Site Remedial Action Excavation Dewatering
376-378 Flushing Avenue Brooklyn, NY 11205

Dear Ms. Zheng:

In accordance with Long Island Well Special Condition 6 of the referenced permit, I hereby serve notice to commence work on _____, 20_____.

This is also to certify that, having read the entire permit equivalent, I am fully aware of and understand the general and Long Island Well conditions therein, and agree to comply with all such conditions. Further, I understand that prior to undertaking any modification to the authorized work, I must seek a permit equivalent modification from the NYSDEC Region 2 Office.

Signature of Applicant

Signature of Contractor

Name of Applicant (please print)

Name of Contractor (please print)

Street Address of Contractor

City, State, & Zip Code of Contractor

Telephone Number of Contractor

WARNING

The Applicant and their contractor(s) (if any) are required to follow all permit equivalent conditions. Violations of the permit equivalent may lead to legal action, including the imposition of substantial monetary fines and corrective work.



Vincent Sapienza, P.E.
Commissioner

Jeff Lynch
Deputy Commissioner
Customer Services

59-17 Junction Blvd.
Flushing, NY 11373

Tel. (718) 595-7000
Fax. (718) 595-5647
CustomerService@dep.nyc.gov

Borough Office Locations:	
Bronx:	1932 Arthur Avenue
Brooklyn:	250 Livingston St
Manhattan:	1250 Broadway
Queens:	9605 Horace Harding Expy
Staten Island:	60 Bay Street

July 8, 2020


AMC Engineering, PLLC
18-36 42nd Street
Astoria, NY 11105
Attn: **Ariel Czemerinski, P.E.**

Re: Groundwater Discharge, 376 Flushing Ave, File # C-6629

Dear Mr. Czemerinski:

Below are the calculations for the permit fee for
DEWATERING PERMIT FOR
975,000 GALLONS OF DISCHARGE (7/2020 thru 8/2020)
@ \$6.34 PER HUNDRED CUBIC FEET –
\$8,264.04 PERMIT FEE

Please bring a check for the above amount payable to The NYC Water Board and a copy of this letter to any of our Borough Offices. The permit should be obtained no earlier than 5 business days prior to the start of pumping.

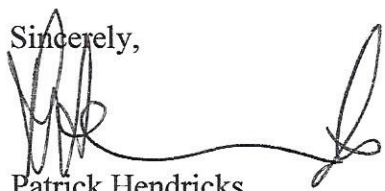Sincerely,

Patrick Hendricks
Director of Collections

Official Use only:

Account #: _____

Permit #: _____

Check Amount: _____ Credit Used: _____

BCS Clerk: _____ Issued Date: _____



October 22, 2019

Lotus Residences LLC
266 Broadway, Suite 301
Brooklyn, NY 11211
Attn: Zelig Weiss

Vincent Sapienza, P.E.
Commissioner

Re: **Groundwater Discharge, 376-378 Flushing Avenue, Brooklyn
File # C-6629**

Pam Elardo, P.E.
Deputy Commissioner

Dear Mr. Weiss:

This Letter of Approval is an extension of the Letter of Approval issued on July 19, 2019.

Bureau of Wastewater
Treatment
96-05 Horace Harding
Expressway – 2nd Floor
Corona, NY 11368

This is in response to the October 15, 2019 submission requesting permission to discharge up to **2,692,800 gallons per day (gpd)** of groundwater generated during the construction of a new 8-story mixed-use building located at 376-378 Flushing Avenue, Brooklyn, NY 11205 (New York State Department of Environmental Conservation Brownfield Cleanup Program Site Code C224264). The groundwater will be treated through one 18,000 gallon settling tank and one 10,098 gallon settling tank, per provided schematic and information, before discharging to one of the following points of discharge (POD) at the specified flow rates:

POD # 1 – up to 2,433,600 gpd to a new proposed 10” sewer connection that leads to the existing 72” combined sewer located at Flushing Avenue between Kent and Franklin Avenues in Brooklyn, NY.

POD # 2 – up to 259,200 gpd to a new 6” sewer connection that leads to the existing 12” combined sewer located at Little Nassau Street between Kent and Franklin Avenues in Brooklyn, NY.

The total combined flow to the above PODs shall not exceed 2,692,800 gpd.

Based upon the information, schematic and analytical data submitted, the property owner Lotus Residences LLC and agents of the property owner who are authorized to act on the property owner’s behalf in this matter (hereinafter referred to as “the owner and its authorized agents”) are hereby conditionally authorized, to discharge up to 2,692,800 gpd of the groundwater, treated through the above system, per provided schematic and information, as specified in your submissions, **for a period of one year**, to the combined sewers at the above mentioned locations. **This Letter of Approval shall expire at midnight on October 21, 2020.**

The owner and its authorized agents are prohibited from discharging any groundwater during wet weather events.

This conditional approval, however, is subject to your obtaining a groundwater discharge Approval, specifying allowable flow rates, from the Chief of Permitting and Compliance, Bureau of Water and Sewer Operations. The owner and its authorized agents are required to follow manufacturer specifications for the operation and maintenance of the selected equipment. **This Letter of Approval is contingent upon compliance on the part of the owner and its authorized agents with any federal, state, or local requirements applicable to the permitted activity.**

Under no circumstances shall muddy groundwater be discharged into the public sewer.

Payment shall be made to and permit obtained from the Bureau of Customer Service for groundwater discharge into the New York City Wastewater System in accordance with the Water and Wastewater Rate Schedule established by the New York City Water Board.

The owner or its authorized agents must notify this section in writing prior to the commencement of discharge. Refer to File # C-6629 in any correspondence to this office.


The owner or its authorized agents must collect samples of the groundwater after the pretreatment system *in each quarter of the calendar year*. The samples must be analyzed for the parameter(s) included in the attached chart by a New York State Department of Health certified laboratory. The results must be submitted to this office within 21 days after each sampling date. If the sampling results, or any other sampling results, exceed the DEP limits, the discharge must cease and the Bureau of Wastewater Treatment must be notified immediately by phone at (718) 595-4715 and by email at shulbert@dep.nyc.gov.

The owner and its authorized agents are prohibited from discharging any groundwater that exceeds the attached discharge limit(s), as well as those contained in Title 15 Rules of the City of New York Chapter 19.

This Letter of Approval is an Order of the Commissioner of the Department of Environmental Protection, and applies to the owner and its authorized agents. Please be advised that failure to comply with this Letter of Approval by the owner and its authorized agents may result in the issuance of summonses to either the owner or its authorized agents, or both (returnable to the New York City Office of Administrative Trials and Hearings) and/or revocation of the Letter of Approval. Summonses carry penalties of up to \$10,000 a day, per violation.

If you have any questions concerning this matter, please contact Sean H. Hulbert, P.E.,
Wastewater Resource Management Unit, at (718) 595-4715.

Sincerely,

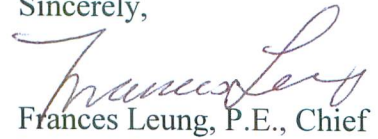

Frances Leung, P.E., Chief
Industrial Resource Management
and Permitting Section

enc: Sampling Requirements and Limitations

SAMPLING REQUIREMENTS AND LIMITATIONS

Parameter ¹	Daily Limit	Units	Sample Type	Monthly Limit
Non-polar material ²	50	mg/l	Instantaneous	---
pH	5-12	SU's	Instantaneous	---
Temperature	< 150	Degree F	Instantaneous	---
Flash Point	> 140	Degree F	Instantaneous	---
Cadmium	2 0.69	mg/l mg/l	Instantaneous Composite	---
Chromium (VI)	5	mg/l	Instantaneous	---
Copper	5	mg/l	Instantaneous	---
Lead	2	mg/l	Instantaneous	---
Mercury	0.05	mg/l	Instantaneous	---
Nickel	3	mg/l	Instantaneous	---
Zinc	5	mg/l	Instantaneous	---
Benzene	134	ppb	Instantaneous	57
Carbontetrachloride	---	---	Composite	---
Chloroform	---	---	Composite	---
1,4 Dichlorobenzene	---	---	Composite	---
Ethylbenzene	380	ppb	Instantaneous	142
MTBE (Methyl-Tert-Butyl-Ether)	50	ppb	Instantaneous	---
Naphthalene	47	ppb	Composite	19
Phenol	---	---	Composite	---
Tetrachloroethylene (Perc)	20	ppb	Instantaneous	---
Toluene	74	ppb	Instantaneous	28
1,2,4 Trichlorobenzene	---	---	Composite	---
1,1,1 Trichloroethane	---	---	Composite	---
Xylenes (Total)	74	ppb	Instantaneous	28
PCB's (Total) ³	1	ppb	Composite	---
Total Suspended Solids (TSS)	350	mg/l	Instantaneous	---
CBOD	---	---	Composite	---
Chloride	---	---	Instantaneous	---
Total Nitrogen ⁴	---	---	Composite	---
Total Solids	---	---	Instantaneous	---
Other				

- 1 All handling and preservation of collected samples and laboratory analyses of samples shall be performed in accordance with 40 C.F.R. pt. 136. If 40 C.F.R. pt. 136 does not cover the pollutant in question, the handling, preservation, and analysis must be performed in accordance with the latest edition of "Standard Methods for the Examination of Water and Wastewater." All analyses shall be performed using a detection level less than the lowest applicable regulatory discharge limit. If a parameter does not have a limit, then the detection level is defined as the method detection limit (MDL) and limit of quantitation (LOQ) required by the analytical method that is used to analyze the parameter. If the method does not contain an MDL or LOQ, the lab must use an approved method that does contain an MDL or LOQ. If none of the approved methods contain an MDL or LOQ for that parameter then the lab must develop its own LOQ, and report it with the analytical results.
- 2 Non-Polar Material shall mean that portion of the oil and grease that is not eliminated from a solution containing N-Hexane, or any other extraction solvent the EPA shall prescribe, by silica gel absorption.
- 3 Analysis for PCB's must be done by EPA method 608 with MDL=<65 ppt. PCB's (total) is the sum of PCB-1242 (Aroclor 1242), PCB-1254 (Aroclor 1254), PCB-1221 (Aroclor 1221), PCB-1232 (Aroclor 1232), PCB-1248 (Aroclor 1248), PCB-1260 (Aroclor 1260) and PCB-1016 (Aroclor 1016).
- 4 Total Nitrogen = Total Kjeldahl Nitrogen (TKN) + Nitrite (NO₂) + Nitrate (NO₃).

July 30, 2019



Ariel Czemerinski, P.E.
AMC Engineering, PLLC
18-36 42nd Street
Astoria, NY 11105

**Re: Dewatering at 376 Flushing Avenue
Block # 1884, Lot # 48
Borough of the Brooklyn**

Dear Mr. Czemerinski:

Vincent Sapienza, P.E.
Commissioner

We are in receipt of your dewatering submittal dated July 14, 2019, requesting permission to temporarily discharge up to 2,433,600 gallons per day (gpd) of groundwater, continuously for a period of one year, during remediation, through a proposed 10" diameter (dia.) connection to the 72" dia. combined sewer in Flushing Avenue between Franklin Avenue and Kent Avenue in the Borough of Brooklyn.

Based upon the information, schematic and analytical data submitted, you are hereby authorized to temporarily discharge during the construction up to 2,433,600, gallons per day (gpd) of ground water, at the rate not to exceed 3,766 cubic feet per second (cfs) for a period of one year as specified in your submission, during dry weather only, to the combined sewer at the above referenced locations. The Industrial Inspections and Permitting Section has given the approval (C-6629) for this dewatering discharge by a letter dated July 19, 2019.

Anastasios Georgelis, P.E.
Deputy Commissioner
Bureau of Water &
Sewer Operations

The discharger shall indemnify and hold the City harmless for any damage or liability incurred by the City due to the dewatering and in the event that the discharge results in overloading the capacity of the discharge sewer. See copy of the Special Indemnity Agreement, to be signed and filed with the discharge permit application.

59-17 Junction Bl,
Flushing, NY 11373

Please note that no dewatering permit will be issued until application for a sewer connection is approved by the Brooklyn Borough Records Office and the payment is made to the Bureau of Customer Service for groundwater discharge into the New York City Wastewater System in accordance with the Water and Wastewater Rate Schedule established by the New York City Water Board.

Connections@dep.nyc.gov

This letter supersedes the previous letter of approval for 376 Flushing Avenue, Lot # 48, dated June 14, 2019. The existing 6" dia. connection will be plugged upon completion of the new 10" dia. connection.

If you have any further questions concerning this matter, please contact:
Mr. Suresh Kumar at (718) 595-5205.

Very truly yours,


Ketki Patel, P.E., Deputy Chief
Site Connection & Application Review