Day 159



SITE OBSERVATION REPORT

PROJECT No.: 170381202

CLIENT:

LLC

DATE: Thursday, July 13, 2023

PROJECT:

250 Water Street

WEATHER:

Partly Sunny, 80 – 90°F

PROJECT: 250 Water Street

c/o The Howard Hughes Corporation

250 Seaport District.

Wind: SW @ 0.2 – 2.6 mph

LOCATION: New York, NY

TIME: 5

5:45am - 4:00pm

BCP SITE ID: C231127

MONITOR Jack Millman

EQUIPMENT:

CAT 335 Excavator Komatsu PC138 Excavator ABI Mobilram Drill Rig Jerome J505 Mercury Vapor Analyzer RKI GX-6000 Photoionization Detector (PID) Aeroqual ASQ1 Air Monitoring Station PRESENT AT SITE:

Langan (Environmental/Geotechnical) Jack Millman, Gabriella

DeGennaro, Pradeep Pandey

Suffolk Construction (Suffolk) (General Contractor) Anthony Galu East Coast Drilling, Inc. (ECD) (Foundation Contractor) Danny Rodgers

New York State Department of Environmental Conservation

(NYSDEC) Rob Strang, Mike Sollecito

TRC Companies Inc. (TRC) (NYSDEC Consultant) **Earth Efficient** (Soil Broker) Mike DiGaetano

OBSERVATIONS, DISCUSSIONS, TEST RESULTS, ETC.:

Langan was present to document remediation activities in accordance with the NYSDEC-approved November 2021 Remedial Action Work Plan (RAWP) at the 250 Water Street site (NYSDEC Brownfield Cleanup Program [BCP] Site No C231127).

Site Activities

- ECD demolished existing asphalt and concrete in the northern part of the site. The construction and demolition (C&D) debris was temporarily stockpiled on and covered with polyethylene sheeting in the northwestern part of the site pending future off-site disposal.
- ECD excavated an about 10-foot-long by 5-foot-wide area to a maximum depth of about 4 feet below grade surface (bgs) to identify potential subsurface utilities and/or obstructions prior to support-of-excavation (SOE) installation in the northern part of the site (along Pearl Street).
 - Excavated soil/fill was temporarily stockpiled adjacent to the work area and was screened for odors, staining, organic vapors, and mercury vapor using a handheld photoionization detector (PID) and handheld Jerome[®] J505 mercury vapor analyzer, respectively. No evidence of impacts was observed. The excavated soil/fill was temporarily backfilled into the original location following removal of concrete obstructions.
- ECD continued constructing wooden formwork in preparation for concrete guide wall installation in the eastern part of the site. The concrete guide wall will be used to facilitate installation of SOE along the perimeter of the site.
- ECD advanced a borehole to about 6 feet bgs in the northwestern part of the site to verify that the drill rig was operational prior to installation of SOE along the perimeter of the site. No drilling spoils were generated during advancement of the borehole.
- TRC continued implementation of the off-site investigation administered by the NYSDEC.

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey,	Ву:	Jack Millman
	S. Simpson		LANGAN



Page 2 of 7

SITE OBSERVATION REPORT

Material Tracking

• ECD exported one truckload (about 20 cubic yards [CY]) of C&D (previously demolished concrete and asphalt) for off-site disposal at the Earth Efficient MSM facility located in East Stroudsburg, PA.

• No material was imported to the site.

	Material Import Summary							
Facility Name Location Type of Material	Stone Industries, Inc. Haledon, NJ 1.5/2.5-inch Virgin Stone		Stone Industries, Inc. Haledon, NJ 0.75-inch Virgin Stone		Impact Reuse & Recovery Center or Impact Materials Jersey City, Lyndhurst/Jersey City, NJ 1.5-inch Clean Bluestone		Impact Reuse & Recovery Center, Lyndhurst, NJ General Fill	
Quantities	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)	No. of Loads	Approx. Volume (Tons)
Today	0	0	0	0	0	0	0	0
Project Total	8	184.42	0	0	15	339.65	336	8,216.79
NYSDEC Approved:	1,800 tons*				720 tons*		19,500 tons*	

^{*0.75-}inch, 1.5-inch, and 2.5-inch virgin stone from the Stone Industries, Inc. facility and 1.5-inch clean bluestone from the Impact Reuse & Recovery Center (IRRC) facility were approved for import of 1,000 cubic yards (CY) and 400 CY, respectively. Assuming a conversion factor of 1.8, each quantity was converted to tons in order to accurately compare with import weight tickets. General fill from the IRRC facility was approved for import of 13,000 CY and a conversion factor of 1.5 is applied.

Material Export Summary (1 of 3)								
Facility Name Location Type of Material	Allocco Recycling Brooklyn, NY Construction & Demolition (C&D) Debris		IRRC Lyndhurst, NJ C&D Debris		Earth Efficient MSM East Stroudsburg, PA C&D Debris		Clean Earth of North Jersey Kearny, NJ Non-hazardous Soil/Fill	
Quantities	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)
Today	0	0	0	0	1	20	0	0
Project Total	5	85	42	840	10	200	95	1,900

	Material Export Summary (2 of 3)						
Facility Name Location Type of Material	Location East Brunswick, NJ		Keas	oil Management Bbey, NJ mpacted Soil/Fill	Clean Earth of Carteret, NJ Carteret, NJ Non-hazardous Soil/Fill		
Quantities	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	No. of Loads	Approx. Volume (CY)	
Today	0	0	0	0	0	0	
Project Total	263	5,260	267	5,340	66	1,320	

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey,	Ву:	Jack Millman
	S. Simpson		LANGAN



Page 3 of 7

SITE OBSERVATION REPORT

Material Export Summary (3 of 3)						
Facility Name Clean Earth of North Jersey Location Kearny, NJ Type of Material Non-hazardous Soil/Fill						
Quantities	No. of Loads	Approx. Volume (CY)				
Today	0	0				
Project Total	216	4,320				

<u>Sampling</u>

•	No	samp	les '	were	col	lect	ed.
---	----	------	-------	------	-----	------	-----

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey,	Ву:	Jack Millman
	S. Simpson		LANGAN



Page 4 of 7

SITE OBSERVATION REPORT

CAMP Activities

Langan performed air monitoring at the perimeter of the site, at the northern sidewalk of Pearl Street, at the western sidewalk of Beekman Street, and at the southern sidewalk of Water Street at seven total locations for mercury vapor, volatile organic compounds (VOCs), and particulate matter less than 10 microns in diameter (PM10) from about 6:46am to 3:26pm. There were no fifteen-minute average concentrations for mercury vapor, VOCs or PM10 that approached or exceeded the action levels established by the CAMP (1.00 μ g/m³, 5.0 ppm, or 0.100 mg/m³, respectively).

Background Concentrations

Prior to implementation of CAMP, instantaneous background concentrations of mercury vapor and VOCs were recorded using a handheld Jerome® J505 mercury vapor analyzer and a handheld PID, respectively.

- Background concentrations of mercury vapor at each CAMP station were recorded at 0.00 μg/m³.
- Background concentrations of VOCs at each CAMP station were recorded at 0.0 ppm.

Perimeter and Work Zone Concentrations

Daily Average Concentrations

Station ID	Particulate (mg/m³)	Organic Vapor (ppm)	Mercury Vapor (µg/m³)
PM-1	0.011	0.00	0.01
PM-2	0.010	0.00	0.01
PM-3	0.009	0.00	0.01
PM-4	0.010	0.00	0.01
WZ-1	0.010	0.00	0.00
WZ-2	0.010	0.00	0.00
WZ-3	-	-	-
WZ-4	0.011	0.00	0.00

Maximum 15-Minute-Average Concentrations

Station ID	Particulate (mg/m³)	Organic Vapor (ppm)	Mercury Vapor (µg/m³)
PM-1	0.018	0.03	0.02
PM-2	0.015	0.04	0.03
PM-3	0.015	0.02	0.02
PM-4	0.013	0.02	0.02
WZ-1	0.014	0.00	0.01
WZ-2	0.016	0.00	0.01
WZ-3	-	-	-
WZ-4	0.015	0.00	0.01

•mg/m³ = milligrams per cubic meter •ppm = parts per million •µg/m³ = micrograms per cubic meter

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey,	Ву:	Jack Millman
	S. Simpson		LANGAN



Page 5 of 7

SITE OBSERVATION REPORT

Ambient Air (Handheld Jerome® J505 and Handheld PID)

- The dedicated mobile monitor (Langan) used a handheld Jerome® J505 mercury vapor analyzer to monitor ambient air conditions at various heights throughout the site. Instantaneous mercury vapor concentrations throughout the site ranged from 0.00 µg/m³ to 0.16 µg/m³.
- The dedicated mobile monitor (Langan) used a handheld PID to monitor VOC concentrations throughout the site. Instantaneous VOC concentrations were not detected above background concentrations throughout the workday.

Off-site CAMP Stations

- CAMP station WZ-1 was placed on the western sidewalk of Beekman Street from 6:28am to 3:45pm.
- CAMP station WZ-2 was placed on the southern sidewalk of Water Street from 6:30am to 3:50pm.
- CAMP station WZ-4 was placed on the northern sidewalk of Pearl Street from 6:33am to 3:40pm.

Prior to CAMP Shutdown

Prior to discontinuing CAMP, mercury vapor and VOC concentrations were confirmed to return to background conditions at each perimeter station using the handheld Jerome® J505 mercury vapor analyzer and handheld PID, respectively. CAMP stations were discontinued sequentially between 3:26pm and 3:50pm.

- Background concentrations of mercury vapor at each CAMP station ranged from 0.00 to 0.01 μg/m³.
- Background concentrations of VOCs at each CAMP station were recorded at 0.0 ppm.

Anticipated Activities


- ECD will continue excavating soil/fill along the perimeter of the site to identify potential subsurface utilities and/or obstructions prior to SOE installation.
- ECD will continue exporting C&D debris and soil/fill from the western part of the site for off-site disposal.
- ECD will continue constructing wooden formwork in preparation for concrete guide wall installation in the southern part of the site.
- ECD will begin installing shallow soil mixing columns for SOE installation along the perimeter of the site.

Cc:	M. Raygorodetsky, P. McMahon, M. Au, J. Frey,	Ву:	Jack Millman
	S. Simpson		LANGAN



Page 6 of 7

SITE OBSERVATION REPORT

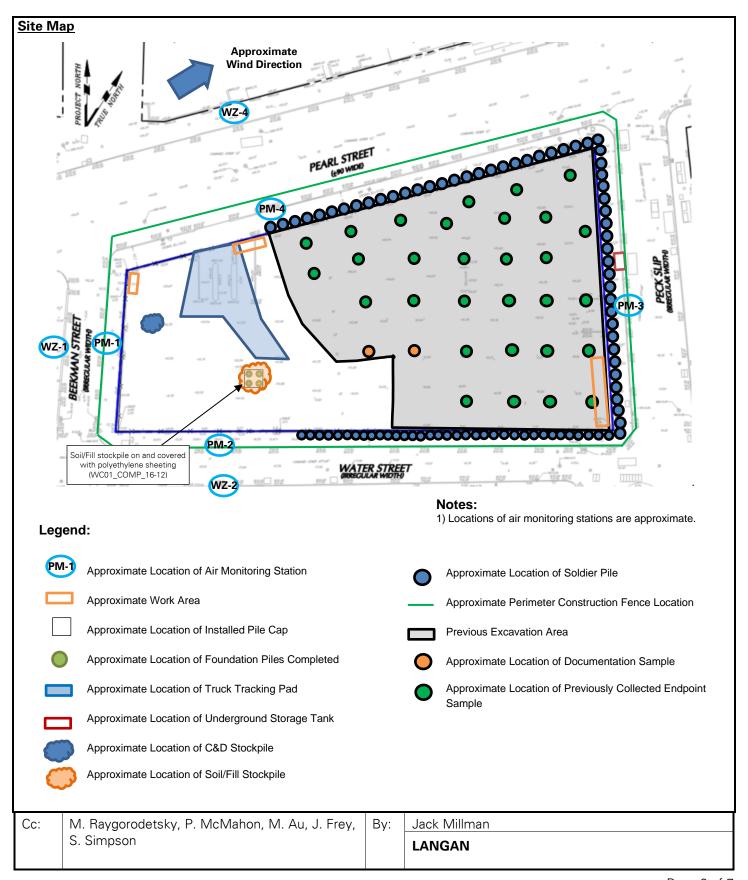



Page 7 of 7

SITE OBSERVATION REPORT

Select Site Photographs:

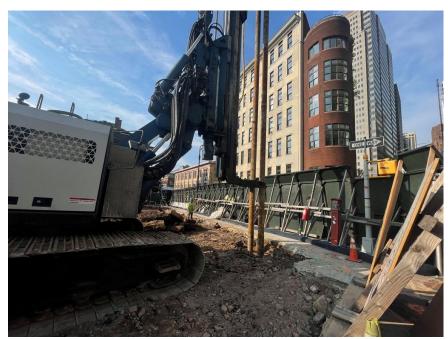


Photo 1: ECD advancing a borehole in the northwestern part of the site (facing southwest)



Photo 2: ECD implementing dust suppression in the central part of the site (facing south)

Cc: M. Raygorodetsky, P. McMahon, M. Au, J. Frey,

S. Simpson

By: Jack Millman

LANGAN