

# NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

## Division of Environmental Remediation, Region 4

1130 North Westcott Road, Schenectady, NY 12306-2014

P: (518) 357-2045 | F: (518) 357-2460

[www.dec.ny.gov](http://www.dec.ny.gov)

October 23, 2020

Maxon ALCO Holdings, LLC  
Attn: Mr. David Buicko  
220 Harborside Dr. Suite 300  
Schenectady, NY 12305  
[dbuicko@galesi.com](mailto:dbuicko@galesi.com)  
(Sent via email only)

RE: Riverbank ISCO work plan  
ALCO-Maxon Site - Parcel A, BCP Site No. C447042, Schenectady

Dear Mr. Buicko:

The New York State Department of Environmental Conservation (Department) has reviewed the October 23, 2020 letter from Barton & Loguidice (B&L) on behalf Maxon ALCO Holdings, LLC, responding to the Department's October 16, 2020 comments on the September 30, 2020 in-situ chemical oxidation (ISCO) work plan. Based on the additional information provided by B&L, the work plan is approved. Please append the above correspondence, including the Department's comments, to the ISCO work plan and place a copy at the document repository.

Please notify me when the work is scheduled so that the Department may arrange to be on site. Feel free to contact me at 518-357-2008 or [joshua.haugh@dec.ny.gov](mailto:joshua.haugh@dec.ny.gov) with any questions about this letter.

Sincerely,



Josh Haugh  
Professional Geologist 1

ec: A. Fleck, DER R4  
G. Burke, DER CO  
S. Lawrence, DOH  
S. Luciano, Galesi  
B. Dingman, B&L  
A. Barber, B&L  
S. Nostrand, B&L



Department of  
Environmental  
Conservation



# NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

## Division of Environmental Remediation, Region 4

1130 North Westcott Road, Schenectady, NY 12306-2014

P: (518) 357-2045 | F: (518) 357-2460

[www.dec.ny.gov](http://www.dec.ny.gov)

October 16, 2020

Maxon ALCO Holdings, LLC  
Attn: Mr. David Buicko  
220 Harborside Dr. Suite 300  
Schenectady, NY 12305  
[dbuicko@galesi.com](mailto:dbuicko@galesi.com)  
(Sent via email only)

RE: Riverbank ISCO work plan  
ALCO-Maxon Site - Parcel A, BCP Site No. C447042, Schenectady

Dear Mr. Buicko:

The New York State Departments of Environmental Conservation (Department) and Health have reviewed the September 30, 2020 in-situ chemical oxidation (ISCO) work plan submitted by Barton & Loguidice (B&L) on behalf Maxon ALCO Holdings, LLC (Volunteer). The Department is requesting that the work plan be revised to address the following comments:

1. The work plan should include product-specific health and safety documentation to supplement the existing site Health and Safety Plan presented in the approved Site Management Plan.
2. Provide a copy of the Safety Data Sheet for the chemical oxidant product.
3. Provide a copy of the current Underground Injection Control notification.
4. Describe B&L's chemical oxidant dosing estimates/assumptions based on previous work.
5. Indicate in the work plan that follow-up report(s) with actual dosing results, metrics, field observations and photographs will be provided to the Department for the record.

Please revise the work plan to address these comments and resubmit it to the Department for review and approval as appropriate. Feel free to contact me at 518-357-2008 or [joshua.haugh@dec.ny.gov](mailto:joshua.haugh@dec.ny.gov) with any questions about this letter.

Sincerely,



Josh Haugh  
Professional Geologist 1



Department of  
Environmental  
Conservation



ec: A. Fleck, DER R4  
G. Burke, DER CO  
S. Lawrence, DOH  
S. Luciano, Galesi  
B. Dingman, Barton & Loguidice  
C. Steinmuller, Barton & Loguidice  
A. Barber, Barton & Loguidice



October 23, 2020

Mr. Joshua Haugh  
Project Manager, Division of Environmental Remediation  
New York State Department of Environmental Conservation  
Region 4  
1130 North Westcott Road  
Schenectady, New York 12306-2014

**Via Electronic Mail**

Re: ALCO-Maxon Parcel A Spill Number 1604483  
ALCO – BCP Site C447042  
Schenectady, NY

Dear Mr. Haugh:

In response to your October 16, 2020 correspondence to Mr. Buicko regarding the ALCO-Maxon Site – Parcel A, BCP Site No. C447042, ISCO Work Plan (a.k.a Riverbank ISCO Work Plan) Barton and Loguidice, D.P.C., provides the following responses on behalf of Maxon ALCO Holdings, LLC:

1. A product-specific health and safety document for PersulfOx™ has been included and appended to the existing site Health and Safety Plan and is included as Attachment A.
2. A Safety Data Sheet has been included as Attachment B to this document for the chemical oxidant PersulfOx.
3. An Underground Injection Control notification was submitted to the USEPA on October 8, 2020 and a copy of the submitted letter is included as Attachment C to this document. EPA has provided correspondence that they have received our request and are in the process of reviewing.
4. As previously defined in B&L's September 30, 2020 electronic letter submittal of the revised Parcel A Riverbank ISCO Work Plan, we are proposing oxidant injection by hand pouring a PersulfOx™ mixture with 5-gallon buckets into 7 existing wells. Each well is 2-



inches in diameter with 10 feet of 0.020 slot screen. Previous injections performed in February 2020 under pressure at two test well locations resulted in the presence of a sheen along the riverbank and therefore a more gentle approach of hand pouring oxidant down the existing wells has been proposed. Based on past injection work in this area, a rate of 5 gallons per vertical foot was utilized and is proposed for the upcoming program. This will result in the injection of approximately 3,000 pounds of PersulfOx™, which equates to roughly 428 pounds per well location. PersulfOx is mixed with water to a 10% - 20% concentration prior to injection. Mixing will be performed by B&L's drilling subcontractor prior to dosing each well. Following the injection work, the injection wells will be capped and secured to allow for additional additions of oxidants, if necessary.

5. A follow-up report with dosing results, metrics, field observations and photographs will be provided to the Department for their use.

Should you have any questions, please feel free to contact me at your convenience to discuss.

Very truly yours,

BARTON & LOGUIDICE, INC.

Andrew J. Barber

A handwritten signature in cursive script that reads "Andrew J. Barber".

Sr. Environmental Consultant

BDD/AJB/tmj

Enclosures

cc: Tom Owens, Esq. - Maxon ALCO Holdings LLC  
Steve Luciano - Maxon ALCO Holdings LLC  
Paul Fallati - Maxon ALCO Holdings LLC  
Dean Sommer, Esq. - Young Sommer  
Jennifer Andaloro - NYSDEC Region 4, OGC  
Steve Lawrence - NYSDEC

Attachment A

**Former ALCO Site  
Brownfield Cleanup Project**

**City of Schenectady  
Schenectady County, New York**

## **Health and Safety Plan (HASP)**

**New York State  
Brownfield Cleanup Program  
Site Nos. C447042, C447043, and C447044**

**December 2013  
Revised October 2020**

Former ALCO Site  
Brownfield Cleanup Project

City of Schenectady

Health and Safety Plan  
Site Nos. C447042, C447043, and C447044

December 2013  
Revised October 2020

Prepared For:

Maxon ALCO Holdings, LLC  
540 Broadway  
Albany, New York 12207

Prepared By:

Barton & Loguidice, P.C.  
Engineers • Environmental Scientists • Planners • Landscape Architects  
10 Airline Drive, Suite 200  
Albany, New York 12205



## Table of Contents

<u>Section</u>	<u>Page</u>
1.0 General Information.....	1
1.1 Introduction .....	1
2.0 Project Information.....	2
2.1 Comprehensive Work Plan .....	2
2.2 Scope of Work.....	2
2.3 Organization Structure .....	2
3.0 Health and Safety Risk Analysis.....	4
3.1 Chemical Hazards .....	4
3.2 Physical Hazards.....	13
3.3 Heat and Cold Stress .....	13
3.4 Confined Space Entry.....	14
4.0 Medical Surveillance Program.....	15
4.1 General.....	15
4.2 Frequency .....	15
4.3 Examination Results.....	16
5.0 Training Program .....	17
5.1 Hazardous Waste Operations Health and Safety Training.....	17
5.2 Additional Training.....	17
5.3 Other Required Training .....	17
5.4 Pre-Entry Briefing .....	18
5.5 Training Records.....	18
6.0 Health and Safety Field Implementation .....	19
6.1 Personal Protective Equipment Requirements.....	19
6.2 Community Air Monitoring Plan .....	20
6.3 Decontamination Procedures .....	22
6.3.1 Heavy Equipment.....	22
6.3.2 Personnel .....	22
6.3.3 Decontamination Wastes and Investigation Derived Wastes.....	23
7.0 Site Operating Procedures .....	24
7.1 Daily Operating Procedures .....	24
7.2 Site Control.....	25
7.3 Buddy System.....	26
7.4 Engineering Controls .....	26

## Table of Contents - Continued

<u>Section</u>	<u>Page</u>
8.0 Emergency Response Procedures.....	27
8.1 Pre-Emergency Planning.....	27
8.2 Personnel Roles .....	27
8.3 Safe Distances and Places of Refuge .....	28
8.4 Emergency Communications .....	28
8.5 Emergency Procedures .....	28
8.5.1 Incident Procedures .....	28
8.5.2 Medical Emergencies .....	329
8.6 Emergency Routes .....	30
8.7 Spill Control.....	31
8.8 Personal Protective and Emergency Equipment.....	31
8.9 Decontamination Procedures .....	31
8.10 Evacuation Routes .....	31
8.11 Response Critique.....	31

### Tables

Table B-1	Site Investigation Activity Hazard Evaluation .....	4
Table B-2	Contaminants Detected in Soil.....	5
Table B-3	Assessment of Detected Chemicals .....	12
Table B-4	Personal Protective Equipment (PPE) Requirements .....	19
Table B-5	Monitoring Protocols and Contaminant Action Levels .....	21

### Attachments

Attachment 1	Hospital Route
Attachment 2	Emergency Contacts
Attachment 3	Regenesis Safety Sheet

## **1.0 General Information**

### **1.1 Introduction**

This Health and Safety Plan (HASP) was prepared by Barton & Loguidice, Inc. (B&L) for future excavation work at the former ALCO site where the existing soils will be penetrated. The existing soils contain residual impacts from historic activities at the site. The impacts were characterized by the Remedial Investigation and Supplemental Remedial Investigation that were conducted at the site. A summary of the impacts is provided in this HASP

Please note that this site falls within the definition of a hazardous waste sites for the purposes of 29 CFR 1910.120, *Hazardous Waste Operations and Emergency Response*. Plan. This was prepared in accordance with 29 CFR 1910.120. This plan was prepared, and will be implemented, by a qualified person as defined under 29 CFR 1910.120; this is also in accordance with NYSDEC DER-10, *Technical Guidance for Site Investigation and Remediation*.

The purpose of this Health and Safety Plan for the ALCO IRMs is to provide specific guidelines and establish procedures for the protection of personnel during the field investigation and site remediation activities. The Plan is based on the site information available at this time and anticipated conditions to be encountered during the different phases of work. This Plan is subject to modification as data are collected and evaluated.

All personnel conducting activities on-site must comply with all applicable Federal and State rules and regulations regarding safe work practices. Personnel conducting field activities must also be familiar with the procedures, requirements and provisions of this Plan. In the event of conflicting Plans and requirements, personnel must implement those safety practices that afford the highest level of protection.

This HASP is not intended to be used by any subcontractors, but it may be used as the basis for contractors to prepare their own plans. This HASP may not address the specific health and safety needs or requirements of subcontractors and should be viewed as the minimum requirement.

## **2.0 Project Information**

### **2.1 Comprehensive Work Plan**

This HASP is appended to the Site Remedial Work Plan (RWP) prepared by Barton & Loguidice, Inc., which describes the proposed remedial activities for the site.

### **2.2 Scope of Work**

Remedial and/or development activities at the site may entail excavation into the existing in-place soils at the site.

### **2.3 Organization Structure**

Barton & Loguidice, P.C.:

Program Manager – Scott Nostrand, P.E.

Site Manager – Andy Barber

Maxon ALCO Holdings, LLC (MAH):

Project Contact – Steve Luciano

The Site Manager is responsible for the day-to-day activities of the project and for coordinating between office and field personnel. The Site Manager will oversee the remedial activities. The Barton & Loguidice on-site field personnel will serve as the Site Safety and Health Coordinator (SSHC). The SSHC will establish operating standards and coordinate overall project safety and health activities for the site. The SSHC will review project plans and revisions to determine that safety and health procedures are maintained throughout the project. Specifically the responsibilities of the SSHC include:

- a. Aiding the selection of protective clothing and equipment.
- b. Periodically inspecting protective clothing and equipment.
- c. Maintaining proper storage of protective clothing and equipment.
- d. Monitoring the workers for signs of heat stress, cold stress, and fatigue.
- e. Monitoring on-site hazards and conditions.
- f. Conducting periodic surveillance to evaluate effectiveness of the Site-specific Health and Safety Plan.
- g. Having knowledge of emergency procedures, evacuation routes, and the telephone numbers of the ambulance, local hospital, poison control center, fire department, and police department.

- h. Providing handouts to all on-site personnel that contain directions to the hospital and the telephone numbers of the ambulance, local hospital, poison control center, fire department, and police department.
- i. Notifying, when necessary, local public emergency officials.
- j. Coordinating emergency medical care.

The Site Manager will be responsible for ensuring that the field personnel are familiar with the contents of this plan and the roles of the SSHC.

### 3.0 Health and Safety Risk Analysis

Table B-1 breaks down the hazard types that may be encountered for the site activities.

Table B-1 Site Investigation Activity Hazard Evaluation						
Activity	Hazard Type					
	Mechanical	Electrical	Chemical	Physical	Biological	Temperature
Excavation of Impacted Soils	Accidental injury from excavation equipment. Accidental injury from contact with excavated materials.	Overhead power lines.	Accidental inhalation, ingestions, skin absorption or eye contact with contaminants. Inhalation of equipment exhaust gases.	Collapse of excavation structure. Puncture from buried objects/nails. Excessive noise. Fall hazards. Falling objects.	Rodents, Bees and wasps.	Heat stress and frost bite.

#### 3.1 Chemical Hazards

Site soils have been impacted by historic industrial operations at the site. These impacts are largely related to the use of petroleum products and coal at the site. The contaminants that have been detected at the site are listed in Table B-2 and their properties are listed in Table B-3 (below).

**Table B-2 – Contaminants Detected in Soil**  
**Contaminants Detected in Surface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SS-A1	SS-A2	SS-A3	SS-A5	SS-A6	SS-A8	SS-A9
<b>Parcel A</b>										
2-Methylnaphthalene	410	NS	NS	57 J	410 J	130 J	700 J	3,500 U	890 J	11,000 J
Benzo(a)Anthracene	1,000	1,000	5,600	1,300	6,000	5,500	4,500	1,800 J	24,000	160,000
Benzo(a)Pyrene	1,000	1,000	1,000	1,700	6,700	6,800	4,200	2,100 J	21,000	140,000
Benzo(b)Fluoranthene	1,000	1,000	5,600	3,100	12,000	14,000	6,700	4,400	25,000	170,000
Benzo(G,H,I)Perylene	100,000	100,000	500,000	600 J	2,300	3,100	1,300	1,500 J	14,000	98,000
Benzo(k)Fluoranthene	1,000	3,900	56,000	1,400	4,000	5,100	3,000	2,100 J	11,000	71,000
Chrysene	1,000	3,900	56,000	1,700	6,600	6,700	4,400	2,600 J	23,000	150,000
Dibenzo(A,H)Anthracene	330	330	560	210 J	820 J	880 J	370 J	3,500 U	4,900 U	9,800 U
Dibenzofuran	14,000	59,000	350,000	31 J	710 J	260 J	1,100	3,500 U	2,300 J	22,000
Fluoranthene	100,000	100,000	500,000	1,800	11,000	8,700	9,900	2,700 J	44,000	330,000
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	570 J	2,200	2,800	1,200	1,400 J	11,000	84,000
Phenanthrene	100,000	100,000	500,000	600 J	9,100	4,600	9,300	1,300 J	35,000	290,000
Pyrene	100,000	100,000	500,000	1,700	8,800	7,100	7,400	2,200 J	40,000	310,000

All units are in µg/Kg

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

U = The compound was not detected at the indicated concentration.

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.

**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Surface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SS-B3	SS-B4	SS-B5	SS-B6	SS-B8
<b>Parcel B</b>								
2-Methylnaphthalene	410	NS	NS	18,000 U	620 J	27 J	12 J	3,900 U
Benzo(a)Anthracene	1,000	1,000	5,600	960 J	13,000	850	1,400	2,900 J
Benzo(a)Pyrene	1,000	1,000	1,000	1,000 J	15,000	1,100	1,500	4,100
Benzo(b)Fluoranthene	1,000	1,000	5,600	18,000 U	20,000	1,300	3,900	5,000
Benzo(k)Fluoranthene	1,000	1,000	56,000	18,000 U	6,800	480	1,500	2,800 J
Chrysene	1,000	1,000	56,000	1,000 J	13,000	890	2,100	3,300 J
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	18,000 U	7,700	550	1,600	2,100 J

All units are in µg/Kg

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

U = The compound was not detected at the indicated concentration.

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.



**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Surface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SS-C1	SS-C2	SS-C4	SS-C6	SS-C9
<b>Parcel C</b>								
2-Methylnaphthalene	410	NS	NS	6,900 U	7,000 U	440 J	65 J	2,000 U
Benzo(a)Anthracene	1,000	1,000	5,600	1,500 J	4,600 J	49,000	3,900	1,500 J
Benzo(a)Pyrene	1,000	1,000	1,000	1,700 J	6,400 J	43,000	3,700	1,600 J
Benzo(b)Fluoranthene	1,000	1,000	5,600	2,000 J	9,600 J	50,000	4,500	2,000
Benzo(k)Fluoranthene	1,000	1,000	56,000	2,100 J	3,500 J	29,000	1,700 J	1,100 J
Chrysene	1,000	1,000	56,000	1,500 J	4,900 J	46,000	3,900	1,600 J
Dibenzo(A,H)Anthracene	330	330	560	6,900 U	7,000 U	9,500 U	680 J	2,000 U
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	880 J	3,600 J	22,000	2,100	800 J

All units are in µg/Kg

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

U = The compound was not detected at the indicated concentration.

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.

**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Surface Soils**

	<b>Arsenic</b>	<b>Copper</b>	<b>Lead</b>
<i>Part 375 Residential</i>	16	270	400
<i>Part 375 Restricted Residential</i>	16	270	400
<i>Part 375 Commercial</i>	16	270	1,000
<b>Sample Location</b>			
SS-A2	18.8	<b>723 J</b>	<b>1530</b>
SS-A3 / DUP-03	<b>32.1 / 19.6 J</b>	92.3 J/ 317 J	<b>897 / 298</b>
SS-A9	<b>15.6 J</b>	67.3	95
SS-B3	<b>79.7 J</b>	15.7	16.4
SS-C7	<b>24.5</b>	37.9	8.8

J= Indicates an estimated value detected below the reporting limit.

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

All units are in mg/Kg

**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Subsurface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SB-A1	SB-A2 / DUP-03	SB-A3
<b>Parcel A</b>						
2-Methylnaphthalene	410	NS	NS	<b>3,200 J</b>	48 J / 36 J	150 J
Benzo(a)Anthracene	1,000	1,000	5,600	<b>14,000</b>	<b>2,000 J / 1,300 J</b>	<b>1,800</b>
Benzo(a)Pyrene	1,000	1,000	1,000	<b>14,000</b>	<b>1,900 J / 1,300 J</b>	<b>1,600</b>
Benzo(b)Fluoranthene	1,000	1,000	5,600	<b>17,000</b>	<b>2,500 J / 1,400 J</b>	<b>1,800</b>
Chrysene	1,000	1,000	56,000	<b>15,000</b>	<b>2,000 J / 1,300 J</b>	<b>1,700</b>
Dibenzo(A,H)Anthracene	330	330	560	<b>2,800 J</b>	370 J / 220	280
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	<b>8,400</b>	<b>1,100 J / 650 J</b>	<b>850</b>

All units are in µg/Kg .

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.

**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Subsurface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SB-B2 / DUP-02-SB	SB-B3
<b>Parcel B</b>					
2-Methylnaphthalene	410	NS	NS	860 J / 890 J	55 J
Benzo(a)Anthracene	1,000	1,000	5,600	<b>13,000 / 13,000</b>	<b>3,800</b>
Benzo(a)Pyrene	1,000	1,000	1,000	<b>13,000 / 13,000</b>	<b>3,900</b>
Benzo(b)Fluoranthene	1,000	1,000	5,600	<b>14,000 / 15,000</b>	<b>5,600</b>
Chrysene	1,000	1,000	56,000	<b>12,000 / 13,000</b>	<b>5,000</b>
Dibenzo(A,H)Anthracene	330	330	560	<b>2,400 / 2,200</b>	400 U
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	<b>7,000 / 6,400</b>	<b>2,700</b>

All units are in µg/Kg .

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

U = The compound was not detected at the indicated concentration.

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.

**Table B-2 – Contaminants Detected in Soil – Continued**  
**Contaminants Detected in Subsurface Soils**

	Part 375 Residential	Part 375 Restricted Residential	Part 375 Commercial	SB-C3
<b>Parcel C</b>				
Benzo(a)Anthracene	1,000	1,000	5,600	<b>1,200 J</b>
Benzo(a)Pyrene	1,000	1,000	1,000	<b>1,200 J</b>
Benzo(b)Fluoranthene	1,000	1,000	5,600	<b>1,300 J</b>
Chrysene	1,000	1,000	56,000	<b>1,200 J</b>
Indeno(1,2,3-Cd)Pyrene	500	500	5,600	<b>700 J</b>

All units are in µg/Kg .

Values shown in BOLD exceed the 6 NYCRR Part 375 Residential Soil Cleanup Objective

Values that are highlighted exceeds the 6 NYCRR Part 375 Commercial Soil Cleanup Objective

J = Data indicates the presence of a compound that meets the identification criteria. The result is less than the quantitation limit but greater than MDL.

Table B-3 - Assessment of Detected Chemicals

Chemical Name (or class)	REL/PEL/TLV	Other Pertinent Limits (Specify)	Warning Properties – Odor Threshold	Potential Exposure Pathways	Acute Health Effects	Chronic Health Effects
#1 Fuel Oil (Kerosene)	100 mg/m3 (NIOSH)		Colorless to yellowish oily liquid with a strong characteristic odor	Inhalation, Ingestion, Contact	Eye, skin & respiratory irritation; dizziness, drowsiness, nausea, vomit, headache, abdominal pain	Eyes; skin; respiratory system; CNS
#2 Fuel Oil	5 mg/m3 (OSHA)		Colorless to yellowish oily liquid with a strong characteristic odor	Inhalation, Ingestion, Contact	Eye, skin & respiratory irritation; dizziness, drowsiness, nausea, vomit, headache, abdominal pain	Eyes; skin; respiratory system; CNS
#4 Fuel Oil	5 mg/m3 (OSHA)		Colorless to yellowish oily liquid with a strong characteristic odor	Inhalation, Ingestion, Contact	Eye, skin & respiratory irritation; dizziness, drowsiness, nausea, vomit, headache, abdominal pain	Eyes; skin; respiratory system; CNS
Polynuclear Aromatic Hydrocarbons (Coal components)	0.1 mg/m3 (NIOSH) 0.2 mg/m3 (OSHA)		Black, dark brown residue	Inhalation, Ingestion, Contact	Skin irritation	Respiratory system; skin, bladder; kidneys
Arsenic				Inhalation, Ingestion, Contact	Skin irritation	Eyes; skin; respiratory system; CNS; kidneys; GI tract; repro system
Copper	1 mg/m3 (OSHA, NIOSH)		Reddish metal	Inhalation, Ingestion, Contact	Eye irritation	Eyes; skin; respiratory system; liver; kidneys;
Lead	0.050 mg/m3 (OSHA, NIOSH)		Gray metal	Inhalation, Ingestion, Contact		Eyes; CNS; kidneys; GI tract; blood
PEL = OSHA Permissible Exposure Limit; represents the maximum allowable 8-hr. time weighted average (TWA) airborne exposure concentration. TLV = ACGIH Threshold Limit Value; represents the maximum recommended 8-hr. TWA exposure concentration. STEL = OSHA Short-term Exposure Limit; represents the maximum allowable 15 minute TWA exposure concentration. TLV-STEL = ACGIH Short-term Exposure Limit; represents the maximum recommended 15 minute TWA exposure concentration.						

### 3.2 Physical Hazards

Physical hazards associated with the site are:

1. *Slip, Trip, and Fall During All Activities (Uneven Terrain):* The site contains numerous potential safety hazards such as pits, broken glass, slippery surfaces and fire debris. The work itself may be a potential safety hazard. Site personnel should constantly look out for potential safety hazards and should immediately inform the SSHC of any new hazards.
2. *Excavation Debris:* Excavation projects pose potential safety hazards from materials falling from the excavator as they are removed from the working excavation. The excavation work is a potential safety hazard and the SSHC will provide oversight during demolition activities.
3. *Moving Parts of Heavy Equipment:* Heavy equipment poses dangers though moving parts. Where feasible, access to moving parts will be guarded and equipment will be equipped with backup alarms.
4. *Noise from Heavy Equipment:* Work around large equipment often creates excess noise. Engineering controls and personal protective equipment will be used to protect employees' hearing.
5. *Electrical Hazards:* As in all site work, overhead power lines, buried power lines, electrical wires and cables, site electrical equipment, and lightning also pose a potential hazard to site workers. Site personnel should constantly look out for potential safety hazards and should immediately inform the SSHC of any new hazards.
6. *Biological Hazards (Insects, Poison Ivy, etc.):* Other biological hazards that may be present at the site include rodents and insects. PPE can reduce the potential for exposure. The SSHC can assist in determining the correct PPE for the hazard present.

### 3.3 Heat and Cold Stress

Workers will be routinely observed by the SSHC for symptoms of heat stress or cold exposure, as dictated by the weather conditions and work being conducted. Heat stress and cold exposure can be avoided by periodic, regular rest breaks.

Heat stress may be a potential hazard for personnel wearing PPE, particularly working in hot and humid conditions. Workers should take regular rest breaks within a shaded area, removing their PPE, and drink electrolyte replacing liquids and/or water. The SSHC is responsible for scheduling the amount of time each individual can work under the existing site conditions, and how often and how long they will break. Workers will be required to take their breaks in the clean zone after going through the decontamination area, or they may undergo partial decontamination and rest in a clean area within the decontamination area. Please refer to Section 7.2 (Site Control) of this HASP for a detailed description of the above referenced clean zone and decontamination area.

### **3.4 Confined Space Entry**

Excavations do pose a potential confined space entry area. When an excavation becomes a confined space entry area (greater than 4 feet deep), then permit-required confined space entry procedures will be followed should the excavation need to be entered. In addition, air monitoring for oxygen deficiency, LEL, and organic vapors will be performed should the excavation be greater than 4 feet deep. Attempts will be made to collect samples from the excavation without entering the excavation (i.e., from excavator bucket, sampling rods, etc.).



## 4.0 Medical Surveillance Program

### 4.1 General

OSHA in 29 CFR 1910.120, the Hazardous Waste Operations regulations and in 1910.134, the Respiratory Protection regulations, requires medical examinations. The examination may include the OSHA required Medical Questionnaire, Respirator Suitability Form, a Medical Examination, Audiology Test, Pulmonary Function Test, and testing for complete blood count and chemistry profile.

These medical examinations and procedures are performed by or under the supervision of a licensed physician. The medical monitoring is provided to workers free of cost, without loss of pay and at a reasonable time and place. In addition, the need to implement a more comprehensive medical surveillance program will be re-evaluated after an apparent over-exposure incident.

Employees who wear, or may wear, respiratory protection will be provided respirators as regulated by 29 CFR 1910.134 before performing designated duties. Prior to issuance of a respirator, a medical professional must have medically certified the individual's ability to wear respiratory protection. Where the medical requirements of 29 CFR 1910.120 overlap those of 29 CFR 1910.134, the more stringent of the two will be enforced. It is not anticipated the respirator use will be required at the site.

### 4.2 Frequency

1. *Baseline Examinations:* Individuals who are assigned temporarily or permanently to fieldwork at hazardous waste sites or the use of a respirator will receive a baseline examination prior to job assignment.
2. *Periodic Examinations:* Individuals who are assigned temporarily or permanently to fieldwork at hazardous waste sites or the use of a respirator will receive periodic examinations as required.
3. *Termination Examinations:* Field employees permanently leaving the company who were in the medical surveillance program will receive an exit examination.
4. *Possible Exposure Examinations:* As soon as possible upon notification by an employee that the employee has developed signs or symptoms indicating possible overexposure to hazardous substances or health hazards, or that an employee has been injured or exposed above the permissible exposure limits in an emergency situation, that employee will be required to receive medical attention.

### **4.3 Examination Results**

A letter must be received from the attending physician stating the parameters of the examination and whether or not the individual is able to work with or without restriction. This letter will be filed in the employee's file and a copy distributed to the employee. The examining physician makes a report to B&L of any medical condition that would place B&L employees at increased risk when wearing a respirator or other personal protective equipment. B&L maintains the medical records of personnel, as regulated by 29 CFR 1910.120 and 29 CFR 1910.1020, where applicable.

## **5.0 Training Program**

### **5.1 Hazardous Waste Operations Health and Safety Training**

Employees who are assigned to perform duties on hazardous waste sites will receive the OSHA initial 40-hour health and safety training prior to on-site activities, in accordance with 29 CFR 1910.120 (e). In addition, such personnel provide documentation of having received three (3) days of supervised field experience applicable to this site, or receive three (3) days of supervised field experience at this site. Applicable employees will receive yearly 8-hour refresher courses. On-site managers and supervisors who are directly responsible for or who supervise workers engaged in hazardous waste operations receive, in addition to the appropriate level of worker HAZWOPER training described above, 8 (eight) additional hours of specialized supervisory training, in compliance with 29 CFR 1910.120(e)(4).

Because this site meets the definition of a hazardous waste site, employees who work during field activities are required to have completed HAZWOPER initial and refresher training.

### **5.2 Additional Training**

As site activities change, supplemental training will be provided to employees to address changes in identified hazards, risks, operations procedures, emergency response, site control, and personal protective equipment. Specialty training will be provided as determined by task and responsibility.

Site-specific training will be provided to each employee and will be reviewed at safety briefings. Specialized training will be provided as dictated by the nature of site activities. Specialized training will be provided for activities such as the handling of unidentified substances. Employees involved in these types of activities will be given off-site instruction regarding the potential hazards involved with such activities and the appropriate health and safety procedures to be followed. Off-site instruction is meant to include any areas where employees will not be exposed to site hazards.

### **5.3 Other Required Training**

Other training that may be required by workers that is in addition to required training described above is detailed below:

- Hazard communication, in accordance with 29 CFR 1910.1200
- Respirator use, in accordance with 29 CFR 1910.134
- Hearing conservation, in accordance with 29 CFR 1910.95
- Working safely around heavy equipment
- Heat and cold stress prevention
- Confined space entry, in accordance with 289 CFR 1910.146

## **5.4 Pre-Entry Briefing**

A site-specific briefing will be provided to all individuals, including site visitors, who enter this site beyond the site entry point. For visitors, the site-specific briefing provides information about site hazards, the site lay-out including work zones and places of refuge, the emergency alarm system and emergency evacuation procedures, and other pertinent safety and health requirements as appropriate.

The SSHC will brief personnel as to the potential hazards likely to be encountered. Topics will include:

- Availability of this HASP.
- General site hazards and specific hazards in the work areas, including those attributable to the chemicals present.
- Selection, use, testing and care of the body, eye, hand and foot protection being worn, with the limitations of each.
- Decontamination procedures for personnel, their personal protective equipment, and other equipment used on the site.
- Emergency response procedures and requirements.
- Emergency alarm systems and other forms of notification, and evacuation routes to be followed.
- Methods to obtain emergency assistance and medical attention.

## **5.5 Training Records**

Written certification of the successful completion of applicable training requirements for each worker will be maintained on-site during the course of the investigation. Written certificates have been given to each person so certified. Additionally, an employee sign off sheet indicating that each worker has reviewed a copy of this HASP and understands its contents is stored at the same location.

## 6.0 Health and Safety Field Implementation

### 6.1 Personal Protective Equipment Requirements

The requirements for personal protective equipment (PPE) are outlined in Table B-4. Level D protection will initially be worn for excavation activities. Level C protection may be used, based upon a sustained (five (5) minutes or more) readings above five (5) parts per million (ppm) measured with the photoionization detector (PID). The emissions from gasoline or diesel-powered excavation equipment may affect PID readings. At the start of work (excavation equipment in operation, but prior to exposing contaminated soils), an ambient PID reading will be established. This ambient PID reading will be subtracted from subsequent readings to evaluate PPE usage.

See Attachment 3, Regensis Safety Sheet, for recommendations regarding chemical oxidant injections.

Table B-4 Personal Protective Equipment (PPE) Requirements								
Job Tasks	Level of Protection	PPE						
		Suit	Gloves	Feet	Head	Eye	Ear	Respirator
Down-grade	Modified D	Std.	Neoprene or Nitrile	Steel + Booties	HH	Glasses/ Goggles	Plugs/ Muffs	N/A
All on-site	C	PE Tyvek	Neoprene or Nitrile	Steel + Booties	HH	N/A	Plugs/ Muffs	Full APR w/OV& N100
Personal Protective Equipment				Personal Protective Equipment				
SUIT: Std = Standard Work Clothes PE Tyvek = Polyethylene-coated Tyvek				EAR: Plugs = Ear Plugs Muffs = Ear Muffs				
FEET: Steel = Steel-toe Boots Booties = PVC or Latex Booties				RESPIRATOR: APR = Air-purifying respirator Full APR = Full-face APR OV = Organic vapor cartridge N100 = N100 particulate filters				
HEAD: HH = Hard Hat								
EYE: Glasses = Safety Glasses w/side shields Goggles = Safety Goggles								

## **6.2 Community Air Monitoring Plan**

The Site Manager or designee will conduct air monitoring in accordance with the New York State Department of Health (NYSDOH) Community Air Monitoring Plan. Direct reading instruments will be calibrated in accordance with manufacturer's requirements and the results of the calibration will be documented.

This Community Air Monitoring Plan (CAMP) sets forth the procedures for performing real-time monitoring for volatile organic compounds (VOCs) and particulates (i.e., dust) at the downwind perimeter of each designated work area with respect to specific subsurface intrusive activities to be completed as part of the IRM. The CAMP is not intended for use in establishing action levels for worker respiratory protection. Rather, its intent is to provide a measure of protection for the downwind community (i.e., off-site receptors including residences and businesses, and on-site or nearby workers not directly involved with the subject work activities) from potential airborne contaminant releases as a direct result of investigative and remedial work activities. The action levels specified herein require increased monitoring, corrective actions to abate emissions, and/or work shutdown. Additionally, the CAMP helps to confirm that work activities did not spread contamination off-site through the air.

Continuous monitoring will be required for all subsurface intrusive excavation activities. The various field instruments that will be used by on-site personnel to perform the continuous air monitoring are listed in Table B-5 below. Subsurface intrusive activities include, but are not limited to, soil excavation and handling.

VOCs will be monitored at the downwind perimeter of the site, outside the existing building on a continuous basis with the use of a Photoionization detector (PID). Upwind concentrations will be measured at the start of each workday and periodically thereafter to establish background conditions.

- If the ambient air concentration of total organic vapors at the downwind perimeter of the site exceeds five (5) parts per million (ppm) above background for the 15-minute average, work activities must be temporarily halted and monitoring continued. If the total organic vapor level readily decreases (per instantaneous readings) below five (5) ppm over background, work activities can resume with continued monitoring.
- If total organic vapor levels at the downwind perimeter of the site persist at levels in excess of five (5) ppm over background but less than 25 ppm, work activities must be halted, the source of vapors identified, corrective actions taken to abate emissions, and monitoring continued. After these steps, work activities can resume provided that the total organic vapor level 200 feet downwind of the exclusion zone or half the distance to the nearest potential receptor or residential/commercial structure, whichever is less - but in no case less than 20 feet, is below five (5) ppm over background for the 15-minute average.

- If the organic vapor level is above 25 ppm at the perimeter of the site, activities must be shutdown.

All 15-minute readings will be recorded and made available for NYSDEC and NYSDOH personnel to review. Instantaneous readings, if any, used for decision making purposes will also be recorded.

Particulate concentrations will also be monitored continuously at the upwind and downwind perimeters of the exclusion zone or work area during the performance of the IRM. The particulate monitoring will be performed using real-time monitoring equipment capable of measuring particulate matter less than 10 micrometers in size (PM-10) and capable of integrating over a period of 15 minutes (or less) for comparison to the airborne particulate action level. The equipment will be equipped with an audible alarm to indicate exceedance of the action level. In addition, fugitive dust migration will be visually assessed during all work activities.

- If the downwind PM-10 particulate level is 100 micrograms per cubic meter (mcg/m<sup>3</sup>) greater than background (upwind perimeter) for the 15-minute period or if airborne dust is observed leaving the work area, then dust suppression techniques will be employed. Work may continue with dust suppression techniques if downwind PM-10 particulate levels do not exceed 150 mcg/m<sup>3</sup> above the upwind level and if no visible dust is migrating from the work area.
- If, after implementation of dust suppression techniques, downwind PM-10 particulate levels are greater than 150 mcg/m<sup>3</sup> above the upwind level, work must be stopped and a re-evaluation of activities initiated. Work can resume if dust suppression measures and other controls are successful in reducing the downwind PM-10 particulate concentration to within 150 mcg/m<sup>3</sup> of the upwind level and in preventing visible dust migration.

All readings will be recorded and made available for NYSDEC and NYSDOH personnel to review.

Table B-5 Monitoring Protocols and Contaminant Action Levels				
Contaminant/ Atmospheric Condition	Monitoring Equipment	Monitoring Protocol	Breathing Zone* Action Level Concentrations	
			Monitored Level For Mandatory Respirator Use**	Monitored Level For Mandatory Work Stoppages***
VOCs	Photoionization detector (PID) with an 10.6 eV lamp	Initially readings will be recorded every 15 minutes. If no sustained readings are obtained in the breathing zone, readings will be recorded every 30 minutes.	5 ppm above background	25 ppm above background

Table B-5 Monitoring Protocols and Contaminant Action Levels				
Contaminant/ Atmospheric Condition	Monitoring Equipment	Monitoring Protocol	Breathing Zone* Action Level Concentrations	
			Monitored Level For Mandatory Respirator Use**	Monitored Level For Mandatory Work Stoppages***
Particulates	MiniRam or Dustrak or Equivalent	Continuously during intrusive activities that can generate dust, e.g. monitoring well installation, test pits		150 ug/m3 at fence line (institute engineering controls to control dust) per NYSDEC TAGM 4031
<p>* Monitoring performed in the breathing zone for sustained readings of 5 minutes or more. Monitor source first; if the source is near or above the action level concentration, monitor in the breathing zone.</p> <p>** Monitored levels will require the use of approved respiratory protection specified in Table B-3.</p> <p>*** Consult the Site manager.</p>				

### 6.3 Decontamination Procedures

Depending on the specific job task, decontamination may include personnel themselves, tools, and/or heavy equipment. The specified level of protection for a task (A, B, C, or D) does not itself define the extent of personal protection or equipment decontamination. For instance, Level C without dermal hazards will require less decontamination than Level C with dermal hazards. Heavy equipment will always require decontamination to prevent cross-contamination. The following sections summarize general decontamination protocols.

#### 6.3.1 Heavy Equipment

Heavy equipment will be decontaminated prior to personnel decontamination. Heavy equipment, drilling rods, augers and/or buckets will be steam cleaned after use at the designated decontamination area. In addition, containment systems will be set-up at the designated decontamination area for collection of decon fluids and materials.

#### 6.3.2 Personnel

In general, decontamination involves scrubbing with a non-phosphate soap/water solution followed by clean water rinses. Disposable items will be disposed of in a dry container.

Reusable protection will be washed with soap and clean potable water and air-dried prior to storage. Dirt, oil, grease or other foreign materials that are visible will be removed from surfaces. Scrubbing with a brush may be required to remove materials that adhere to the surfaces. Certain parts of contaminated respirators, such as harness assemblies and leather or cloth components, are difficult to decontaminate. If grossly contaminated, they may be discarded in a designated container. Rubber components can be soaked in soap and water and scrubbed with a brush.



The following decontamination protocol will be used, as appropriate to the level of PPE being used:

- Drop hand tools and equipment in the designated decontamination area.
- Either wash outer rubber boots or dispose of booties.
- Rinse outer boots.
- Wash and rinse outer gloves.
- Remove outer boots and gloves, dispose gloves if necessary in the container designated for PPE waste.
- Replace cartridges if required.
- Remove and dispose Tyvek coverall in the designated PPE waste container.
- Remove respirator, dispose cartridges as required in the container designated for PPE waste.
- Personnel should wash their respirator at the end of each workday.

#### ***6.3.3 Decontamination Wastes and Investigation Derived Wastes***

Decontamination wash and rinse waters and investigation derived wastes (IDW) will be managed according to applicable regulatory guidelines.

- Spent decon solutions may be required to be drummed and disposed of as hazardous waste and/or solvent solutions may be required to be segregated from water rinses.
- Decontamination shall be performed in a manner that minimizes the amount of waste generated.
- IDW may be required to be drummed and disposed of as hazardous waste.

## 7.0 Site Operating Procedures

These following guidelines comply with the established guidelines of the Barton & Loguidice, P.C., Corporate Health and Safety Program:

All field investigation activities must be coordinated through the Site Manager.

During any activity conducted on-site in which a potential exists for exposure to hazardous materials, accident or injury, at least two (2) persons must be present who are in constant communication with each other. At least two (2) persons must also be present during all demolition or excavation activities.

Samples obtained from areas known or suspected to contain contaminated substances or materials must be handled with appropriate personal protection equipment.

All equipment used to conduct the Site Investigation must be properly decontaminated and maintained in good working order. Equipment must be inspected for signs of defects and/or contamination before and after each use.

The discovery of any condition that would suggest the existence of a situation more hazardous than anticipated will result in the evacuation of the activity zone until a complete evaluation of the hazard can be performed.

### 7.1 Daily Operating Procedures

The following are the daily operating procedures that are to be followed by on-site personnel:

- Hold Tailgate Safety Meetings prior to work start and as needed thereafter (suggest daily; however, minimum of weekly).
- Use monitoring instruments and follow designated protocol and contaminant action levels.
- Use PPE as specified.
- Use hearing protection around heavy equipment.
- Remain upwind of operations and airborne contaminants, if possible.
- Establish a work/rest regimen when ambient temperatures and protective clothing create potential thermal hazards.
- Eating, drinking, applying cosmetics and smoking are prohibited in work areas.
- Refer to the SSHC for specific safety concerns for each individual site task.
- On-site personnel are encouraged to be alert to their own physical condition, as well as their co-workers.
- **All accidents, no matter how minor**, must be immediately reported to the SSHC.

## 7.2 Site Control

The purpose of site control is to minimize the exposure of site workers to potential contamination, protect the public from the site's hazards, and prevent vandalism. The degree of site control necessary depends on site characteristics and the surrounding community. At this time, there are no access restrictions to the site. During the field activities, Barton & Loguidice, P.C. (B&L), and Steel Treaters are requesting that personnel, subcontractors and visitors report to the on-site B&L supervisor prior to entering the work area.

Since there are no access restrictions to the Site, particular attention will be placed on the condition of the site regarding three (3) main work zone areas:

### *Activity Zone*

This zone applies to the immediate work area and includes all materials, equipment, vehicles and personnel involved in the site activity. For example, during the installation of a monitoring well, the activity zone will encompass the borehole, drilling rig, monitoring well construction materials and equipment, sampling equipment, decontamination supplies, and drilling/well inspection personnel. Site control measures will include flagging the perimeter of the activity zone to clearly mark the limits of work and to warn passers-by and visitors of the site activity. In addition, the site supervisor will maintain communication with City personnel as the location of this zone (and the type of work being performed) changes throughout the project.

The required level of PPE in the activity zone can vary according to job assignment. This will allow a flexible, effective, and less costly operation, while still maintaining a high degree of safety.

This area will be limited to authorized personnel from B&L, regulatory agencies, and contractors/subcontractors to the B&L and/or Steel Treaters. Personnel entering this area will be required to comply with their own HASP that is at least as stringent as this HASP.

### *Decontamination Zone*

In order to prevent incidental contact with contaminants on investigation equipment or in the wash water, activities within the decontamination area will be completed before subsequent site work or other activity begins. This includes:

- Complete removal of contaminants on all equipment used during the preceding phase of the investigation;
- Placement of the waste wash water and sediment in sealed drums;
- Storage of the drums in a secure and out-of-the-way place for future disposal;
- Proper labeling of drum contents;
- Cleanup (if necessary) of area outside of decontamination area; and

### *Support Zone*

The support zone is the location of the administrative and other support functions needed to keep the operations in the activity and decontamination zone running smoothly. Any function that need not or cannot be performed in a hazardous atmosphere is performed here. Personnel may wear normal work clothes within this zone. Any potentially contaminated clothing, equipment and samples must remain in the decontamination zone until decontaminated. All emergency telephone numbers, change for the telephone (if necessary), evacuation route maps, and vehicle keys should be kept in the support zone.

The SSHC will establish a decontamination system and decontamination procedures appropriate to the site and the work that will prevent potentially hazardous materials from leaving the site. All personnel exiting the activity zone will be decontaminated prior to entering the support zone. The decontamination procedures will be reviewed at each daily safety briefing.

Personal hygiene facilities meeting at least the minimum requirements of 29 CFR Part 1910.120 will be provided nearby.

Upon completion of the day's activities, heavy machinery and equipment will be stored securely within the site, or at a location selected by the SSHC.

### **7.3 Buddy System**

Most activities in a contaminated or otherwise hazardous area should be conducted with a partner who is able to:

- Provide his or her partner with assistance.
- Observe his or her partner for signs of chemical or heat exposure.
- Periodically check the integrity of his or her partner's protective clothing.
- Notify the SSHC if emergency help is needed.

### **7.4 Engineering Controls**

Engineering controls and work practices are primarily for limiting exposure through application of engineered barriers. They will be applied to this project when and where they are practicable. The following engineering controls may be applied on this project: water spray, covering of materials, site preparation to facilitate operations and remove obvious physical hazards, and warning alarms/devices.

## **8.0 Emergency Response Procedures**

### **8.1 Pre-Emergency Planning**

Planning for emergencies is a crucial part of emergency response. The SSHC is responsible for training all employees in potential site hazards and the emergency response procedures.

### **8.2 Personnel Roles**

The SSHC is responsible for responding to, or coordinating the response of, off-site personnel to emergencies. In the event of an emergency, the SSHC will direct all notification, response and follow-up actions. Contacts with outside response personnel (hospital, fire department, etc.) will be done at the direction of the SSHC.

Prior to the start of work on the site, the SSHC will:

1. Notify emergency contacts, and/or health care facilities of the potentially hazardous activities and potential wastes that may develop as a result of the activities performed on-site;
2. Confirm that the following safety equipment is available: eyewash and safety shower station, first aid supplies, air horn, and fire extinguishers;
3. Have a working knowledge of the safety equipment available; and
4. Confirm directions to the hospital are prominently posted with the emergency telephone numbers.

Employees who will respond to emergencies involving hazardous materials will be trained in how to respond to such emergencies.

The SSHC will check daily to see that the following safety equipment is available at the site: eyewash station, first aid supplies, and fire extinguisher.

The SSHC will be responsible for directing notification, response and follow-up actions and for contacting outside response personnel (ambulance, fire department or others) prior to and during an emergency. Upon notification of an exposure incident, the SSHC will call the Hospital and fire and police emergency response personnel for recommended medical diagnosis, treatment, if necessary, and transportation to the hospital.

The SSHC must conduct an investigation of the incident as soon as possible. The SSHC will determine whether and at what levels exposure actually occurred, the cause of such exposure, and the means to prevent similar incidents from occurring. The resulting report must be accurate, objective, complete and signed and dated.

### **8.3 Safe Distances and Places of Refuge**

In case of an emergency, a designated off-site area will serve as the immediate place of refuge. Personnel in the exclusion zone should evacuate through the decontamination zone to the refuge location, both for their own personal safety and to prevent hampering response/rescue efforts. Following an evacuation, the SSHC will account for on-site personnel. If evacuation from the work site is necessary, the project vehicles will be used to transport on-site personnel to a place of refuge.

### **8.4 Emergency Communications**

There will be a cellular telephone located in either the Site Manager's and/or SSHC's vehicle for emergency use. Emergency telephone numbers are listed in Attachment 7 of this HASP. There will be air horns, walkie-talkies, and/or other audible emergency signals located within the exclusion zone and decontamination area to signal others of an emergency. The SSHC should brief all personnel regarding audible emergency signals to be used during the site activities prior to starting the work. Site personnel will use the following hand signals to inform others of emergencies:

- Hand gripping throat - out of air, cannot breathe.
- Grip partner's wrist or both hands around waist - leave area immediately.
- Hands on top of head - need assistance.
- Thumbs up - everything's OK, or I understand.
- Thumbs down - No.

### **8.5 Emergency Procedures**

The nature of work at a contaminated or potentially contaminated work site makes emergencies a continual possibility. Although emergencies are unlikely and occur infrequently, a contingency plan is required to assure timely and appropriate response actions. The contingency plan is reviewed at tailgate safety meetings.

#### **8.5.1 Incident Procedures**

If an emergency incident occurs, the following actions will be taken:

1. Size-up the situation based upon available information.
2. Notify the SSHC.
3. Only respond to an emergency if personnel are sufficiently trained and properly equipped.
4. As appropriate, evacuate site personnel and notify emergency response agencies, e.g., police, fire, etc.

5. As necessary, request assistance from outside sources and/or allocate personnel and equipment resources for the response.
6. Consult the posted emergency telephone list and contact key project personnel.
7. Prepare an incident report.

All site personnel should be aware of the location of fire fighting equipment. Personnel shall only extinguish minor fires. Large fires will require contacting the local fire department and allowing them to handle the fire. The local fire department will be contacted prior to initiating site activities to inform them of the potential hazardous materials that could be encountered in an emergency.

### **8.5.2 Medical Emergencies**

In the event of an accident or injury, workers will immediately implement emergency decontamination and isolation measures to assist those who have been injured or exposed and to protect others from the hazards. Upon notification of an exposure incident, the SSHC will contact the emergency response personnel who can provide medical diagnosis and treatment. If necessary, immediate medical care will be provided by trained personnel competent in first aid procedures. Trained personnel competent in such matters will only provide other on-site medical and/or first aid response to an injury or illness.

If an individual is transported to a hospital or doctor, a copy of this HASP will accompany the individual.

The SSHC will be notified when an accident or incident occurs and will respond according to the seriousness of the incident. The SSHC will investigate facility/site conditions to determine whether and at what levels exposure actually occurred, the cause of such exposure and the means to be taken to prevent the incident from recurring.

The SSHC and the exposed individual will complete an exposure-incident investigation. The SSHC will prepare a signed and dated report documenting the investigation. The SSHC and the exposed individual will also complete an exposure-incident reporting form. The form will be filed with the employee's medical and safety records to serve as documentation of the incident and the actions taken.

Emergency first aid may include taking care of minor scrapes to performing CPR. All site personnel should be familiar with the location of the site first aid kits. The site safety officer should be trained in first aid and CPR. Contacting hospital and/or emergency agencies shall be made on a case by case basis depending on the severity of the injury. If an off-site emergency agency is contacted, all the details relating to the injury should be relayed to that agency. All site injuries should be documented. The following actions should be taken if someone requires first aid:

1. Survey the scene to determine if it is safe to reach the injured person.

2. Ask the injured person what happened. If the person is unconscious, look for signs as to what may have occurred.
3. See if there are others injured.
4. Reassure the victim. Contact others for help; tell them to call the appropriate emergency agency.
5. If it is safe to move the victim, return them back to the field office.

Only trained personnel should perform CPR or rescue breathing on an unconscious victim.

Personnel who experience heat stress or frost bite should be attended to in the following manner:

Heat Stress - Symptoms include cool, pale and moist skin, heavy sweating, headache, and nausea. This person should be removed from the hot environment immediately, and allowed to lie on their back. Apply cold packs or make sure they are in an air-conditioned room. Give them plenty of water and/or electrolyte-replacing fluids. Should a victim experience heat stroke (high body temperature, red skin) the body must be cooled down quickly and receive medical attention immediately. Persons experiencing heat stress or heat stroke should be attended to until the situation has been remedied.

Frostbite - Symptoms include slightly flushed skin that becomes white, pain at extremities in early stages. Get a victim experiencing frostbite to a warm area and put the frostbitten parts in warm (100-105° F) water. Loosely bandage injured parts after soaking.

Hypothermia - Under conditions of cold temperatures and high winds, there is the potential for workers experiencing hypothermia. Signs of hypothermia include: shivering, dizziness, numbness, confusion, or drowsiness. Warm up this person's body with dry clothes and a blanket, if available. Call the appropriate emergency agency or take this person to the hospital.

## **8.6 Emergency Routes**

Should an emergency signal be sounded, on-site personnel should immediately stop what they are doing, and return to the decontamination area. Personnel in the decontamination area and the support zone should evaluate the emergency and contact the appropriate off site emergency personnel. Once on site personnel return to the decontamination area, there will be someone there to direct them as to what to do. It is imperative that the SSHC or designated alternate account for all site personnel. The SSHC should direct all personnel to the nearest safe refuge.

**The hospital route is included as an attachment.**

If the emergency event threatens the surrounding community, it is important that the local police and fire departments be contacted immediately regarding the potential danger.



## **8.7 Spill Control**

A major spill is not anticipated at the site. Should a spill of any type occur, the employee should report it immediately to the SSHC, who will make arrangements for the proper cleanup of the spill. These arrangements will include diking and ditching, as necessary, as well as the use of absorbents such as vermiculite or Speedi Dry. The emergency response personnel will be contacted immediately by SSHC in the event that on-site materials can not immediately contain the spill.

## **8.8 Personal Protective and Emergency Equipment**

There will be suitable equipment on site for small emergency events such as additional PPE, fire extinguishers and first aid kits. In the event of a major emergency event, off-site personnel will be contacted immediately.

## **8.9 Decontamination Procedures**

The extent of emergency decontamination depends on the severity of the injury or illness and the nature of the contamination. Minimum decontamination will consist of detergent washing, rinsing, and removal of contaminated outer clothing and equipment. If time does not permit the completion of all of these actions, it is acceptable to remove the contaminated clothing without washing it. If the situation is such that the contaminated clothing cannot be removed, the person should be given required first aid treatment, and then wrapped in plastic or a blanket prior to transport to medical care. If heat stress is a factor in the victim's illness/injury, the outer protective garment will be removed immediately.

## **8.10 Evacuation Routes**

Unless otherwise directed, evacuation will be made through the decon area to the designated refuge location for a head count.

## **8.11 Response Critique**

Should an incident on-site occur, the SSHC will analyze the response efforts in order to continually improve on-site conditions and procedures. The SSHC must complete follow-up activities before on-site work is resumed following an emergency. Used emergency equipment must be recharged, refilled or replaced. Government agencies must be notified as required in their regulations.

## Attachment 1


### Driving directions to Ellis Hospital

1.0 mi – about 2 mins

**A** 301 Nott St  
Schenectady, NY 12305

1. Head **east** on **Nott St** toward **Erie Blvd/Maxon Rd** 1.0 mi  
Destination will be on the left

**B** Ellis Hospital  
1101 Nott St  
Schenectady, NY

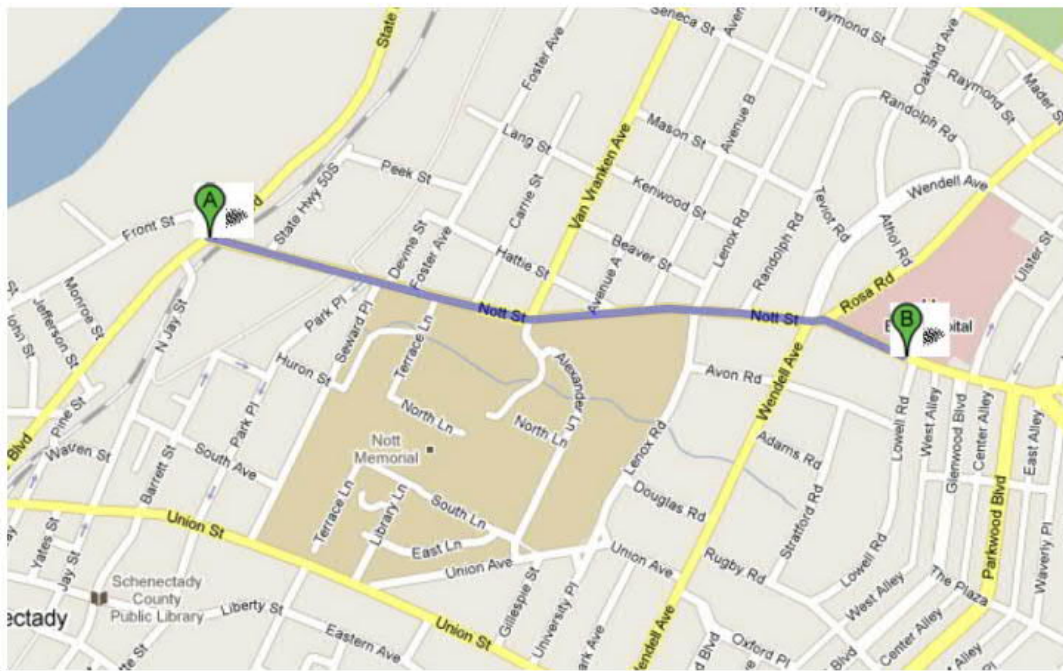

(This should be posted at a conspicuous location at the site.)

**Attachment 2****Emergency Contacts  
(To Be Posted)**

<b>Contact</b>	<b>Person or Agency</b>	<b>Phone Number</b>
Maxon-ALCO Holdings LLC	Steve Luciano	(518) 356-4445
NYSDEC Region 4 Project Manager	John Strang	(518) 357-2390
Law Enforcement	(C) Schenectady PD	911
Fire Department	(C) Schenectady FD	911
Confined Space Rescue (Fire Department)	(C) Schenectady FD	911
Ambulance		911
Hospital - Emergency	Ellis Hospital	(518) 243-4000
B&L Site Manager/Site Safety Officer	Andrew J Barber	(518) 218-1801
B&L Officer-in-Charge	Scott D. Nostrand, P.E.	(315) 457-5200

**Attachment 3**

**Regenesis Safety Sheet**



## Packaging, Storage, Health and Safety

PersulfOx® is a chemical oxidation technology developed by REGENESIS for the remediation of organic contaminants in soil and groundwater which employs a patented “catalyzed persulfate” technology. PersulfOx is mixed with water and applied to the contaminated matrix via mixing equipment or subsurface injection techniques. When adding the fine dry PersulfOx powder to the mix water, proper handling and dust precautions should be followed as indicated in the Health and Safety section below (also review the MSDS).

### ***Packaging and Storage:***

PersulfOx is a dry, white, and free flowing powder delivered in 5 gallon HDPE pails or 55.1 lb (25 kg) bags. It ships as a DOT 5.1 Class Oxidizer and should be handled according to rules and regulations governing oxidizers. PersulfOx should be stored in a cool (<40° C), clean, dry, and well-ventilated area and away from heat and moisture. It should not be stored with combustible or reducing materials.

### ***Health and Safety:***

PersulfOx is engineered for ease of handling in the field and can be safely mixed without the risks and potential hazards associated with most other chemical oxidants such as alkaline activated sodium persulfate. However, PersulfOx is an oxidizer/catalyst powder mixture, therefore Level C proper protective equipment (PPE) is recommended for all personnel working with or in areas of potential contact with PersulfOx. In addition, PersulfOx is an alkaline product when in solution; if left to stand for a long periods, persulfate based products can become acidic. Under either alkaline or acidic conditions PersulfOx can be caustic and corrosive and can degrade equipment surfaces.

#### Personal Protective Equipment (PPE)

- **Eye protection** – wear well sealed goggles or a face shield (face shield recommended for full face protection)
- **Head** – hard hat when required
- **Respiratory** – use NIOSH (P100) approved respirator when airborne dust is expected
- **Hands** – wear chemical resistant gloves (neoprene, rubber, PVC)
- **Feet** – wear steel toe shoes with chemical resistant soles or neoprene boots
- **Clothing** – wear long sleeve shirts and long pants. Consider using a Tyvek® body suit, Carhartt® coverall or splash gear
- **Engineering Controls**-ventilation is required if used indoors. Controls should be maintained to avoid creation of dusts and mists



**REGENESIS**

Advanced Technologies for Groundwater Resources

REGENESIS / 949-366-8000 / [www.regenesis.com](http://www.regenesis.com)

Attachment B



## 1. Identification

<b>Product identifier</b>	<b>PersulfOx®</b>
<b>Other means of identification</b>	None.
<b>Recommended use</b>	Soil and Groundwater Remediation.
<b>Recommended restrictions</b>	None known.
<b>Manufacturer/Importer/Supplier/Distributor information</b>	
<b>Company Name</b>	RegenesiS
<b>Address</b>	1011 Calle Sombra San Clemente, CA 92673
<b>Telephone</b>	949-366-8000
<b>E-mail</b>	CustomerService@regenesiS.com
<b>Emergency phone number</b>	CHEMTREC® at 1-800-424-9300 (International)

## 2. Hazard(s) identification

<b>Physical hazards</b>	Oxidizing solids	Category 3
<b>Health hazards</b>	Acute toxicity, oral	Category 4
	Skin corrosion/irritation	Category 2
	Serious eye damage/eye irritation	Category 2A
	Sensitization, respiratory	Category 1
	Sensitization, skin	Category 1
	Specific target organ toxicity, single exposure	Category 3 respiratory tract irritation
<b>OSHA defined hazards</b>	Not classified.	

### Label elements



**Signal word** Danger

**Hazard statement** May intensify fire; oxidizer. Harmful if swallowed. Causes skin irritation. May cause an allergic skin reaction. Causes serious eye irritation. May cause allergy or asthma symptoms or breathing difficulties if inhaled. May cause respiratory irritation.

### Precautionary statement

#### Prevention

Keep away from heat. Keep/Store away from clothing and other combustible materials. Avoid breathing dust. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Contaminated work clothing must not be allowed out of the workplace. Wear protective gloves/eye protection/face protection. In case of inadequate ventilation wear respiratory protection.

#### Response

If swallowed: Call a poison center/doctor if you feel unwell. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a poison center/doctor if you feel unwell. Rinse mouth. If skin irritation or rash occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. If experiencing respiratory symptoms: Call a poison center/doctor. Take off contaminated clothing and wash before reuse. In case of fire: Use appropriate media to extinguish.

#### Storage

Store in a well-ventilated place. Keep container tightly closed. Store locked up.

#### Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

**Hazard(s) not otherwise classified (HNOC)**

None known.

### 3. Composition/information on ingredients

#### Mixtures

Chemical name	CAS number	%
Silicic Acid, sodium salt, sodium silicate	1344-09-8	≤10
Sodium Persulfate	7775-27-1	≥90

**Composition comments** All concentrations are in percent by weight unless otherwise indicated.

### 4. First-aid measures

<b>Inhalation</b>	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. If experiencing respiratory symptoms: Call a POISON CENTER or doctor/physician.
<b>Skin contact</b>	Remove contaminated clothing immediately and wash skin with soap and water. In case of eczema or other skin disorders: Seek medical attention and take along these instructions.
<b>Eye contact</b>	Do not rub eyes. Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.
<b>Ingestion</b>	Rinse mouth. Never give anything by mouth to a victim who is unconscious or is having convulsions. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Get medical advice/attention if you feel unwell.
<b>Most important symptoms/effects, acute and delayed</b>	Irritation of eyes. Exposed individuals may experience eye tearing, redness, and discomfort. Dusts may irritate the respiratory tract, skin and eyes. Difficulty in breathing. Skin irritation. May cause redness and pain. May cause an allergic skin reaction. Dermatitis. Rash.
<b>Indication of immediate medical attention and special treatment needed</b>	Provide general supportive measures and treat symptomatically. Keep victim warm. Keep victim under observation. Symptoms may be delayed.
<b>General information</b>	Take off all contaminated clothing immediately. Contact with combustible material may cause fire. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

### 5. Fire-fighting measures

<b>Suitable extinguishing media</b>	Water spray, fog (flooding amounts).
<b>Unsuitable extinguishing media</b>	Do not use water unless flooding amounts are available. Material reacts with water. Do not use carbon dioxide or other gas filled fire extinguishers; they will have no effect on decomposing persulfates.
<b>Specific hazards arising from the chemical</b>	Greatly increases the burning rate of combustible materials. Containers may explode when heated. During fire, gases hazardous to health may be formed. Combustion products may include: sulfur oxides.
<b>Special protective equipment and precautions for firefighters</b>	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
<b>Fire fighting equipment/instructions</b>	In case of fire and/or explosion do not breathe fumes. Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers.
<b>Specific methods</b>	Cool containers exposed to flames with water until well after the fire is out. Avoid dust formation.
<b>General fire hazards</b>	May intensify fire; oxidizer. Contact with combustible material may cause fire.

### 6. Accidental release measures

<b>Personal precautions, protective equipment and emergency procedures</b>	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep away from clothing and other combustible materials. Wear appropriate protective equipment and clothing during clean-up. Avoid inhalation of dust. Use a NIOSH/MSHA approved respirator if there is a risk of exposure to dust/fume at levels exceeding the exposure limits. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
--	---



## Methods and materials for containment and cleaning up

Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Avoid dispersal of dust in the air (i.e., clearing dust surfaces with compressed air). Collect dust using a vacuum cleaner equipped with HEPA filter. If sweeping of a contaminated area is necessary use a dust suppressant agent which does not react with the product. Keep combustibles (wood, paper, oil, etc.) away from spilled material. Ventilate the contaminated area. Stop the flow of material, if this is without risk. Spillage collected should be monitored for signs of reaction or decomposition (fuming/smoking). If spilled material is wet, dissolve with large quantity of water.

Large Spills: Sweep up or vacuum up spillage and collect in suitable container for disposal. Minimize dust generation and accumulation. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use. Place all material into loosely covered plastic containers for later disposal. For waste disposal, see section 13 of the SDS. Wear appropriate protective equipment and clothing during clean-up.

## Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

## 7. Handling and storage

### Precautions for safe handling

Minimize dust generation and accumulation. Routine housekeeping should be instituted to ensure that dusts do not accumulate on surfaces. Keep away from heat. Provide appropriate exhaust ventilation at places where dust is formed. Keep away from clothing and other combustible materials. Take any precaution to avoid mixing with combustibles. Avoid contamination. Wear appropriate personal protective equipment (See Section 8). Avoid breathing dust. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Observe good industrial hygiene practices.

### Conditions for safe storage, including any incompatibilities

Store locked up. Keep away from heat. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Do not store near combustible materials. Store away from incompatible materials (see Section 10 of the SDS). Recommended storage temperature: less than 40°C.

## 8. Exposure controls/personal protection

### Occupational exposure limits

#### US. ACGIH Threshold Limit Values

Components	Type	Value
Sodium Persulfate (CAS 7775-27-1)	TWA	0.1 mg/m3

### Biological limit values

No biological exposure limits noted for the ingredient(s).

### Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. If engineering measures are not sufficient to maintain concentrations of dust particulates below the Occupational Exposure Limit (OEL), suitable respiratory protection must be worn. Eye wash facilities and emergency shower must be available when handling this product.

### Individual protection measures, such as personal protective equipment

#### Eye/face protection

Use dust-tight, unvented chemical safety goggles when there is potential for eye contact.

#### Skin protection

##### Hand protection

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier. Frequent change is advisable. Rubber, neoprene or PVC gloves are recommended.

##### Other

Wear appropriate chemical resistant clothing.

#### Respiratory protection

Use a NIOSH/MSHA approved respirator if there is a risk of exposure to dust/fume at levels exceeding the exposure limits. Respirator type: approved respirator with P100 filters.

#### Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

### General hygiene considerations

Keep from contact with clothing and other combustible materials. Remove and wash contaminated clothing promptly. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Contaminated work clothing should not be allowed out of the workplace.

## 9. Physical and chemical properties

### Appearance

Physical state	Solid.
Form	Free-flowing powder
Color	White.
Odor	Odorless.
Odor threshold	Not available.
pH	11.5 (10% suspension/water) (10 % solution, 77 °F (25 °C))
Melting point/freezing point	Not available.
Initial boiling point and boiling range	Not available.
Flash point	Not applicable.
Evaporation rate	Not available.
Flammability (solid, gas)	Oxidizer.

### Upper/lower flammability or explosive limits

Flammability limit - lower (%)	Not available.
Flammability limit - upper (%)	Not available.
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	Not available.
Vapor density	Not available.
Relative density	1.5 - 1.8 (68 °F (20 °C))
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	Not available.
Decomposition temperature	Decomposition will occur upon heating.
Viscosity	Not available.
Other information	
Flammability	Non-combustible.

## 10. Stability and reactivity

Reactivity	Greatly increases the burning rate of combustible materials.
Chemical stability	Decomposes on heating.
Possibility of hazardous reactions	Oxidizing, avoid contact with reducing agents.
Conditions to avoid	Heat. Contact with incompatible materials. Avoid dust formation.
Incompatible materials	Acids. Bases. Combustible material. Reducing agents. Metals. Organic compounds.
Hazardous decomposition products	Oxygen. Sulfur oxides.

## 11. Toxicological information

### Information on likely routes of exposure

Inhalation	May cause allergy or asthma symptoms or breathing difficulties if inhaled. Dust may irritate respiratory system.
Skin contact	Causes skin irritation. May cause an allergic skin reaction.
Eye contact	Causes serious eye irritation.
Ingestion	Harmful if swallowed.

**Symptoms related to the physical, chemical and toxicological characteristics**

Severe eye irritation. Dusts may irritate the respiratory tract, skin and eyes. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Difficulty in breathing. Skin irritation. May cause redness and pain. May cause an allergic skin reaction. Dermatitis. Rash.

**Information on toxicological effects****Acute toxicity**

Harmful if swallowed. May cause allergic respiratory and skin reactions. May cause respiratory irritation.

**Components****Species****Test Results**

Silicic Acid, sodium salt, sodium silicate (CAS 1344-09-8)

**Acute***Oral*

LD50

Rat

1280 mg/kg

Sodium Persulfate (CAS 7775-27-1)

**Acute***Dermal*

LD50

Rabbit

> 10000 mg/kg

*Inhalation*

LC50

Rat

> 5.1 mg/l, 4 Hours

*Oral*

LD50

Rat

895 mg/kg

**Skin corrosion/irritation**

Causes skin irritation.

**Serious eye damage/eye irritation**

Causes serious eye irritation.

**Respiratory or skin sensitization****Respiratory sensitization**

May cause allergy or asthma symptoms or breathing difficulties if inhaled.

**Skin sensitization**

May cause an allergic skin reaction.

**Germ cell mutagenicity**

No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

**Carcinogenicity**

This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

**OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)**

Not listed.

**Reproductive toxicity**

This product is not expected to cause reproductive or developmental effects.

**Specific target organ toxicity - single exposure**

May cause respiratory irritation.

**Specific target organ toxicity - repeated exposure**

Not classified.

**Aspiration hazard**

Not an aspiration hazard.

**Chronic effects**

Prolonged exposure may cause chronic effects.

**12. Ecological information****Ecotoxicity**

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

**Components****Species****Test Results**

Silicic Acid, sodium salt, sodium silicate (CAS 1344-09-8)

**Aquatic**

Crustacea

EC50

Water flea (Daphnia magna)

247 mg/l, 4.2 days

Sodium Persulfate (CAS 7775-27-1)

**Aquatic**

Crustacea

EC50

Daphnia

133 mg/l, 48 hours

Fish

Bluegill (Lepomis macrochirus)

771 mg/l, 96 hours

**Persistence and degradability**

No data is available on the degradability of this product.

**Bioaccumulative potential**

No data available.

**Mobility in soil**

No data available.

**Other adverse effects** None known.

### 13. Disposal considerations

**Disposal instructions** Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.

**Local disposal regulations** Dispose in accordance with all applicable regulations.

**Hazardous waste code** The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

**Waste from residues / unused products** Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

**Contaminated packaging** Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

### 14. Transport information

#### DOT

**UN number** UN1479

**UN proper shipping name** Oxidizing solid, n.o.s. (Sodium Persulfate Mixture)

**Transport hazard class(es)**

**Class** 5.1

**Subsidiary risk** -

**Label(s)** 5.1

**Packing group** III

**Environmental hazards**

**Marine pollutant** No

**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.

**Special provisions** 62, IB8, IP3, T1, TP33

**Packaging exceptions** 152

**Packaging non bulk** 213

**Packaging bulk** 240

#### IATA

**UN number** UN1479

**UN proper shipping name** Oxidizing solid, n.o.s. (Sodium Persulfate Mixture)

**Transport hazard class(es)**

**Class** 5.1

**Subsidiary risk** -

**Packing group** III

**Environmental hazards** No

**ERG Code** 5L

**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.

#### IMDG

**UN number** UN1479

**UN proper shipping name** OXIDIZING SOLID, N.O.S. (Sodium Persulfate Mixture)

**Transport hazard class(es)**

**Class** 5.1

**Subsidiary risk** -

**Packing group** III

**Environmental hazards**

**Marine pollutant** No

**EmS** F-A, S-Q

**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.

**Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code** Not applicable.

### 15. Regulatory information

**US federal regulations** This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.  
All components are on the U.S. EPA TSCA Inventory List.

**TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)**

Not regulated.

**OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)**

Not listed.

**CERCLA Hazardous Substance List (40 CFR 302.4)**

Not listed.

**Superfund Amendments and Reauthorization Act of 1986 (SARA)**

**Hazard categories**

Immediate Hazard - Yes  
 Delayed Hazard - No  
 Fire Hazard - Yes  
 Pressure Hazard - No  
 Reactivity Hazard - Yes

**SARA 302 Extremely hazardous substance**

Not listed.

**SARA 311/312 Hazardous chemical**      Yes

**SARA 313 (TRI reporting)**

Not regulated.

**Other federal regulations****Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

**Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)**

Not regulated.

**Safe Drinking Water Act (SDWA)**      Not regulated.

**US state regulations****US. Massachusetts RTK - Substance List**

Not regulated.

**US. New Jersey Worker and Community Right-to-Know Act**

Sodium Persulfate (CAS 7775-27-1)

**US. Pennsylvania Worker and Community Right-to-Know Law**

Not listed.

**US. Rhode Island RTK**

Not regulated.

**US. California Proposition 65**

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

**International Inventories**

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

\*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

## 16. Other information, including date of preparation or last revision

**Issue date** 12-February-2015

**Revision date** 02-April-2015

**Version #** 02

**Further information** HMIS® is a registered trade and service mark of the American Coatings Association (ACA).

**HMIS® ratings** Health: 2\*  
Flammability: 0  
Physical hazard: 1

**NFPA ratings**



### Disclaimer

Regenesis cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available.

Attachment C



October 8, 2020

Chief, Groundwater Compliance Section  
U.S. EPA Region 2  
290 Broadway, 24th Floor  
New York, NY 10007-1866

Re: Former ALCO Site Parcel A - Schenectady, NY  
BCP Site C447042

File: 1368.001.004

Dear Sir:

This letter is provided at the request of the New York State Department of Environmental Conservation (NYSDEC) to provide notification to your agency of the on-site injection of oxidizing chemicals into the subsurface for the purposes of soil remediation at the subject site.

- A. This project is being conducted by Maxon-ALCO Holdings, LLC under a Brownfield Cleanup Agreement (BCA) with NYSDEC, who is also providing oversight to the project.
- B. This project is presumed to be authorized by rule.
- C. The site is located at 301 Nott Street Schenectady, New York.
- D. The oxidizing chemicals are being introduced into the subsurface through temporary boreholes created with a Geoprobe™ direct-push drilling rig at a depth of 5-15 feet below grade.
- E. The chemical oxidant being injected is PersulfOx™, produced by Regenesis; product information is attached.
- F. We anticipate injecting PersulfOx™ at a rate of roughly 5 gallons per vertical foot; this will result in the injection of roughly 3,000 pounds of PersulfOx™ in this area.
- G. A site map is attached that identifies the general area of contamination be addressed by chemical injection.





Chief, Groundwater Compliance Section  
U.S. EPA Region 2  
October 8, 2020  
Page 2

H. Site Owner contact:

Steve Luciano  
Maxon ALCO Holdings, LLC  
540 Broadway  
Albany, New York 12207  
Phone: (518) 465-1565

I. Environmental Consultant overseeing the project:

Barton & Loguidice, D.P.C.  
10 Airline Drive  
Suite 200  
Albany, New York 12205

Should you have any questions, please do not hesitate to contact me.

Very truly yours,

BARTON & LOGUIDICE, D.P.C.




Andrew J. Barber  
Senior Environmental Consultant

CIS/  
Enclosures

cc:	Steve Luciano	- Maxon ALCO Holdings LLC
	Joshua Haugh	- NYSDEC Region 4
	Andrew Fleck	- NYSDEC Region 4

Plotted: ☒ SYR By: ☒

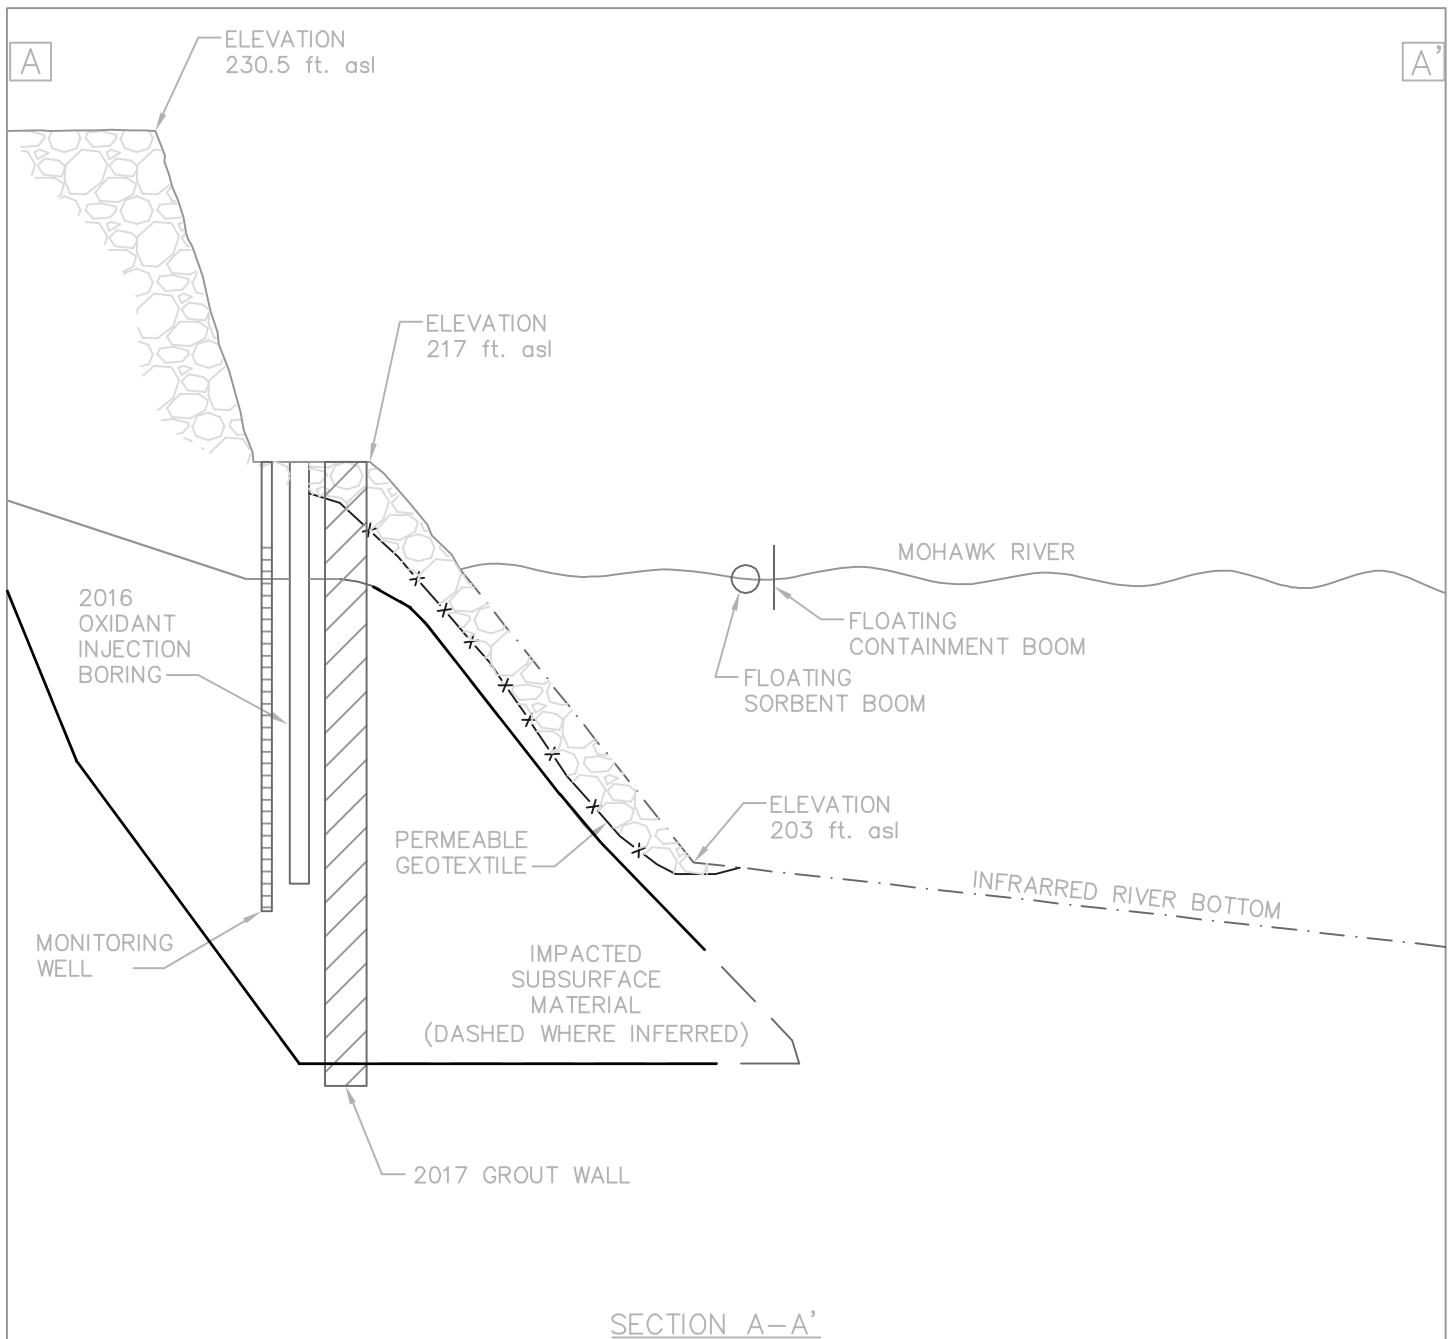

**Barton**  
& **Loguidice, D.P.C.**

MAXON ALCO HOLDINGS, LLC.  
ALCO BROWNFIELD SITE

EXISTING RIVERBANK  
CROSS SECTION

Figure Number  
1

Project Number  
1368.001.004

Date  
MAY, 2019

Scale  
NOT TO SCALE

SCHENECTADY, NY.

SCHENECTADY COUNTY, NEW YORK



## Legend

- Proposed Injection Wells
- Grout Wall
- Sentry Wells
- Collection Wells
- Boom





September 30, 2020

Mr. Joshua Haugh  
Project Manager, Division of Environmental Remediation  
New York State Department of Environmental Conservation  
Region 4  
1130 North Westcott Road  
Schenectady, New York 12306-2014

**Via Electronic Mail**

Re: ALCO-Maxon Parcel A Spill Number 1604483  
ALCO – BCP Site C447042  
Schenectady, NY

Dear Mr. Haugh:

This letter serves as a revised work plan for the subject spill to continue the in-situ chemical oxidant (ISCO) injections that began in February 2020.

Several changes have been made due to field conditions to the original approved September 2019 work plan. We began installation of permanent injection wells to treat the ongoing sheen issue on the riverbank outside of the casino/hotel. Initially, we proposed doing angled borings but were unable to stabilize the drill rig to support this, so vertical wells were installed between the existing grout wall and the river.

Oxidant injections on the riverbank were started in 5 wells, hand poured from a 5 gallon bucket. Some sheen was noted while injecting two of the wells but injection through a hose at a higher rate was performed as a "test". An increase in sheen led to the collective decision not to continue with the injections at the time.

A total of 7 well shave been installed. As the wells were installed in the target area, no more wells are proposed to be installed at this time. We are proposing to revert to injection utilizing hand pouring with 5-gallon buckets as the least amount of sheen was noted with this method and mitigation is possible.

In April 2020, an aerator system was installed for sheen mitigation. This system, paired with a more robust use of absorbent fabric will allow for the ISCO injections to continue.





Mr. Josh Haugh  
NYSDEC  
September 30, 2020  
Page 2

We will make reasonable efforts to avoid the liberation of residual petroleum in the river near the shore. The existing containment boom will be in place during the injection work and we will have absorbent pads and activated carbon impregnated fabric available to mitigate free-phase petroleum and/or sheen.

B&L is proposing to perform this work during October-November 2020.

Following the injection work, the injection wells will be capped and secured to allow for additional additions of oxidants, if necessary.

Very truly yours,

BARTON & LOGUIDICE, INC.

Andrew J. Barber

A handwritten signature in black ink, reading "Andrew J. Barber", is positioned below the printed name.

Sr. Environmental Consultant

CIS/AJB/  
Enclosure

cc:	Tom Owens, Esq.	- Maxon ALCO Holdings LLC
	Steve Luciano	- Maxon ALCO Holdings LLC
	Paul Fallati	- Maxon ALCO Holdings LLC
	Dean Sommer, Esq.	- Young Sommer
	Jennifer Andalaro	- NYSDEC Region 4, OGC
	Steve Lawrence	- NYSDOH

