



DRAFT

INTERIM REMEDIAL MEASURES WORK PLAN

**Study Area Bounded by Pyrex Street, E. Pulteney Street,
Post Creek and Chemung River
Corning, NY**

NYSDEC Project ID 851046

City of Corning Memorial Stadium

May 4, 2016

Prepared for:

**Corning Incorporated
Corning, New York**

Prepared by:

**WESTON SOLUTIONS, INC.
West Chester, Pennsylvania 19380**

W.O. No. 02005.056.002.0001



Certification

I, Michael H. Corbin, certify that I am currently a New York State registered professional engineer as defined in 6 NYCRR Part 375 and that this Interim Remedial Measures Work Plan was prepared in accordance with all applicable standards and regulations and in substantial conformance with the DER Technical Guidance for Site Investigation and Remediation (DER-10).

Executed on the ___ day of _____, 2016

Weston Solutions, Inc.

Technical Director, P.E.



TABLE OF CONTENTS

Section	Page
1. INTRODUCTION.....	1-1
1.1 ENVIRONMENTAL SETTING	1-1
1.1.1 Land Use	1-1
1.1.2 Topography	1-2
1.1.3 Geology.....	1-2
1.1.4 Hydrology	1-3
1.1.5 Ecological Setting	1-3
1.2 ORGANIZATION OF THIS DOCUMENT	1-3
2. CURRENT CONDITIONS.....	2-1
2.1 CHARACTERIZATION ACTIVITIES	2-1
2.1.1 Surface and Shallow Soil Sampling.....	2-1
2.1.2 Soil Boring Sampling.....	2-2
2.1.3 Groundwater Sampling Results	2-5
2.2 CORNING-PAINTED POST EAST HIGH SCHOOL CONSTRUCTION PROJECT.....	2-6
2.3 CORNING-PAINTED POST SCHOOL DISTRICT TURF REPLACEMENT PROJECT	2-6
2.4 SUMMARY OF CURRENT CONDITIONS.....	2-7
3. INTERIM REMEDIAL MEASURES APPROACH.....	3-1
3.1 INTERIM REMEDIAL MEASURES OBJECTIVE	3-1
3.2 INTERIM REMEDIAL MEASURES APPROACH	3-1
4. INTERIM REMEDIAL MEASURES ACTIVITIES & METHODOLOGIES.....	4-1
4.1 WRITTEN ACCESS CONSENT	4-1
4.2 ADDITIONAL SURFACE SOIL SAMPLING AND EXCAVATION AREA REFINEMENT	4-1
4.2.1 Quality Assurance / Quality Control.....	4-2
4.3 SOIL EXCAVATION ACTIVITIES	4-3
4.3.1 Pre-Excavation Activities	4-3
4.3.2 Excavation Activities.....	4-4
4.4 WASTE HANDLING.....	4-6
4.4.1 Staging and Loading	4-6
4.5 SURVEY ACTIVITIES.....	4-7
4.6 INSPECTIONS	4-7

TABLE OF CONTENTS (Continued)

Section	Page
5. PROJECT MANAGEMENT.....	5-1
5.1 SCHEDULE.....	5-1
5.2 DOCUMENTATION	5-1
5.2.1 Field Logs	5-1
5.2.2 Photo Log.....	5-1
5.2.3 Field Measurements	5-1
5.2.4 Field Reports.....	5-2
5.2.5 Reporting.....	5-2
5.3 HEALTH AND SAFETY PLAN	5-2
5.4 TEMPORARY FIELD OFFICE.....	5-3
6. REFERENCES.....	6-1

APPENDIX A – CHARACTERIZATION SAMPLING RESULTS

APPENDIX B – HEALTH AND SAFETY PLAN (HASP)

APPENDIX C – COMMUNITY AIR MONITORING PLAN (CAMP)

DRAFT

LIST OF FIGURES

Title

Figure 1-1	Location of the Study Area
Figure 1-2	Study Area Features
Figure 1-3	City of Corning Memorial Stadium Property Features
Figure 2-1	Sample Locations
Figure 2-2	IRM Areas, City of Corning Memorial Stadium property
Figure 3-1	IRM Limits of Excavation, City of Corning Memorial Stadium Property
Figure 5-1	Project Schedule

DRAFT

LIST OF TABLES

Title

Table 2-1 Soil Boring Log Summary, City of Corning Memorial Stadium property

DRAFT

LIST OF ACRONYMS

ASP	Analytical Services Protocol
CAMP	Community Air Monitoring Plan
cfs	cubic feet per second
EPA	Environmental Protection Agency
FEMA	Federal Emergency Management Agency
ft amsl	feet above mean sea level
ft bgs	feet below ground surface
GPS	global positioning system
HASP	Health and Safety Plan
IDW	investigative derived waste
in bgs	inches below ground surface
IRM	Interim Remedial Measure
mg/Kg	milligram per kilogram
mg/L	milligram per liter
NYSDEC	New York State Department of Environmental Conservation
NYSDOH	New York State Department of Health
NYSPDES	New York State Pollutant Discharge Elimination System
PC	public-conservation zoning
PCBs	polychlorinated bi-phenyls
QA	Quality Assurance
QAPP	Quality Assurance Project Plan
QC	Quality Control
RCRA	Resource Conservation Recovery Act
SCO	Soil Cleanup Objectives
SOP	standard operating procedure
SVOCs	semi-volatile organic compounds
TAL	Target Analyte List
TCL	Target Compound List
TCLP	Toxicity Characteristic Leaching Procedure
TOGS	New York State Division of Water Technical Operation and Guidance Series

LIST OF ACRONYMS (Continued)

TPH	total petroleum hydrocarbons
USACE	U.S. Army Corps of Engineers
USEPA	U.S. Environmental Protection Agency
USGS	U.S. Geological Survey
µg/Kg	microgram per kilogram
VOCs	volatile organic compounds
WESTON®	Weston Solutions, Inc.

DRAFT

1. INTRODUCTION

The Study Area is located in the City of Corning, New York, and is bounded by Pyrex Street on the west, E. Pulteney Street on the north, Post Creek on the east and the Chemung River on the south, as illustrated on Figure 1-1. The City of Corning Memorial Stadium property, subject of this Interim Remedial Measure (IRM) Work Plan, is located in the southwest corner of the Study Area, as illustrated on Figure 1-2.

On June 27, 2014 Corning Incorporated entered into an Order on Consent and Administrative Settlement (Order on Consent) with the New York State Department of Environmental Conservation (NYSDEC) to perform preliminary characterization activities within the Study Area. Weston Solutions, Inc. (WESTON®) prepared, on behalf of Corning Incorporated, a Study Area Characterization Work Plan dated June 2014, which was Attachment B to the Order on Consent (WESTON, 2014a). Subsequent to the Order on Consent, the NYSDEC approved Study Area Work Plan Addendum 3 (Work Plan Addendum 3) for additional characterization activities at the City of Corning Memorial Stadium property (WESTON, 2015). Collectively the June 2014 Study Area Characterization Work Plan and its Addenda, as modified, amended and approved by NYSDEC will be referred to herein as the Study Area Work Plan.

In accordance with Section II.5 and Appendix A, Section III of the Order on Consent, an IRM is proposed for the City of Corning Memorial Stadium property based on analytical data collected during field investigation activities performed between August 2014 and April 2015 under the Study Area Work Plan.

1.1 ENVIRONMENTAL SETTING

1.1.1 Land Use

The City of Corning Memorial Stadium property is located on an approximately 10.5 acre parcel. This land is owned by the City of Corning and is zoned Public-Conservation (PC). Approximately 6.9 acres of the parcel is leased by the Corning-Painted Post School District for use as athletic fields. As illustrated on Figure 1-3, the surface area for the City of Corning Memorial Stadium property is covered by several structures, a synthetic turf field, a variety of impervious surfaces

(i.e., a rubberized track, concrete sidewalks, roads and parking areas), and permeable surfaces (i.e., grassy areas, stone rip rap areas and gravel areas).

The City of Corning Memorial Stadium property is primarily used for athletic and educational purposes (e.g. marching band, physical education classes and ceremonial activities) and ground cover exists in the form of impervious surfaces including a synthetic turf athletic field and asphalt roads and parking areas. Small portions of the property are covered by mowed lawn.

1.1.2 Topography

The Corning, New York 1976 U.S. Geological Service (USGS) 7.5-minute topographic quadrangle map indicates that the City of Corning Memorial Stadium property is approximately 929 feet above mean sea level (ft amsl). Within approximately one mile radius of the City of Corning Memorial Stadium property, the ground surface elevation ranges from 915 ft amsl to 1,459 ft amsl, with two steep elevation changes, one located to the north and one to the east.

The City of Corning Memorial Stadium property is located adjacent to the Chemung River and the southern boundary of the property runs along an earthen dike located within the NYSDEC-maintained flood control lands. As a result, the City of Corning Memorial Stadium property is located outside but adjacent to the Federal Emergency Management Agency (FEMA) 100-year and 500-year flood zones (FEMA, 2002).

1.1.3 Geology

The City of Corning Memorial Stadium property is located in the Chemung River valley which contains predominately sand and gravel deposits of glaciofluvial origin and more recent alluvial deposits. In the vicinity of the City of Corning Memorial Stadium property, a low permeability, lacustrine silt and clay layer (approximately 10 feet thick) appears to be present about 30 feet below ground surface (ft bgs) in the Chemung River valley-fill deposits (Miller, 1982). The river valley deposits are on the order of 100 feet thick in the vicinity of the City of Corning Memorial Stadium property. These river valley deposits are underlain by low permeability shale/siltstone bedrock (Miller, 1982).

1.1.4 Hydrology

The saturated portions of the Chemung River valley deposits are recharged principally by infiltration of precipitation. This valley-filled glacial/alluvial aquifer is generally unconfined (i.e., the water table forms the upper boundary of the aquifer) and saturated approximately to the level of nearby rivers (such as the Chemung River) (Olcot, 1995). The depth to the water table at the City of Corning Memorial Stadium property ranges from approximately 16 to 21 ft bgs; however, groundwater levels may be deeper where supply wells actively extract groundwater from the valley aquifer. Groundwater in the valley aquifer generally flows toward and discharges to nearby rivers/creeks; however, groundwater flow directions can be locally altered by supply well withdrawals from the valley aquifer.

1.1.5 Ecological Setting

The City of Corning Memorial Stadium property is composed of a terrestrial cultural ecological community created and maintained by human activities and has been modified by human influence to such a degree that the physical conformation of the substrate and the biological composition of the resident community is substantially different from the character of the substrate or community as it existed prior to human influence.

1.2 ORGANIZATION OF THIS DOCUMENT

This Work Plan is organized into the following sections:

- **Section 1 – Introduction.** This section contains an introduction to the project and environmental setting information.
- **Section 2 – Current Conditions.** This section contains a description of characterization activities conducted at the City of Corning Memorial Stadium property, including the location, types and number of samples collected. Construction activities and an IRM previously conducted at the City of Corning Memorial Stadium property are also discussed.
- **Section 3 – Interim Remedial Measure Approach.** This section contains a description of the approach and objectives of the proposed IRM.
- **Section 4 – Interim Remedial Measure Activities and Methodologies.** This section contains a description of the activities to be conducted, including the locations, rationale for design, and execution of the planned work.

- **Section 5 – Project Management.** This section contains information regarding the scheduling of the work as well as the reporting schedule. Additionally, this section provides details about project logistics, including project controls, management and public relations.
- **Section 6 – References.**

Generally, tables and figures are provided at the end of each section for ease of review.

Tables of validated analytical results for samples collected on the City of Corning Memorial Stadium property are provided in Appendix A.

DRAFT

SECTION 1

FIGURES

DRAFT



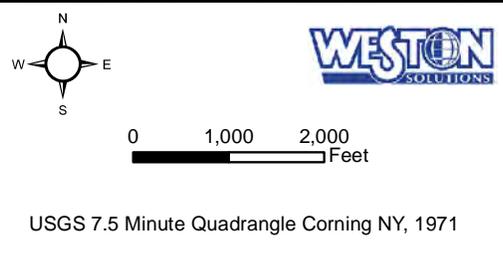


Figure 1-1
 Location of Study Area
 Corning NY

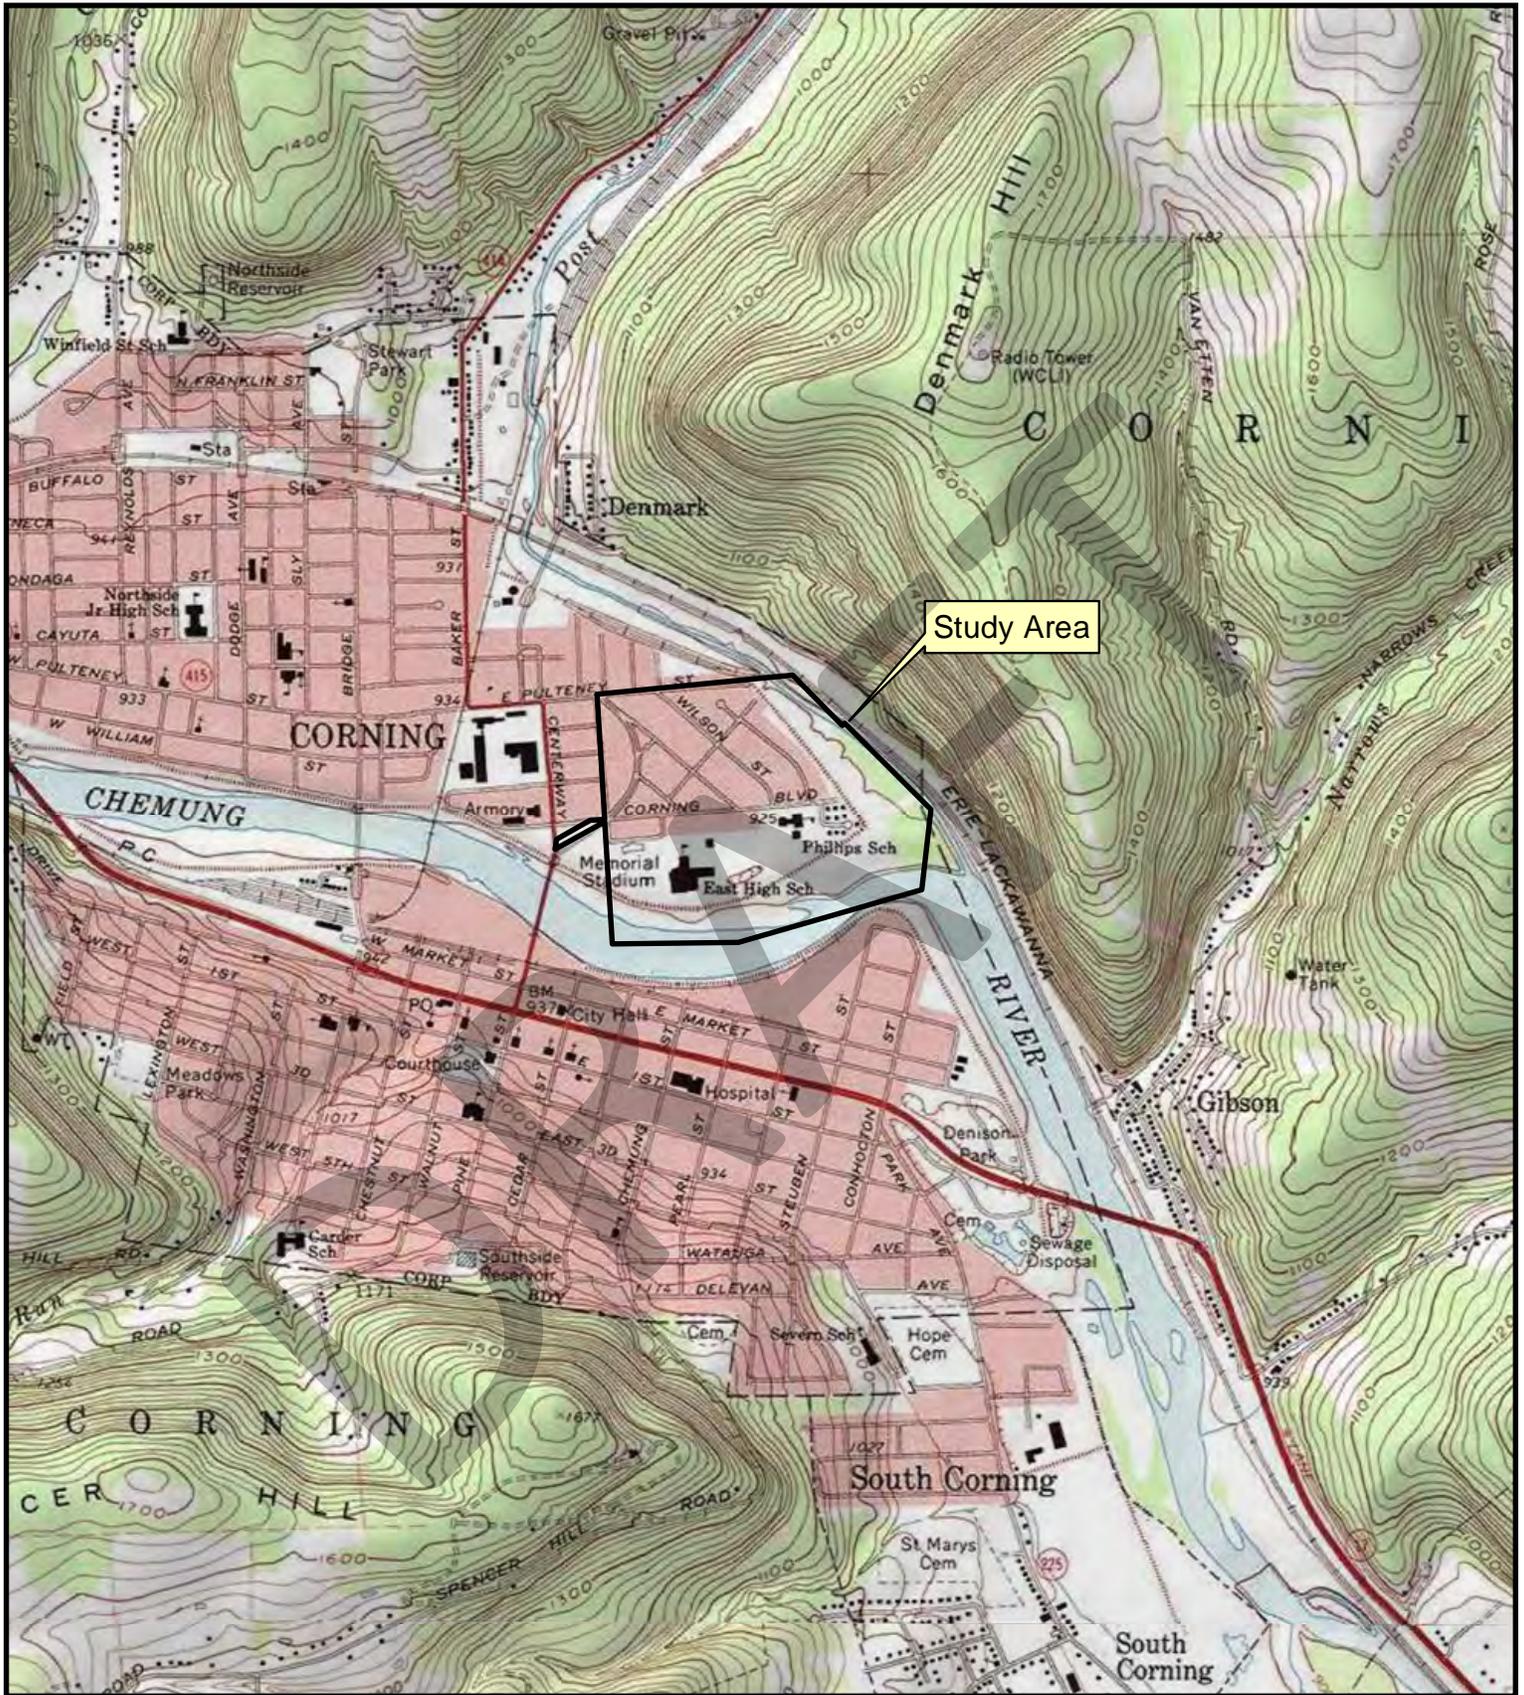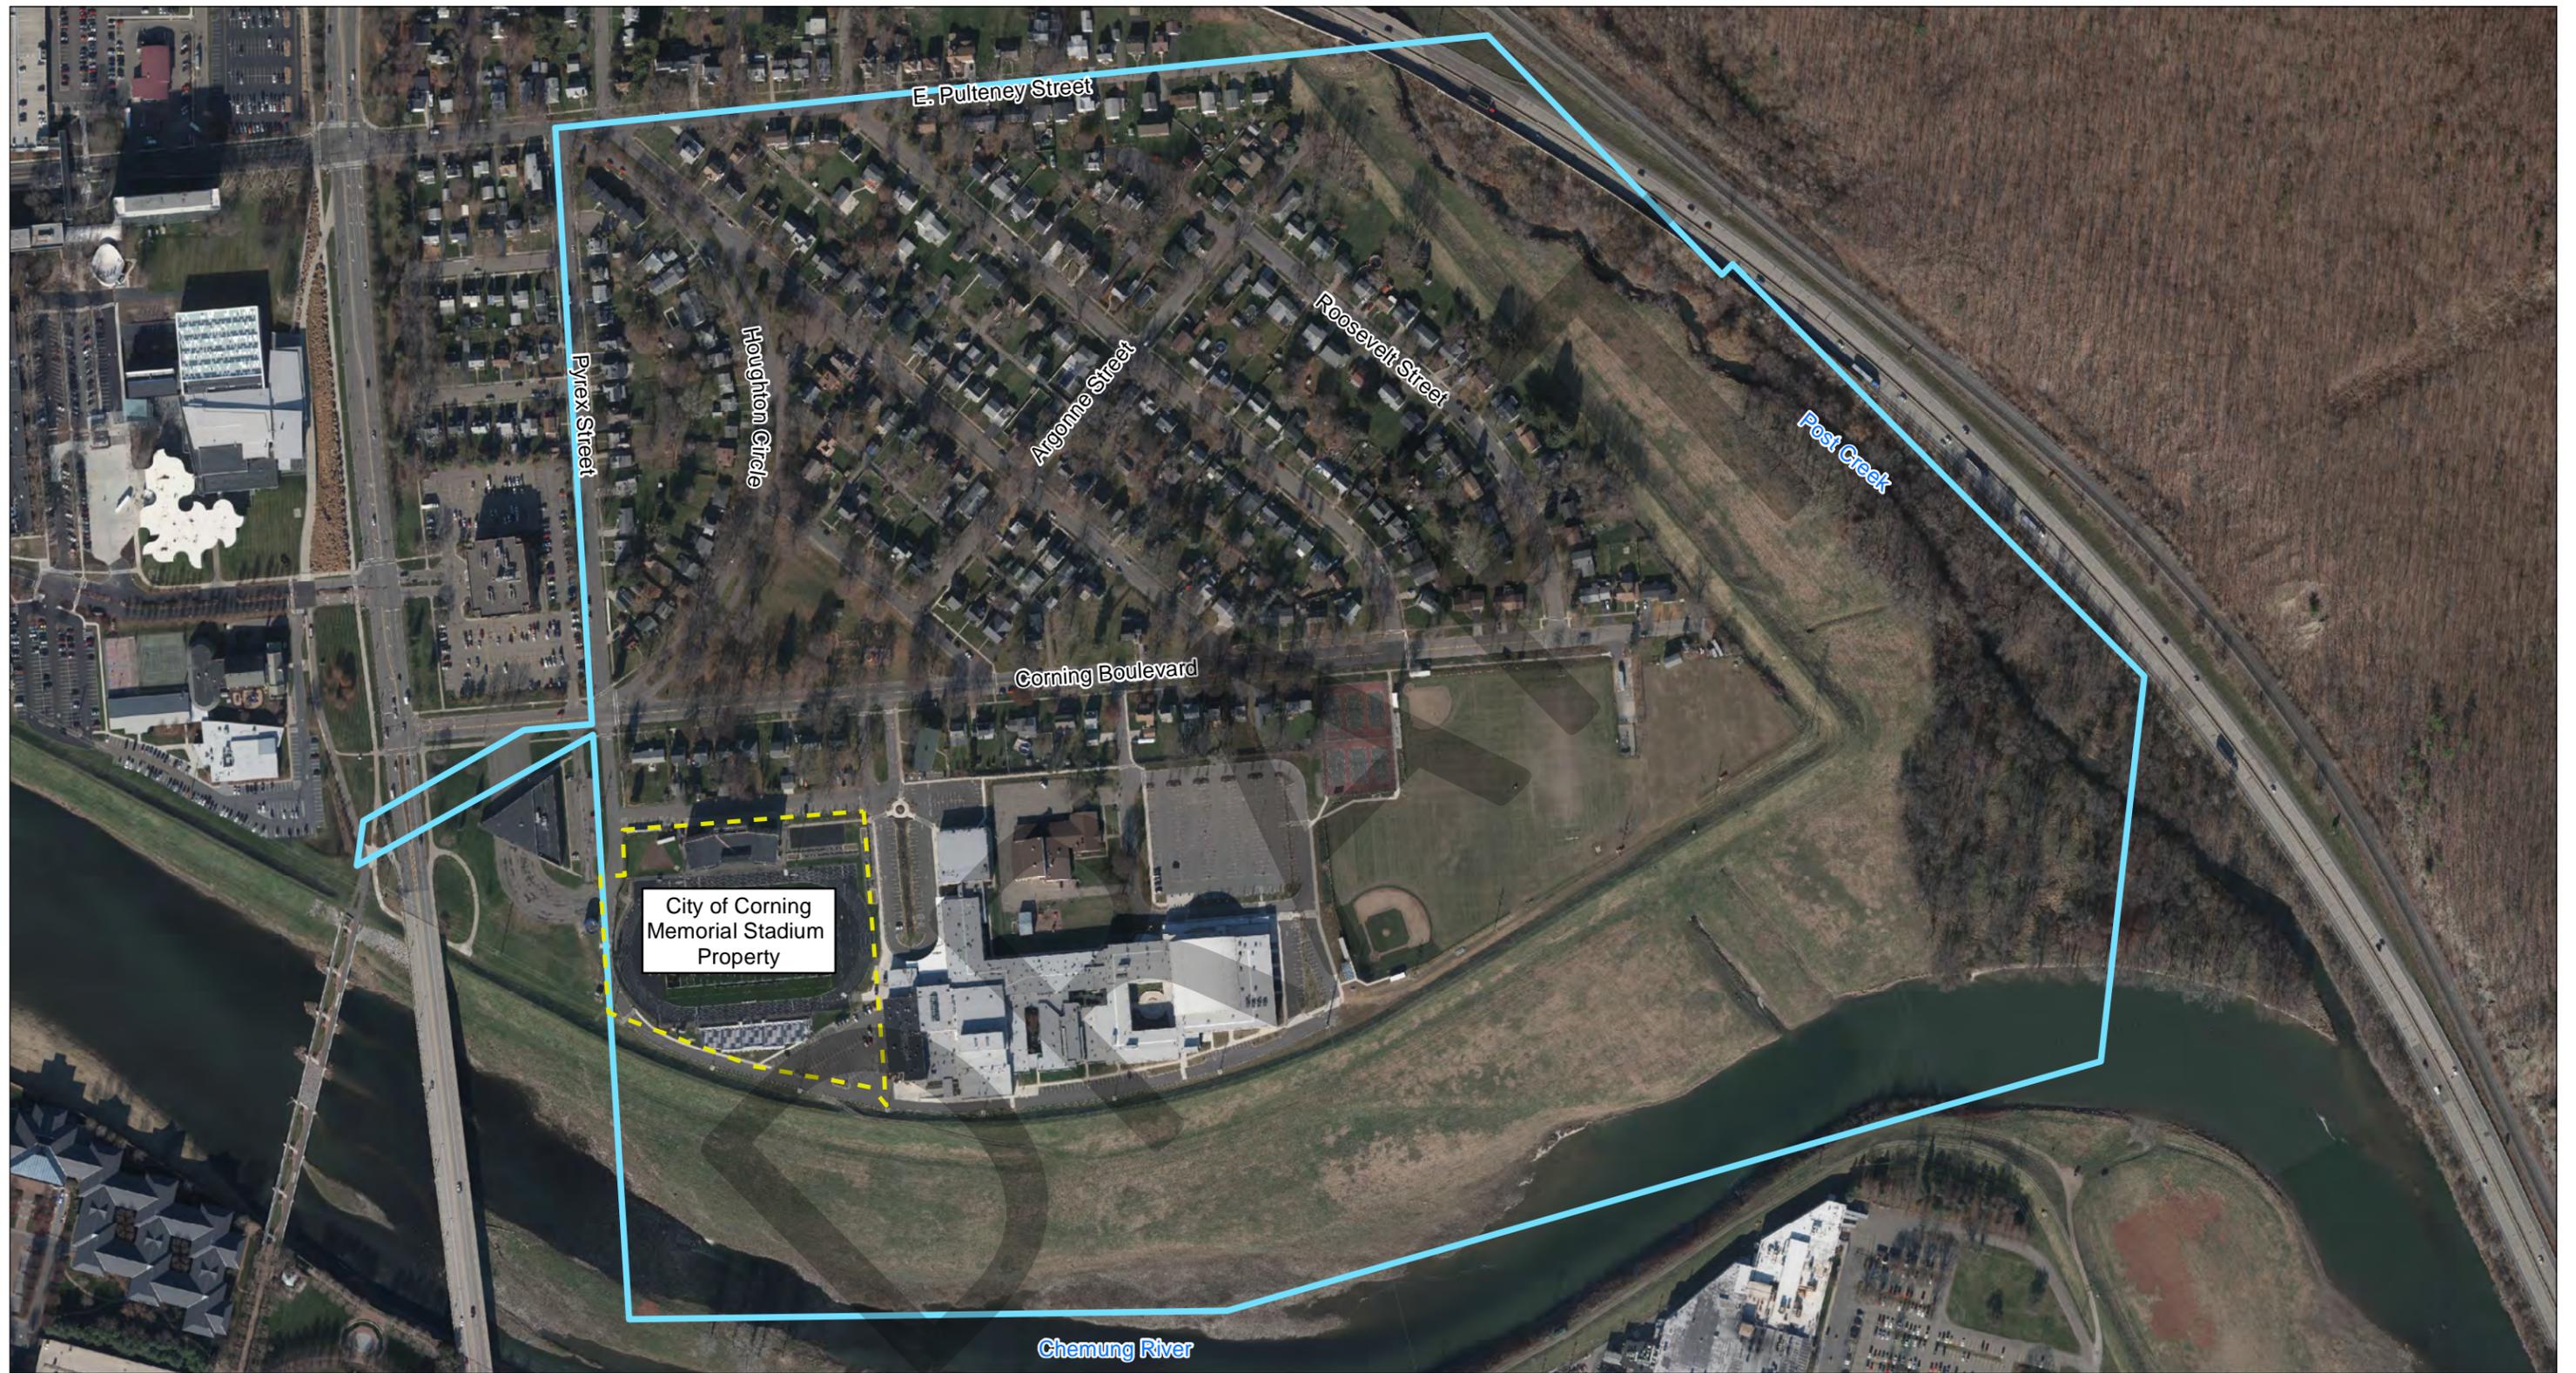

- Legend**
- ▬ Study Area Boundary Based on 1937 Quit Claim Deed
 - ▬ City of Corning Memorial Stadium

NOTES:
 Base Imagery: Robinson Aerial Imagery, Dec 2015
 Coordinate System: NAD 1983 State Plane
 New York Central Feet
 Datum: NAD83. Units: Feet


Study Area
 Corning NY



Figure 1-2
 Study Area Features



Document Name: Study_Area_Features.MXD
 1/28/2016

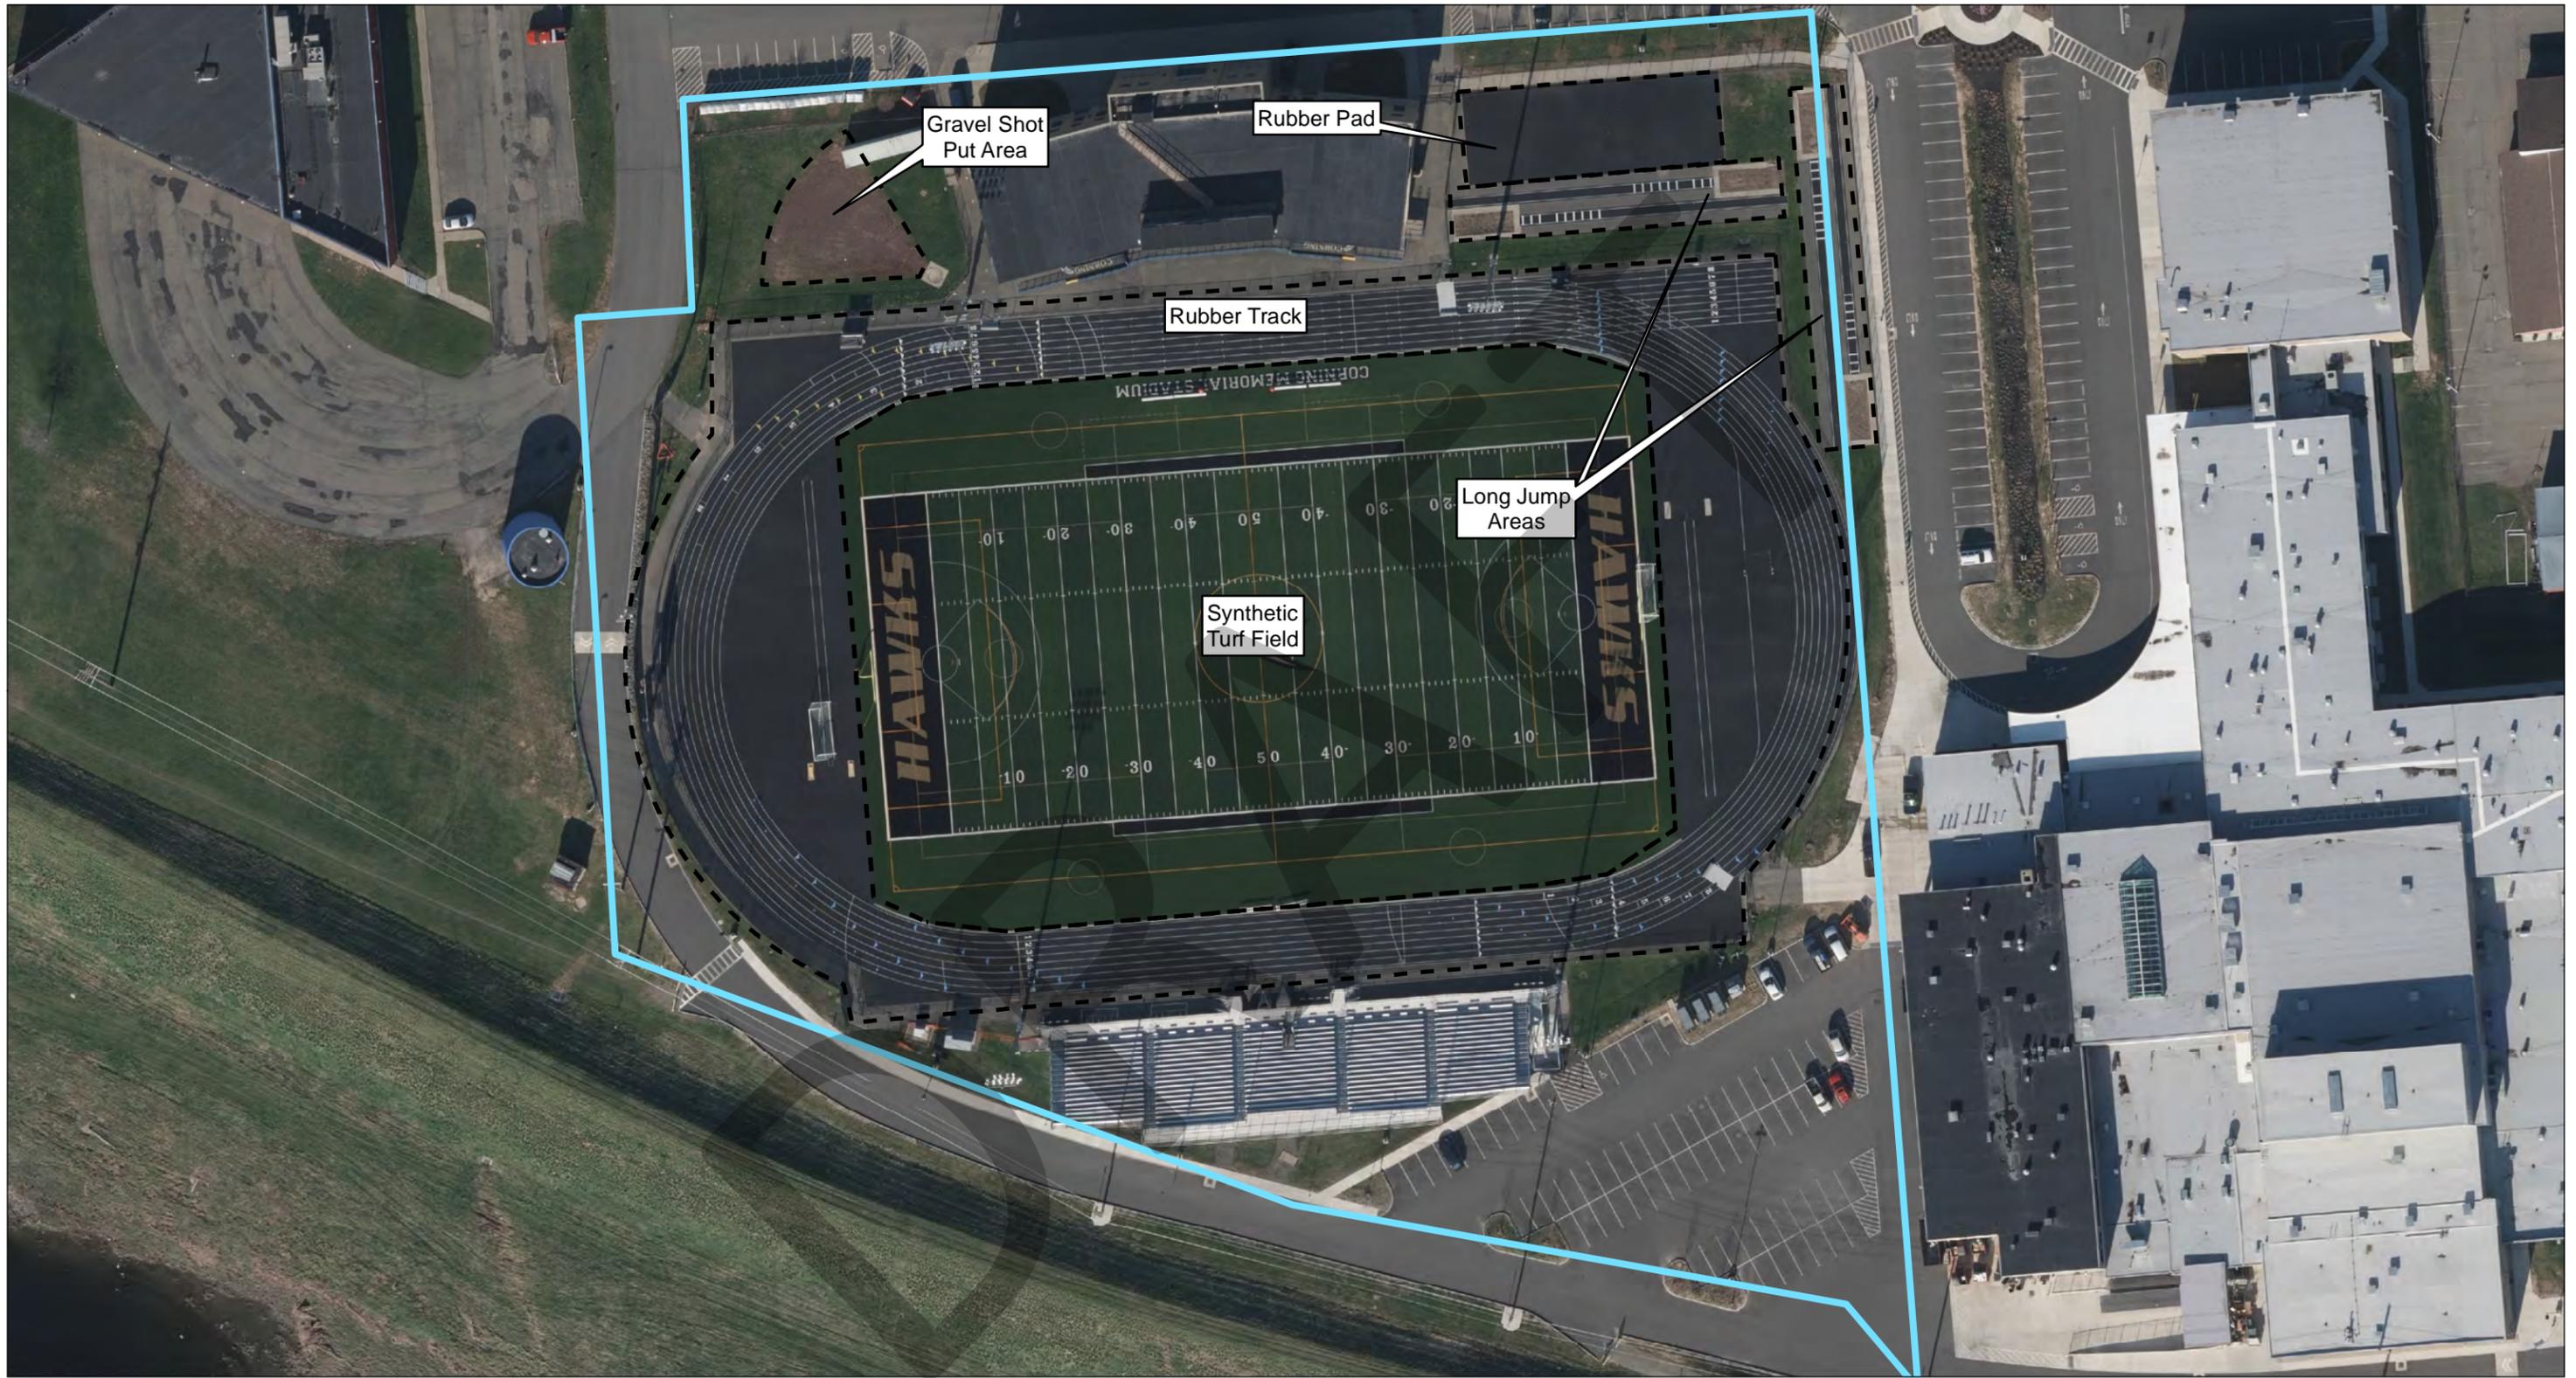

Legend

- City of Corning Memorial Stadium Property

NOTES:
 Base Imagery: Robinson Aerial Imagery, Dec 2015
 Coordinate System: NAD 1983 State Plane
 New York Central Feet
 Datum: NAD83. Units: Feet

Study Area
 Corning NY



Figure 1-3
 City of Corning
 Memorial Stadium Property
 Features



Document Name: Features.MXD
 1/28/2016

2. CURRENT CONDITIONS

2.1 CHARACTERIZATION ACTIVITIES

In accordance with the Study Area Work Plan and Work Plan Addendum 3, WESTON on behalf of Corning Incorporated has collected soil samples at sixteen surface soil locations and thirteen soil boring locations on the City of Corning Memorial Stadium property. In addition, in accordance with the Study Area Work Plan and the NYSDEC-approved Groundwater Wells plan (WESTON, 2014b) two groundwater monitoring wells have been installed and sampled at the City of Corning Memorial Stadium property. Cumulatively, a total of 63 soil samples and four groundwater samples, along with associated quality assurance/quality control (QA/QC) samples have been collected at the City of Corning Memorial Stadium property. Samples were analyzed for Target Analyte List (TAL) metals plus mercury, Toxicity Characteristic Leaching Procedure (TCLP) Resource Conservation and Recovery Act (RCRA) metals, total petroleum hydrocarbons (TPH), polychlorinated bi-phenyls (PCBs), Target Compound List (TCL) semi-volatile organic compounds (SVOCs), volatile organic compounds (VOCs), or a subset thereof. The locations of the soil samples, soil borings and groundwater monitoring wells are illustrated on Figure 2-1. Tables of validated analytical results for soil samples and groundwater samples collected on the City of Corning Memorial Stadium property are provided in Appendix A.

2.1.1 Surface and Shallow Soil Sampling

At each of the 16 surface soil sampling locations (CMSSS001 to CMSSS016), a surface (0 to 2 inches below ground surface [in bgs]) and a shallow (2 to 24 in bgs) soil sample was collected. In addition, at one surface soil sampling location (CMSSS011) an additional sample was collected from 24 to 29 in bgs at the request of NYSDEC. During the collection of the 2 to 24 in bgs sample at this location ash and coal was observed from 23.5 to 24 in bgs. At the request of NYSDEC, the hand auger was advanced to 29 in bgs and an additional sample was collected of this material.

At 14 of the 16 surface soil sampling locations analytical results for both the surface and shallow soil samples were below the NYSDEC restricted residential Soil Cleanup Objectives (NYSDEC restricted residential SCOs; NYSDEC Subpart 375-6).

At surface soil sampling location CMSSS012, the analytical results for arsenic and lead were above the NYSDEC restricted residential SCOs in the 0 to 2 in bgs surface soil sample. Arsenic and lead were detected at concentrations of 20 mg/Kg and 720 mg/Kg, respectively. The NYSDEC restricted residential SCOs for these compounds are 16 mg/Kg and 400 mg/Kg, respectively. This sampling location is located east of the track, outside of the track fence in the vicinity of the parking area for Corning-Painted Post High School. The analytical results for the corresponding shallow soil sample (2 to 24 in bgs) collected at this location were below the NYSDEC restricted residential SCOs.

At surface soil sampling location CMSSS013, the analytical results in the shallow soil sample (2 to 24 in bgs) had concentrations of arsenic and lead above the NYSDEC restricted residential SCOs. Arsenic and lead were detected at concentrations of 24 mg/Kg and 1,500 mg/Kg, respectively. This sampling location is located in the southwest corner of the property, outside of the stadium fencing. The surface soil sample collected at this location was below the NYSDEC restricted residential SCOs.

At sampling location CMSSS011 the additional soil sample requested by NYSDEC (from 24 to 29 in bgs) had a concentration of arsenic of 18 mg/Kg. The NYSDEC restricted residential SCO for arsenic is 16 mg/Kg. The other two soil samples collected at this location, the surface and shallow soil samples, were below the NYSDEC restricted residential SCOs.

2.1.2 Soil Boring Sampling

Of the 13 soil borings advanced to approximately 16 ft bgs on the City of Corning Memorial Stadium property, four soil borings were installed in grassy areas outside of the footprint of the synthetic turf (i.e., athletic field). The remaining nine soil borings were advanced in soils beneath the synthetic turf in the stadium. The locations of the soil borings are illustrated on Figure 2-1. One to four samples were collected from each soil boring in accordance with the Study Area Work Plan and Work Plan Addendum 3. A summary of the soil boring analytical results is provided in Appendix A and a summary of the soil boring logs is included in Table 2-1.

2.1.2.1 Soil Boring Results in Grassy Areas

No layer of fill material containing ash, brick and/or glass was observed at the following soil borings installed in the northern area of the property: soil boring CMSSB001 located in the northwest corner of the property and soil boring CMSSB004 located outside the northeastern limits of the track surrounding the synthetic turf field. Furthermore, the analytical results for all soil samples collected from these two soil borings were below the NYSDEC restricted residential SCOs. It should be noted that soil boring CMSSB004 was advanced to investigate ash and coal that was observed during surface and shallow soil sampling at location CMSSS011.

In the southwest corner of the City of Corning Memorial Stadium property, a layer of fill material containing ash, brick and glass was observed between 2 ft and 6 ft bgs at soil boring CMSSB002. Analytical results from the soil sample collected from the layer of fill material containing ash, brick and glass in this soil boring showed concentrations of arsenic, cadmium and lead above the NYSDEC restricted residential SCOs. Total arsenic, cadmium and lead were detected at concentrations of 69.0 mg/Kg, 12 mg/Kg and 1,900 mg/Kg, respectively, which is above their respective NYSDEC restricted residential SCOs of 16 mg/Kg, 4.3 mg/Kg and 400 mg/Kg. In addition, a sample of the fill material containing ash, brick and glass was analyzed using the USEPA TCLP method. Cadmium and lead were detected in this sample at concentrations of 1.1 J+ mg/L and 46 mg/L, respectively. The “J+” qualifier indicates the result is an estimated quantity and may be biased high. USEPA TCLP method is used to determine the appropriate disposal method under current NYSDEC and USEPA regulations. Excavated material will need to be characterized *ex situ* for disposal profiling.

Analytical results from the soil samples collected above and below the layer of fill material containing ash, brick and glass in soil boring CMSSB002 (i.e., the 0 to 2 ft bgs and the 6 to 8 ft bgs intervals) showed total metals at concentrations less than their respective NYSDEC restricted residential SCOs. In addition, samples collected from these intervals and analyzed using the TCLP method did not indicate concentrations of leachate above the USEPA criteria.

In the southeast corner of the City of Corning Memorial Stadium property, in the area of the newly repaved parking lot, a layer of fill material containing ash and brick was observed between 3 and 5 ft bgs at soil boring CMSSB003. Analytical results for all soil samples collected from this soil

boring were below NYSDEC restricted residential SCOs including the sample collected from the layer of fill material containing ash and brick.

2.1.2.2 Soil Borings beneath the Synthetic Turf Field

Nine soil borings were advanced beneath the synthetic turf field at the City of Corning Memorial Stadium property. No layer of fill material containing ash, brick and/or glass was encountered in two of the nine soil borings advanced beneath the synthetic turf (CMSSB005 and CMSSB011). A summary of the observances of ash, brick, and/or glass pieces in all of the soil borings installed at the City of Corning Memorial Stadium property is provided in Table 2-1.

In four of the nine soil borings advanced beneath the synthetic turf field (CMSB005, CMSSB008, CMSSB010 and CMSSB011), the analytical results from all soil samples collected in the respective soil boring were less than the NYSDEC restricted residential SCOs. In addition, samples collected from these intervals and analyzed using the TCLP method did not indicate concentrations of leachate above the USEPA criteria.

Analytical results for arsenic, cadmium and/or lead were greater than the respective NYSDEC restricted residential SCOs in five of the nine soil borings advanced beneath the synthetic turf field. The NYSDEC restricted residential SCOs for arsenic, cadmium and lead are 16 mg/Kg, 4.3 mg/Kg and 400 mg/Kg, respectively. In four of these soil borings (CMSSB006, CMSSB009, CMSSB012 and CMSSB013), analytical results greater than NYSDEC restricted residential SCOs were detected in a sampling interval that coincided with an encountered layer of fill material containing ash, brick and/or glass. Furthermore, in each of these four soil borings, analytical results were below the NYSDEC restricted residential SCOs for samples collected from an interval below the layer of fill material containing ash, brick and/or glass. At the fifth location, CMSSB007, a layer of fill material containing ash and coal was encountered from 1.6 to 1.9 ft bgs and the soil sample collected from the interval below the ash and coal layer (2.5 to 5 ft bgs) had concentrations of arsenic and lead at 16.9 mg/Kg and 485 mg/Kg, respectively.

Two soil samples collected from soil boring CMSSB006 had analytical results for TCLP lead above the USEPA criteria of 5 mg/L. TCLP lead was detected in the 21 to 24 inch sample at 19.4 mg/L and in the 2 to 5.9 ft bgs sample 19.4 (16.4-duplicate) mg/L. TCLP lead was not detected

(0.0030 U) in an additional sample collected in this soil boring at a depth from 6 to 8 ft bgs. USEPA TCLP method is used to determine the appropriate disposal method under current NYSDEC and USEPA regulations. Material, if excavated, will need to be characterized *ex situ* for disposal profiling.

Lastly, concentrations of semi-volatile organic compounds (SVOCs) were detected above their respective NYSDEC restricted residential SCOs in two of the nine soil borings advanced beneath the synthetic turf field (CMSSB006 and CMSSB013). At both of these sampling locations, the analytical results greater than residential SCOs were limited to the samples collected from within the identified layer of fill material containing ash, brick and/or glass in each respective soil boring.

2.1.3 Groundwater Sampling Results

In December 2014, as part of the Study Area Work Plan, two groundwater monitoring wells were installed on the City of Corning Memorial Stadium property. These two monitoring wells (CMSMW-01 and CMSMW-02) were installed in the vicinity of CMSSB002 and CMSSB003 as described in the NYSDEC-approved Groundwater Wells plan (WESTON, 2014b). These two groundwater monitoring wells are located along the southern edge of the City of Corning Memorial Stadium property near the earthen dike that runs along Chemung River. Based on groundwater elevation readings, groundwater in this area flows in a southeasterly direction towards the Chemung River.

Two rounds of groundwater samples were collected from each of the groundwater monitoring wells, one in January 2015 and a second round in April 2015. Analytical results from both of these sampling events indicate that the groundwater has not been impacted by the layers of fill material containing ash, brick and/or glass. The only compounds detected in groundwater above New York State Division of Water Technical and Operational Guidance Series (TOGS) standards were boron, iron and sodium. Iron and sodium are believed to be naturally occurring in the area of the City of Corning Memorial Stadium property. Boron was analyzed for and detected in the CMSMW-02 at concentrations of 1.1 mg/L (1.1 mg/L-duplicate) in April 2015. The TOGS groundwater standard for boron is 1 mg/L. In January 2015, the concentration of boron in groundwater samples collected from monitoring well CMSMW-02 was 0.90 mg/L (0.89 mg/L-duplicate) which is below the



TOGS standard. A summary table of validated analytical results from the groundwater samples collected on the City of Corning Memorial Stadium property is provided in Appendix A.

2.2 CORNING-PAINTED POST EAST HIGH SCHOOL CONSTRUCTION PROJECT

As a part of the Corning-Painted Post School District construction activities, extensive work has been performed on the City of Corning Memorial Stadium property including, but not limited to, the construction of new asphalt roadways and parking areas and the construction of concrete sidewalks. The newly constructed parking lot, roadway and sidewalk areas are shown on the Corning Memorial Stadium property features map provided in the previous section (see Figure 1-3).

2.3 CORNING-PAINTED POST SCHOOL DISTRICT TURF REPLACEMENT PROJECT

The synthetic turf in the City of Corning Memorial Stadium was deemed by the Corning-Painted Post Area School District (School District) to be unsuitable for continued athletic play and replacement of the old turf was proposed and approved by the School District in the fall of 2014. The School District planned to replace the synthetic turf during the summer of 2015 in preparation for its utilization during the 2015-2016 academic year. The School District's consultant (Haley & Aldrich) prepared an IRM Work Plan for the turf replacement project which was included as Appendix B to an Order on Consent and Administrative Settlement (Index No. A8-0859-15-07) between NYSDEC and the School District. This Order on Consent and Administrative Settlement was executed on July 1, 2015. Following the Order on Consent and Administrative Settlement between the School District and NYSDEC, the IRM activities were conducted by the School District as part of the City of Corning Memorial Stadium turf project (Turf Project) during the summer of 2015.

Before the execution of the Order on Consent and Administrative Settlement between the School District and NYSDEC, the City of Corning, the Corning-Painted Post School District and Corning Incorporated submitted letters dated June 30, 2015, to NYSDEC committing that each would undertake the following future actions:

- The City of Corning (as owner of the City of Corning Memorial Stadium property) would impose an institutional control in the form of an Environmental Easement restricting use of the Memorial Stadium property to Restricted Residential Uses and requiring compliance with a NYSDEC-approved Site Management Plan (SMP).
- The School District would implement a Work Plan (consisting of a Work Plan submitted on June 8, 2015 and an amendment dated June 15, 2015) to undertake the Turf Project as defined in the Work Plan at the City of Corning Memorial Stadium and would commit to work with the City of Corning and Corning Incorporated to develop and implement the SMP pursuant to an Environmental Easement to be filed.
- Corning Incorporated would, under its existing Order on Consent prepare and implement a proposed IRM Work Plan to provide and maintain a suitable cover system for soils outside of the Turf Project area at the City of Corning Memorial Stadium property.


2.4 SUMMARY OF CURRENT CONDITIONS

Based on the characterization activities performed by WESTON and the Turf Project and construction work performed by the School District at the City of Corning Memorial Stadium property, two areas have been identified where soil concentrations of arsenic, cadmium and/or lead were detected above the NYSDEC restricted residential SCOs (See Figure 2-2) in the top 2 feet of soil (i.e., 0 to 2 ft bgs). These areas are along the eastern edge of the track in the vicinity of sample CMSSS012 and in the grassy area in the southwest corner of the City of Corning Memorial Stadium property in the vicinity of sample CMSSS013. An additional area southwest of the City of Corning Memorial Stadium in the vicinity of soil boring CMSSB002 was identified where soil concentrations of arsenic, cadmium and lead were detected above the NYSDEC restricted residential SCOs in the soil sample collected at 2 ft bgs (sample collected from 2 to 6 ft bgs).

SECTION 2

FIGURES

DRAFT

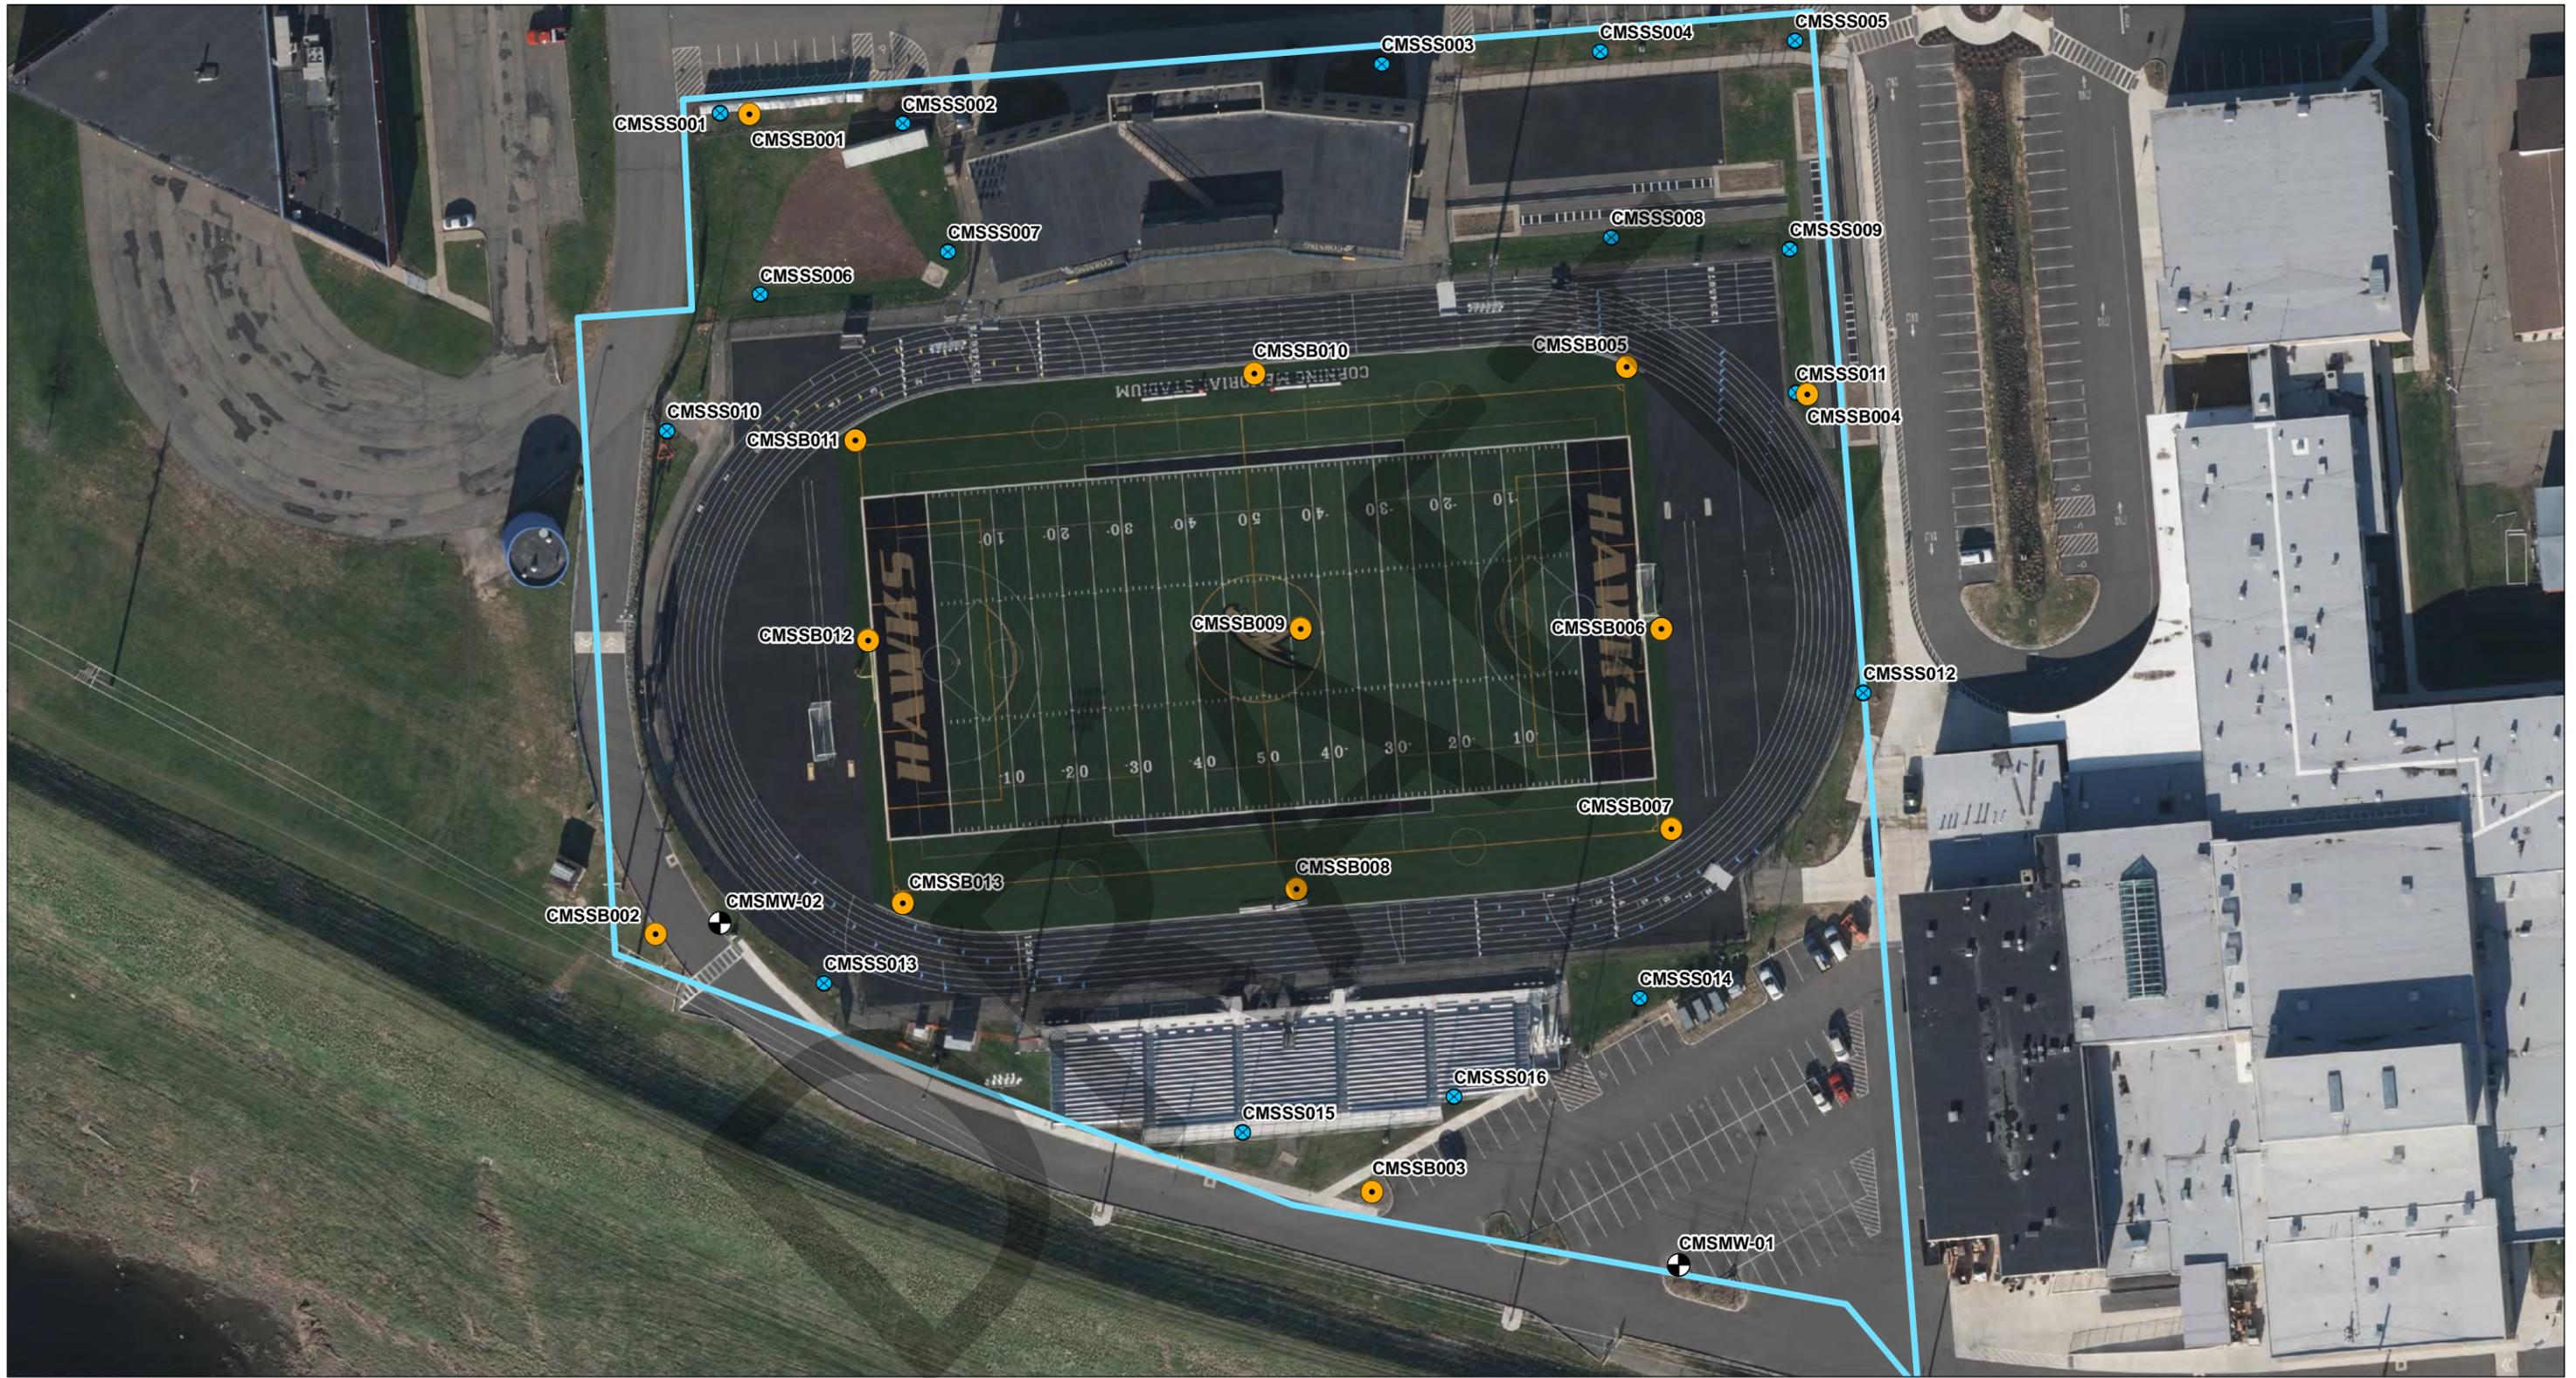

Legend

- City of Corning Memorial Stadium Property
- ✕ Surface Soil Locations
- Soil Borings
- Monitoring Well Locations

NOTES:
 Base Imagery: Robinson Aerial Imagery, Dec 2015
 Coordinate System: NAD 1983 State Plane
 New York Central Feet
 Datum: NAD83. Units: Feet


Study Area
 Corning NY



Figure 2-1
 Sample Locations
 City of Corning
 Memorial Stadium Property



Document Name: Sample_Locations.MXD
 2/11/2016

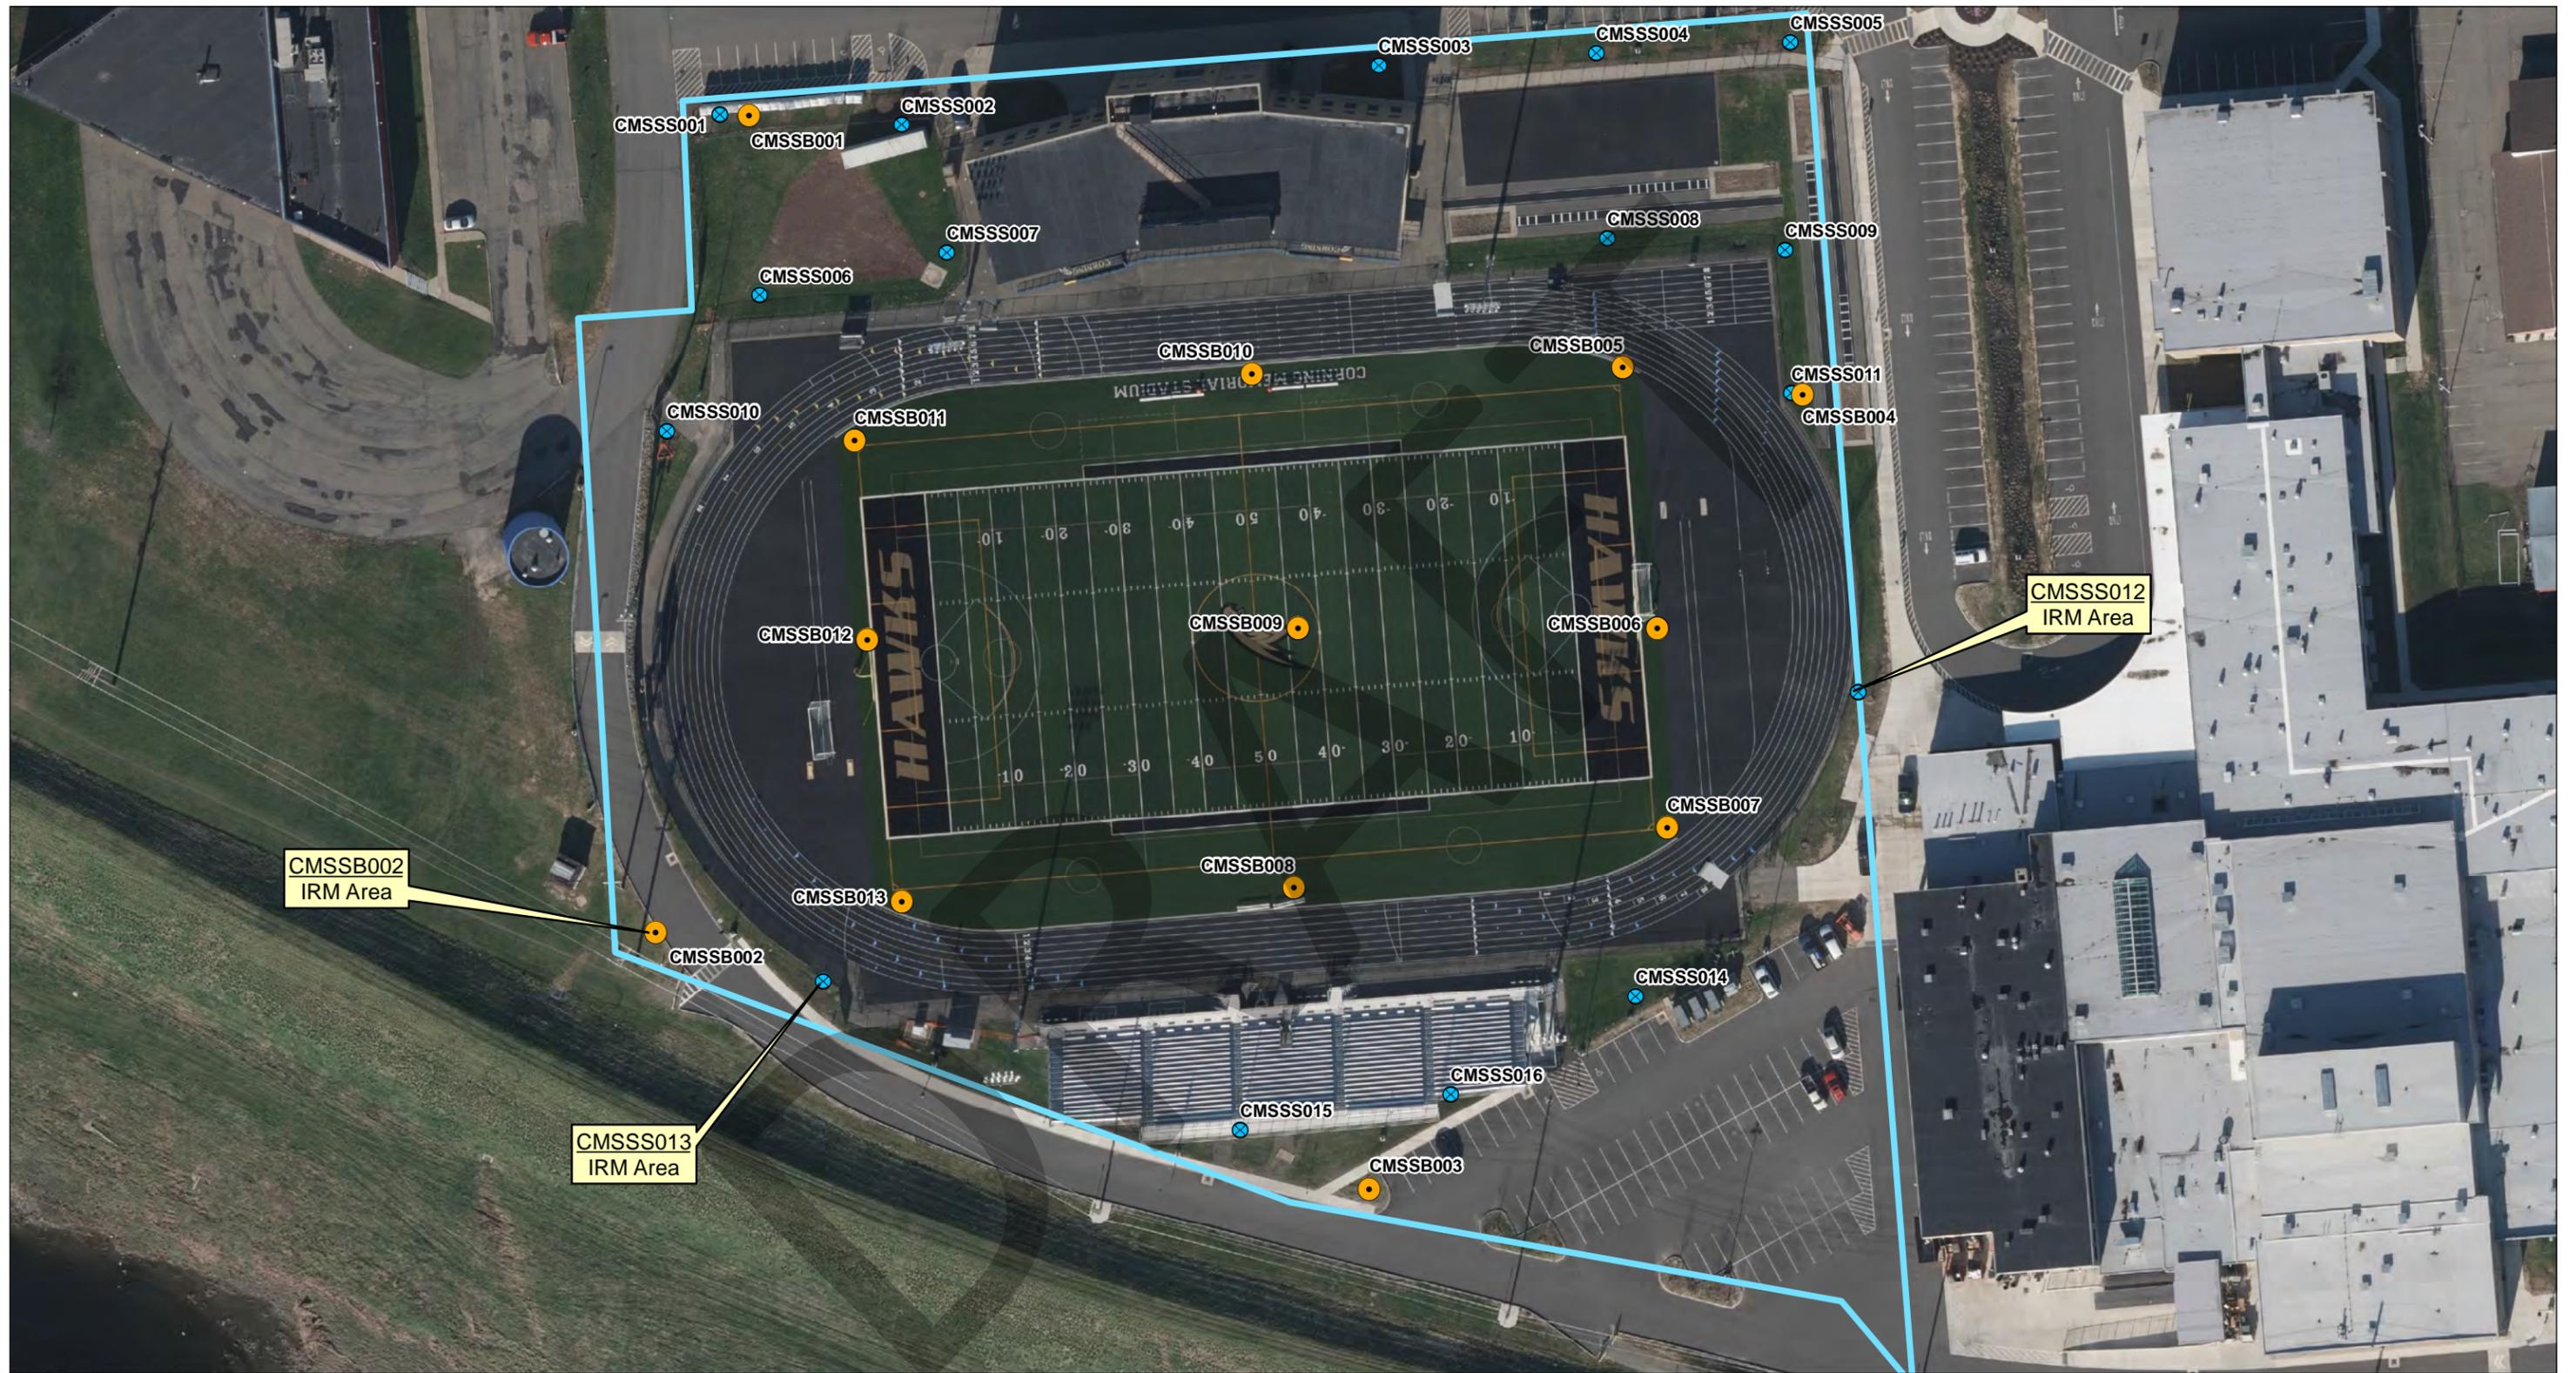

Legend


- City of Corning Memorial Stadium Property
- X Surface Soil Locations
- Soil Borings

NOTES:
 Base Imagery: Robinson Aerial Imagery, Dec 2015
 Coordinate System: NAD 1983 State Plane
 New York Central Feet
 Datum: NAD83. Units: Feet

Study Area
 Corning NY



Figure 2-2
 IRM Areas
 City of Corning
 Memorial Stadium Property

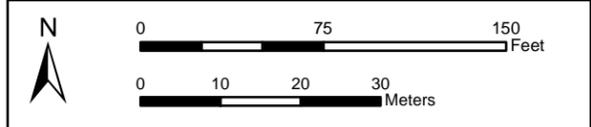

**SECTION 2
TABLES**

DRAFT



**Table 2-1
Soil Boring Log Summary
Study Area, Corning, NY**

Sample Location	Observance of ash, brick, and/or glass pieces			Depth to Native Soil (ft bgs)	Total Boring Depth (ft bgs)	Highest PID Reading (ppm)
	Comment / Notes	Interval (ft bgs)	Thickness (ft)			
City of Corning Memorial Stadium Property (CMS)						
CMSSB001	None	--	--	1.8 ft	16.0 ft	0 ppm
CMSSB002	Ash, brick, and glass	2.0 to 6.0 ft	4.0 ft	6.0 ft	16.0 ft	0 ppm
CMSSB003	Ash and brick	3.0 to 5.0 ft	2.0 ft	5.0 ft	16.0 ft	0 ppm
CMSSB004	None	--	--	2.85 ft	16.0 ft	0 ppm
CMSSB005	None	--	--	4.6 ft	16.0 ft	0 ppm
CMSSB006	Ash, brick, and glass	1.75 to 5.9 ft	4.15 ft	5.9 ft	16.0 ft	0 ppm
CMSSB007	Ash and coal	1.5 to 1.9 ft	0.4 ft	2.0 ft	16.0 ft	0 ppm
CMSSB008	Ash, brick, glass and coal	0.95 to 2.0 ft	1.05 ft	2.0 ft	16.0 ft	0 ppm
CMSSB009	Ash, brick, glass and coal	3.9 ft to 4.5 ft	0.6 ft	4.5 ft	16.0 ft	0 ppm
CMSSB010	Brick	1.0 to 1.33 ft	0.33 ft	1.33 ft	16.0 ft	0 ppm
CMSSB011	None	--	--	1.15 ft	16.0 ft	0 ppm
CMSSB012	Ash, brick and coal	2.0 to 3.9 ft	1.9 ft	3.9 ft	16.0 ft	0 ppm
CMSSB013	Brick and coal	1.0 to 4.2 ft	3.2 ft	4.2 ft	16.0 ft	0 ppm

Notes:

PID = photoionization detector
ppm = parts per million
-- = not applicable

3. INTERIM REMEDIAL MEASURES APPROACH

3.1 INTERIM REMEDIAL MEASURES OBJECTIVE

An IRM is proposed to be conducted at the City of Corning Memorial Stadium property to “mitigate potential environmental or human exposure” to soils with concentrations greater than the NYSDEC restricted residential SCOs [DER-10 1.11(a)1]. In accordance with the NYSDEC DER-10 Technical Guidance for Site Investigation and Remediation (DER-10) a “non-emergency” IRM is being proposed because exposure to soils or fill material containing glass, ash and/or brick with concentrations above NYSDEC restricted residential SCOs can be effectively addressed before completion of the ongoing investigation activities in the Study Area [DER-10 1.11(c)1].

The specific objective of the IRM is to provide a two foot cover in areas with soil sample concentrations greater than the NYSDEC restricted residential SCOs in the areas outside of the Turf Project completed by the Corning-Painted Post School District.

3.2 INTERIM REMEDIAL MEASURES APPROACH


As described in the following Section, additional soil sampling is proposed to refine the limits of excavation in the southeast corner of the stadium near sample location CMSSS013. Following this sampling, two feet of soil will be excavated and removed from the refined limits of excavation at sample location CMSSS013 and the predefined limits of excavation at sample locations CMSSS012 and CMSSB002. These three areas are identified on Figure 3-1.

The predefined limits of excavation at sample locations CMSSS012 and CMSSB002 were identified by radiating outward from the sample locations until reaching a sampling location where soil concentrations were detected at concentrations below the NYSDEC restricted residential SCOs or the property boundary. These identified areas were then refined by areas of impervious surface (i.e., asphalt and concrete covered areas). In addition to the previously stated criteria, final excavation limits will be established based on utility clearance, and accessibility.

SECTION 3

FIGURES

DRAFT

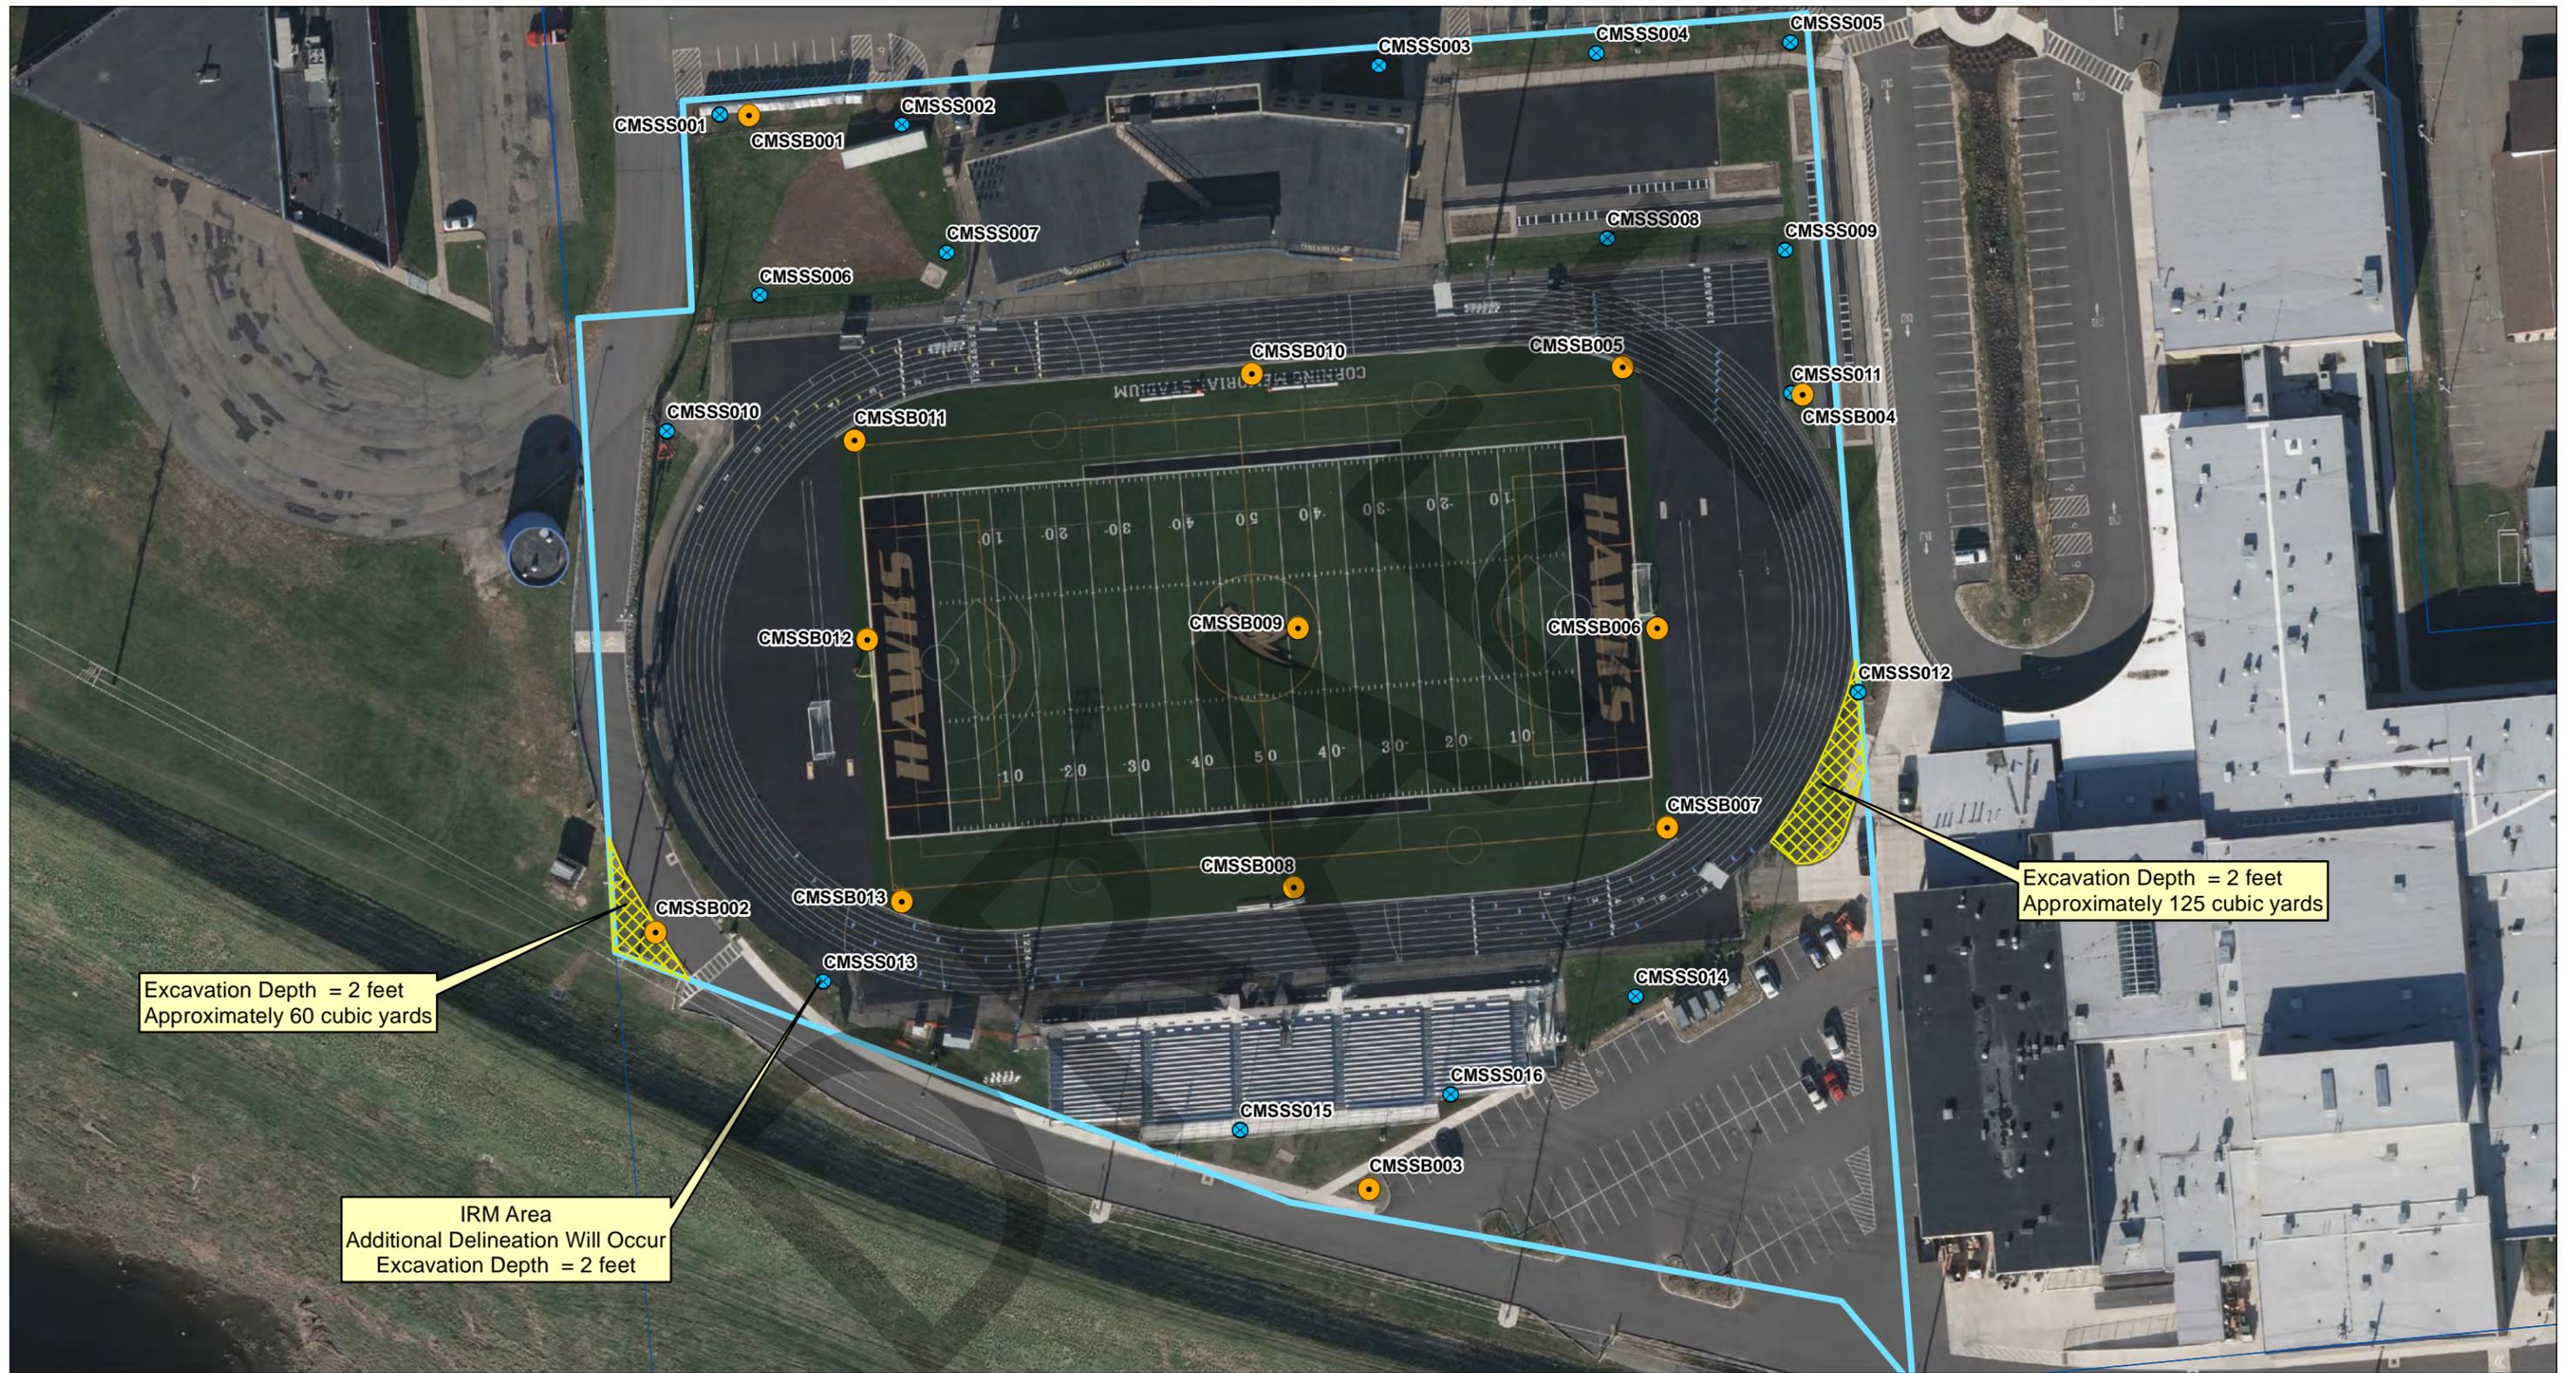

Legend

- City of Corning Memorial Stadium Property
- Parcels
- IRM Areas
- ⊗ Surface Soil Locations
- Soil Borings

NOTES:
 Base Imagery: Robinson Aerial Imagery, Dec 2015
 Coordinate System: NAD 1983 State Plane
 New York Central Feet
 Datum: NAD83. Units: Feet


Study Area
 Corning NY



Figure 3-1
 IRM Limits of Excavation
 City of Corning
 Memorial Stadium Property

Document Name: IRM_areas_Alt_excav.MXD

2/11/2016

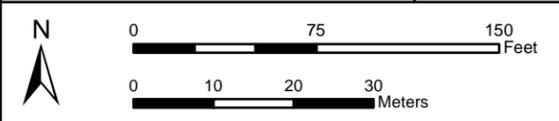

4. INTERIM REMEDIAL MEASURES ACTIVITIES & METHODOLOGIES

4.1 WRITTEN ACCESS CONSENT

The City of Corning Memorial Stadium property is not owned by or under the control of Corning Incorporated or NYSDEC, therefore, activities proposed in this IRM Work Plan will be performed under a written access agreement between Corning Incorporated and the City of Corning.

4.2 ADDITIONAL SURFACE SOIL SAMPLING AND EXCAVATION AREA REFINEMENT

Prior to the start of excavation activities additional shallow soil samples (2 to 24 in bgs) will be collected near CMSS013, located in the area southwest of the City of Corning Memorial Stadium. Samples will be collected on a five foot grid, stepping outward from the CMSS013 location for twenty-five feet (five sample grids, twenty samples). The four samples collected from the first grid will be analyzed for arsenic, cadmium and lead, while all other samples will be extracted by the laboratory and held.

If the analytical results from the first step out grid are found to be below the NYSDEC restricted residential SCOs, the extent of excavation will be refined to removal of all material within this 5 foot grid around CMSS013. If one of the step out locations has concentrations greater than NYSDEC restricted residential SCOs, the next step out point in that direction will be analyzed. This process will continue until the limits of excavation are refined by analytical results. If the limits of excavation cannot be determined after analysis of all the samples, additional sampling will be performed in a similar manner.

Shallow soil samples will be collected for analysis from 2 to 24 in bgs excluding the vegetative cover or sod layer. Prior to sample collection, gross vegetative matter will be removed (i.e., sod layer). Shallow soil samples will be collected using a small Geoprobe rig, a hand-held steel soil auger, or hand-held scoop. Shallow soil samples will be homogenized and placed directly into appropriate sample containers. The soil will be described as appropriate noting the color, moisture content, texture, layering, evidence of disturbance (foreign debris), and the distribution/abundance of roots, as applicable. Shallow soil sample locations will be recorded using a hand-held GPS unit with sub-meter accuracy.

All sample locations will be backfilled with bagged topsoil and the surface will be restored with appropriate material (e.g., sod, gravel, rip-rap). Any investigative derived waste (IDW) from this investigation will be contained in sealed containers (e.g., drums or other appropriate containers) and staged in the NYSDEC-approved Study Area staging area.

All non-dedicated sampling equipment will either be decontaminated by washing with phosphate-free detergent and rinsing with distilled water prior to and between sampling locations, or disposable equipment (e.g., scoops, plastic blending trays) will be used. Decontamination fluids will be collected and contained in sealed containers (e.g., drums or other appropriate containers) and staged in the NYSDEC-approved Study Area staging area.

Samples (including appropriate QC samples such as duplicate samples) will be placed in appropriate sample containers, in iced coolers and shipped with completed chain-of-custody documentation to TestAmerica for analysis. Sampling will be performed in a manner consistent with the Quality Assurance Project Plan (QAPP) contained in NYSDEC-approved Study Area Work Plan.

4.2.1 Quality Assurance / Quality Control

To ensure quality throughout the project, the involvement of trained and experienced personnel will be utilized, and proven operating procedures and analytical methods for sample collection, preservation, analysis, and documentation will be followed.

In addition to the laboratory QA and QC samples analyzed in accordance with the laboratory QA/QC Plan, several types of field QC samples will be obtained and submitted for analysis during the course of the field investigation activities to assess the quality of the data resulting from the field sampling program. These samples include:

- **Duplicates:** These samples are duplicate samples collected in the field and submitted to the laboratory without indication of the corresponding parent sample. These samples will be collected at a rate of one per every 20 samples and will provide a measure of laboratory precision and matrix variability.
- **Field Rinsate Blanks:** These samples will be collected to document the field decontamination of reusable sampling equipment. Field rinsate blanks will be prepared by pouring deionized water over the sampling equipment after a decontamination procedure has been completed. This rinse water is then collected



and submitted for analysis to provide an indication of the effectiveness of decontamination procedures (carry-over from sample to sample). These samples will be prepared at a rate of one per 20 samples.

Based on the anticipated collection of samples (20 samples) one duplicate sample and one rinsate blank sample (if applicable) will be collected. Further description of the QA/QC samples and analytical procedures are provided in the QAPP.

Laboratory data deliverable packages will meet the requirements of NYSDEC Analytical Services Protocol (ASP) Category B (See DER-10 Appendix 2B Section 1.0b). Validation of laboratory data deliverable packages will be performed as described in Section 5.2.2.

4.3 SOIL EXCAVATION ACTIVITIES

A map identifying where IRMs will be conducted at the City of Corning Memorial Stadium property under this IRM Work Plan is provided as Figure 3-1. The proposed IRMs within the defined and refined limits of excavation include excavation to two feet below ground surface and placement of a demarcation layer followed by backfill and re-vegetation.

The vertical extent of excavation will be limited to 2 ft bgs. As analytical results from the characterization sampling activities indicate some of the soil below 2 ft bgs has concentrations greater than NYSDEC restricted residential SCOs, a demarcation layer will be installed in all excavation areas at the base of the excavation between the existing in-place soils and the imported backfill material.

4.3.1 Pre-Excavation Activities

Prior to the start of any excavation activities, construction health and safety perimeters will be established around the project work areas (i.e. exclusion zone) to prevent unauthorized personnel from entering. The perimeters will be established through the use of temporary barriers, fencing and/or signage to prevent access to the area during excavation and backfilling activities.

The established perimeter will encompass an area large enough to provide a safe construction buffer and for excavation equipment to operate freely to perform the excavation as well as the staging of the excavated soils. The exclusion zone will also provide an area of protection around open excavations and have signage to prevent trespassers from entering the established exclusion

zone. The exclusion zone will remain in place until backfilling of the excavation has been completed.

Prior to excavation activities, the locations of subsurface utilities will be identified by non-intrusive subsurface scans using a combination of geophysical methods to assist in identifying subsurface details.

Prior to and/or during excavation activities, temporary construction erosion and sedimentation control measures (i.e., silt fences, erosion eels) will be installed as needed, adjusted during the course of the work, and will be removed when the area is stabilized. It should be noted that the proposed work will not require a New York State Pollutant Discharge Elimination System (NYS PDES) General Permit for Stormwater Discharges since less than one acre of soil disturbance is proposed.

4.3.2 Excavation Activities

Soil removal will generally be accomplished through the use of conventional earth moving equipment such as an excavator, backhoe, front-end loader, skid steer loader and/or other construction equipment. It is anticipated that smaller equipment (i.e., small to mid-size excavator and a skid steer loader) will be used for the excavation activities given the shallow excavation depth and location of the excavation relative to existing property structures and roadways. Excavation activities will be performed in a controlled manner to limit the exposed earthen areas and minimize the effect on soil erosion. Shovels, rakes and other hand tools will be used as needed for precise removal of material around existing property structures, foundations and utilities.

Staging of excavated soils will be conducted in a controlled manner such as (1) on a prepared pad lined with plastic sheeting (i.e., visqueen), bermed and tarped to provide containment and protection from precipitation, or (2) in roll-off containers. As described in the Community Air Monitoring Plan (CAMP) and subsection 4.4.1, additional actions will be undertaken during hauling and excavation activities to manage dust generation. Wherever possible, excavated soil will be directly loaded onto trucks or into roll off containers for hauling to an appropriate landfill or staging area. Additional information about the handling of excavated soils is described in subsection 4.4. Where possible, care will be taken to allow traffic to pass around the staging and



excavation areas and the City of Corning and School District will be notified of planned excavation activities at least 48 hours prior to the start of activities. To the extent practicable, hauling will be limited to off-peak school hours (i.e., minimize traffic during peak student arrival and departure times).

Erosion and sediment control measures will be implemented as needed and inspected weekly and after each major storm event during excavation activities. Maintenance and repair of the sediment and erosion control measures will be performed on an as needed basis. Excavation activities will be performed in a manner such that erosion is adequately controlled and soil and sediments are not allowed to flow into or onto any watercourse, adjacent properties, roadways, parking areas, walkways or storm and sanitary sewers. In most of the areas, excavation will be conducted in a below grade manner which will minimize uncontrolled run-off. Soil staging/stockpiling areas will be bermed and covered/tarped. Water that collects in an excavation area will be allowed to infiltrate. Excavation will proceed in a manner to minimize water collecting in the excavation, however excess water may have to be removed by pumping prior to backfill.

The demarcation layer, typically a geotextile membrane, will be placed at the base of excavation between the subsurface existing soil and the imported backfill material. The excavated areas will then be initially backfilled with structural fill and graded to the natural surrounding topographic contours or pre-determined elevations. Grassy areas will be covered with a minimum of 6 inches of vegetative support soil (i.e., top soil, amended soil). Following placement of the vegetative support soil, sod will be installed at the ground surface or, in the event sod is not available due to time of year, a natural seed blanket will be installed and covered with a protective stabilization blanket composed of biodegradable materials.

The order of excavation activities on the City of Corning Memorial Stadium property will be determined based upon a variety of factors, typically including: weather, traffic, ongoing activities at the property and communication with the property owner or the School District. Backfilling will occur after excavation areas are completed to minimize the time that excavations remain open. To prevent cross contamination, separate backfilling equipment will typically be used or equipment will be decontaminated prior to being utilized to move imported backfill material. Equipment



decontamination will be conducted in accordance with Standard Operating Procedures included in Appendix D to the Study Area Work Plan (Weston, 2014a).

Prior to importing backfill material, analytical samples will be collected at the source to ensure the material meets the requirements for soil to be imported under DER-10 Section 5.4(e). These samples will be collected and analyzed in accordance with QAPP. Analytical results for soil samples will be submitted to NYSDEC for approval prior to use during the IRM activities.

Confirmation sampling will not be collected in a horizontal direction during the execution of the IRM activities because the lateral extent of excavation is bound by either impervious surface, by sampling locations where soil concentrations are below NYSDEC restricted residential SCO, or by property boundaries. Vertical confirmation sampling will not be necessary because soils will be excavated to a predetermined depth of two feet within the defined limits of excavation.

4.4 WASTE HANDLING

Excavated soil generated during removal activities will be direct loaded for disposal or moved to the NYSDEC-approved Study Area staging area for subsequent disposal. In lieu of moving soil to the NYSDEC-approved Study Area staging area, soil can be directly loaded onto haul trucks for disposal in accordance with applicable NYSDEC waste regulations. For profiling of the removed material, including decontamination water and/or solids, samples of the various excavated media will be collected and analyzed in accordance with the QAPP in place for the Study Area Work Plan for disposal profiling. Excavated materials will then be disposed in accordance with all applicable federal and state laws.

Reasonable care will be taken by the equipment operator in handling and loading of excavated soils to minimize spillage and tracking. In the event of spillage or tracking of soils, hand shovels, a skid steer loader or an industrial street sweeper will be utilized to clean traffic areas.

4.4.1 Staging and Loading

Prior to any staging and loading activities, an exclusion zone will be established around the excavation areas. To the extent practical, the exclusion zone will be set up in a manner to allow haul trucks to remain outside of the exclusion zone where they can be loaded by equipment located



inside the exclusion zone. This will minimize the need for decontamination and potential for tracking soil out of the exclusion zone.

Staging and loading activities will be conducted on existing asphalt roadways/driveways to the extent practical. Transportation vehicles will not be permitted to be staged on the grass at the City of Corning Memorial Stadium property. If soils are directly loaded, all trucks will be operated by a licensed hauling company. A route of access will be determined for all truck vehicles going to or from the City of Corning Memorial Stadium property and WESTON will inspect all vehicles prior to departure to assure the load is secured to prevent spillage, leakage or airborne movement during transit. Staging of excavated soils at the NYSDEC-approved Study Area staging area staging area will occur on an as needed basis.

Any construction water or accumulated precipitation collecting in the excavation will be allowed to infiltrate. Excavation will proceed in a manner to minimize water collecting in the excavation, however excess water may have to be removed by pumping prior to backfill.

In the event of excessive dry conditions that could create dust, the spread of dust and dirt will be limited by the use of water mist or other suitable methods. Air monitoring will be performed by WESTON to ensure excessive migration of dust particles does not occur during the excavation and/or loading activities. Ambient air concentrations greater than the action level will result in actions being taken to control fugitive emissions (See the CAMP).

4.5 SURVEY ACTIVITIES

The final limits of the excavations will be surveyed by a New York State licensed professional surveyor prior to backfilling. The professional surveyor will produce and stamp a set of “as-built” drawings to document the limits of removal.

4.6 INSPECTIONS

Following backfilling and restoration, WESTON will perform monthly inspections of the areas where the IRM excavation activities were performed under this IRM Work Plan to (1) initially ensure the stability of the area and reestablishment of vegetation in backfilled areas and to (2) confirm that no visual indicators of soil disturbance at depth occurred. These monthly inspections



will be conducted until a final remedy is implemented for the City of Corning Memorial Stadium property, unless otherwise approved by the NYSDEC.

DRAFT

5. PROJECT MANAGEMENT

The proposed activities will be performed by WESTON on behalf of Corning Incorporated. It is anticipated that this work, consistent with the activities performed to date in the Study Area, will be performed under the oversight of an NYSDEC field representative.

5.1 SCHEDULE

The activities described in this IRM Work Plan are scheduled to be performed following NYSDEC approval of this IRM Work Plan and upon receipt of consent to access from the City of Corning. The anticipated project schedule is provided as Figure 5-1.

5.2 DOCUMENTATION

5.2.1 Field Logs

Essential project information pertinent to field activities will be recorded in bound field logbooks and/or field hauling inspection sheets (if applicable). Information pertinent to field activities may include the following: active excavation area, daily excavation and backfill volumes, inspection reports, equipment decontamination, placement of demarcation barrier, waste profiling, project manifests, etc.

5.2.2 Photo Log

A project photo log will be prepared and maintained throughout the IRM activities to provide photo documentation of field activities.

5.2.3 Field Measurements

The limits of excavation will be measured and documented as the work progresses primarily using GPS controls. Final depths of excavation will be measured prior to backfilling in addition to the location of buried utilities or other structures encountered in the excavation area. After backfilling final elevations will be measured prior to placing sod or seeding.

5.2.4 Field Reports

NYSDEC and NYSDOH will be provided updates in the weekly progress reports, including select supporting photographs. All air monitoring data will be recorded in the site field logbook, in designated field sheets, or digitally, and the results of the air monitoring will be communicated to the NYSDEC and NYSDOH on a scheduled basis (i.e. daily for levels which require actions, weekly for routine monitoring data).

5.2.5 Reporting

Following implementation of IRM activities, a Construction Completion Report documenting the work performed will be prepared and submitted to NYSDEC in accordance with DER-10 subdivision 5.8(b)-(d).

The aforementioned report will typically contain the following information:

- Summary description of the removal action as implemented pursuant to the IRM Work Plan
- Quantity of material removed and disposal facility
- Source of backfill and analytical test results
- A set of “as-built” drawings documenting the limits of removal (i.e., depth and extent) and final elevations after backfilling
- Description of institutional controls (if applicable)
- Documentation of any changes to the IRM Work Plan activities

5.3 HEALTH AND SAFETY PLAN

The health and safety of field workers, visitors, and the community are of utmost importance. For the field work, it is planned that workers will be in Level D personal protection (i.e., coveralls or work clothes, work boots, safety glasses, and hard hats). All field activities will be conducted in accordance with the Health and Safety Plan (HASP) and CAMP contained in Appendices B and C. An exclusion zone will be established around the work area in accordance with the HASP. To the extent possible, haul trucks will operate outside of the exclusion zone to minimize the need for



decontamination and potential for tracking soils. As excavation areas are completed the exclusion zone will be adjusted accordingly.

5.4 TEMPORARY FIELD OFFICE


The excavation activities will involve mobilization of personnel and equipment. The temporary field office and equipment staging area, approved by NYSDEC for the ongoing Study Area work, will be utilized. This temporary field office area is surrounded by temporary fencing for security. The office area and access gate are closed and locked when not in use and consist of an office trailer and staging area for field equipment.

DRAFT

SECTION 5

FIGURE

DRAFT

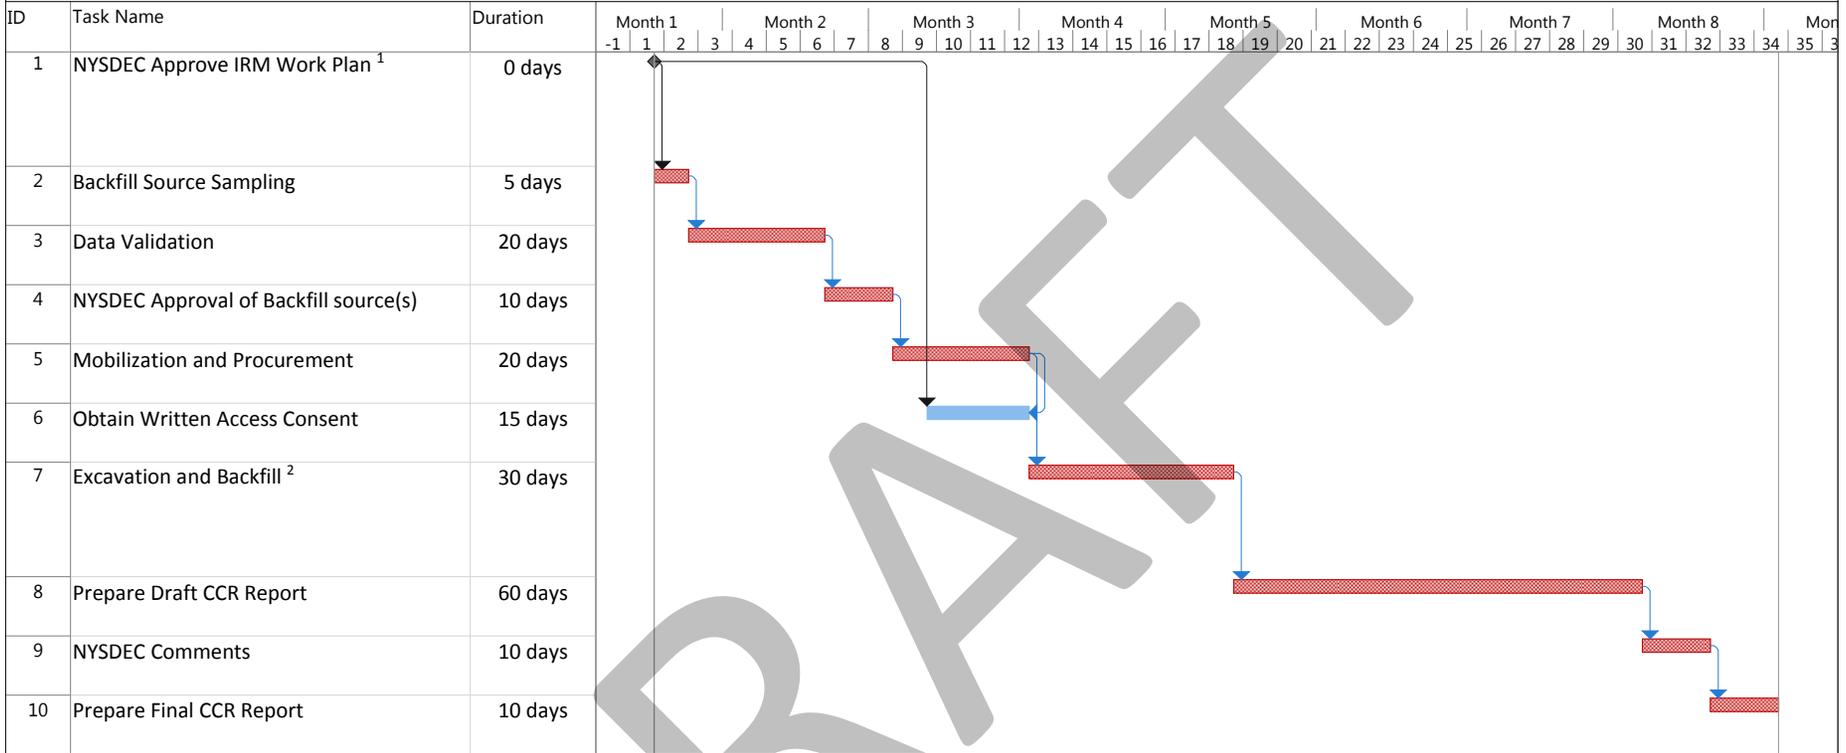

Notes:

¹ Subject to approval by NYSDEC

² Predicated upon obtaining written access consent from the property owner

Figure 5-1
City of Corning Memorial Stadium IRM Schedule
Study Area, Corning, NY

Task Milestone Split Critical Path



6. REFERENCES

FEMA, 2002. Federal Emergency Management Agency. 2002. *Firm Flood Insurance Rate Map, City of Corning, New York.*

Miller, 1982. Miller, T.S., Belli, J.L., Allen, R.V. Geohydrology of the valley-fill aquifer in the Corning area, Steuben County, New York, 1982.

Olcot, 1995. Olcot, Perry G., USGS. Groundwater Atlas of the United States. Connecticut, Maine, Massachusetts, New Hampshire, New York, Rhode Island, Vermont, 1995.

USGS, 2014. USGS National Water Information System. Station Number 01529950 Chemung River at Corning, New York. http://nwis.waterdata.usgs.gov/nwis/uv?site_no=01529950 accessed 3/7/2014.

WESTON, 2014a. Study Area Characterization Work Plan, June 2014. Prepared by Weston Solutions, Inc. for Corning Incorporated.

WESTON, 2014b. Groundwater Wells, October 24, 2014. Prepared by Weston Solutions, Inc. for Corning Incorporated.

WESTON, 2015, Study Area Characterization Work Plan Addendum Number 3, 20 March 2015. Prepared by Weston Solutions, Inc. for Corning Incorporated.

DRAFT



APPENDIX A

CHARACTERIZATION SAMPLING RESULTS

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB001	CMSSB001	CMSSB002	CMSSB002	CMSSB002	CMSSB003	CMSSB003	CMSSB004
			CMSSB001-0-000	CMSSB001-0-020	CMSSB002-0-000	CMSSB002-0-020	CMSSB002-0-060	CMSSB003-0-030	CMSSB003-0-050	CMSSB004-0-030
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	4/22/2015
			0 - 2 feet	2 - 4 feet	0 - 2 feet	2 - 6 feet	6 - 8 feet	3 - 5 feet	5 - 7 feet	3-4 feet
			0 - Primary							
			SB							
			480-65070-10	480-65070-11	480-65070-12	480-65070-13	480-65070-14	480-65070-15	480-65070-16	480-79128-1
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	~	~	0.0056 U	0.052	0.024	~	~	~
Barium, TCLP	~	100	~	~	0.33 J+	1.5	0.37 J+	~	~	~
Cadmium, TCLP	~	1	~	~	0.00050 U	1.1 J+	0.014	~	~	~
Chromium, TCLP	~	5	~	~	0.070	0.0068 J+	0.0052 J+	~	~	~
Lead, TCLP	~	5	~	~	0.010 U	46	0.044 J+	~	~	~
Mercury, TCLP	~	0.2	~	~	0.00012 U	0.00012 U	0.00012 U	~	~	~
Selenium, TCLP	~	1	~	~	0.0087 U	0.0087 U	0.0087 U	~	~	~
Silver, TCLP	~	5	~	~	0.0017 U	0.0017 U	0.0017 U	~	~	~
Total Metals, mg/Kg										
Aluminum, Total	~	~	~	~	8400	1900	6900	~	~	~
Antimony, Total	~	~	~	~	0.45 U	4.4 J	0.45 U	~	~	~
Arsenic, Total	16	~	5.9	5.5	6.9	69	7.6	7.6	4.1	5.4
Barium, Total	400	~	~	~	82	93	79	~	~	~
Beryllium, Total	72	~	~	~	0.45	0.080 J	0.37	~	~	~
Boron, Total	~	~	~	~	4.9	19	5.6	~	~	~
Cadmium, Total	4.3	~	0.031 U	0.035 U	0.034 U	13	0.50	0.27	0.037 U	0.15 J
Calcium, Total	~	~	~	~	30000	1400	1200	~	~	~
Chromium, Total	180	~	~	~	12	4.5	8.0	~	~	~
Cobalt, Total	~	~	~	~	7.9	2.1	7.0	~	~	~
Copper, Total	270	~	~	~	17	29	9.7	~	~	~
Iron, Total	~	~	~	~	15000	3300	14000	~	~	~
Lead, Total	400	~	19	11	20	1900	24	57	11	10.6
Magnesium, Total	~	~	~	~	4700	480	2100	~	~	~
Manganese, Total	2000	~	~	~	490	67	410	~	~	~
Mercury, Total	0.81	~	~	~	~	~	~	~	~	0.015 J
Nickel, Total	310	~	~	~	19	4.5 J	16	~	~	~
Potassium, Total	~	~	~	~	1100	290	660	~	~	~
Selenium, Total	180	~	~	~	0.45 U	1.9 J	0.45 U	~	~	~
Silver, Total	180	~	~	~	0.22 U	0.22 U	0.22 U	~	~	~
Sodium, Total	~	~	~	~	370	150 J	40 J	~	~	~
Thallium, Total	~	~	~	~	0.34 U	0.33 U	0.34 U	~	~	~
Vanadium, Total	~	~	~	~	12	5.6	10	~	~	~
Zinc, Total	10000	~	~	~	58	140	41	~	~	~
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB001	CMSSB001	CMSSB002	CMSSB002	CMSSB002	CMSSB003	CMSSB003	CMSSB004	
			CMSSB001-0-000	CMSSB001-0-020	CMSSB002-0-000	CMSSB002-0-020	CMSSB002-0-060	CMSSB003-0-030	CMSSB003-0-050	CMSSB004-0-030	
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	4/22/2015	
			0 - 2 feet	2 - 4 feet	0 - 2 feet	2 - 6 feet	6 - 8 feet	3 - 5 feet	5 - 7 feet	3-4 feet	
			0 - Primary								
SB	SB	SB	SB	SB	SB	SB	SB				
			480-65070-10	480-65070-11	480-65070-12	480-65070-13	480-65070-14	480-65070-15	480-65070-16	480-79128-1	
Volatile Organic Compounds (VOCs), ug/Kg (continued)											
2-Hexanone	~	~	~	~	~	~	~	~	~	~	
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~	
Acetone	100000	~	~	~	~	~	~	~	~	~	
Benzene	4800	~	~	~	~	~	~	~	~	~	
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~	
Bromoform	~	~	~	~	~	~	~	~	~	~	
Bromomethane	~	~	~	~	~	~	~	~	~	~	
Carbon disulfide	~	~	~	~	~	~	~	~	~	~	
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~	
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~	
Chloroethane	~	~	~	~	~	~	~	~	~	~	
Chloroform	49000	~	~	~	~	~	~	~	~	~	
Chloromethane	~	~	~	~	~	~	~	~	~	~	
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~	
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~	
Cyclohexane	~	~	~	~	~	~	~	~	~	~	
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~	
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~	
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~	
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~	
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~	
Methyl acetate	~	~	~	~	~	~	~	~	~	~	
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~	
Methylene chloride	100000	~	~	~	~	~	~	~	~	~	
Styrene	~	~	~	~	~	~	~	~	~	~	
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~	
Toluene	100000	~	~	~	~	~	~	~	~	~	
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~	
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~	
Trichloroethene	21000	~	~	~	~	~	~	~	~	~	
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~	
Vinylchloride	~	~	~	~	~	~	~	~	~	~	
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~	
Semi-Volatile Organic Compounds (SVOCs), ug/Kg											
2,4,5-Trichlorophenol	~	~	~	~	78	U	39	UJ	43	U	~
2,4,6-Trichlorophenol	~	~	~	~	23	U	12	UJ	13	U	~
2,4-Dichlorophenol	~	~	~	~	19	U	9.3	UJ	10	U	~
2,4-Dimethylphenol	~	~	~	~	96	U	48	UJ	53	U	~
2,4-Dinitrophenol	~	~	~	~	120	U	62	UJ	69	U	~
2,4-Dinitrotoluene	~	~	~	~	55	U	28	UJ	30	U	~
2,6-Dinitrotoluene	~	~	~	~	87	U	44	UJ	48	U	~
2-Chloronaphthalene	~	~	~	~	24	U	12	UJ	13	U	~
2-Chlorophenol	~	~	~	~	18	U	9.1	UJ	10	U	~
2-Methylnaphthalene	~	~	~	~	4.3	U	2.2	UJ	2.4	U	~
2-Methylphenol	100000	~	~	~	11	U	5.5	UJ	6.0	U	~
2-Nitroaniline	~	~	~	~	110	U	57	UJ	63	U	~
2-Nitrophenol	~	~	~	~	16	U	8.2	UJ	9.0	U	~
3,3'-Dichlorobenzidine	~	~	~	~	310	U	160	UJ	170	U	~
3-Nitroaniline	~	~	~	~	82	U	41	UJ	45	U	~
4,6-Dinitro-2-methylphenol	~	~	~	~	120	U	62	UJ	68	U	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB001	CMSSB001	CMSSB002	CMSSB002	CMSSB002	CMSSB003	CMSSB003	CMSSB004
			CMSSB001-0-000	CMSSB001-0-020	CMSSB002-0-000	CMSSB002-0-020	CMSSB002-0-060	CMSSB003-0-030	CMSSB003-0-050	CMSSB004-0-030
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	4/22/2015
			0 - 2 feet	2 - 4 feet	0 - 2 feet	2 - 6 feet	6 - 8 feet	3 - 5 feet	5 - 7 feet	3-4 feet
			0 - Primary							
SB	SB	SB	SB	SB	SB	SB	SB			
			480-65070-10	480-65070-11	480-65070-12	480-65070-13	480-65070-14	480-65070-15	480-65070-16	480-79128-1
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	~	~	110 U	57 UJ	62 U	~	~	~
4-Chloro-3-methylphenol	~	~	~	~	15 U	7.3 UJ	8.1 U	~	~	~
4-Chloroaniline	~	~	~	~	100 U	52 UJ	58 U	~	~	~
4-Chlorophenyl-phenylether	~	~	~	~	7.6 U	3.8 UJ	4.2 U	~	~	~
4-Methylphenol	100000	~	~	~	20 U	9.9 UJ	11 U	~	~	~
4-Nitroaniline	~	~	~	~	40 U	20 UJ	22 U	~	~	~
4-Nitrophenol, SVOC	~	~	~	~	86 U	43 R	48 U	~	~	~
Acenaphthene	100000	~	~	~	4.2 U	2.1 UJ	2.3 U	~	~	~
Acenaphthylene	100000	~	~	~	2.9 U	30 J	1.6 U	~	~	~
Acetophenone	~	~	~	~	18 U	9.1 UJ	10 U	~	~	~
Anthracene	100000	~	~	~	9.1 U	33 J	5.0 U	~	~	~
Atrazine	~	~	~	~	16 U	7.9 UJ	8.7 U	~	~	~
Benz(a)anthracene	1000	~	~	~	6.1 U	170 J	6.5 J	~	~	~
Benzaldehyde	~	~	~	~	39 U	20 UJ	22 U	~	~	~
Benzo(a)pyrene	1000	~	~	~	18 J	130 J	4.7 U	~	~	~
Benzo(b)fluoranthene	1000	~	~	~	30 J	250 J	3.8 U	~	~	~
Benzo(g,h,i)perylene	100000	~	~	~	16 J	110 J	2.4 U	~	~	~
Benzo(k)fluoranthene	3900	~	~	~	13 J	89 J	2.2 U	~	~	~
Biphenyl	~	~	~	~	22 U	11 UJ	12 U	~	~	~
bis (2-chloroisopropyl) ether	~	~	~	~	37 U	19 UJ	20 U	~	~	~
bis(2-Chloroethoxy)methane	~	~	~	~	19 U	9.7 UJ	11 U	~	~	~
bis(2-Chloroethyl)ether	~	~	~	~	31 U	15 UJ	17 U	~	~	~
bis(2-Ethylhexyl)phthalate	~	~	~	~	110 U	57 UJ	63 U	~	~	~
Butyl benzyl phthalate	~	~	~	~	96 U	48 UJ	53 U	~	~	~
Caprolactam	~	~	~	~	150 U	77 UJ	85 U	~	~	~
Carbazole	~	~	~	~	4.1 U	2.1 UJ	2.3 U	~	~	~
Chrysene	3900	~	~	~	25 J	150 J	2.0 U	~	~	~
Dibenz(a,h)anthracene	330	~	~	~	4.2 U	35 J	2.3 UJ	~	~	~
Dibenzofuran	59000	~	~	~	3.7 U	1.9 UJ	2.0 U	~	~	~
Diethylphthalate	~	~	~	~	11 U	5.4 UJ	5.9 U	~	~	~
Dimethyl phthalate	~	~	~	~	9.3 U	4.6 UJ	5.1 U	~	~	~
Di-N-Butyl phthalate	~	~	~	~	120 U	62 UJ	68 U	~	~	~
Di-N-Octyl phthalate	~	~	~	~	8.3 U	4.2 UJ	4.6 U	~	~	~
Fluoranthene	100000	~	~	~	33 J	210 J	2.8 U	~	~	~
Fluorene	100000	~	~	~	8.2 U	4.1 UJ	4.5 U	~	~	~
Hexachlorobenzene	1200	~	~	~	18 U	8.9 UJ	9.8 U	~	~	~
Hexachlorobutadiene, SVOC	~	~	~	~	18 U	9.1 UJ	10 U	~	~	~
Hexachlorocyclopentadiene	~	~	~	~	110 U	54 UJ	59 U	~	~	~
Hexachloroethane	~	~	~	~	28 U	14 UJ	15 U	~	~	~
Indeno(1,2,3-cd)pyrene	500	~	~	~	14 J	150 J	5.4 UJ	~	~	~
Isophorone	~	~	~	~	18 U	8.9 UJ	9.8 U	~	~	~
Naphthalene, SVOC	100000	~	~	~	5.9 U	41 J	3.3 U	~	~	~
Nitrobenzene	15000 ^a	~	~	~	16 U	7.9 UJ	8.7 U	~	~	~
N-Nitroso-di-N-propylamine	~	~	~	~	28 U	14 UJ	16 U	~	~	~
N-Nitrosodiphenylamine	~	~	~	~	19 U	9.7 UJ	11 U	~	~	~
Pentachlorophenol, SVOC	6700	~	~	~	120 U	61 UJ	67 U	~	~	~
Phenanthrene	100000	~	~	~	28 J	110 J	4.1 U	~	~	~
Phenol	100000	~	~	~	38 U	19 UJ	21 U	~	~	~
Pyrene	100000	~	~	~	36 J	210 J	5.7 J	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB001	CMSSB001	CMSSB002	CMSSB002	CMSSB002	CMSSB003	CMSSB003	CMSSB004
			CMSSB001-0-000	CMSSB001-0-020	CMSSB002-0-000	CMSSB002-0-020	CMSSB002-0-060	CMSSB003-0-030	CMSSB003-0-050	CMSSB004-0-030
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	4/22/2015
			0 - 2 feet	2 - 4 feet	0 - 2 feet	2 - 6 feet	6 - 8 feet	3 - 5 feet	5 - 7 feet	3-4 feet
			0 - Primary							
			SB							
			480-65070-10	480-65070-11	480-65070-12	480-65070-13	480-65070-14	480-65070-15	480-65070-16	480-79128-1
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	0.0034 U	0.0034 U	0.0037 U	~	~	~
Aroclor-1221	~	~	~	~	0.0034 U	0.0034 U	0.0037 U	~	~	~
Aroclor-1232	~	~	~	~	0.0034 U	0.0034 U	0.0037 U	~	~	~
Aroclor-1242	~	~	~	~	0.0034 U	0.0034 U	0.0037 U	~	~	~
Aroclor-1248	~	~	~	~	0.0034 U	0.0034 U	0.0037 U	~	~	~
Aroclor-1254	~	~	~	~	0.0082 U	0.0082 U	0.0090 U	~	~	~
Aroclor-1260	~	~	~	~	0.0082 U	0.0082 U	0.0090 U	~	~	~
Aroclor-1262	~	~	~	~	0.0082 U	0.0082 U	0.0090 U	~	~	~
Aroclor-1268	~	~	~	~	0.0082 U	0.0082 U	0.0090 U	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	41 J	40 J	66 J	~	~	~

Notes:
 mg/Kg = milligram per kilogram.
 mg/L = milligram per liter.
 ug/Kg = microgram per kilogram.
 U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.
 UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.
 J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.
 J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.
 R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.
 SB = Soil boring.
 SS = Surface soil.
 (1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).
 (2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).
 a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).
 c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).
 ~ = Analysis not performed or No standard or guidance value listed for this constituent.





Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB005	CMSSB005	CMSSB006	CMSSB006	CMSSB006	CMSSB006	CMSSB007	CMSSB007
			CMSSB005-0-046	CMSSB005-0-010	CMSSB006-0-020	CMSSB006-1-020	CMSSB006-0-060	CMSSB006-0-018	CMSSB007-0-025	CMSSB007-0-005
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015
			4.6-6 feet	11.5-24 inches	2-5.9 feet	2-5.9 feet	6-8 feet	21-24 inches	2.5-5 feet	6.5-24 inches
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SB							
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	~	~	0.065	0.047	0.0056 U	0.049	0.0056 U	0.031
Barium, TCLP	~	100	~	~	0.76	0.62	0.52	0.91	0.46	0.76
Cadmium, TCLP	~	1	~	~	0.33	0.24	0.00050 U	0.17	0.00050 U	0.0071
Chromium, TCLP	~	5	~	~	0.0040 U	0.0010 U	0.0040 U	0.0040 U	0.0040 U	0.0010 U
Lead, TCLP	~	5	~	~	19.4	16.3	0.0030 U	19.4	0.0037 J	0.51
Mercury, TCLP	~	0.2	~	~	0.00012 U	0.00012 U	0.00012 UJ	0.00012 U	0.00012 U	0.00012 U
Selenium, TCLP	~	1	~	~	0.0087 U					
Silver, TCLP	~	5	~	~	0.0017 U					
Total Metals, mg/Kg										
Aluminum, Total	~	~	~	~	2150 J	7570 J	7700 J	4220	9610	8170
Antimony, Total	~	~	~	~	13.5 J	16.0 J	0.54 J	8.2 J	0.53 J	1.8 J
Arsenic, Total	16	~	5.8	9.0	36.4	49.5	4.5	24.2	5.1	16.1
Barium, Total	400	~	~	~	49.6 J	127 J	79.1 J	61.7	99.1	79.0
Beryllium, Total	72	~	~	~	0.22 J	0.71 J	0.39	0.52	0.48	0.55
Boron, Total	~	~	~	~	7.9	10	3.7	6.7	3.6	9.0
Cadmium, Total	4.3	~	0.13 J	0.55	13.1	21.6	0.10 J	7.0	0.13 J	0.89
Calcium, Total	~	~	~	~	1180 J	3280 J	931 J	1750	1970	13600
Chromium, Total	180	~	~	~	4.0 J	10.2 J	9.6	9.2	11.9	11.8
Cobalt, Total	~	~	~	~	2.6 J	7.5 J	6.5	3.6	7.2	6.8
Copper, Total	270	~	~	~	23.1	32.3	8.1	20.1	10	18.0
Iron, Total	~	~	~	~	7900 J	19200 J	14500	10600	16400	15600
Lead, Total	400	~	10.8	78.5	1170 J	2010 J	8.1	1470	8.7	485
Magnesium, Total	~	~	~	~	403 J	1890 J	2040 J	1240	2310	3110
Manganese, Total	2000	~	~	~	66.8 J	317 J	386	156	432	271
Mercury, Total	0.81	~	0.016 J	0.037	0.35	0.34	0.0098 U	0.18	0.013 J	0.077
Nickel, Total	310	~	~	~	6.6	14.1	14.1	8.9	16.6	18.7
Potassium, Total	~	~	~	~	423 J	1060 J	943 J	699	1190	1160
Selenium, Total	180	~	~	~	2.0 J	1.6 J	0.45 U	0.46 U	0.50 U	0.49 U
Silver, Total	180	~	~	~	0.23 U	0.24 U	0.23 U	0.23 U	0.25 U	0.25 U
Sodium, Total	~	~	~	~	52.8 J	105 J	32.3 J	56.9 J	32.0 J	138 J
Thallium, Total	~	~	~	~	0.35 U	0.37 U	0.34 U	0.35 U	0.37 U	0.37 U
Vanadium, Total	~	~	~	~	5.6 J	14.1 J	11.6	9.4	13.7	15.6
Zinc, Total	10000	~	~	~	164	249	43.1	186	48.7	139
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB005	CMSSB005	CMSSB006	CMSSB006	CMSSB006	CMSSB006	CMSSB007	CMSSB007
			CMSSB005-0-046	CMSSB005-0-010	CMSSB006-0-020	CMSSB006-1-020	CMSSB006-0-060	CMSSB006-0-018	CMSSB007-0-025	CMSSB007-0-005
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015
			4.6-6 feet	11.5-24 inches	2-5.9 feet	2-5.9 feet	6-8 feet	21-24 inches	2.5-5 feet	6.5-24 inches
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
SB	SB	SB	SB	SB	SB	SB	SB			
480-79128-3	480-79128-2	480-79133-2	480-79133-3	480-79133-4	480-79133-1	480-79133-6	480-79133-5			
Volatile Organic Compounds (VOCs), ug/Kg (continued)										
2-Hexanone	~	~	~	~	~	~	~	~	~	~
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~
Acetone	100000	~	~	~	~	~	~	~	~	~
Benzene	4800	~	~	~	~	~	~	~	~	~
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~
Bromoform	~	~	~	~	~	~	~	~	~	~
Bromomethane	~	~	~	~	~	~	~	~	~	~
Carbon disulfide	~	~	~	~	~	~	~	~	~	~
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~
Chloroethane	~	~	~	~	~	~	~	~	~	~
Chloroform	49000	~	~	~	~	~	~	~	~	~
Chloromethane	~	~	~	~	~	~	~	~	~	~
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Cyclohexane	~	~	~	~	~	~	~	~	~	~
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~
Methyl acetate	~	~	~	~	~	~	~	~	~	~
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~
Methylene chloride	100000	~	~	~	~	~	~	~	~	~
Styrene	~	~	~	~	~	~	~	~	~	~
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~
Toluene	100000	~	~	~	~	~	~	~	~	~
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Trichloroethene	21000	~	~	~	~	~	~	~	~	~
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~
Vinylchloride	~	~	~	~	~	~	~	~	~	~
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~
Semi-Volatile Organic Compounds (SVOCs), ug/Kg										
2,4,5-Trichlorophenol	~	~	~	~	5200 U	5300 U	55 U	520 U	58 U	270 U
2,4,6-Trichlorophenol	~	~	~	~	3900 U	3900 U	41 U	390 U	43 U	200 U
2,4-Dichlorophenol	~	~	~	~	2000 U	2100 U	22 U	200 U	23 U	110 U
2,4-Dimethylphenol	~	~	~	~	4700 U	4800 U	49 U	470 U	52 U	240 U
2,4-Dinitrophenol	~	~	~	~	89000 U	91000 U	940 U	8900 U	990 U	4600 U
2,4-Dinitrotoluene	~	~	~	~	4000 U	4100 U	42 U	400 U	44 U	210 U
2,6-Dinitrotoluene	~	~	~	~	2300 UJ	2300 UJ	24 UJ	230 UJ	25 UJ	120 UJ
2-Chloronaphthalene	~	~	~	~	3200 U	3200 U	34 U	320 U	35 U	160 U
2-Chlorophenol	~	~	~	~	3500 U	3600 U	37 U	350 U	39 U	180 U
2-Methylnaphthalene	~	~	~	~	3900 U	3900 U	41 U	390 U	43 U	200 U
2-Methylphenol	100000	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
2-Nitroaniline	~	~	~	~	2800 U	2900 U	30 U	280 U	31 U	150 U
2-Nitrophenol	~	~	~	~	5400 U	5600 U	58 U	540 U	60 U	280 U
3,3'-Dichlorobenzidine	~	~	~	~	23000 U	23000 U	240 U	2300 U	250 U	1200 U
3-Nitroaniline	~	~	~	~	5300 U	5400 U	56 U	530 U	59 U	280 U
4,6-Dinitro-2-methylphenol	~	~	~	~	19000 U	20000 U	200 U	1900 U	210 U	1000 U



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB005	CMSSB005	CMSSB006	CMSSB006	CMSSB006	CMSSB006	CMSSB007	CMSSB007
			CMSSB005-0-046	CMSSB005-0-010	CMSSB006-0-020	CMSSB006-1-020	CMSSB006-0-060	CMSSB006-0-018	CMSSB007-0-025	CMSSB007-0-005
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015
			4.6-6 feet	11.5-24 inches	2-5.9 feet	2-5.9 feet	6-8 feet	21-24 inches	2.5-5 feet	6.5-24 inches
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
SB	SB	SB	SB	SB	SB	SB	SB			
			480-79128-3	480-79128-2	480-79133-2	480-79133-3	480-79133-4	480-79133-1	480-79133-6	480-79133-5
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	~	~	2700 U	2800 U	29 U	270 U	30 U	140 U
4-Chloro-3-methylphenol	~	~	~	~	4800 U	4900 U	50 U	480 U	53 U	250 U
4-Chloroaniline	~	~	~	~	4800 U	4900 U	50 U	480 U	53 U	250 U
4-Chlorophenyl-phenylether	~	~	~	~	2400 U	2400 U	25 U	240 U	26 U	120 U
4-Methylphenol	100000	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
4-Nitroaniline	~	~	~	~	10000 U	10000 U	110 U	1000 U	110 U	520 U
4-Nitrophenol, SVOC	~	~	~	~	13000 U	14000 U	140 U	1400 U	150 U	700 U
Acenaphthene	100000	~	~	~	2800 U	2900 U	30 U	280 U	31 U	150 U
Acenaphthylene	100000	~	~	~	2500 U	2500 U	26 U	250 U	28 U	130 U
Acetophenone	~	~	~	~	2600 U	2700 U	28 U	260 U	29 U	140 U
Anthracene	100000	~	~	~	4800 U	4900 U	50 U	480 U	53 U	250 U
Atrazine	~	~	~	~	6700 UJ	6800 UJ	71 UJ	670 UJ	74 UJ	350 UJ
Benz(a)anthracene	1000	~	~	~	1900 U	8700 J	20 U	240 J	21 U	120 J
Benzaldehyde	~	~	~	~	15000 UJ	16000 UJ	160 UJ	1500 UJ	170 UJ	790 UJ
Benzo(a)pyrene	1000	~	~	~	16000 J	7600 J	30 U	280 U	31 U	150 U
Benzo(b)fluoranthene	1000	~	~	~	20000	12000 J	32 U	320 J	34 U	160 J
Benzo(g,h,i)perylene	100000	~	~	~	11000 J	5500 J	22 UJ	200 UJ	23 UJ	110 UJ
Benzo(k)fluoranthene	3900	~	~	~	14000 J	4600 J	26 U	250 U	28 U	130 U
Biphenyl	~	~	~	~	2800 U	2900 U	30 U	280 U	31 U	150 U
bis (2-chloroisopropyl) ether	~	~	~	~	3900 U	3900 U	41 U	390 U	43 U	200 U
bis(2-Chloroethoxy)methane	~	~	~	~	4100 U	4200 U	43 U	410 U	45 U	210 U
bis(2-Chloroethyl)ether	~	~	~	~	2500 U	2500 U	26 U	250 U	28 U	130 U
bis(2-Ethylhexyl)phthalate	~	~	~	~	6600 U	6700 U	70 U	660 U	73 U	340 U
Butyl benzyl phthalate	~	~	~	~	3200 U	3200 U	34 U	320 U	35 U	160 U
Caprolactam	~	~	~	~	5800 U	5900 U	61 U	580 U	64 U	300 U
Carbazole	~	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
Chrysene	3900	~	~	~	4300 U	11000 J	46 U	430 U	48 U	220 U
Dibenz(a,h)anthracene	330	~	~	~	3400 UJ	3500 UJ	36 UJ	340 UJ	38 UJ	180 UJ
Dibenzofuran	59000	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
Diethylphthalate	~	~	~	~	2500 U	2500 U	26 U	250 U	28 U	130 U
Dimethyl phthalate	~	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
Di-N-Butyl phthalate	~	~	~	~	3300 U	3400 U	35 U	330 U	36 U	170 U
Di-N-Octyl phthalate	~	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
Fluoranthene	100000	~	~	~	55000	23000	22 U	460 J	23 U	170 J
Fluorene	100000	~	~	~	2300 U	2300 U	24 U	230 U	25 U	120 U
Hexachlorobenzene	1200	~	~	~	2600 U	2700 U	28 U	260 U	29 U	140 U
Hexachlorobutadiene, SVOC	~	~	~	~	2800 U	2900 U	30 U	280 U	31 U	150 U
Hexachlorocyclopentadiene	~	~	~	~	2600 U	2700 U	28 U	260 U	29 U	140 U
Hexachloroethane	~	~	~	~	2500 U	2500 U	26 U	250 U	28 U	130 U
Indeno(1,2,3-cd)pyrene	500	~	~	~	11000 J	6100 J	25 UJ	240 UJ	26 UJ	120 UJ
Isophorone	~	~	~	~	4100 U	4200 U	43 U	410 U	45 U	210 U
Naphthalene, SVOC	100000	~	~	~	2500 U	2500 U	26 U	250 U	28 U	130 U
Nitrobenzene	15000 ^a	~	~	~	2200 U	2200 U	23 U	220 U	24 U	110 U
N-Nitroso-di-N-propylamine	~	~	~	~	3300 U	3400 U	35 U	330 U	36 U	170 U
N-Nitrosodiphenylamine	~	~	~	~	16000 U	16000 U	170 U	1600 U	170 U	810 U
Pentachlorophenol, SVOC	6700	~	~	~	19000 U	20000 U	200 U	1900 U	210 U	1000 U
Phenanthrene	100000	~	~	~	12000 J	6000 J	30 U	280 U	31 U	150 U
Phenol	100000	~	~	~	2900 U	3000 U	31 U	300 U	33 U	150 U
Pyrene	100000	~	~	~	40000	17000 J	24 U	350 J	25 U	130 J



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB005	CMSSB005	CMSSB006	CMSSB006	CMSSB006	CMSSB006	CMSSB007	CMSSB007
			CMSSB005-0-046	CMSSB005-0-010	CMSSB006-0-020	CMSSB006-1-020	CMSSB006-0-060	CMSSB006-0-018	CMSSB007-0-025	CMSSB007-0-005
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015
			4.6-6 feet	11.5-24 inches	2-5.9 feet	2-5.9 feet	6-8 feet	21-24 inches	2.5-5 feet	6.5-24 inches
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SB							
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	~	~	~	~	~	~
Aroclor-1221	~	~	~	~	~	~	~	~	~	~
Aroclor-1232	~	~	~	~	~	~	~	~	~	~
Aroclor-1242	~	~	~	~	~	~	~	~	~	~
Aroclor-1248	~	~	~	~	~	~	~	~	~	~
Aroclor-1254	~	~	~	~	~	~	~	~	~	~
Aroclor-1260	~	~	~	~	~	~	~	~	~	~
Aroclor-1262	~	~	~	~	~	~	~	~	~	~
Aroclor-1268	~	~	~	~	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	~	~	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB008	CMSSB008	CMSSB009	CMSSB009	CMSSB009	CMSSB010	CMSSB010	CMSSB011
			CMSSB008-0-022	CMSSB008-0-010	CMSSB009-0-039	CMSSB009-0-046	CMSSB009-0-007	CMSSB010-0-020	CMSSB010-0-008	CMSSB011-0-020
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/23/2015
			2.2-4 feet	11.5-24 inches	3.9-4.5 feet	4.6-6.6 feet	8.5-24 inches	2-4 feet	9.5-24 inches	2-4 feet
			0 - Primary							
			SB							
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	0.0056 U	0.025	0.0075 J	0.0056 U	0.018	0.0056 U	0.0056 U	~
Barium, TCLP	~	100	0.53	0.70	0.84	0.44 J+	0.78	0.25 J+	0.39 J+	~
Cadmium, TCLP	~	1	0.00050 J	0.0047	0.085	0.0011 J	0.0030	0.00050 U	0.00050 U	~
Chromium, TCLP	~	5	0.0040 U	0.0040 U	0.0040 U	0.0010 U	0.0040 U	0.0040 U	0.0010 U	~
Lead, TCLP	~	5	0.0030 J	0.044	2.6	0.0095 J	0.029	0.0030 U	0.0030 U	~
Mercury, TCLP	~	0.2	0.00012 U	~						
Selenium, TCLP	~	1	0.0087 U	~						
Silver, TCLP	~	5	0.0017 U	~						
Total Metals, mg/Kg										
Aluminum, Total	~	~	8610	8570	4790	8570	6100	11300	8280	~
Antimony, Total	~	~	0.57 J	1.5 J	3.6 J	0.49 U	0.62 J	0.72 J	0.49 J	~
Arsenic, Total	16	~	5.3	12.9	23.3	5.2	4.9	6.3	6.6	4.4
Barium, Total	400	~	91.2	93.6	75.7	89.6	67.0	86.3	79.3	~
Beryllium, Total	72	~	0.45	0.48	0.35	0.45	0.33	0.52	0.41	~
Boron, Total	~	~	3.1	4.2	6.2	6.1	2.9	2.7	2.1 J	~
Cadmium, Total	4.3	~	0.14 J	0.49	4.5	0.26	0.28	0.10 J	0.12 J	0.088 J
Calcium, Total	~	~	1180	2160	1900	1540	2220	1360	1940	~
Chromium, Total	180	~	10.9	15.2	8.6	11.1	16.1	14.0	11.5	~
Cobalt, Total	~	~	7.2	7.0	4.6	7.2	5.3	8.1	7.2	~
Copper, Total	270	~	9.9	18.6	21.2	10.0	9.9	12.3	10.2	~
Iron, Total	~	~	15900	15500	17100	15800	12300	19000	18700	~
Lead, Total	400	~	11.5	64.4	679	19.5	25.0	10.4	9.3	7.8
Magnesium, Total	~	~	2230	2300	1260	2230	1920	2650	2290	~
Manganese, Total	2000	~	421	310	280	439	305	425	503	~
Mercury, Total	0.81	~	0.019 J	0.047	0.13	0.015 J	0.019 J	0.010 U	0.010 J	0.0093 U
Nickel, Total	310	~	15.4	16.1	10.6	16.1	11.7	18.0	15.9	~
Potassium, Total	~	~	1040	1120	626	1030	773	1340	1060	~
Selenium, Total	180	~	0.52 J	0.46 U	0.81 J	0.49 U	0.50 U	0.47 U	0.45 U	~
Silver, Total	180	~	0.23 U	0.23 U	0.22 U	0.24 U	0.25 U	0.24 U	0.23 U	~
Sodium, Total	~	~	32.5 J	41.2 J	86.7 J	45.0 J	28.0 J	46.1 J	35.6 J	~
Thallium, Total	~	~	0.34 U	0.34 U	0.33 U	0.37 U	0.38 U	0.36 U	0.34 U	~
Vanadium, Total	~	~	12.7	13.5	9.4	12.6	9.5	16.1	13.2	~
Zinc, Total	10000	~	49.0	77.8	125	47.9	45.4	50.9	47.9	~
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB008	CMSSB008	CMSSB009	CMSSB009	CMSSB009	CMSSB010	CMSSB010	CMSSB011							
			CMSSB008-0-022	CMSSB008-0-010	CMSSB009-0-039	CMSSB009-0-046	CMSSB009-0-007	CMSSB010-0-020	CMSSB010-0-008	CMSSB011-0-020							
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/23/2015							
			2.2-4 feet	11.5-24 inches	3.9-4.5 feet	4.6-6.6 feet	8.5-24 inches	2-4 feet	9.5-24 inches	2-4 feet							
			0 - Primary														
SB	SB	SB	SB	SB	SB	SB	SB										
480-79133-8	480-79133-7	480-79133-10	480-79133-11	480-79133-9	480-79133-13	480-79133-12	480-79128-5										
Volatile Organic Compounds (VOCs), ug/Kg (continued)																	
2-Hexanone	~	~	~	~	~	~	~	~	~	~							
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~							
Acetone	100000	~	~	~	~	~	~	~	~	~							
Benzene	4800	~	~	~	~	~	~	~	~	~							
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~							
Bromoform	~	~	~	~	~	~	~	~	~	~							
Bromomethane	~	~	~	~	~	~	~	~	~	~							
Carbon disulfide	~	~	~	~	~	~	~	~	~	~							
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~							
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~							
Chloroethane	~	~	~	~	~	~	~	~	~	~							
Chloroform	49000	~	~	~	~	~	~	~	~	~							
Chloromethane	~	~	~	~	~	~	~	~	~	~							
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~							
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~							
Cyclohexane	~	~	~	~	~	~	~	~	~	~							
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~							
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~							
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~							
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~							
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~							
Methyl acetate	~	~	~	~	~	~	~	~	~	~							
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~							
Methylene chloride	100000	~	~	~	~	~	~	~	~	~							
Styrene	~	~	~	~	~	~	~	~	~	~							
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~							
Toluene	100000	~	~	~	~	~	~	~	~	~							
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~							
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~							
Trichloroethene	21000	~	~	~	~	~	~	~	~	~							
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~							
Vinylchloride	~	~	~	~	~	~	~	~	~	~							
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~							
Semi-Volatile Organic Compounds (SVOCs), ug/Kg																	
2,4,5-Trichlorophenol	~	~	53	U	260	U	510	U	54	U	280	U	56	U	52	U	~
2,4,6-Trichlorophenol	~	~	39	U	200	U	380	U	40	U	210	U	42	U	38	U	~
2,4-Dichlorophenol	~	~	21	U	100	U	200	U	21	U	110	U	22	U	20	U	~
2,4-Dimethylphenol	~	~	48	U	240	U	450	U	49	U	250	U	50	U	46	U	~
2,4-Dinitrophenol	~	~	910	U	4500	U	8700	U	930	U	4800	U	960	U	890	U	~
2,4-Dinitrotoluene	~	~	41	U	200	U	390	U	41	U	210	U	43	U	40	U	~
2,6-Dinitrotoluene	~	~	23	UJ	110	UJ	220	UJ	24	UJ	120	UJ	24	UJ	23	UJ	~
2-Chloronaphthalene	~	~	32	U	160	U	310	U	33	U	170	U	34	U	32	U	~
2-Chlorophenol	~	~	36	U	180	U	340	U	37	U	190	U	38	U	35	U	~
2-Methylnaphthalene	~	~	39	U	200	U	380	U	40	U	210	U	42	U	38	U	~
2-Methylphenol	100000	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~
2-Nitroaniline	~	~	29	U	140	U	280	U	30	U	150	U	31	U	28	U	~
2-Nitrophenol	~	~	56	U	280	U	530	U	57	U	290	U	59	U	54	U	~
3,3'-Dichlorobenzidine	~	~	230	U	1100	U	2200	U	240	U	1200	U	240	U	230	U	~
3-Nitroaniline	~	~	55	U	270	U	520	U	56	U	290	U	57	U	53	U	~
4,6-Dinitro-2-methylphenol	~	~	200	U	980	U	1900	U	200	U	1000	U	210	U	190	U	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB008		CMSSB008		CMSSB009		CMSSB009		CMSSB009		CMSSB010		CMSSB010		CMSSB011	
			CMSSB008-0-022		CMSSB008-0-010		CMSSB009-0-039		CMSSB009-0-046		CMSSB009-0-007		CMSSB010-0-020		CMSSB010-0-008		CMSSB011-0-020	
			4/22/2015		4/22/2015		4/22/2015		4/22/2015		4/22/2015		4/22/2015		4/22/2015		4/23/2015	
			2.2-4 feet		11.5-24 inches		3.9-4.5 feet		4.6-6.6 feet		8.5-24 inches		2-4 feet		9.5-24 inches		2-4 feet	
			0 - Primary		0 - Primary		0 - Primary		0 - Primary		0 - Primary		0 - Primary		0 - Primary		0 - Primary	
			SB		SB		SB		SB		SB		SB		SB		SB	
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)			480-79133-8		480-79133-7		480-79133-10		480-79133-11		480-79133-9		480-79133-13		480-79133-12		480-79128-5	
4-Bromophenyl-phenylether	~	~	28	U	140	U	270	U	28	U	150	U	29	U	27	U	~	
4-Chloro-3-methylphenol	~	~	49	U	240	U	460	U	50	U	250	U	51	U	47	U	~	
4-Chloroaniline	~	~	49	U	240	U	460	U	50	U	250	U	51	U	47	U	~	
4-Chlorophenyl-phenylether	~	~	24	U	120	U	230	U	25	U	130	U	26	U	24	U	~	
4-Methylphenol	100000	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
4-Nitroaniline	~	~	100	U	510	U	990	U	110	U	540	U	110	U	100	U	~	
4-Nitrophenol, SVOC	~	~	140	U	680	U	1300	U	140	U	720	U	150	U	130	U	~	
Acenaphthene	100000	~	29	U	140	U	280	U	30	U	150	U	31	U	28	U	~	
Acenaphthylene	100000	~	26	U	130	U	240	U	26	U	130	U	27	U	25	U	~	
Acetophenone	~	~	27	U	130	U	250	U	27	U	140	U	28	U	26	U	~	
Anthracene	100000	~	49	U	240	U	460	U	50	U	250	U	51	U	47	U	~	
Atrazine	~	~	68	UJ	340	UJ	650	UJ	70	UJ	360	UJ	72	UJ	67	UJ	~	
Benz(a)anthracene	1000	~	20	U	98	U	690	J	20	U	100	U	21	U	19	U	~	
Benzaldehyde	~	~	160	UJ	780	UJ	1500	UJ	160	UJ	820	UJ	160	UJ	150	UJ	~	
Benzo(a)pyrene	1000	~	29	U	140	U	540	J	30	U	150	U	31	U	28	U	~	
Benzo(b)fluoranthene	1000	~	31	U	160	U	750	J	32	U	160	U	33	U	31	U	~	
Benzo(g,h,i)perylene	100000	~	21	UJ	100	UJ	590	J	21	UJ	110	UJ	22	UJ	20	UJ	~	
Benzo(k)fluoranthene	3900	~	26	U	130	U	410	J	26	U	130	U	27	U	25	U	~	
Biphenyl	~	~	29	U	140	U	280	U	30	U	150	U	31	U	28	U	~	
bis (2-chloroisopropyl) ether	~	~	39	U	200	U	380	U	40	U	210	U	42	U	38	U	~	
bis(2-Chloroethoxy)methane	~	~	42	U	210	U	400	U	43	U	220	U	44	U	41	U	~	
bis(2-Chloroethyl)ether	~	~	26	U	130	U	240	U	26	U	130	U	27	U	25	U	~	
bis(2-Ethylhexyl)phthalate	~	~	67	U	330	U	640	U	69	U	350	U	71	U	66	U	~	
Butyl benzyl phthalate	~	~	32	U	160	U	310	U	33	U	170	U	34	U	32	U	~	
Caprolactam	~	~	59	U	290	U	560	U	60	U	310	U	62	U	58	U	~	
Carbazole	~	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
Chrysene	3900	~	44	U	220	U	700	J	45	U	230	U	46	U	43	U	~	
Dibenz(a,h)anthracene	330	~	35	UJ	170	UJ	330	UJ	36	UJ	180	UJ	37	UJ	34	UJ	~	
Dibenzofuran	59000	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
Diethylphthalate	~	~	26	U	130	U	240	U	26	U	130	U	27	U	25	U	~	
Dimethyl phthalate	~	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
Di-N-Butyl phthalate	~	~	34	U	170	U	320	U	34	U	180	U	35	U	33	U	~	
Di-N-Octyl phthalate	~	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
Fluoranthene	100000	~	21	U	130	J	1500	J	21	U	110	U	22	U	20	U	~	
Fluorene	100000	~	23	U	110	U	220	U	24	U	120	U	24	U	23	U	~	
Hexachlorobenzene	1200	~	27	U	130	U	250	U	27	U	140	U	28	U	26	U	~	
Hexachlorobutadiene, SVOC	~	~	29	U	140	U	280	U	30	U	150	U	31	U	28	U	~	
Hexachlorocyclopentadiene	~	~	27	U	130	U	250	U	27	U	140	U	28	U	26	U	~	
Hexachloroethane	~	~	26	U	130	U	240	U	26	U	130	U	27	U	25	U	~	
Indeno(1,2,3-cd)pyrene	500	~	24	UJ	120	UJ	400	J	25	UJ	130	UJ	26	UJ	24	UJ	~	
Isophorone	~	~	42	U	210	U	400	U	43	U	220	U	44	U	41	U	~	
Naphthalene, SVOC	100000	~	26	U	130	U	240	U	26	U	130	U	27	U	25	U	~	
Nitrobenzene	15000 ^a	~	22	U	110	U	210	U	22	U	120	U	23	U	21	U	~	
N-Nitroso-di-N-propylamine	~	~	34	U	170	U	320	U	34	U	180	U	35	U	33	U	~	
N-Nitrosodiphenylamine	~	~	160	U	790	U	1500	U	160	U	840	U	170	U	160	U	~	
Pentachlorophenol, SVOC	6700	~	200	U	980	U	1900	U	200	U	1000	U	210	U	190	U	~	
Phenanthrene	100000	~	29	U	140	U	1300	J	30	U	150	U	31	U	28	U	~	
Phenol	100000	~	30	U	150	U	290	U	31	U	160	U	32	U	29	U	~	
Pyrene	100000	~	23	U	110	U	1100	J	24	U	120	U	24	U	23	U	~	



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB008	CMSSB008	CMSSB009	CMSSB009	CMSSB009	CMSSB010	CMSSB010	CMSSB011
			CMSSB008-0-022	CMSSB008-0-010	CMSSB009-0-039	CMSSB009-0-046	CMSSB009-0-007	CMSSB010-0-020	CMSSB010-0-008	CMSSB011-0-020
			4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/22/2015	4/23/2015
			2.2-4 feet	11.5-24 inches	3.9-4.5 feet	4.6-6.6 feet	8.5-24 inches	2-4 feet	9.5-24 inches	2-4 feet
			0 - Primary							
			SB							
			480-79133-8	480-79133-7	480-79133-10	480-79133-11	480-79133-9	480-79133-13	480-79133-12	480-79128-5
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	~	~	~	~	~	~
Aroclor-1221	~	~	~	~	~	~	~	~	~	~
Aroclor-1232	~	~	~	~	~	~	~	~	~	~
Aroclor-1242	~	~	~	~	~	~	~	~	~	~
Aroclor-1248	~	~	~	~	~	~	~	~	~	~
Aroclor-1254	~	~	~	~	~	~	~	~	~	~
Aroclor-1260	~	~	~	~	~	~	~	~	~	~
Aroclor-1262	~	~	~	~	~	~	~	~	~	~
Aroclor-1268	~	~	~	~	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	~	~	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB011	CMSSB012	CMSSB012	CMSSB012	CMSSB012	CMSSB013	CMSSB013	CMSSB013
			CMSSB011-0-011	CMSSB012-0-020	CMSSB012-0-040	CMSSB012-1-040	CMSSB012-0-007	CMSSB013-0-010	CMSSB013-0-020	CMSSB013-0-045
			4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015
			13.5-24 inches	2-3.9 feet	4-12 feet	4-12 feet	8.5-24 inches	1-2 feet	2-4.2 feet	4.5-6.5 feet
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SB							
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	~	0.094	0.0056 U	0.0056 U	0.0056 U	0.013 J	0.0056 U	0.0056 U
Barium, TCLP	~	100	~	0.62	0.56	0.47	0.66	0.74	0.64	0.35 J+
Cadmium, TCLP	~	1	~	0.0054	0.00050 U	0.00050 U	0.0020	0.021	0.014	0.00050 U
Chromium, TCLP	~	5	~	0.0040 U	0.0073 J+	0.0040 U				
Lead, TCLP	~	5	~	0.31	0.0030 U	0.0038 J	0.0075 J	3.0	2.8	0.0031 J
Mercury, TCLP	~	0.2	~	0.00012 U	0.00012 UJ	0.00012 UJ	0.00012 U	0.00012 U	0.00012 U	0.00012 U
Selenium, TCLP	~	1	~	0.0087 U						
Silver, TCLP	~	5	~	0.0017 U	0.0017 UJ	0.0017 UJ	0.0017 U	0.0017 U	0.0017 U	0.0017 U
Total Metals, mg/Kg										
Aluminum, Total	~	~	~	7620	11400 J	9940 J	9880	5620	6650	9250
Antimony, Total	~	~	~	4.5 J	0.95 J	2.0 J	0.95 J	2.0 J	1.9 J	0.84 J
Arsenic, Total	16	~	5.0	30.5	6.2	6.0	8.5	10.4	7.8	5.1
Barium, Total	400	~	~	95.3	135 J	104 J	102	212	236	93.6
Beryllium, Total	72	~	~	0.53	0.57	0.52	0.51	0.30	0.33	0.46
Boron, Total	~	~	~	38.8	9.6	8.1	5.6	4.8	5.3	5.0
Cadmium, Total	4.3	~	0.12 J	1.6	0.048 J	0.12 J	0.37	1.1	0.66	0.088 J
Calcium, Total	~	~	~	10200	1580 J	1450 J	7600	7570	27200	1740
Chromium, Total	180	~	~	12.2	12.7 J	13.0 J	17.1	9.5	11.5	10.5
Cobalt, Total	~	~	~	13.1	9.5	8.8	8.0	4.6	3.9	7.2
Copper, Total	270	~	~	45.6	12.4	11.2	15.5	20.2	15.3	9.7
Iron, Total	~	~	~	15100	19900 J	18200 J	18100	13100	12000	16500
Lead, Total	400	~	9.8	559	11.4	11.7	37.4	1000	333	9.7
Magnesium, Total	~	~	~	2190	2900 J	2690 J	2820	1680	2440	2220
Manganese, Total	2000	~	~	363	526 J	509 J	456	232	208	419
Mercury, Total	0.81	~	0.015 J	0.45	0.0097 U	0.011 U	0.010 J	0.30	0.47	0.015 J
Nickel, Total	310	~	~	15.2	20.0	19.1	18.3	12.2	10.4	15.5
Potassium, Total	~	~	~	1090	1410 J	1180 J	1180	733	1010	1140
Selenium, Total	180	~	~	0.45 U	0.49 U	0.50 U	0.49 U	0.43 U	0.44 U	0.50 U
Silver, Total	180	~	~	0.22 U	0.24 U	0.25 U	0.25 U	0.64 J	0.95	0.25 U
Sodium, Total	~	~	~	180	30.0 J	32.2 J	43.7 J	69.0 J	125 J	35.1 J
Thallium, Total	~	~	~	0.34 U	0.37 U	0.38 U	0.37 U	0.32 U	0.33 U	0.38 U
Vanadium, Total	~	~	~	15.8	14.5 J	14.0 J	15.1	11.7	14.9	12.5
Zinc, Total	10000	~	~	122	54.5 J	52.1 J	67.4	171	176	49.0
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB011	CMSSB012	CMSSB012	CMSSB012	CMSSB012	CMSSB013	CMSSB013	CMSSB013							
			CMSSB011-0-011	CMSSB012-0-020	CMSSB012-0-040	CMSSB012-1-040	CMSSB012-0-007	CMSSB013-0-010	CMSSB013-0-020	CMSSB013-0-045							
			4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015							
			13.5-24 inches	2-3.9 feet	4-12 feet	4-12 feet	8.5-24 inches	1-2 feet	2-4.2 feet	4.5-6.5 feet							
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary							
SB	SB	SB	SB	SB	SB	SB	SB										
			480-79128-4	480-79133-16	480-79133-17	480-79133-18	480-79133-15	480-79133-19	480-79133-20	480-79133-21							
Volatile Organic Compounds (VOCs), ug/Kg (continued)																	
2-Hexanone	~	~	~	~	~	~	~	~	~	~							
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~							
Acetone	100000	~	~	~	~	~	~	~	~	~							
Benzene	4800	~	~	~	~	~	~	~	~	~							
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~							
Bromoform	~	~	~	~	~	~	~	~	~	~							
Bromomethane	~	~	~	~	~	~	~	~	~	~							
Carbon disulfide	~	~	~	~	~	~	~	~	~	~							
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~							
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~							
Chloroethane	~	~	~	~	~	~	~	~	~	~							
Chloroform	49000	~	~	~	~	~	~	~	~	~							
Chloromethane	~	~	~	~	~	~	~	~	~	~							
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~							
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~							
Cyclohexane	~	~	~	~	~	~	~	~	~	~							
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~							
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~							
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~							
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~							
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~							
Methyl acetate	~	~	~	~	~	~	~	~	~	~							
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~							
Methylene chloride	100000	~	~	~	~	~	~	~	~	~							
Styrene	~	~	~	~	~	~	~	~	~	~							
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~							
Toluene	100000	~	~	~	~	~	~	~	~	~							
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~							
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~							
Trichloroethene	21000	~	~	~	~	~	~	~	~	~							
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~							
Vinylchloride	~	~	~	~	~	~	~	~	~	~							
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~							
Semi-Volatile Organic Compounds (SVOCs), ug/Kg																	
2,4,5-Trichlorophenol	~	~	~	260	U	56	U	57	U	270	U	510	U	520	U	57	U
2,4,6-Trichlorophenol	~	~	~	200	U	42	U	42	U	200	U	370	U	390	U	42	U
2,4-Dichlorophenol	~	~	~	100	U	22	U	22	U	110	U	200	U	210	U	22	U
2,4-Dimethylphenol	~	~	~	240	U	50	U	51	U	240	U	450	U	470	U	51	U
2,4-Dinitrophenol	~	~	~	4500	U	960	U	970	U	4700	U	8600	U	8900	U	970	U
2,4-Dinitrotoluene	~	~	~	200	U	43	U	43	U	210	U	390	U	400	U	43	U
2,6-Dinitrotoluene	~	~	~	120	UJ	24	UJ	25	UJ	120	UJ	220	UJ	230	UJ	25	U
2-Chloronaphthalene	~	~	~	160	U	34	U	35	U	170	U	310	U	320	U	35	U
2-Chlorophenol	~	~	~	180	U	38	U	38	U	180	U	340	U	350	U	39	U
2-Methylnaphthalene	~	~	~	200	U	42	U	42	U	200	U	370	U	390	U	42	U
2-Methylphenol	100000	~	~	120	U	24	U	25	U	120	U	220	U	230	U	25	U
2-Nitroaniline	~	~	~	140	U	31	U	31	U	150	U	280	U	280	U	31	U
2-Nitrophenol	~	~	~	280	U	59	U	59	U	290	U	530	U	550	U	60	U
3,3'-Dichlorobenzidine	~	~	~	1200	U	240	U	250	U	1200	U	2200	U	2300	U	250	U
3-Nitroaniline	~	~	~	270	U	57	U	58	U	280	U	520	U	540	U	58	U
4,6-Dinitro-2-methylphenol	~	~	~	980	U	210	U	210	U	1000	U	1900	U	1900	U	210	U



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB011	CMSSB012	CMSSB012	CMSSB012	CMSSB012	CMSSB013	CMSSB013	CMSSB013
			CMSSB011-0-011	CMSSB012-0-020	CMSSB012-0-040	CMSSB012-1-040	CMSSB012-0-007	CMSSB013-0-010	CMSSB013-0-020	CMSSB013-0-045
			4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015	4/23/2015
			13.5-24 inches	2-3.9 feet	4-12 feet	4-12 feet	8.5-24 inches	1-2 feet	2-4.2 feet	4.5-6.5 feet
			0 - Primary	0 - Primary	0 - Primary	1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SB	SB	SB	SB	SB	SB	SB	SB
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)			480-79128-4	480-79133-16	480-79133-17	480-79133-18	480-79133-15	480-79133-19	480-79133-20	480-79133-21
4-Bromophenyl-phenylether	~	~	~	140 U	29 U	30 U	140 U	260 U	270 U	30 U
4-Chloro-3-methylphenol	~	~	~	240 U	51 U	52 U	250 U	460 U	480 U	52 U
4-Chloroaniline	~	~	~	240 U	51 U	52 U	250 U	460 U	480 U	52 U
4-Chlorophenyl-phenylether	~	~	~	120 U	26 U	26 U	120 U	230 U	240 U	26 U
4-Methylphenol	100000	~	~	120 U	24 U	25 U	120 U	220 U	230 U	25 U
4-Nitroaniline	~	~	~	510 U	110 U	110 U	530 U	980 U	1000 U	110 U
4-Nitrophenol, SVOC	~	~	~	680 U	150 U	150 U	710 U	1300 U	1400 U	150 U
Acenaphthene	100000	~	~	140 U	31 U	31 U	150 U	280 U	280 U	31 U
Acenaphthylene	100000	~	~	130 U	27 U	27 U	130 U	240 U	250 U	27 U
Acetophenone	~	~	~	130 U	28 U	28 U	140 U	250 U	260 U	29 U
Anthracene	100000	~	~	240 U	51 U	52 U	250 U	460 U	530 J	52 U
Atrazine	~	~	~	340 UJ	72 UJ	73 UJ	350 UJ	650 UJ	670 UJ	73 UJ
Benz(a)anthracene	1000	~	~	270 J	21 U	21 U	100 U	460 J	1200 J	21 U
Benzaldehyde	~	~	~	780 UJ	170 UJ	170 UJ	800 UJ	1500 UJ	1500 UJ	170 U
Benzo(a)pyrene	1000	~	~	250 J	31 U	31 U	150 U	370 J	1200 J	31 U
Benzo(b)fluoranthene	1000	~	~	370 J	33 U	33 U	160 U	470 J	1500 J	34 U
Benzo(g,h,i)perylene	100000	~	~	280 J	22 UJ	22 UJ	110 UJ	280 J	830 J	22 U
Benzo(k)fluoranthene	3900	~	~	170 J	27 U	27 U	130 U	270 J	980 J	27 U
Biphenyl	~	~	~	140 U	31 U	31 U	150 U	280 U	280 U	31 U
bis (2-chloroisopropyl) ether	~	~	~	200 U	42 U	42 U	200 U	370 U	390 U	42 U
bis(2-Chloroethoxy)methane	~	~	~	210 U	44 U	44 U	210 U	400 U	410 U	45 U
bis(2-Chloroethyl)ether	~	~	~	130 U	27 U	27 U	130 U	240 U	250 U	27 U
bis(2-Ethylhexyl)phthalate	~	~	~	330 U	71 U	72 U	350 U	640 U	660 U	72 U
Butyl benzyl phthalate	~	~	~	160 U	34 U	35 U	170 U	310 U	320 U	35 U
Caprolactam	~	~	~	290 U	62 U	63 U	300 U	560 U	580 U	63 U
Carbazole	~	~	~	120 U	24 U	25 U	120 U	220 U	290 J	25 U
Chrysene	3900	~	~	240 J	46 U	47 U	230 U	500 J	1600 J	47 U
Dibenz(a,h)anthracene	330	~	~	170 UJ	37 UJ	37 UJ	180 UJ	330 UJ	340 UJ	37 U
Dibenzofuran	59000	~	~	120 U	24 U	25 U	120 U	220 U	230 U	25 U
Diethylphthalate	~	~	~	130 U	27 U	27 U	130 U	240 U	250 U	27 U
Dimethyl phthalate	~	~	~	120 U	24 U	25 U	120 U	220 U	230 U	25 U
Di-N-Butyl phthalate	~	~	~	170 U	35 U	36 U	170 U	320 U	330 U	36 U
Di-N-Octyl phthalate	~	~	~	120 U	24 U	25 U	120 U	220 U	230 U	25 U
Fluoranthene	100000	~	~	350 J	22 U	22 U	110 U	1100 J	3100 J	31 J
Fluorene	100000	~	~	120 U	24 U	25 U	120 U	220 U	260 J	25 U
Hexachlorobenzene	1200	~	~	130 U	28 U	28 U	140 U	250 U	260 U	29 U
Hexachlorobutadiene, SVOC	~	~	~	140 U	31 U	31 U	150 U	280 U	280 U	31 U
Hexachlorocyclopentadiene	~	~	~	130 U	28 U	28 U	140 U	250 U	260 U	29 U
Hexachloroethane	~	~	~	130 U	27 U	27 U	130 U	240 U	250 U	27 U
Indeno(1,2,3-cd)pyrene	500	~	~	280 J	26 UJ	26 UJ	120 UJ	260 J	850 J	26 U
Isophorone	~	~	~	210 U	44 U	44 U	210 U	400 U	410 U	45 U
Naphthalene, SVOC	100000	~	~	130 U	27 U	27 U	130 U	240 U	250 U	27 U
Nitrobenzene	15000 ^a	~	~	110 U	23 U	23 U	110 U	210 U	220 U	24 U
N-Nitroso-di-N-propylamine	~	~	~	170 U	35 U	36 U	170 U	320 U	330 U	36 U
N-Nitrosodiphenylamine	~	~	~	790 U	170 U	170 U	820 U	1500 U	1600 U	170 U
Pentachlorophenol, SVOC	6700	~	~	980 U	210 U	210 U	1000 U	1900 U	1900 U	210 U
Phenanthrene	100000	~	~	150 J	31 U	31 U	150 U	1100 J	2200 J	31 U
Phenol	100000	~	~	150 U	32 U	32 U	150 U	290 U	300 U	32 U
Pyrene	100000	~	~	330 J	24 U	25 U	120 U	800 J	2300 J	26 J



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSB011	CMSSB012	CMSSB012	CMSSB012	CMSSB012	CMSSB013	CMSSB013	CMSSB013
			CMSSB011-0-011 4/23/2015 13.5-24 inches 0 - Primary SB 480-79128-4	CMSSB012-0-020 4/23/2015 2-3.9 feet 0 - Primary SB 480-79133-16	CMSSB012-0-040 4/23/2015 4-12 feet 0 - Primary SB 480-79133-17	CMSSB012-1-040 4/23/2015 4-12 feet 1 - Duplicate SB 480-79133-18	CMSSB012-0-007 4/23/2015 8.5-24 inches 0 - Primary SB 480-79133-15	CMSSB013-0-010 4/23/2015 1-2 feet 0 - Primary SB 480-79133-19	CMSSB013-0-020 4/23/2015 2-4.2 feet 0 - Primary SB 480-79133-20	CMSSB013-0-045 4/23/2015 4.5-6.5 feet 0 - Primary SB 480-79133-21
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	~	~	~	~	~	~
Aroclor-1221	~	~	~	~	~	~	~	~	~	~
Aroclor-1232	~	~	~	~	~	~	~	~	~	~
Aroclor-1242	~	~	~	~	~	~	~	~	~	~
Aroclor-1248	~	~	~	~	~	~	~	~	~	~
Aroclor-1254	~	~	~	~	~	~	~	~	~	~
Aroclor-1260	~	~	~	~	~	~	~	~	~	~
Aroclor-1262	~	~	~	~	~	~	~	~	~	~
Aroclor-1268	~	~	~	~	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	~	~	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS001	CMSS001	CMSS002	CMSS002	CMSS003	CMSS003	CMSS004	CMSS004
			CMSS001-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-12	CMSS001-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-13	CMSS002-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-6	CMSS002-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-7	CMSS003-0-000 8/5/2014 0 - 2 inches 0 - Primary SS 480-65115-7	CMSS003-0-002 8/5/2014 2 - 24 inches 0 - Primary SS 480-65115-8	CMSS004-0-000 8/5/2014 0 - 2 inches 0 - Primary SS 480-65115-4	CMSS004-0-002 8/5/2014 2 - 24 inches 0 - Primary SS 480-65115-5
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	~	~	0.0056 U	0.0056 U	~	~	~	~
Barium, TCLP	~	100	~	~	0.45 J+	0.44 J+	~	~	~	~
Cadmium, TCLP	~	1	~	~	0.0012 J	0.00050 U	~	~	~	~
Chromium, TCLP	~	5	~	~	0.0040 U	0.0040 U	~	~	~	~
Lead, TCLP	~	5	~	~	0.010 U	0.010 U	~	~	~	~
Mercury, TCLP	~	0.2	~	~	0.00012 U	0.00012 U	~	~	~	~
Selenium, TCLP	~	1	~	~	0.0087 U	0.0087 U	~	~	~	~
Silver, TCLP	~	5	~	~	0.0017 U	0.0017 U	~	~	~	~
Total Metals, mg/Kg										
Aluminum, Total	~	~	~	~	8000	9100	~	~	~	~
Antimony, Total	~	~	~	~	1.5 J	1.2 J	~	~	~	~
Arsenic, Total	16	~	7.9	7.1	8.1	6.8	7.2	8.1	8.1	6.3
Barium, Total	400	~	~	~	120	140	~	~	~	~
Beryllium, Total	72	~	~	~	0.48	0.52	~	~	~	~
Boron, Total	~	~	~	~	3.9 J+	2.4 U	~	~	~	~
Cadmium, Total	4.3	~	0.54	0.39	0.50	0.28	0.44	0.37	0.60	0.21 J
Calcium, Total	~	~	~	~	2800	2000	~	~	~	~
Chromium, Total	180	~	~	~	18	12	~	~	~	~
Cobalt, Total	~	~	~	~	7.6	8.5	~	~	~	~
Copper, Total	270	~	~	~	15	13	~	~	~	~
Iron, Total	~	~	~	~	16000	17000	~	~	~	~
Lead, Total	400	~	74	45	76	31	66	50	79	32
Magnesium, Total	~	~	~	~	2500	2600	~	~	~	~
Manganese, Total	2000	~	~	~	480	540	~	~	~	~
Mercury, Total	0.81	~	~	~	~	~	~	~	~	~
Nickel, Total	310	~	~	~	17	20	~	~	~	~
Potassium, Total	~	~	~	~	760	770	~	~	~	~
Selenium, Total	180	~	~	~	0.50 U	0.47 U	~	~	~	~
Silver, Total	180	~	~	~	0.25 U	0.24 U	~	~	~	~
Sodium, Total	~	~	~	~	32 J	31 J	~	~	~	~
Thallium, Total	~	~	~	~	0.37 U	0.35 U	~	~	~	~
Vanadium, Total	~	~	~	~	11	12	~	~	~	~
Zinc, Total	10000	~	~	~	80	62	~	~	~	~
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS001	CMSS001	CMSS002	CMSS002	CMSS003	CMSS003	CMSS004	CMSS004
			CMSS001-0-000	CMSS001-0-002	CMSS002-0-000	CMSS002-0-002	CMSS003-0-000	CMSS003-0-002	CMSS004-0-000	CMSS004-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014	8/5/2014	8/5/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary							
			SS							
			480-65069-12	480-65069-13	480-65069-6	480-65069-7	480-65115-7	480-65115-8	480-65115-4	480-65115-5
Volatile Organic Compounds (VOCs), ug/Kg (continued)										
2-Hexanone	~	~	~	~	~	~	~	~	~	~
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~
Acetone	100000	~	~	~	~	~	~	~	~	~
Benzene	4800	~	~	~	~	~	~	~	~	~
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~
Bromoform	~	~	~	~	~	~	~	~	~	~
Bromomethane	~	~	~	~	~	~	~	~	~	~
Carbon disulfide	~	~	~	~	~	~	~	~	~	~
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~
Chloroethane	~	~	~	~	~	~	~	~	~	~
Chloroform	49000	~	~	~	~	~	~	~	~	~
Chloromethane	~	~	~	~	~	~	~	~	~	~
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Cyclohexane	~	~	~	~	~	~	~	~	~	~
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~
Methyl acetate	~	~	~	~	~	~	~	~	~	~
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~
Methylene chloride	100000	~	~	~	~	~	~	~	~	~
Styrene	~	~	~	~	~	~	~	~	~	~
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~
Toluene	100000	~	~	~	~	~	~	~	~	~
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Trichloroethene	21000	~	~	~	~	~	~	~	~	~
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~
Vinylchloride	~	~	~	~	~	~	~	~	~	~
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~
Semi-Volatile Organic Compounds (SVOCs), ug/Kg										
2,4,5-Trichlorophenol	~	~	~	~	48	U	45	U	~	~
2,4,6-Trichlorophenol	~	~	~	~	14	U	14	U	~	~
2,4-Dichlorophenol	~	~	~	~	11	U	11	U	~	~
2,4-Dimethylphenol	~	~	~	~	59	U	56	U	~	~
2,4-Dinitrophenol	~	~	~	~	76	U	72	U	~	~
2,4-Dinitrotoluene	~	~	~	~	34	U	32	U	~	~
2,6-Dinitrotoluene	~	~	~	~	53	U	50	U	~	~
2-Chloronaphthalene	~	~	~	~	15	U	14	U	~	~
2-Chlorophenol	~	~	~	~	11	U	10	U	~	~
2-Methylnaphthalene	~	~	~	~	4.8	J	2.5	U	~	~
2-Methylphenol	100000	~	~	~	6.7	U	6.3	U	~	~
2-Nitroaniline	~	~	~	~	70	U	66	U	~	~
2-Nitrophenol	~	~	~	~	10	U	9.4	U	~	~
3,3'-Dichlorobenzidine	~	~	~	~	190	U	180	U	~	~
3-Nitroaniline	~	~	~	~	50	U	47	U	~	~
4,6-Dinitro-2-methylphenol	~	~	~	~	75	U	71	U	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS001	CMSS001	CMSS002	CMSS002	CMSS003	CMSS003	CMSS004	CMSS004
			CMSS001-0-000	CMSS001-0-002	CMSS002-0-000	CMSS002-0-002	CMSS003-0-000	CMSS003-0-002	CMSS004-0-000	CMSS004-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014	8/5/2014	8/5/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary							
SS	SS	SS	SS	SS	SS	SS	SS			
			480-65069-12	480-65069-13	480-65069-6	480-65069-7	480-65115-7	480-65115-8	480-65115-4	480-65115-5
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	~	~	69 U	65 U	~	~	~	~
4-Chloro-3-methylphenol	~	~	~	~	9.0 U	8.5 U	~	~	~	~
4-Chloroaniline	~	~	~	~	64 U	60 U	~	~	~	~
4-Chlorophenyl-phenylether	~	~	~	~	4.6 U	4.4 U	~	~	~	~
4-Methylphenol	100000	~	~	~	12 U	11 U	~	~	~	~
4-Nitroaniline	~	~	~	~	24 U	23 U	~	~	~	~
4-Nitrophenol, SVOC	~	~	~	~	53 U	50 U	~	~	~	~
Acenaphthene	100000	~	~	~	6.5 J	2.4 U	~	~	~	~
Acenaphthylene	100000	~	~	~	8.7 J	1.7 U	~	~	~	~
Acetophenone	~	~	~	~	11 U	11 U	~	~	~	~
Anthracene	100000	~	~	~	27 J	6.7 J	~	~	~	~
Atrazine	~	~	~	~	9.7 U	9.2 U	~	~	~	~
Benz(a)anthracene	1000	~	~	~	190 J	50 J	~	~	~	~
Benzaldehyde	~	~	~	~	24 U	23 U	~	~	~	~
Benzo(a)pyrene	1000	~	~	~	240 U	57 J	~	~	~	~
Benzo(b)fluoranthene	1000	~	~	~	390 U	89 J	~	~	~	~
Benzo(g,h,i)perylene	100000	~	~	~	250 U	46 J	~	~	~	~
Benzo(k)fluoranthene	3900	~	~	~	130 J	41 J	~	~	~	~
Biphenyl	~	~	~	~	14 U	13 U	~	~	~	~
bis (2-chloroisopropyl) ether	~	~	~	~	23 U	21 U	~	~	~	~
bis(2-Chloroethoxy)methane	~	~	~	~	12 U	11 U	~	~	~	~
bis(2-Chloroethyl)ether	~	~	~	~	19 U	18 U	~	~	~	~
bis(2-Ethylhexyl)phthalate	~	~	~	~	70 U	66 U	~	~	~	~
Butyl benzyl phthalate	~	~	~	~	58 U	55 U	~	~	~	~
Caprolactam	~	~	~	~	94 U	89 U	~	~	~	~
Carbazole	~	~	~	~	18 J	4.8 J	~	~	~	~
Chrysene	3900	~	~	~	250 J	62 J	~	~	~	~
Dibenz(a,h)anthracene	330	~	~	~	56 J	12 J	~	~	~	~
Dibenzofuran	59000	~	~	~	6.1 J	2.1 U	~	~	~	~
Diethylphthalate	~	~	~	~	6.6 U	6.2 U	~	~	~	~
Dimethyl phthalate	~	~	~	~	5.7 U	5.4 U	~	~	~	~
Di-N-Butyl phthalate	~	~	~	~	75 U	71 U	~	~	~	~
Di-N-Octyl phthalate	~	~	~	~	5.1 U	4.8 U	~	~	~	~
Fluoranthene	100000	~	~	~	400 U	100 J	~	~	~	~
Fluorene	100000	~	~	~	7.7 J	4.7 U	~	~	~	~
Hexachlorobenzene	1200	~	~	~	11 U	10 U	~	~	~	~
Hexachlorobutadiene, SVOC	~	~	~	~	11 U	11 U	~	~	~	~
Hexachlorocyclopentadiene	~	~	~	~	66 U	62 U	~	~	~	~
Hexachloroethane	~	~	~	~	17 U	16 U	~	~	~	~
Indeno(1,2,3-cd)pyrene	500	~	~	~	240 U	49 J	~	~	~	~
Isophorone	~	~	~	~	11 U	10 U	~	~	~	~
Naphthalene, SVOC	100000	~	~	~	8.2 J	3.4 U	~	~	~	~
Nitrobenzene	15000 ^a	~	~	~	9.7 U	9.1 U	~	~	~	~
N-Nitroso-di-N-propylamine	~	~	~	~	17 U	16 U	~	~	~	~
N-Nitrosodiphenylamine	~	~	~	~	12 U	11 U	~	~	~	~
Pentachlorophenol, SVOC	6700	~	~	~	75 U	71 U	~	~	~	~
Phenanthrene	100000	~	~	~	150 J	40 J	~	~	~	~
Phenol	100000	~	~	~	23 U	22 U	~	~	~	~
Pyrene	100000	~	~	~	370 U	92 J	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS001	CMSS001	CMSS002	CMSS002	CMSS003	CMSS003	CMSS004	CMSS004
			CMSS001-0-000	CMSS001-0-002	CMSS002-0-000	CMSS002-0-002	CMSS003-0-000	CMSS003-0-002	CMSS004-0-000	CMSS004-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014	8/5/2014	8/5/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary							
			SS							
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	0.0042 U	0.0039 U	~	~	~	~
Aroclor-1221	~	~	~	~	0.0042 U	0.0039 U	~	~	~	~
Aroclor-1232	~	~	~	~	0.0042 U	0.0039 U	~	~	~	~
Aroclor-1242	~	~	~	~	0.0042 U	0.0039 U	~	~	~	~
Aroclor-1248	~	~	~	~	0.0042 U	0.0039 U	~	~	~	~
Aroclor-1254	~	~	~	~	0.018 J	0.0093 U	~	~	~	~
Aroclor-1260	~	~	~	~	0.010 U	0.0093 U	~	~	~	~
Aroclor-1262	~	~	~	~	0.010 U	0.0093 U	~	~	~	~
Aroclor-1268	~	~	~	~	0.010 U	0.0093 U	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	51 U	46 U	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS004	CMSS005	CMSS005	CMSS006	CMSS006	CMSS007	CMSS007	CMSS008
			CMSS004-1-002 8/5/2014 2 - 24 inches 1 - Duplicate SS 480-65115-6	CMSS005-0-000 8/5/2014 0 - 2 inches 0 - Primary SS 480-65115-9	CMSS005-0-002 8/5/2014 2 - 24 inches 0 - Primary SS 480-65115-10	CMSS006-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-3	CMSS006-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-4	CMSS007-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-1	CMSS007-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-2	CMSS008-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-8
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	~	~	~	~	~	~	~	~
Barium, TCLP	~	100	~	~	~	~	~	~	~	~
Cadmium, TCLP	~	1	~	~	~	~	~	~	~	~
Chromium, TCLP	~	5	~	~	~	~	~	~	~	~
Lead, TCLP	~	5	~	~	~	~	~	~	~	~
Mercury, TCLP	~	0.2	~	~	~	~	~	~	~	~
Selenium, TCLP	~	1	~	~	~	~	~	~	~	~
Silver, TCLP	~	5	~	~	~	~	~	~	~	~
Total Metals, mg/Kg										
Aluminum, Total	~	~	~	~	~	~	~	~	~	~
Antimony, Total	~	~	~	~	~	~	~	~	~	~
Arsenic, Total	16	~	7.4	5.9	6.9	9.3	7.1	7.9 J	6.8	11
Barium, Total	400	~	~	~	~	~	~	~	~	~
Beryllium, Total	72	~	~	~	~	~	~	~	~	~
Boron, Total	~	~	~	~	~	~	~	~	~	~
Cadmium, Total	4.3	~	0.37	0.076 J	0.41	0.58	0.14 J	0.45 J	0.34	0.77
Calcium, Total	~	~	~	~	~	~	~	~	~	~
Chromium, Total	180	~	~	~	~	~	~	~	~	~
Cobalt, Total	~	~	~	~	~	~	~	~	~	~
Copper, Total	270	~	~	~	~	~	~	~	~	~
Iron, Total	~	~	~	~	~	~	~	~	~	~
Lead, Total	400	~	47	8.3	47	85	28	55	27	92
Magnesium, Total	~	~	~	~	~	~	~	~	~	~
Manganese, Total	2000	~	~	~	~	~	~	~	~	~
Mercury, Total	0.81	~	~	~	~	~	~	~	~	~
Nickel, Total	310	~	~	~	~	~	~	~	~	~
Potassium, Total	~	~	~	~	~	~	~	~	~	~
Selenium, Total	180	~	~	~	~	~	~	~	~	~
Silver, Total	180	~	~	~	~	~	~	~	~	~
Sodium, Total	~	~	~	~	~	~	~	~	~	~
Thallium, Total	~	~	~	~	~	~	~	~	~	~
Vanadium, Total	~	~	~	~	~	~	~	~	~	~
Zinc, Total	10000	~	~	~	~	~	~	~	~	~
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS004	CMSS005	CMSS005	CMSS006	CMSS006	CMSS007	CMSS007	CMSS008
			CMSS004-1-002	CMSS005-0-000	CMSS005-0-002	CMSS006-0-000	CMSS006-0-002	CMSS007-0-000	CMSS007-0-002	CMSS008-0-000
			8/5/2014	8/5/2014	8/5/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches
			1 - Duplicate	0 - Primary						
SS	SS	SS	SS	SS	SS	SS	SS			
480-65115-6	480-65115-9	480-65115-10	480-65069-3	480-65069-4	480-65069-1	480-65069-2	480-65069-8			
Volatile Organic Compounds (VOCs), ug/Kg (continued)										
2-Hexanone	~	~	~	~	~	~	~	~	~	~
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~
Acetone	100000	~	~	~	~	~	~	~	~	~
Benzene	4800	~	~	~	~	~	~	~	~	~
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~
Bromoform	~	~	~	~	~	~	~	~	~	~
Bromomethane	~	~	~	~	~	~	~	~	~	~
Carbon disulfide	~	~	~	~	~	~	~	~	~	~
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~
Chloroethane	~	~	~	~	~	~	~	~	~	~
Chloroform	49000	~	~	~	~	~	~	~	~	~
Chloromethane	~	~	~	~	~	~	~	~	~	~
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Cyclohexane	~	~	~	~	~	~	~	~	~	~
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~
Methyl acetate	~	~	~	~	~	~	~	~	~	~
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~
Methylene chloride	100000	~	~	~	~	~	~	~	~	~
Styrene	~	~	~	~	~	~	~	~	~	~
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~
Toluene	100000	~	~	~	~	~	~	~	~	~
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~
Trichloroethene	21000	~	~	~	~	~	~	~	~	~
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~
Vinylchloride	~	~	~	~	~	~	~	~	~	~
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~
Semi-Volatile Organic Compounds (SVOCs), ug/Kg										
2,4,5-Trichlorophenol	~	~	~	~	~	~	~	~	~	~
2,4,6-Trichlorophenol	~	~	~	~	~	~	~	~	~	~
2,4-Dichlorophenol	~	~	~	~	~	~	~	~	~	~
2,4-Dimethylphenol	~	~	~	~	~	~	~	~	~	~
2,4-Dinitrophenol	~	~	~	~	~	~	~	~	~	~
2,4-Dinitrotoluene	~	~	~	~	~	~	~	~	~	~
2,6-Dinitrotoluene	~	~	~	~	~	~	~	~	~	~
2-Chloronaphthalene	~	~	~	~	~	~	~	~	~	~
2-Chlorophenol	~	~	~	~	~	~	~	~	~	~
2-Methylnaphthalene	~	~	~	~	~	~	~	~	~	~
2-Methylphenol	100000	~	~	~	~	~	~	~	~	~
2-Nitroaniline	~	~	~	~	~	~	~	~	~	~
2-Nitrophenol	~	~	~	~	~	~	~	~	~	~
3,3'-Dichlorobenzidine	~	~	~	~	~	~	~	~	~	~
3-Nitroaniline	~	~	~	~	~	~	~	~	~	~
4,6-Dinitro-2-methylphenol	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS004	CMSS005	CMSS005	CMSS006	CMSS006	CMSS007	CMSS007	CMSS008
			CMSS004-1-002	CMSS005-0-000	CMSS005-0-002	CMSS006-0-000	CMSS006-0-002	CMSS007-0-000	CMSS007-0-002	CMSS008-0-000
			8/5/2014	8/5/2014	8/5/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches
			1 - Duplicate	0 - Primary						
SS	SS	SS	SS	SS	SS	SS	SS			
			480-65115-6	480-65115-9	480-65115-10	480-65069-3	480-65069-4	480-65069-1	480-65069-2	480-65069-8
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	~	~	~	~	~	~	~	~
4-Chloro-3-methylphenol	~	~	~	~	~	~	~	~	~	~
4-Chloroaniline	~	~	~	~	~	~	~	~	~	~
4-Chlorophenyl-phenylether	~	~	~	~	~	~	~	~	~	~
4-Methylphenol	100000	~	~	~	~	~	~	~	~	~
4-Nitroaniline	~	~	~	~	~	~	~	~	~	~
4-Nitrophenol, SVOC	~	~	~	~	~	~	~	~	~	~
Acenaphthene	100000	~	~	~	~	~	~	~	~	~
Acenaphthylene	100000	~	~	~	~	~	~	~	~	~
Acetophenone	~	~	~	~	~	~	~	~	~	~
Anthracene	100000	~	~	~	~	~	~	~	~	~
Atrazine	~	~	~	~	~	~	~	~	~	~
Benz(a)anthracene	1000	~	~	~	~	~	~	~	~	~
Benzaldehyde	~	~	~	~	~	~	~	~	~	~
Benzo(a)pyrene	1000	~	~	~	~	~	~	~	~	~
Benzo(b)fluoranthene	1000	~	~	~	~	~	~	~	~	~
Benzo(g,h,i)perylene	100000	~	~	~	~	~	~	~	~	~
Benzo(k)fluoranthene	3900	~	~	~	~	~	~	~	~	~
Biphenyl	~	~	~	~	~	~	~	~	~	~
bis (2-chloroisopropyl) ether	~	~	~	~	~	~	~	~	~	~
bis(2-Chloroethoxy)methane	~	~	~	~	~	~	~	~	~	~
bis(2-Chloroethyl)ether	~	~	~	~	~	~	~	~	~	~
bis(2-Ethylhexyl)phthalate	~	~	~	~	~	~	~	~	~	~
Butyl benzyl phthalate	~	~	~	~	~	~	~	~	~	~
Caprolactam	~	~	~	~	~	~	~	~	~	~
Carbazole	~	~	~	~	~	~	~	~	~	~
Chrysene	3900	~	~	~	~	~	~	~	~	~
Dibenz(a,h)anthracene	330	~	~	~	~	~	~	~	~	~
Dibenzofuran	59000	~	~	~	~	~	~	~	~	~
Diethylphthalate	~	~	~	~	~	~	~	~	~	~
Dimethyl phthalate	~	~	~	~	~	~	~	~	~	~
Di-N-Butyl phthalate	~	~	~	~	~	~	~	~	~	~
Di-N-Octyl phthalate	~	~	~	~	~	~	~	~	~	~
Fluoranthene	100000	~	~	~	~	~	~	~	~	~
Fluorene	100000	~	~	~	~	~	~	~	~	~
Hexachlorobenzene	1200	~	~	~	~	~	~	~	~	~
Hexachlorobutadiene, SVOC	~	~	~	~	~	~	~	~	~	~
Hexachlorocyclopentadiene	~	~	~	~	~	~	~	~	~	~
Hexachloroethane	~	~	~	~	~	~	~	~	~	~
Indeno(1,2,3-cd)pyrene	500	~	~	~	~	~	~	~	~	~
Isophorone	~	~	~	~	~	~	~	~	~	~
Naphthalene, SVOC	100000	~	~	~	~	~	~	~	~	~
Nitrobenzene	15000 ^a	~	~	~	~	~	~	~	~	~
N-Nitroso-di-N-propylamine	~	~	~	~	~	~	~	~	~	~
N-Nitrosodiphenylamine	~	~	~	~	~	~	~	~	~	~
Pentachlorophenol, SVOC	6700	~	~	~	~	~	~	~	~	~
Phenanthrene	100000	~	~	~	~	~	~	~	~	~
Phenol	100000	~	~	~	~	~	~	~	~	~
Pyrene	100000	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS004	CMSS005	CMSS005	CMSS006	CMSS006	CMSS007	CMSS007	CMSS008
			CMSS004-1-002	CMSS005-0-000	CMSS005-0-002	CMSS006-0-000	CMSS006-0-002	CMSS007-0-000	CMSS007-0-002	CMSS008-0-000
			8/5/2014	8/5/2014	8/5/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches
			1 - Duplicate	0 - Primary						
			SS							
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	~	~	~	~	~	~
Aroclor-1221	~	~	~	~	~	~	~	~	~	~
Aroclor-1232	~	~	~	~	~	~	~	~	~	~
Aroclor-1242	~	~	~	~	~	~	~	~	~	~
Aroclor-1248	~	~	~	~	~	~	~	~	~	~
Aroclor-1254	~	~	~	~	~	~	~	~	~	~
Aroclor-1260	~	~	~	~	~	~	~	~	~	~
Aroclor-1262	~	~	~	~	~	~	~	~	~	~
Aroclor-1268	~	~	~	~	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	~	~	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS008	CMSS009	CMSS009	CMSS010	CMSS010	CMSS011	CMSS011	CMSS011			
			CMSS008-0-002	CMSS009-0-000	CMSS009-0-002	CMSS010-0-000	CMSS010-0-002	CMSS011-0-000	CMSS011-1-000	CMSS011-0-002			
			8/4/2014	8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/1/2014	8/1/2014	8/1/2014			
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	0 - 2 inches	2 - 24 inches			
			0 - Primary	1 - Duplicate	0 - Primary								
			SS										
			480-65069-9	480-64771-6	480-64771-7	480-65069-10	480-65069-11	480-64771-1	480-64771-2	480-64771-3			
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L													
Arsenic, TCLP	~	5	~	~	~	~	~	0.010	J	~	0.0056	U	
Barium, TCLP	~	100	~	~	~	~	~	0.47		~	0.72		
Cadmium, TCLP	~	1	~	~	~	~	~	0.0024		~	0.0065		
Chromium, TCLP	~	5	~	~	~	~	~	0.0049	J+	~	0.0040	U	
Lead, TCLP	~	5	~	~	~	~	~	0.019	J+	~	0.044	J+	
Mercury, TCLP	~	0.2	~	~	~	~	~	0.00012	U	~	0.00012	U	
Selenium, TCLP	~	1	~	~	~	~	~	0.0087	U	~	0.0087	U	
Silver, TCLP	~	5	~	~	~	~	~	0.0017	U	~	0.0017	U	
Total Metals, mg/Kg													
Aluminum, Total	~	~	~	~	~	~	~	7200		~	7800	J	
Antimony, Total	~	~	~	~	~	~	~	0.46	U	~	3.0	J	
Arsenic, Total	16	~	9.2	9.1	8.0	6.1	6.9	9.0		~	14		
Barium, Total	400	~	~	~	~	~	~	100		~	110	J	
Beryllium, Total	72	~	~	~	~	~	~	0.65		~	0.45		
Boron, Total	~	~	~	~	~	~	~	4.6		~	4.7		
Cadmium, Total	4.3	~	0.46	0.50	0.18	J	0.30	0.37		~	1.1		
Calcium, Total	~	~	~	~	~	~	~	2900		~	4100		
Chromium, Total	180	~	~	~	~	~	~	24		~	16		
Cobalt, Total	~	~	~	~	~	~	~	7.2		~	7.6		
Copper, Total	270	~	~	~	~	~	~	16		~	21		
Iron, Total	~	~	~	~	~	~	~	15000		~	16000		
Lead, Total	400	~	46	95	48	28	38	86		~	200		
Magnesium, Total	~	~	~	~	~	~	~	2400		~	3100	J	
Manganese, Total	2000	~	~	~	~	~	~	440		~	440		
Mercury, Total	0.81	~	~	~	~	~	~	~		~	~		
Nickel, Total	310	~	~	~	~	~	~	16		~	18		
Potassium, Total	~	~	~	~	~	~	~	750		~	710	J	
Selenium, Total	180	~	~	~	~	~	~	0.46	U	~	0.52	J	
Silver, Total	180	~	~	~	~	~	~	0.26	J	~	0.25	U	
Sodium, Total	~	~	~	~	~	~	~	67	J	~	46	J	
Thallium, Total	~	~	~	~	~	~	~	0.35	U	~	0.38	U	
Vanadium, Total	~	~	~	~	~	~	~	11		~	12		
Zinc, Total	10000	~	~	~	~	~	~	110		~	96		
Volatile Organic Compounds (VOCs), ug/Kg													
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	0.40	UJ	0.40	UJ	0.45	U
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	0.89	UJ	0.88	UJ	1.0	U
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	1.2	UJ	1.2	UJ	1.4	U
1,1,2-Trichloroethane	~	~	~	~	~	~	~	0.71	UJ	0.71	UJ	0.80	U
1,1-Dichloroethane	26000	~	~	~	~	~	~	0.67	UJ	0.66	UJ	0.75	U
1,1-Dichloroethene	100000	~	~	~	~	~	~	0.67	UJ	0.67	UJ	0.75	U
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	0.33	UJ	0.33	UJ	0.37	U
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	2.7	UJ	2.7	UJ	3.1	U
1,2-Dibromoethane	~	~	~	~	~	~	~	0.70	UJ	0.70	UJ	0.79	U
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	0.43	UJ	0.43	UJ	0.48	U
1,2-Dichloroethane	3100	~	~	~	~	~	~	0.28	UJ	0.27	UJ	0.31	U
1,2-Dichloropropane	~	~	~	~	~	~	~	2.7	UJ	2.7	UJ	3.1	U
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	0.28	UJ	0.28	UJ	0.32	U
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	0.77	UJ	0.76	UJ	0.86	U
2-Butanone	~	~	~	~	~	~	~	2.0	UJ	2.0	UJ	2.3	U



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS008	CMSS009	CMSS009	CMSS010	CMSS010	CMSS011	CMSS011	CMSS011
			CMSS008-0-002	CMSS009-0-000	CMSS009-0-002	CMSS010-0-000	CMSS010-0-002	CMSS011-0-000	CMSS011-1-000	CMSS011-0-002
			8/4/2014	8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/1/2014	8/1/2014	8/1/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	1 - Duplicate	0 - Primary					
SS	SS	SS	SS	SS	SS	SS	SS	SS		
480-65069-9	480-64771-6	480-64771-7	480-65069-10	480-65069-11	480-64771-1	480-64771-2	480-64771-3			
Volatile Organic Compounds (VOCs), ug/Kg (continued)										
2-Hexanone	~	~	~	~	~	~	~	2.7 UJ	2.7 UJ	3.1 U
4-Methyl-2-pentanone	~	~	~	~	~	~	~	1.8 UJ	1.8 UJ	2.0 U
Acetone	100000	~	~	~	~	~	~	4.6 UJ	4.6 UJ	5.2 U
Benzene	4800	~	~	~	~	~	~	0.27 UJ	0.27 UJ	0.30 U
Bromodichloromethane	~	~	~	~	~	~	~	0.73 UJ	0.73 UJ	0.83 U
Bromoform	~	~	~	~	~	~	~	2.7 UJ	2.7 UJ	3.1 U
Bromomethane	~	~	~	~	~	~	~	0.49 UJ	0.49 UJ	0.56 U
Carbon disulfide	~	~	~	~	~	~	~	2.7 UJ	2.7 UJ	3.1 U
Carbon tetrachloride	2400	~	~	~	~	~	~	0.53 UJ	0.53 UJ	0.60 U
Chlorobenzene	100000	~	~	~	~	~	~	0.72 UJ	0.72 UJ	0.81 U
Chloroethane	~	~	~	~	~	~	~	1.2 UJ	1.2 UJ	1.4 U
Chloroform	49000	~	~	~	~	~	~	0.34 UJ	0.34 UJ	0.38 U
Chloromethane	~	~	~	~	~	~	~	0.33 UJ	0.33 UJ	0.37 U
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	0.70 UJ	0.70 UJ	0.79 U
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	0.79 UJ	0.78 UJ	0.89 U
Cyclohexane	~	~	~	~	~	~	~	0.77 UJ	0.76 UJ	0.86 U
Cyclohexane, Methyl-	~	~	~	~	~	~	~	0.83 UJ	0.83 UJ	0.94 U
Dibromochloromethane	~	~	~	~	~	~	~	0.70 UJ	0.70 UJ	0.79 U
Dichlorodifluoromethane	~	~	~	~	~	~	~	0.45 UJ	0.45 UJ	0.51 U
Ethylbenzene	41000	~	~	~	~	~	~	0.38 UJ	0.38 UJ	0.43 U
Isopropylbenzene	~	~	~	~	~	~	~	0.83 UJ	0.82 UJ	0.93 U
Methyl acetate	~	~	~	~	~	~	~	1.0 UJ	1.0 UJ	1.1 UJ
Methyl tert-butyl ether	100000	~	~	~	~	~	~	0.54 UJ	0.54 UJ	0.61 U
Methylene chloride	100000	~	~	~	~	~	~	2.5 UJ	2.5 UJ	2.8 U
Styrene	~	~	~	~	~	~	~	0.27 UJ	0.27 UJ	0.31 U
Tetrachloroethene	19000	~	~	~	~	~	~	0.74 UJ	0.73 UJ	0.83 U
Toluene	100000	~	~	~	~	~	~	0.41 UJ	0.41 UJ	0.47 U
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	0.57 UJ	0.56 UJ	0.64 U
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	2.4 UJ	2.4 UJ	2.7 U
Trichloroethene	21000	~	~	~	~	~	~	1.2 UJ	1.2 UJ	1.4 U
Trichlorofluoromethane	~	~	~	~	~	~	~	0.52 UJ	0.52 UJ	0.58 U
Vinylchloride	~	~	~	~	~	~	~	0.67 UJ	0.66 UJ	0.75 U
Xylenes, Total	100000	~	~	~	~	~	~	0.92 UJ	0.92 UJ	1.0 U
Semi-Volatile Organic Compounds (SVOCs), ug/Kg										
2,4,5-Trichlorophenol	~	~	~	~	~	~	~	41 U	~	43 U
2,4,6-Trichlorophenol	~	~	~	~	~	~	~	12 U	~	13 U
2,4-Dichlorophenol	~	~	~	~	~	~	~	9.8 U	~	10 U
2,4-Dimethylphenol	~	~	~	~	~	~	~	50 U	~	53 U
2,4-Dinitrophenol	~	~	~	~	~	~	~	65 U	~	68 U
2,4-Dinitrotoluene	~	~	~	~	~	~	~	29 U	~	30 U
2,6-Dinitrotoluene	~	~	~	~	~	~	~	46 U	~	48 U
2-Chloronaphthalene	~	~	~	~	~	~	~	12 U	~	13 U
2-Chlorophenol	~	~	~	~	~	~	~	9.5 U	~	10 U
2-Methylnaphthalene	~	~	~	~	~	~	~	8.4 J	~	10 J
2-Methylphenol	100000	~	~	~	~	~	~	5.7 U	~	6.0 U
2-Nitroaniline	~	~	~	~	~	~	~	60 U	~	63 U
2-Nitrophenol	~	~	~	~	~	~	~	8.5 U	~	8.9 U
3,3'-Dichlorobenzidine	~	~	~	~	~	~	~	160 U	~	170 U
3-Nitroaniline	~	~	~	~	~	~	~	43 U	~	45 U
4,6-Dinitro-2-methylphenol	~	~	~	~	~	~	~	64 U	~	68 U



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS008	CMSS009	CMSS009	CMSS010	CMSS010	CMSS011	CMSS011	CMSS011
			CMSS008-0-002	CMSS009-0-000	CMSS009-0-002	CMSS010-0-000	CMSS010-0-002	CMSS011-0-000	CMSS011-1-000	CMSS011-0-002
			8/4/2014	8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/1/2014	8/1/2014	8/1/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	0 - 2 inches	0 - 2 inches
			0 - Primary	1 - Duplicate	0 - Primary					
SS	SS	SS	SS	SS	SS	SS	SS			
			480-65069-9	480-64771-6	480-64771-7	480-65069-10	480-65069-11	480-64771-1	480-64771-2	480-64771-3
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	~	~	~	~	~	59 U	~	62 U
4-Chloro-3-methylphenol	~	~	~	~	~	~	~	7.7 U	~	8.0 U
4-Chloroaniline	~	~	~	~	~	~	~	55 U	~	57 U
4-Chlorophenyl-phenylether	~	~	~	~	~	~	~	4.0 U	~	4.2 U
4-Methylphenol	100000	~	~	~	~	~	~	10 U	~	11 U
4-Nitroaniline	~	~	~	~	~	~	~	21 U	~	22 U
4-Nitrophenol, SVOC	~	~	~	~	~	~	~	45 U	~	47 U
Acenaphthene	100000	~	~	~	~	~	~	2.2 U	~	4.4 J
Acenaphthylene	100000	~	~	~	~	~	~	7.4 J	~	15 J
Acetophenone	~	~	~	~	~	~	~	9.6 U	~	10 U
Anthracene	100000	~	~	~	~	~	~	11 J	~	27 J
Atrazine	~	~	~	~	~	~	~	8.3 U	~	8.7 U
Benz(a)anthracene	1000	~	~	~	~	~	~	66 J	~	92 J
Benzaldehyde	~	~	~	~	~	~	~	20 U	~	21 U
Benzo(a)pyrene	1000	~	~	~	~	~	~	75 J	~	110 J
Benzo(b)fluoranthene	1000	~	~	~	~	~	~	110 J	~	170 J
Benzo(g,h,i)perylene	100000	~	~	~	~	~	~	74 J	~	73 J
Benzo(k)fluoranthene	3900	~	~	~	~	~	~	49 J	~	65 J
Biphenyl	~	~	~	~	~	~	~	12 U	~	12 U
bis (2-chloroisopropyl) ether	~	~	~	~	~	~	~	19 U	~	20 U
bis(2-Chloroethoxy)methane	~	~	~	~	~	~	~	10 U	~	11 U
bis(2-Chloroethyl)ether	~	~	~	~	~	~	~	16 U	~	17 U
bis(2-Ethylhexyl)phthalate	~	~	~	~	~	~	~	60 U	~	63 U
Butyl benzyl phthalate	~	~	~	~	~	~	~	50 U	~	52 U
Caprolactam	~	~	~	~	~	~	~	81 U	~	85 U
Carbazole	~	~	~	~	~	~	~	5.5 J	~	12 J
Chrysene	3900	~	~	~	~	~	~	75 J	~	100 J
Dibenz(a,h)anthracene	330	~	~	~	~	~	~	17 J	~	26 J
Dibenzofuran	59000	~	~	~	~	~	~	4.2 J	~	5.7 J
Diethylphthalate	~	~	~	~	~	~	~	5.6 U	~	5.9 U
Dimethyl phthalate	~	~	~	~	~	~	~	4.9 U	~	5.1 U
Di-N-Butyl phthalate	~	~	~	~	~	~	~	64 U	~	68 U
Di-N-Octyl phthalate	~	~	~	~	~	~	~	4.4 U	~	4.6 U
Fluoranthene	100000	~	~	~	~	~	~	120 J	~	170 J
Fluorene	100000	~	~	~	~	~	~	4.3 U	~	7.2 J
Hexachlorobenzene	1200	~	~	~	~	~	~	9.3 U	~	9.7 U
Hexachlorobutadiene, SVOC	~	~	~	~	~	~	~	9.6 U	~	10 U
Hexachlorocyclopentadiene	~	~	~	~	~	~	~	56 U	~	59 U
Hexachloroethane	~	~	~	~	~	~	~	14 U	~	15 U
Indeno(1,2,3-cd)pyrene	500	~	~	~	~	~	~	84 J	~	92 J
Isophorone	~	~	~	~	~	~	~	9.3 U	~	9.8 U
Naphthalene, SVOC	100000	~	~	~	~	~	~	7.6 J	~	3.3 U
Nitrobenzene	15000 ^a	~	~	~	~	~	~	8.3 U	~	8.7 U
N-Nitroso-di-N-propylamine	~	~	~	~	~	~	~	15 U	~	16 U
N-Nitrosodiphenylamine	~	~	~	~	~	~	~	10 U	~	11 U
Pentachlorophenol, SVOC	6700	~	~	~	~	~	~	64 U	~	67 U
Phenanthrene	100000	~	~	~	~	~	~	45 J	~	79 J
Phenol	100000	~	~	~	~	~	~	20 U	~	21 U
Pyrene	100000	~	~	~	~	~	~	110 J	~	120 J



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS008	CMSS009	CMSS009	CMSS010	CMSS010	CMSS011	CMSS011	CMSS011
			CMSS008-0-002	CMSS009-0-000	CMSS009-0-002	CMSS010-0-000	CMSS010-0-002	CMSS011-0-000	CMSS011-1-000	CMSS011-0-002
			8/4/2014	8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/1/2014	8/1/2014	8/1/2014
			2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	1 - Duplicate	0 - Primary					
			SS							
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	~	~	~	~	~	0.0036 U	~	0.0037 U
Aroclor-1221	~	~	~	~	~	~	~	0.0036 U	~	0.0037 U
Aroclor-1232	~	~	~	~	~	~	~	0.0036 U	~	0.0037 U
Aroclor-1242	~	~	~	~	~	~	~	0.0036 U	~	0.0037 U
Aroclor-1248	~	~	~	~	~	~	~	0.0036 U	~	0.0037 U
Aroclor-1254	~	~	~	~	~	~	~	0.025	~	0.023 J
Aroclor-1260	~	~	~	~	~	~	~	0.0085 U	~	0.019 U
Aroclor-1262	~	~	~	~	~	~	~	0.0085 U	~	0.0089 U
Aroclor-1268	~	~	~	~	~	~	~	0.0085 U	~	0.0089 U
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	~	~	~	~	~	300	~	180

Notes:
 mg/Kg = milligram per kilogram.
 mg/L = milligram per liter.
 ug/Kg = microgram per kilogram.
 U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.
 UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.
 J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.
 J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.
 R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.
 SB = Soil boring.
 SS = Surface soil.
 (1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).
 (2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).
 a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).
 c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).
 ~ = Analysis not performed or No standard or guidance value listed for this constituent.





Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSS011	CMSSS011	CMSSS012	CMSSS012	CMSSS013	CMSSS013	CMSSS014	CMSSS014
			CMSSS011-1-002 8/1/2014 2 - 24 inches 1 - Duplicate SS 480-64771-4	CMSSS011-0-020 8/1/2014 24 - 29 inches 0 - Primary SS 480-64771-5	CMSSS012-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-20	CMSSS012-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-21	CMSSS013-0-000 8/4/2014 0 - 2 inches 0 - Primary SS 480-65069-14	CMSSS013-0-002 8/4/2014 2 - 24 inches 0 - Primary SS 480-65069-15	CMSSS014-0-000 8/5/2014 0 - 2 inches 0 - Primary SS 480-65115-1	CMSSS014-0-002 8/5/2014 2 - 24 inches 0 - Primary SS 480-65115-2
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L										
Arsenic, TCLP	~	5	0.0056 U	~	~	~	~	~	0.012 J	0.0090 J
Barium, TCLP	~	100	0.63	~	~	~	~	~	0.36	0.71
Cadmium, TCLP	~	1	0.0055	~	~	~	~	~	0.0019 J	0.0058
Chromium, TCLP	~	5	0.0040 U	~	~	~	~	~	0.0040 U	0.0010 U
Lead, TCLP	~	5	0.024 J+	~	~	~	~	~	0.0071 J	0.020
Mercury, TCLP	~	0.2	0.00012 U	~	~	~	~	~	0.00012 U	0.00012 U
Selenium, TCLP	~	1	0.0087 U	~	~	~	~	~	0.0087 U	0.0087 U
Silver, TCLP	~	5	0.0017 U	~	~	~	~	~	0.0017 U	0.0017 U
Total Metals, mg/Kg										
Aluminum, Total	~	~	7300 J	~	~	~	~	~	7800	7000
Antimony, Total	~	~	0.94 J	~	~	~	~	~	1.1 J	3.7 J
Arsenic, Total	16	~	9.6	18	20	11	11	24	10	11
Barium, Total	400	~	100 J	~	~	~	~	~	120	110
Beryllium, Total	72	~	0.41	~	~	~	~	~	0.45	0.41
Boron, Total	~	~	4.1	~	~	~	~	~	4.2	3.5
Cadmium, Total	4.3	~	0.85	1.6	3.1	1.7	0.69	0.99	0.77	0.91
Calcium, Total	~	~	6500	~	~	~	~	~	3000	2700
Chromium, Total	180	~	15	~	~	~	~	~	22	13
Cobalt, Total	~	~	7.6	~	~	~	~	~	7.9	7.0
Copper, Total	270	~	18	~	~	~	~	~	18	18
Iron, Total	~	~	15000	~	~	~	~	~	16000	15000
Lead, Total	400	~	120	190	720	390	85	1500	100	86
Magnesium, Total	~	~	2400 J	~	~	~	~	~	2700	2300
Manganese, Total	2000	~	430	~	~	~	~	~	470	410
Mercury, Total	0.81	~	~	~	~	~	~	~	~	~
Nickel, Total	310	~	18	~	~	~	~	~	18	16
Potassium, Total	~	~	610 J	~	~	~	~	~	890	730
Selenium, Total	180	~	0.46 J	~	~	~	~	~	0.47 U	0.50 U
Silver, Total	180	~	0.22 J	~	~	~	~	~	0.23 U	0.25 U
Sodium, Total	~	~	36 J	~	~	~	~	~	31 J	36 J
Thallium, Total	~	~	0.32 U	~	~	~	~	~	0.35 U	0.37 U
Vanadium, Total	~	~	12	~	~	~	~	~	12	11
Zinc, Total	10000	~	100	~	~	~	~	~	170	320
Volatile Organic Compounds (VOCs), ug/Kg										
1,1,1-Trichloroethane	100000	~	~	~	~	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS011		CMSS012		CMSS013		CMSS014				
			CMSS011-1-002	CMSS011-0-020	CMSS012-0-000	CMSS012-0-002	CMSS013-0-000	CMSS013-0-002	CMSS014-0-000	CMSS014-0-002			
			8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014			
			2 - 24 inches	24 - 29 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches			
			1 - Duplicate	0 - Primary	0 - Primary	0 - Primary	0 - Primary	0 - Primary	0 - Primary	0 - Primary			
			SS	SS	SS	SS	SS	SS	SS	SS			
			480-64771-4	480-64771-5	480-65069-20	480-65069-21	480-65069-14	480-65069-15	480-65115-1	480-65115-2			
Volatile Organic Compounds (VOCs), ug/Kg (continued)													
2-Hexanone	~	~	~	~	~	~	~	~	~	~			
4-Methyl-2-pentanone	~	~	~	~	~	~	~	~	~	~			
Acetone	100000	~	~	~	~	~	~	~	~	~			
Benzene	4800	~	~	~	~	~	~	~	~	~			
Bromodichloromethane	~	~	~	~	~	~	~	~	~	~			
Bromoform	~	~	~	~	~	~	~	~	~	~			
Bromomethane	~	~	~	~	~	~	~	~	~	~			
Carbon disulfide	~	~	~	~	~	~	~	~	~	~			
Carbon tetrachloride	2400	~	~	~	~	~	~	~	~	~			
Chlorobenzene	100000	~	~	~	~	~	~	~	~	~			
Chloroethane	~	~	~	~	~	~	~	~	~	~			
Chloroform	49000	~	~	~	~	~	~	~	~	~			
Chloromethane	~	~	~	~	~	~	~	~	~	~			
cis-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~			
cis-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~			
Cyclohexane	~	~	~	~	~	~	~	~	~	~			
Cyclohexane, Methyl-	~	~	~	~	~	~	~	~	~	~			
Dibromochloromethane	~	~	~	~	~	~	~	~	~	~			
Dichlorodifluoromethane	~	~	~	~	~	~	~	~	~	~			
Ethylbenzene	41000	~	~	~	~	~	~	~	~	~			
Isopropylbenzene	~	~	~	~	~	~	~	~	~	~			
Methyl acetate	~	~	~	~	~	~	~	~	~	~			
Methyl tert-butyl ether	100000	~	~	~	~	~	~	~	~	~			
Methylene chloride	100000	~	~	~	~	~	~	~	~	~			
Styrene	~	~	~	~	~	~	~	~	~	~			
Tetrachloroethene	19000	~	~	~	~	~	~	~	~	~			
Toluene	100000	~	~	~	~	~	~	~	~	~			
trans-1,2-Dichloroethene	100000	~	~	~	~	~	~	~	~	~			
trans-1,3-Dichloropropene	~	~	~	~	~	~	~	~	~	~			
Trichloroethene	21000	~	~	~	~	~	~	~	~	~			
Trichlorofluoromethane	~	~	~	~	~	~	~	~	~	~			
Vinylchloride	~	~	~	~	~	~	~	~	~	~			
Xylenes, Total	100000	~	~	~	~	~	~	~	~	~			
Semi-Volatile Organic Compounds (SVOCs), ug/Kg													
2,4,5-Trichlorophenol	~	~	40	U	43	UJ	~	~	~	46	U	48	U
2,4,6-Trichlorophenol	~	~	12	U	13	UJ	~	~	~	14	U	14	U
2,4-Dichlorophenol	~	~	9.5	U	10	UJ	~	~	~	11	U	12	U
2,4-Dimethylphenol	~	~	49	U	54	UJ	~	~	~	57	U	60	U
2,4-Dinitrophenol	~	~	64	U	70	UJ	~	~	~	74	U	77	U
2,4-Dinitrotoluene	~	~	28	U	31	UJ	~	~	~	33	U	34	U
2,6-Dinitrotoluene	~	~	44	U	49	UJ	~	~	~	51	U	54	U
2-Chloronaphthalene	~	~	12	U	13	UJ	~	~	~	14	U	15	U
2-Chlorophenol	~	~	9.2	U	10	UJ	~	~	~	11	U	11	U
2-Methylnaphthalene	~	~	9.7	J	20	J	~	~	~	2.5	U	2.7	U
2-Methylphenol	100000	~	5.6	U	6.1	UJ	~	~	~	6.5	U	6.8	U
2-Nitroaniline	~	~	58	U	64	UJ	~	~	~	67	U	71	U
2-Nitrophenol	~	~	8.3	U	9.1	UJ	~	~	~	9.6	U	10	U
3,3'-Dichlorobenzidine	~	~	160	U	170	UJ	~	~	~	180	U	190	U
3-Nitroaniline	~	~	42	U	46	UJ	~	~	~	48	U	51	U
4,6-Dinitro-2-methylphenol	~	~	63	U	69	UJ	~	~	~	73	U	76	U



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSS011		CMSSS012		CMSSS013		CMSSS014	
			CMSSS011-1-002	CMSSS011-0-020	CMSSS012-0-000	CMSSS012-0-002	CMSSS013-0-000	CMSSS013-0-002	CMSSS014-0-000	CMSSS014-0-002
			8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014
			2 - 24 inches	24 - 29 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			1 - Duplicate	0 - Primary						
			SS							
			480-64771-4	480-64771-5	480-65069-20	480-65069-21	480-65069-14	480-65069-15	480-65115-1	480-65115-2
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)										
4-Bromophenyl-phenylether	~	~	58 U	63 UJ	~	~	~	~	67 U	70 U
4-Chloro-3-methylphenol	~	~	7.5 U	8.2 UJ	~	~	~	~	8.7 U	9.1 U
4-Chloroaniline	~	~	53 U	58 UJ	~	~	~	~	62 U	65 U
4-Chlorophenyl-phenylether	~	~	3.9 U	4.2 UJ	~	~	~	~	4.5 U	4.7 U
4-Methylphenol	100000	~	10 U	11 UJ	~	~	~	~	12 U	12 U
4-Nitroaniline	~	~	20 U	22 UJ	~	~	~	~	24 U	25 U
4-Nitrophenol, SVOC	~	~	44 U	48 UJ	~	~	~	~	51 U	53 U
Acenaphthene	100000	~	15 J	5.4 J	~	~	~	~	2.5 U	2.6 U
Acenaphthylene	100000	~	12 J	8.2 J	~	~	~	~	1.7 U	1.8 U
Acetophenone	~	~	9.3 U	10 UJ	~	~	~	~	11 U	11 U
Anthracene	100000	~	33 J	35 J	~	~	~	~	56 J	5.6 U
Atrazine	~	~	8.1 U	8.9 UJ	~	~	~	~	9.4 U	9.8 U
Benz(a)anthracene	1000	~	120 J	330 J	~	~	~	~	120 J	43 J
Benzaldehyde	~	~	20 U	22 UJ	~	~	~	~	23 U	24 U
Benzo(a)pyrene	1000	~	120 J	350 J	~	~	~	~	120 J	44 J
Benzo(b)fluoranthene	1000	~	180 J	600 J	~	~	~	~	170 J	69 J
Benzo(g,h,i)perylene	100000	~	110 J	340 J	~	~	~	~	120 J	49 J
Benzo(k)fluoranthene	3900	~	73 J	290 J	~	~	~	~	65 J	24 J
Biphenyl	~	~	11 U	12 UJ	~	~	~	~	13 U	14 U
bis (2-chloroisopropyl) ether	~	~	19 U	21 UJ	~	~	~	~	22 U	23 U
bis(2-Chloroethoxy)methane	~	~	9.9 U	11 UJ	~	~	~	~	11 U	12 U
bis(2-Chloroethyl)ether	~	~	16 U	17 UJ	~	~	~	~	18 U	19 U
bis(2-Ethylhexyl)phthalate	~	~	59 U	64 UJ	~	~	~	~	68 U	71 U
Butyl benzyl phthalate	~	~	49 U	53 UJ	~	~	~	~	56 U	59 U
Caprolactam	~	~	79 U	86 UJ	~	~	~	~	91 U	95 U
Carbazole	~	~	15 J	17 J	~	~	~	~	37 J	2.5 U
Chrysene	3900	~	120 J	300 J	~	~	~	~	130 J	47 J
Dibenz(a,h)anthracene	330	~	28 J	73 J	~	~	~	~	36 J	20 J
Dibenzofuran	59000	~	9.0 J	12 J	~	~	~	~	27 J	2.3 U
Diethylphthalate	~	~	5.5 U	6.0 UJ	~	~	~	~	6.4 U	6.7 U
Dimethyl phthalate	~	~	4.7 U	5.2 UJ	~	~	~	~	5.5 U	5.7 U
Di-N-Butyl phthalate	~	~	63 U	69 UJ	~	~	~	~	73 U	76 U
Di-N-Octyl phthalate	~	~	4.2 U	4.7 UJ	~	~	~	~	4.9 U	5.2 U
Fluoranthene	100000	~	190 J	410 J	~	~	~	~	230 J	67 J
Fluorene	100000	~	15 J	8.3 J	~	~	~	~	32 J	5.1 U
Hexachlorobenzene	1200	~	9.0 U	9.9 UJ	~	~	~	~	10 U	11 U
Hexachlorobutadiene, SVOC	~	~	9.3 U	10 UJ	~	~	~	~	11 U	11 U
Hexachlorocyclopentadiene	~	~	55 U	60 UJ	~	~	~	~	64 U	67 U
Hexachloroethane	~	~	14 U	15 UJ	~	~	~	~	16 U	17 U
Indeno(1,2,3-cd)pyrene	500	~	130 J	450 J	~	~	~	~	120 J	49 J
Isophorone	~	~	9.1 U	10 UJ	~	~	~	~	11 U	11 U
Naphthalene, SVOC	100000	~	8.4 J	21 J	~	~	~	~	26 J	3.7 U
Nitrobenzene	15000 ^a	~	8.0 U	8.8 UJ	~	~	~	~	9.3 U	9.8 U
N-Nitroso-di-N-propylamine	~	~	14 U	16 UJ	~	~	~	~	17 U	17 U
N-Nitrosodiphenylamine	~	~	9.9 U	11 UJ	~	~	~	~	12 U	12 U
Pentachlorophenol, SVOC	6700	~	62 U	68 UJ	~	~	~	~	72 U	76 U
Phenanthrene	100000	~	120 J	140 J	~	~	~	~	260 J	30 J
Phenol	100000	~	19 U	21 UJ	~	~	~	~	22 U	23 U
Pyrene	100000	~	190 J	480 J	~	~	~	~	220 J	56 J



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSS011	CMSSS011	CMSSS012	CMSSS012	CMSSS013	CMSSS013	CMSSS014	CMSSS014
			CMSSS011-1-002	CMSSS011-0-020	CMSSS012-0-000	CMSSS012-0-002	CMSSS013-0-000	CMSSS013-0-002	CMSSS014-0-000	CMSSS014-0-002
			8/1/2014	8/1/2014	8/4/2014	8/4/2014	8/4/2014	8/4/2014	8/5/2014	8/5/2014
			2 - 24 inches	24 - 29 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			1 - Duplicate	0 - Primary						
			SS							
			480-64771-4	480-64771-5	480-65069-20	480-65069-21	480-65069-14	480-65069-15	480-65115-1	480-65115-2
Polychlorinated Biphenyls (PBCs), mg/Kg										
Aroclor-1016	~	~	0.0035 U	~	~	~	~	~	0.0040 U	0.0042 U
Aroclor-1221	~	~	0.0035 U	~	~	~	~	~	0.0040 U	0.0042 U
Aroclor-1232	~	~	0.0035 U	~	~	~	~	~	0.0040 U	0.0042 U
Aroclor-1242	~	~	0.0035 U	~	~	~	~	~	0.0040 U	0.0042 U
Aroclor-1248	~	~	0.0035 U	~	~	~	~	~	0.0040 U	0.0042 U
Aroclor-1254	~	~	0.029	~	~	~	~	~	0.023	0.018 J
Aroclor-1260	~	~	0.018 U	~	~	~	~	~	0.014 J	0.015 J
Aroclor-1262	~	~	0.0083 U	~	~	~	~	~	0.0097 U	0.010 U
Aroclor-1268	~	~	0.0083 U	~	~	~	~	~	0.0097 U	0.010 U
Total Petroleum Hydrocarbons, mg/Kg										
TPH	~	~	210	~	~	~	~	~	400	360

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.

DRAFT



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS015	CMSS015	CMSS016	CMSS016
			CMSS015-0-000	CMSS015-0-002	CMSS016-0-000	CMSS016-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SS	SS	SS	SS
			480-65069-16	480-65069-17	480-65069-18	480-65069-19
Toxicity Characteristic Leaching Procedure (TCLP) Metals, mg/L						
Arsenic, TCLP	~	5	~	~	~	~
Barium, TCLP	~	100	~	~	~	~
Cadmium, TCLP	~	1	~	~	~	~
Chromium, TCLP	~	5	~	~	~	~
Lead, TCLP	~	5	~	~	~	~
Mercury, TCLP	~	0.2	~	~	~	~
Selenium, TCLP	~	1	~	~	~	~
Silver, TCLP	~	5	~	~	~	~
Total Metals, mg/Kg						
Aluminum, Total	~	~	~	~	~	~
Antimony, Total	~	~	~	~	~	~
Arsenic, Total	16	~	7.8	4.8	8.8	12
Barium, Total	400	~	~	~	~	~
Beryllium, Total	72	~	~	~	~	~
Boron, Total	~	~	~	~	~	~
Cadmium, Total	4.3	~	0.50	0.22	0.57	0.58
Calcium, Total	~	~	~	~	~	~
Chromium, Total	180	~	~	~	~	~
Cobalt, Total	~	~	~	~	~	~
Copper, Total	270	~	~	~	~	~
Iron, Total	~	~	~	~	~	~
Lead, Total	400	~	60	17	70	93
Magnesium, Total	~	~	~	~	~	~
Manganese, Total	2000	~	~	~	~	~
Mercury, Total	0.81	~	~	~	~	~
Nickel, Total	310	~	~	~	~	~
Potassium, Total	~	~	~	~	~	~
Selenium, Total	180	~	~	~	~	~
Silver, Total	180	~	~	~	~	~
Sodium, Total	~	~	~	~	~	~
Thallium, Total	~	~	~	~	~	~
Vanadium, Total	~	~	~	~	~	~
Zinc, Total	10000	~	~	~	~	~
Volatile Organic Compounds (VOCs), ug/Kg						
1,1,1-Trichloroethane	100000	~	~	~	~	~
1,1,2,2-Tetrachloroethane	~	~	~	~	~	~
1,1,2-Trichloro-1,2,2-trifluoroethane	~	~	~	~	~	~
1,1,2-Trichloroethane	~	~	~	~	~	~
1,1-Dichloroethane	26000	~	~	~	~	~
1,1-Dichloroethene	100000	~	~	~	~	~
1,2,4-Trichlorobenzene, VOC	~	~	~	~	~	~
1,2-Dibromo-3-chloropropane	~	~	~	~	~	~
1,2-Dibromoethane	~	~	~	~	~	~
1,2-Dichlorobenzene, VOC	~	~	~	~	~	~
1,2-Dichloroethane	3100	~	~	~	~	~
1,2-Dichloropropane	~	~	~	~	~	~
1,3-Dichlorobenzene, VOC	~	~	~	~	~	~
1,4-Dichlorobenzene, VOC	~	~	~	~	~	~
2-Butanone	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSS015	CMSS015	CMSS016	CMSS016
			CMSS015-0-000	CMSS015-0-002	CMSS016-0-000	CMSS016-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SS	SS	SS	SS
			480-65069-16	480-65069-17	480-65069-18	480-65069-19
Volatile Organic Compounds (VOCs), ug/Kg (continued)						
2-Hexanone	~	~	~	~	~	~
4-Methyl-2-pentanone	~	~	~	~	~	~
Acetone	100000	~	~	~	~	~
Benzene	4800	~	~	~	~	~
Bromodichloromethane	~	~	~	~	~	~
Bromoform	~	~	~	~	~	~
Bromomethane	~	~	~	~	~	~
Carbon disulfide	~	~	~	~	~	~
Carbon tetrachloride	2400	~	~	~	~	~
Chlorobenzene	100000	~	~	~	~	~
Chloroethane	~	~	~	~	~	~
Chloroform	49000	~	~	~	~	~
Chloromethane	~	~	~	~	~	~
cis-1,2-Dichloroethene	100000	~	~	~	~	~
cis-1,3-Dichloropropene	~	~	~	~	~	~
Cyclohexane	~	~	~	~	~	~
Cyclohexane, Methyl-	~	~	~	~	~	~
Dibromochloromethane	~	~	~	~	~	~
Dichlorodifluoromethane	~	~	~	~	~	~
Ethylbenzene	41000	~	~	~	~	~
Isopropylbenzene	~	~	~	~	~	~
Methyl acetate	~	~	~	~	~	~
Methyl tert-butyl ether	100000	~	~	~	~	~
Methylene chloride	100000	~	~	~	~	~
Styrene	~	~	~	~	~	~
Tetrachloroethene	19000	~	~	~	~	~
Toluene	100000	~	~	~	~	~
trans-1,2-Dichloroethene	100000	~	~	~	~	~
trans-1,3-Dichloropropene	~	~	~	~	~	~
Trichloroethene	21000	~	~	~	~	~
Trichlorofluoromethane	~	~	~	~	~	~
Vinylchloride	~	~	~	~	~	~
Xylenes, Total	100000	~	~	~	~	~
Semi-Volatile Organic Compounds (SVOCs), ug/Kg						
2,4,5-Trichlorophenol	~	~	~	~	~	~
2,4,6-Trichlorophenol	~	~	~	~	~	~
2,4-Dichlorophenol	~	~	~	~	~	~
2,4-Dimethylphenol	~	~	~	~	~	~
2,4-Dinitrophenol	~	~	~	~	~	~
2,4-Dinitrotoluene	~	~	~	~	~	~
2,6-Dinitrotoluene	~	~	~	~	~	~
2-Chloronaphthalene	~	~	~	~	~	~
2-Chlorophenol	~	~	~	~	~	~
2-Methylnaphthalene	~	~	~	~	~	~
2-Methylphenol	100000	~	~	~	~	~
2-Nitroaniline	~	~	~	~	~	~
2-Nitrophenol	~	~	~	~	~	~
3,3'-Dichlorobenzidine	~	~	~	~	~	~
3-Nitroaniline	~	~	~	~	~	~
4,6-Dinitro-2-methylphenol	~	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSS015	CMSSS015	CMSSS016	CMSSS016
			CMSSS015-0-000	CMSSS015-0-002	CMSSS016-0-000	CMSSS016-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SS	SS	SS	SS
			480-65069-16	480-65069-17	480-65069-18	480-65069-19
Semi-Volatile Organic Compounds (SVOCs), ug/Kg (continued)						
4-Bromophenyl-phenylether	~	~	~	~	~	~
4-Chloro-3-methylphenol	~	~	~	~	~	~
4-Chloroaniline	~	~	~	~	~	~
4-Chlorophenyl-phenylether	~	~	~	~	~	~
4-Methylphenol	100000	~	~	~	~	~
4-Nitroaniline	~	~	~	~	~	~
4-Nitrophenol, SVOC	~	~	~	~	~	~
Acenaphthene	100000	~	~	~	~	~
Acenaphthylene	100000	~	~	~	~	~
Acetophenone	~	~	~	~	~	~
Anthracene	100000	~	~	~	~	~
Atrazine	~	~	~	~	~	~
Benz(a)anthracene	1000	~	~	~	~	~
Benzaldehyde	~	~	~	~	~	~
Benzo(a)pyrene	1000	~	~	~	~	~
Benzo(b)fluoranthene	1000	~	~	~	~	~
Benzo(g,h,i)perylene	100000	~	~	~	~	~
Benzo(k)fluoranthene	3900	~	~	~	~	~
Biphenyl	~	~	~	~	~	~
bis (2-chloroisopropyl) ether	~	~	~	~	~	~
bis(2-Chloroethoxy)methane	~	~	~	~	~	~
bis(2-Chloroethyl)ether	~	~	~	~	~	~
bis(2-Ethylhexyl)phthalate	~	~	~	~	~	~
Butyl benzyl phthalate	~	~	~	~	~	~
Caprolactam	~	~	~	~	~	~
Carbazole	~	~	~	~	~	~
Chrysene	3900	~	~	~	~	~
Dibenz(a,h)anthracene	330	~	~	~	~	~
Dibenzofuran	59000	~	~	~	~	~
Diethylphthalate	~	~	~	~	~	~
Dimethyl phthalate	~	~	~	~	~	~
Di-N-Butyl phthalate	~	~	~	~	~	~
Di-N-Octyl phthalate	~	~	~	~	~	~
Fluoranthene	100000	~	~	~	~	~
Fluorene	100000	~	~	~	~	~
Hexachlorobenzene	1200	~	~	~	~	~
Hexachlorobutadiene, SVOC	~	~	~	~	~	~
Hexachlorocyclopentadiene	~	~	~	~	~	~
Hexachloroethane	~	~	~	~	~	~
Indeno(1,2,3-cd)pyrene	500	~	~	~	~	~
Isophorone	~	~	~	~	~	~
Naphthalene, SVOC	100000	~	~	~	~	~
Nitrobenzene	15000 ^a	~	~	~	~	~
N-Nitroso-di-N-propylamine	~	~	~	~	~	~
N-Nitrosodiphenylamine	~	~	~	~	~	~
Pentachlorophenol, SVOC	6700	~	~	~	~	~
Phenanthrene	100000	~	~	~	~	~
Phenol	100000	~	~	~	~	~
Pyrene	100000	~	~	~	~	~



Appendix A-1: Validated Soil Analytical Results - City of Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Depth Sample Type Matrix Laboratory Sample ID	Restricted Residential Screening Levels ⁽¹⁾	TCLP Regulatory Levels ⁽²⁾	CMSSS015	CMSSS015	CMSSS016	CMSSS016
			CMSSS015-0-000	CMSSS015-0-002	CMSSS016-0-000	CMSSS016-0-002
			8/4/2014	8/4/2014	8/4/2014	8/4/2014
			0 - 2 inches	2 - 24 inches	0 - 2 inches	2 - 24 inches
			0 - Primary	0 - Primary	0 - Primary	0 - Primary
			SS	SS	SS	SS
			480-65069-16	480-65069-17	480-65069-18	480-65069-19
Polychlorinated Biphenyls (PBCs), mg/Kg						
Aroclor-1016	~	~	~	~	~	~
Aroclor-1221	~	~	~	~	~	~
Aroclor-1232	~	~	~	~	~	~
Aroclor-1242	~	~	~	~	~	~
Aroclor-1248	~	~	~	~	~	~
Aroclor-1254	~	~	~	~	~	~
Aroclor-1260	~	~	~	~	~	~
Aroclor-1262	~	~	~	~	~	~
Aroclor-1268	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/Kg						
TPH	~	~	~	~	~	~

Notes:

mg/Kg = milligram per kilogram.

mg/L = milligram per liter.

ug/Kg = microgram per kilogram.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

R = The data is unusable. The sample results are rejected due to serious deficiencies in meeting the quality control criteria. The analyte may or maynot be in the sample.

SB = Soil boring.

SS = Surface soil.

(1) New York State Department of Environmental Conservation (NYSDEC) Subpart 375-6 Remedial Program Soil Cleanup Objectives (SCOs).

(2) Federal Code of Regulations, Section 261.24 - Toxicity characteristic. Context: Title 40 - Protection of Environment. CHAPTER I - ENVIRONMENTAL PROTECTION AGENCY (CONTINUED). SUBCHAPTER I - SOLID WASTES (CONTINUED). PART 261 - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE. Subpart C - Characteristics of Hazardous Waste (2012-07-01).

a = Final Commissioner Policy, CP-51, Supplemental Soil Cleanup Objectives (SSCOs).

c = Constituent included in both NYSDEC Subpart 375-6 and CP-51, most conservative value used (CP-51 SSCO).

~ = Analysis not performed or No standard or guidance value listed for this constituent.



Appendix A-2: Validated Aqueous Analytical Results - Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Type Matrix Laboratory Sample ID	TOGS Groundwater Standard ⁽¹⁾	TOGS Groundwater Guidance Value ⁽²⁾	CMSMW01		CMSMW02		CMSMW02		CMSMW02	
			CMSMW01-0-150106	CMSMW01-0-150427	CMSMW02-0-150106	CMSMW02-1-150106	CMSMW02-0-150428	CMSMW02-1-150428		
			1/6/2015	4/27/2015	1/6/2015	1/6/2015	4/28/2015	4/28/2015		
			0 - Primary GW	0 - Primary GW	0 - Primary GW	1 - Duplicate GW	0 - Primary GW	1 - Duplicate GW		
			480-73807-3	480-79302-1	480-73807-5	480-73807-6	480-79302-4	480-79302-5		
Total Metals, mg/L										
Aluminum, Total	~	~	~	~	0.11 J	0.16 J	0.25	0.26		
Antimony, Total	0.003	~	~	~	0.0068 U	0.0068 U	0.0068 U	0.0068 U		
Arsenic, Total	0.025	~	0.0056 U	0.0056 U	0.0056 U	0.0056 U	0.0056 U	0.0056 U		
Barium, Total	1	~	~	~	0.20	0.20	0.23	0.24		
Beryllium, Total	~	0.003	~	~	0.00030 U	0.00030 U	0.00030 U	0.00030 U		
Boron, Total	1	~	~	~	0.90	0.89	1.1	1.1		
Cadmium, Total	0.005	~	0.00050 U	0.00050 U	0.00050 U	0.00050 U	0.00050 U	0.00050 U		
Calcium, Total	~	~	~	~	109	108	117	123		
Chromium, Total	0.05	~	~	~	0.0061	0.0062	0.0013 J	0.0015 J		
Cobalt, Total	~	~	~	~	0.00063 U	0.00063 U	0.00063 U	0.00063 U		
Copper, Total	0.2	~	~	~	0.010 U	0.010 U	0.0016 U	0.0016 U		
Iron, Total	0.3	~	~	~	0.11	0.16	0.40	0.35		
Lead, Total	0.025	~	0.0030 U	0.0030 U	0.0030 U	0.0030 U	0.0030 U	0.0030 U		
Magnesium, Total	~	35	~	~	26.4	26.0	26.7	28.2		
Manganese, Total	0.3	~	~	~	0.28	0.28	0.077	0.072		
Mercury, Total	0.0007	~	~	~	0.00012 U	0.00012 U	0.00012 U	0.00012 U		
Nickel, Total	0.1	~	~	~	0.0047 J	0.0047 J	0.0018 J	0.0022 J		
Potassium, Total	~	~	~	~	2.3	2.2	2.7	2.8		
Selenium, Total	0.01	~	~	~	0.0087 U	0.0087 U	0.0087 U	0.0087 U		
Silver, Total	0.05	~	~	~	0.0017 U	0.0017 U	0.0027 J	0.0017 U		
Sodium, Total	20	~	~	~	136	136	144	145		
Thallium, Total	~	0.0005	~	~	0.010 U	0.010 U	0.010 U	0.010 U		
Vanadium, Total	~	~	~	~	0.0015 U	0.0015 U	0.0015 U	0.0015 U		
Zinc, Total	~	2	~	~	0.011 J+	0.010 U	0.010 U	0.010 U		
Volatile Organic Compounds (VOCs), ug/L										
1,1,1-Trichloroethane	5	~	~	~	0.82 U	0.82 U	0.82 U	0.82 U		
1,1,2,2-Tetrachloroethane	5	~	~	~	0.21 U	0.21 U	0.21 U	0.21 U		
1,1,2-Trichloro-1,2,2-trifluoroethane	5	~	~	~	0.31 U	0.31 U	0.31 U	0.31 U		
1,1,2-Trichloroethane	1	~	~	~	0.23 U	0.23 U	0.23 U	0.23 U		
1,1-Dichloroethane	5	~	~	~	0.38 U	0.38 U	0.38 U	0.38 U		
1,1-Dichloroethene	5	~	~	~	0.29 U	0.29 U	0.29 U	0.29 U		
1,2,4-Trichlorobenzene, VOC	5	~	~	~	0.41 U	0.41 U	0.41 U	0.41 U		
1,2-Dibromo-3-chloropropane	0.04	~	~	~	0.39 U	0.39 U	0.39 U	0.39 U		
1,2-Dibromoethane	0.0006	~	~	~	0.73 U	0.73 U	0.73 U	0.73 U		
1,2-Dichlorobenzene, VOC	3	~	~	~	0.79 U	0.79 U	0.79 U	0.79 U		
1,2-Dichloroethane	0.6	~	~	~	0.21 U	0.21 U	0.21 U	0.21 U		
1,2-Dichloropropane	1	~	~	~	0.72 U	0.72 U	0.72 U	0.72 U		
1,3-Dichlorobenzene, VOC	3	~	~	~	0.78 U	0.78 U	0.78 U	0.78 U		
1,4-Dichlorobenzene, VOC	3	~	~	~	0.84 U	0.84 U	0.84 U	0.84 U		
2-Butanone	~	50	~	~	1.3 U	1.3 U	1.3 U	1.3 U		UJ
2-Hexanone	~	50	~	~	1.2 U	1.2 U	1.2 U	1.2 U		UJ
4-Methyl-2-pentanone	~	~	~	~	2.1 U	2.1 U	2.1 U	2.1 U		UJ
Acetone	~	50	~	~	3.0 U	3.0 U	3.0 U	3.0 U		UJ
Benzene	1	~	~	~	0.41 U	0.41 U	0.41 U	0.41 U		U
Bromodichloromethane	~	50	~	~	0.39 U	0.39 U	0.39 U	0.39 U		U
Bromoform	~	50	~	~	0.26 U	0.26 U	0.26 U	0.26 U		U
Bromomethane	5	~	~	~	0.69 U	0.69 U	0.69 U	0.69 U		UJ
Carbon disulfide	~	60 ⁽³⁾	~	~	0.19 U	0.19 U	0.19 U	0.19 U		U
Carbon tetrachloride	5	~	~	~	0.27 UJ	0.27 UJ	0.27 U	0.27 U		U



Appendix A-2: Validated Aqueous Analytical Results - Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Type Matrix Laboratory Sample ID	TOGS Groundwater Standard ⁽¹⁾	TOGS Groundwater Guidance Value ⁽²⁾	CMSMW01	CMSMW01	CMSMW02	CMSMW02	CMSMW02	CMSMW02
			CMSMW01-0-150106	CMSMW01-0-150427	CMSMW02-0-150106	CMSMW02-1-150106	CMSMW02-0-150428	CMSMW02-1-150428
			1/6/2015	4/27/2015	1/6/2015	1/6/2015	4/28/2015	4/28/2015
			0 - Primary GW	0 - Primary GW	0 - Primary GW	1 - Duplicate GW	0 - Primary GW	1 - Duplicate GW
			480-73807-3	480-79302-1	480-73807-5	480-73807-6	480-79302-4	480-79302-5
Volatile Organic Compounds (VOCs), ug/L (continued)								
Chlorobenzene	5	~	~	~	0.75 U	0.75 U	0.75 U	0.75 U
Chloroethane	5	~	~	~	0.32 U	0.32 U	0.32 U	0.32 U
Chloroform	7	~	~	~	0.34 U	0.34 U	0.34 U	0.34 U
Chloromethane	5	~	~	~	0.35 U	0.35 U	0.35 U	0.35 U
cis-1,2-Dichloroethene	5	~	~	~	0.81 U	0.81 U	0.81 U	0.81 U
cis-1,3-Dichloropropene	0.4 ⁽⁴⁾	~	~	~	0.36 U	0.36 U	0.36 U	0.36 U
Cyclohexane	~	~	~	~	0.18 U	0.18 U	0.18 U	0.18 U
Cyclohexane, Methyl-	~	~	~	~	0.16 U	0.16 U	0.16 U	0.16 U
Dibromochloromethane	~	50	~	~	0.32 U	0.32 U	0.32 U	0.32 U
Dichlorodifluoromethane	5	~	~	~	0.68 U	0.68 U	0.68 U	0.68 U
Ethylbenzene	5	~	~	~	0.74 U	0.74 U	0.74 U	0.74 U
Isopropylbenzene	5	~	~	~	0.79 U	0.79 U	0.79 U	0.79 U
Methyl acetate	~	~	~	~	0.50 U	0.50 U	0.50 U	0.50 U
Methyl tert-butyl ether	~	10 ⁽³⁾	~	~	0.16 U	0.16 U	0.16 U	0.16 U
Methylene chloride	5	~	~	~	0.44 U	0.44 U	0.44 U	0.44 U
Styrene	5	~	~	~	0.73 U	0.73 U	0.73 U	0.73 U
Tetrachloroethene	5	~	~	~	0.36 U	0.36 U	0.36 U	0.36 U
Toluene	5	~	~	~	0.51 U	0.51 U	0.51 U	0.51 U
trans-1,2-Dichloroethene	5	~	~	~	0.90 U	0.90 U	0.90 U	0.90 U
trans-1,3-Dichloropropene	0.4 ⁽⁴⁾	~	~	~	0.37 U	0.37 U	0.37 U	0.37 U
Trichloroethene	5	~	~	~	0.46 U	0.46 U	0.46 U	0.46 U
Trichlorofluoromethane	5	~	~	~	0.88 UJ	0.88 UJ	0.88 U	0.88 U
Vinylchloride	2	~	~	~	0.90 U	0.90 U	0.90 U	0.90 U
Xylenes, Total	5 ⁽⁵⁾	~	~	~	0.66 U	0.66 U	0.66 U	0.66 U
Semi-Volatile Organic Compounds (SVOCs), ug/L								
2,4,5-Trichlorophenol	~	~	~	~	1.1 U	1.1 U	0.45 U	0.47 U
2,4,6-Trichlorophenol	~	~	~	~	0.73 U	0.73 U	0.57 U	0.59 U
2,4-Dichlorophenol	5	~	~	~	0.57 U	0.57 U	0.48 U	0.49 U
2,4-Dimethylphenol	~	50	~	~	0.63 U	0.63 U	0.47 U	0.48 U
2,4-Dinitrophenol	~	10	~	~	1.0 U	1.0 UJ	2.1 U	2.2 U
2,4-Dinitrotoluene	5	~	~	~	0.15 U	0.15 U	0.42 U	0.43 U
2,6-Dinitrotoluene	5	~	~	~	0.14 U	0.14 U	0.37 U	0.39 U
2-Chloronaphthalene	~	10	~	~	0.68 U	0.68 U	0.43 U	0.45 U
2-Chlorophenol	~	~	~	~	0.48 U	0.48 U	0.49 U	0.51 U
2-Methylnaphthalene	~	~	~	~	0.78 U	0.78 U	0.56 U	0.58 U
2-Methylphenol	~	~	~	~	0.73 U	0.73 U	0.37 U	0.39 U
2-Nitroaniline	5	~	~	~	1.0 U	1.0 U	0.39 U	0.41 U
2-Nitrophenol	~	~	~	~	0.35 U	0.35 U	0.45 U	0.47 U
3,3'-Dichlorobenzidine	5	~	~	~	1.7 U	1.7 U	0.37 U	0.39 U
3-Nitroaniline	5	~	~	~	1.5 U	1.5 U	0.45 U	0.47 U
4,6-Dinitro-2-methylphenol	~	~	~	~	1.6 U	1.6 UJ	2.1 U	2.1 U



Appendix A-2: Validated Aqueous Analytical Results - Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Type Matrix Laboratory Sample ID	TOGS Groundwater Standard ⁽¹⁾	TOGS Groundwater Guidance Value ⁽²⁾	CMSMW01	CMSMW01	CMSMW02	CMSMW02	CMSMW02	CMSMW02
			CMSMW01-0-150106	CMSMW01-0-150427	CMSMW02-0-150106	CMSMW02-1-150106	CMSMW02-0-150428	CMSMW02-1-150428
			1/6/2015	4/27/2015	1/6/2015	1/6/2015	4/28/2015	4/28/2015
			0 - Primary GW	0 - Primary GW	0 - Primary GW	1 - Duplicate GW	0 - Primary GW	1 - Duplicate GW
			480-73807-3	480-79302-1	480-73807-5	480-73807-6	480-79302-4	480-79302-5
Semi-Volatile Organic Compounds (SVOCs), ug/L (continued)								
4-Bromophenyl-phenylether	~	~	~	~	0.57 U	0.57 U	0.42 U	0.44 U
4-Chloro-3-methylphenol	~	~	~	~	0.57 U	0.57 U	0.42 U	0.44 U
4-Chloroaniline	5	~	~	~	0.17 U	0.17 U	0.55 U	0.57 U
4-Chlorophenyl-phenylether	~	~	~	~	0.78 U	0.78 U	0.33 U	0.34 U
4-Methylphenol	~	~	~	~	0.52 U	0.52 U	0.34 U	0.35 U
4-Nitroaniline	5	~	~	~	1.5 U	1.5 U	0.23 U	0.24 U
4-Nitrophenol, SVOC	~	~	~	~	1.0 U	1.0 U	1.4 U	1.5 U
Acenaphthene	~	20	~	~	0.57 U	0.57 U	0.38 U	0.40 U
Acenaphthylene	~	~	~	~	0.94 U	0.94 U	0.35 U	0.37 U
Acetophenone	~	~	~	~	0.46 U	0.46 U	0.50 U	0.52 U
Anthracene	~	50	~	~	0.44 U	0.44 U	0.26 U	0.27 U
Atrazine	7.5	~	~	~	0.52 UJ	0.52 UJ	0.43 U	0.45 U
Benz(a)anthracene	~	0.002	~	~	0.094 U	0.094 U	0.34 U	0.35 U
Benzaldehyde	~	~	~	~	1.1 U	1.1 U	0.33 UJ	0.26 UJ
Benzo(a)pyrene	ND	~	~	~	0.073 U	0.073 U	0.44 U	0.46 U
Benzo(b)fluoranthene	~	0.002	~	~	0.11 U	0.11 U	0.32 U	0.33 U
Benzo(g,h,i)perylene	~	~	~	~	0.48 U	0.48 U	0.33 U	0.34 U
Benzo(k)fluoranthene	~	0.002	~	~	0.073 U	0.073 U	0.68 U	0.71 U
Biphenyl	5	~	~	~	0.94 U	0.94 U	0.61 U	0.63 U
bis (2-chloroisopropyl) ether	5	~	~	~	0.68 U	0.68 U	0.48 U	0.50 U
bis(2-Chloroethoxy)methane	5	~	~	~	0.52 U	0.52 U	0.33 U	0.34 U
bis(2-Chloroethyl)ether	1.0	~	~	~	0.16 U	0.16 U	0.37 U	0.39 U
bis(2-Ethylhexyl)phthalate	5	~	~	~	0.42 U	0.42 U	1.7 U	1.7 U
Butyl benzyl phthalate	~	50	~	~	0.73 U	0.73 U	0.39 U	0.49 U
Caprolactam	~	~	~	~	0.47 U	0.47 U	2.1 U	2.1 U
Carbazole	~	~	~	~	0.63 U	0.63 U	0.28 U	0.29 U
Chrysene	~	0.002	~	~	0.73 U	0.73 U	0.31 U	0.32 U
Dibenz(a,h)anthracene	~	~	~	~	0.083 U	0.083 U	0.39 U	0.41 U
Dibenzofuran	~	~	~	~	0.78 U	0.78 U	0.48 U	0.49 U
Diethylphthalate	~	50	~	~	0.73 U	0.73 U	0.21 U	0.21 U
Dimethyl phthalate	~	50	~	~	0.57 U	0.57 U	0.34 U	0.35 U
Di-N-Butyl phthalate	50	~	~	~	0.52 U	0.52 U	0.29 U	0.30 U
Di-N-Octyl phthalate	~	50	~	~	0.46 UJ	0.46 U	0.44 U	0.46 U
Fluoranthene	~	50	~	~	0.57 U	0.57 U	0.37 U	0.39 U
Fluorene	~	50	~	~	0.89 U	0.89 U	0.34 U	0.35 U
Hexachlorobenzene	0.04	~	~	~	0.10 U	0.10 U	0.48 U	0.49 U
Hexachlorobutadiene, SVOC	0.5	~	~	~	0.35 U	0.35 U	0.63 U	0.66 U
Hexachlorocyclopentadiene	5	~	~	~	0.78 U	0.78 U	0.55 U	0.57 U
Hexachloroethane	5	~	~	~	0.078 U	0.078 U	0.55 U	0.57 U
Indeno(1,2,3-cd)pyrene	~	0.002	~	~	0.057 U	0.057 U	0.44 UJ	0.46 U
Isophorone	~	50	~	~	0.68 U	0.68 U	0.40 U	0.42 U
Naphthalene, SVOC	~	10	~	~	1.0 U	1.0 U	0.71 U	0.74 U
Nitrobenzene	0.4	~	~	~	0.18 U	0.18 U	0.27 U	0.28 U
N-Nitroso-di-N-propylamine	~	~	~	~	0.14 U	0.14 UJ	0.50 U	0.52 U
N-Nitrosodiphenylamine	~	50	~	~	0.52 U	0.52 U	0.48 U	0.49 U
Pentachlorophenol, SVOC	1 ⁽⁶⁾	~	~	~	1.4 U	1.4 U	2.1 U	2.1 U
Phenanthrene	~	50	~	~	0.63 U	0.63 U	0.41 U	0.43 U
Phenol	1 ⁽⁶⁾	~	~	~	0.31 U	0.31 U	0.36 U	0.38 U
Pyrene	~	50	~	~	0.57 UJ	0.57 U	0.32 U	0.33 U



Appendix A-2: Validated Aqueous Analytical Results - Corning Memorial Stadium Property
Study Area, Corning, NY

Location ID Sample ID Date Sample Type Matrix Laboratory Sample ID	TOGS Groundwater Standard ⁽¹⁾	TOGS Groundwater Guidance Value ⁽²⁾	CMSMW01	CMSMW01	CMSMW02	CMSMW02	CMSMW02	CMSMW02
			CMSMW01-0-150106 1/6/2015 0 - Primary GW 480-73807-3	CMSMW01-0-150427 4/27/2015 0 - Primary GW 480-79302-1	CMSMW02-0-150106 1/6/2015 0 - Primary GW 480-73807-5	CMSMW02-1-150106 1/6/2015 1 - Duplicate GW 480-73807-6	CMSMW02-0-150428 4/28/2015 0 - Primary GW 480-79302-4	CMSMW02-1-150428 4/28/2015 1 - Duplicate GW 480-79302-5
Polychlorinated Biphenyls (PBCs), mg/L								
Aroclor-1016	0.09	~	~	~	~	~	~	~
Aroclor-1221	0.09	~	~	~	~	~	~	~
Aroclor-1232	0.09	~	~	~	~	~	~	~
Aroclor-1242	0.09	~	~	~	~	~	~	~
Aroclor-1248	0.09	~	~	~	~	~	~	~
Aroclor-1254	0.09	~	~	~	~	~	~	~
Aroclor-1260	0.09	~	~	~	~	~	~	~
Aroclor-1262	0.09	~	~	~	~	~	~	~
Aroclor-1268	0.09	~	~	~	~	~	~	~
Total Petroleum Hydrocarbons, mg/L								
TPH	~	~	~	~	~	~	~	~

mg/L = milligram per liter.

ug/L = microgram per liter.

U = The analyte was analyzed for but was not detected above the level of the detection quantitation limit.

UJ = The analyte was analyzed for but not detected. The quantitation limit is approximate and may be inaccurate or imprecise.

J = The positive result reported is estimated either because the result is less than the LOQ or because certain quality control criteria were not met.

J+ = The result is an estimated quantity, but the result may be biased high because certain quality control criteria were not met.

GW = Groundwater.

(1) Groundwater standards for water class GW (groundwater as a source for drinking water) from Table 1 of the New York State Division of Water Technical and Operational Guidance Series (TOGS) No. 1.1.1 Ambient Water Quality Standards and Guidance Values Memorandum, Part 1 (Reissued June 1998).

(2) TOGS guidance value for water class GA included in the TOGS No. 111 Ambient Water Quality Standards and Guidance Values Memorandum, Part 1 (Reissued June 1998).

(3) TOGS guidance value for water class GA included in the April 2000 Addendum to June 1998 Division of Water Technical and Operational Guidance Series (TOGS) No. 1.1.1.

(4) Standard for total 1,3-dichloropene (cis- and trans-).

(5) Standard for total xylenes.

(6) Standard for total phenols.

ND = means a non-detectable concentration by the approved analytical methods referenced in Section 700.3.

DRAFT

APPENDIX B

HEALTH AND SAFETY PLAN (HASP)

The final Health and Safety Plan will be maintained at the Study Area during field activities.

DRAFT

HEALTH AND SAFETY PLAN (HASP)

Office: West Chester, PA
Project Name: Study Area Bounded by Pyrex Street, E. Pulteney Street,
Post Creek and Chemung River
Client: Corning Incorporated
Work Location: Corning, NY
WO#: 02005.056.001.0001

DRAFT



HEALTH AND SAFETY PLAN (HASP)

Work Order Number	Date	Project Manager Approval	Project Safety Manager Approval

DRAFT





HEALTH AND SAFETY PLAN (HASP)

Prepared by: A. Jayne / R. McLoughlin	W.O. Number: 02005.056.001.0001	Date: 04/03/2015
--	--	-------------------------

Project Identification Study Area Bounded by Pyrex St., E. Pulteney St., Post Creek and Chemung River Office: West Chester, PA Site Name: Study Area, Corning, New York Client: Corning Incorporated Work Location: Located in Corning, New York on the north bank of the Chemung River (see Figure 1). Address:	History: Soil and/or groundwater characterization activities at a site with potential fill containing ash, brick and glass pieces.
---	--

Scope of Work: Study Area Characterization Activities

Site visit only; site HASP not necessary. List personnel here and sign off below:

X Utility notification required. If required, provide utility notification agency, authorization number, and valid dates:
 New York Leak Detector (NYLD) subcontracted to perform independent utility clearance.

Regulatory Status:

Site regulatory status: TBD CERCLA/SARA <input type="checkbox"/> U.S. EPA <input type="checkbox"/> State <input type="checkbox"/> NPL Site <input type="checkbox"/> OSHA Hazard Communication (Req'd See Attachment D) <input type="checkbox"/> 1910 <input type="checkbox"/> 1926 <input type="checkbox"/> State	RCRA <input type="checkbox"/> U.S. EPA <input type="checkbox"/> State NRC <input type="checkbox"/> 10 CFR 20	Other Federal Agency <input type="checkbox"/> DOE <input type="checkbox"/> USACE <input type="checkbox"/> Air Force <input type="checkbox"/> _____	Safety Officer Manual (Required to be On-Site) Based on the Hazard Assessment and Regulatory Status, determine the Standard HASP(s) applicable to this project. Indicate below which Standard HASP will be used and append the appropriate pages of this form along with the Standard Plan. <table style="width:100%;"> <tr><td><input type="checkbox"/> Stack Test</td><td><input type="checkbox"/> _____</td></tr> <tr><td><input type="checkbox"/> Air Emissions</td><td><input type="checkbox"/> _____</td></tr> <tr><td><input type="checkbox"/> Asbestos</td><td><input type="checkbox"/> _____</td></tr> <tr><td><input type="checkbox"/> Industrial Hygiene</td><td><input type="checkbox"/> _____</td></tr> <tr><td><input type="checkbox"/> _____</td><td><input type="checkbox"/> _____</td></tr> </table>	<input type="checkbox"/> Stack Test	<input type="checkbox"/> _____	<input type="checkbox"/> Air Emissions	<input type="checkbox"/> _____	<input type="checkbox"/> Asbestos	<input type="checkbox"/> _____	<input type="checkbox"/> Industrial Hygiene	<input type="checkbox"/> _____	<input type="checkbox"/> _____	<input type="checkbox"/> _____
<input type="checkbox"/> Stack Test	<input type="checkbox"/> _____												
<input type="checkbox"/> Air Emissions	<input type="checkbox"/> _____												
<input type="checkbox"/> Asbestos	<input type="checkbox"/> _____												
<input type="checkbox"/> Industrial Hygiene	<input type="checkbox"/> _____												
<input type="checkbox"/> _____	<input type="checkbox"/> _____												

Review and Approval Documentation:

Reviewed by:	<u>George Crawford</u>	<u><i>George M Crawford J CIH</i></u>	Date: <u>04/06/2015</u>
	Name (Print)	Signature	
Environmental Compliance Advisor	_____	_____	Date: _____
	Name (Print)	Signature	
Approved by:	<u>John Sontag</u>	_____	Date: _____
Project Manager	Name (Print)	Signature	

Hazard Assessment and Equipment Selection:

In accordance with WESTON's Personal Protective Equipment Program and 29 CFR 1910.132, at the site prior to personnel beginning work, the FSO and/or the Site Manager have evaluated conditions and verified that the personal protective equipment selection outlined within this HASP is appropriate for the hazards known or expected to exist. (Refer to CEHS Program Manual Section 5, Personal Protection Program, for guidance.)

<input checked="" type="checkbox"/>	FSO	<u>Stephan Roy</u>	Date: _____
		Name	Signature
<input checked="" type="checkbox"/>	Site Manager	<u>John Sontag</u>	Date: _____
		Name	Signature

<input checked="" type="checkbox"/>	Project Environmental Compliance Officer	<u>John Sontag</u>	Date: _____
		Name	
<input type="checkbox"/>	Dangerous Goods Shipping Coordinator	_____	Date: _____
		Name	



BEHAVIOR-BASED SAFETY (BBS) – Pledge

I Accept and Understand 100% Safe Work Is an Achievable Goal

- ★ I will work to develop strong connections and team with my co-workers to establish a culture of working safely 100% of the time.
- ★ I will actively care about all Weston employees, our families, team contractors and clients.
- ★ I will help to keep our projects safe and will meet and exceed compliance requirements.
- ★ I will understand and comply with the Health and Safety Plan, Accident Prevention Plan, and Environmental Compliance Plan for each field project. They guide my actions.
- ★ I will stop any work that presents an imminent hazard to people or the environment or is not adequately addressed in the Health and Safety Plan, Accident Prevention Plan, or Environmental Compliance Plan.
- ★ I will identify changing conditions to address safety implications. No surprises!
- ★ I will identify unsafe working conditions and be proactive in correcting them.
- ★ I will coach and mentor and will accept coaching from others to encourage safe work behaviors.
- ★ I am empowered to share lessons-learned and foster continuous improvement.

I will Learn where I can get Assistance

- ★ I will develop high quality relationships with my Division Environmental, Health, and Safety (EHS) Manager; Profit Center Safety Officer; and Field Safety Officer.
- ★ I will learn how and when to contact our Environmental Advisors.
- ★ I will get to know our Corporate EHS staff and become familiar with the Corporate EHS Portal Site.

I will Report All Incidents

- ★ If a safety incident occurs, even if there is no injury or damage but there could have been, I will report the incident immediately.
- ★ I will conduct safety reviews of all incidents with my supervisor, if requested. The review will focus on cause and lessons-learned so that we can be proactive in preventing it from happening again.



TABLE OF CONTENTS

Section	Page
1. PERSONNEL ON SITE INFORMATION	1-1
1.1 WESTON REPRESENTATIVES	1-2
1.2 WESTON SUBCONTRACTORS	1-2
1.3 SITE PERSONNEL AND CERTIFICATION STATUS	1-3
1.3.1 WESTON Employee Certification	1-3
1.3.2 Subcontractor's Health and Safety Program Evaluation	1-4
2. HEALTH AND SAFETY EVALUATION	2-1
2.1 HEALTH AND SAFETY EVALUATION	2-2
2.1.1 Task Hazard Assessment	2-2
2.1.2 Chemical Hazards of Concern	2-3
2.1.3 Biological Hazards of Concern	2-4
2.1.4 Radiation Hazards of Concern	2-5
2.1.5 Physical Hazards of Concern	2-6
3. SITE SECURITY	3-1
3.1 SITE SECURITY ASSESSMENT FORM	3-2
3.2 WESTON SITE SECURITY CHECKLIST	3-3
4. TASK BY TASK ASSESSMENT	4-1
4.1 TASK-BY-TASK RISK ASSESSMENT	4-2
4.1.1 Task 1 Description	4-2
4.1.2 Task 2 Description	4-3
4.1.3 Task 3 Description	4-4
4.2 PERSONNEL PROTECTION PLAN	4-6
4.3 DESCRIPTION OF LEVELS OF PROTECTION	4-7
5. MONITORING PROGRAM	5-1
5.1.1 Air Monitoring Instruments	5-2
5.1.1 Air Monitoring Instruments Calibration Record	5-3
5.2 SITE AIR MONITORING PROGRAM	5-4
5.3 ACTION LEVELS	5-5
6. HOSPITAL INFORMATION	6-1
6.1 CONTINGENCIES	6-2
6.1.1 Emergency Contacts and Phone Numbers	6-2
6.1.2 Hospital Map	6-4
6.1.3 Response Plans	6-5
7. DECONTAMINATION PLAN	7-1
7.1 GENERAL DECONTAMINATION PLAN	7-2
7.2 LEVEL D DECONTAMINATION PLAN	7-3
7.3 LEVEL C DECONTAMINATION PLAN	7-4
7.4 LEVEL B () or Level A () DECONTAMINATION PLAN	7-5
8. TRAINING AND BRIEFING TOPICS/SIGN OFF SHEET	8-1
8.1 TRAINING AND BRIEFING TOPICS	8-2
8.2 HEALTH AND SAFETY PLAN APPROVAL/SIGNOFF FORM	8-3

June 2014



ATTACHMENTS

ATTACHMENT A	Chemical Contaminants Data Sheets
ATTACHMENT B	Safety Data Sheets
ATTACHMENT C	Safety Procedures/Field Operating Procedures (FLD Ops)
ATTACHMENT D	Hazard Communication Program
ATTACHMENT E	Air Sampling Data Sheets
ATTACHMENT F	Incident Reporting
ATTACHMENT G	Traffic Control Plan
ATTACHMENT H	Environmental Health & Safety Inspection Checklist

DRAFT

June 2014

1. PERSONNEL ON SITE INFORMATION

DRAFT



1.1 WESTON REPRESENTATIVES

Organization/Branch	Name/Title	Address	Telephone
National Accounts	John Sontag/Project Manager	1400 Weston Way West Chester, PA 19380	610-701-3679
National Accounts	Stephane Roy/ Project Geoscientist	1400 Weston Way West Chester, PA 19380	610-701-3147
National Accounts	Rachel McLoughlin/ Project Scientist	1400 Weston Way West Chester, PA 19380	610-701-3428

Roles and Responsibilities:
Manage and implement site characterization program.

1.2 WESTON SUBCONTRACTORS

Organization/Branch	Name/Title	Address	Telephone
	Name: Title:	Street: City: State, Zip:	
	Name: Title:	Street: City: State, Zip:	
	Name: Title:	Street: City: State, Zip:	

Roles and Responsibilities:

SITE-SPECIFIC HEALTH AND SAFETY PERSONNEL

The Site Field Safety Officer (FSO) for activities to be conducted at this site is: Stephane Roy / Rachel McLoughlin

The Site Manager has ultimate responsibility for ensuring that the provisions of this Site HASP are adequate and implemented in the field.

Changing field conditions may require decisions to be made concerning adequate protection programs. Therefore, the personnel assigned as FSOs must be experienced and meet the additional training requirements specified by OSHA in 29 CFR 1910.120.

Qualifications:
40-hour OSHA HAZWOPER certification; annual 8-hour OSHA HAZWOPER refresher certification; current Adult First Aid and CPR certification; familiarity with jobs of similar scope.

Designated alternates include: John Sontag



1.3 SITE PERSONNEL AND CERTIFICATION STATUS	
1.3.1 WESTON Employee Certification	
Name: John Sontag Title: Project Manager Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)	Name: Stephane Roy Title: Project Geoscientist Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)
Name: Rachel McLoughlin Title: Project Scientist Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)	Name: Matt Barela Title: Associate Project Scientist Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)
Name: Devon Hollenden Title: Assistant Geoscientist Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)	Name: Greg Flasiniski Title: Task(s): All Certification Level or Description: <input checked="" type="checkbox"/> Medical Current <input checked="" type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)
Name: Title: Task(s): Certification Level or Description: <input type="checkbox"/> Medical Current <input type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)	Name: Title: Task(s): Certification Level or Description: <input type="checkbox"/> Medical Current <input type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)
Name: Title: Task(s): Certification Level or Description: <input type="checkbox"/> Medical Current <input type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)	Name: Title: Task(s): Certification Level or Description: <input type="checkbox"/> Medical Current <input type="checkbox"/> Training Current <input type="checkbox"/> Fit Test Current (Qual.) <input type="checkbox"/> Fit Test Current (Quant.)

TRAINING CURRENT - Training: All personnel, including visitors, entering the exclusion or contamination reduction zones must have certifications of completion of training in accordance with OSHA 29 CFR 1910, 29 CFR 1926, or 29 CFR 1910.120.

FIT TEST CURRENT - Respirator Fit Testing: All persons, including visitors, entering any area requiring the use or potential use of any tight-fitting respirator must have had, as a minimum, a qualitative fit test, administered in accordance with OSHA 29 CFR 1910.134 or ANSI, within the last 12 months. If site conditions require the use of a full-face, tight-fitting, air-purifying respirator for protection from asbestos or lead, employees must have had a quantitative fit test, administered according to OSHA 29 CFR 1910.1001 or .1025 or 29 CFR 1926.1101 or .62, within the last 12 months.

MEDICAL CURRENT - Medical Monitoring Requirements: All personnel, including visitors, entering the exclusion or contamination reduction zones must be certified as medically fit to work and able to wear a respirator, if appropriate, in accordance with 29 CFR 1910 or 29 CFR 1926 (substance-specific), or 29 CFR 1910.120 (HAZWOPER).

The Site Field Safety Officer is responsible for verifying all certifications and fit tests.



SITE PERSONNEL AND CERTIFICATION STATUS

1.3.2 Subcontractor's Health and Safety Program Evaluation

Name of Subcontractor: TBD

Address:

Activities To Be Conducted by Subcontractor:

Evaluation Criteria

Medical Program meets OSHA/WESTON criteria

- Acceptable
 Unacceptable

Comments:

Personal Protective Equipment available

- Acceptable
 Unacceptable

Comments:

On-site monitoring equipment available, calibrated, and operated properly

- Acceptable
 Unacceptable

Comments:

Safe Working Procedures clearly specified

- Acceptable
 Unacceptable

Comments:

Training meets OSHA/WESTON criteria

- Acceptable
 Unacceptable

Comments:

Emergency Procedures

- Acceptable
 Unacceptable

Comments:

Decontamination Procedures

- Acceptable
 Unacceptable

Comments:

General Health and Safety Program evaluation

- Acceptable
 Unacceptable

Comments:

Additional comments:

- Subcontractor has agreed to and will conform to the WESTON HASP for this project.
 Subcontractor will work under its own HASP, which has been accepted by Project PM.

Evaluation Conducted by:

Date:

Evaluation Source (SubTrack, etc.):

Subcontractor

Certifications for all subcontractor personnel will be added to the HASP prior to beginning work.

Name:

Title:

Task(s):

Certification Level or Description:

- Medical Current Training Current
 Fit Test Current (Qual.) Fit Test Current (Quant.)

Name:

Title:

Task(s):

Certification Level or Description:

- Medical Current Training Current
 Fit Test Current (Qual.) Fit Test Current (Quant.)

Name:

Title:

Task(s):

Certification Level or Description:

- Medical Current Training Current
 Fit Test Current (Qual.) Fit Test Current (Quant.)

Name:

Title:

Task(s):

Certification Level or Description:

- Medical Current Training Current
 Fit Test Current (Qual.) Fit Test Current (Quant.)

2. HEALTH AND SAFETY EVALUATION

DRAFT



2.1 HEALTH AND SAFETY EVALUATION

2.1.1 Task Hazard Assessment

Background Review: Complete Partial If partial why? **N/A**

Activities Covered Under This Plan:

No.	Task/Subtask	Description	Schedule
1	Soil sampling	A combination of soil boring and surface sampling.	2015 - TBD
2	Groundwater Investigation	Installation of groundwater monitoring wells and groundwater sampling	2015 - TBD
3	Test Pitting/Excavation	Excavation and backfill of test pits/surface soil	2015 - TBD

Types of Hazards:

Numbers refer to one of the following hazard evaluation forms. Complete hazard evaluation forms for each appropriate hazard class.

<p>Physiochemical 1</p> <input type="checkbox"/> Flammable <input type="checkbox"/> Explosive <input type="checkbox"/> Corrosive <input type="checkbox"/> Reactive <input type="checkbox"/> O ₂ Rich <input type="checkbox"/> O ₂ Deficient	<p>Chemically Toxic 1</p> <input checked="" type="checkbox"/> Inhalation <input checked="" type="checkbox"/> Carcinogen <input checked="" type="checkbox"/> Ingestion <input type="checkbox"/> Mutagen <input checked="" type="checkbox"/> Contact <input type="checkbox"/> Teratogen <input type="checkbox"/> Absorption <input type="checkbox"/> OSHA 1910.1000 Substance (Air Contaminants) <input checked="" type="checkbox"/> OSHA Specific Hazard Substance Standard (Refer to following page for listing)	<p>Radiation 3</p> <p>Ionizing:</p> <input type="checkbox"/> Internal exposure <input type="checkbox"/> External exposure <p>Non-ionizing:</p> <input checked="" type="checkbox"/> UV <input type="checkbox"/> IR <input type="checkbox"/> RF <input type="checkbox"/> MicroW <input type="checkbox"/> Laser	<p>Biological 2</p> <input type="checkbox"/> Etiological Agent <input checked="" type="checkbox"/> Other (plant, insect, animal) <hr/> <input type="checkbox"/> Physical Hazards 4 <input checked="" type="checkbox"/> Characterization Activities
---	--	---	---

Source/Location of Contaminants and Hazardous Substances:

<p>Directly Related to Tasks</p> <input type="checkbox"/> Air <input type="checkbox"/> Other Surface <input checked="" type="checkbox"/> Groundwater <input checked="" type="checkbox"/> Soil <input type="checkbox"/> Surface Water <input type="checkbox"/> Sanitary Wastewater <input type="checkbox"/> Process Wastewater <input type="checkbox"/> Other _____	<p>Indirectly Related to Tasks — Nearby Process(es) That Could Affect Team Members:</p> <input checked="" type="checkbox"/> WESTON Work Location <input type="checkbox"/> Nearby Non-Client Facility <p>Describe:</p> <input type="checkbox"/> Have activities (task[s]) been coordinated with facility? <p>Comments:</p>
--	--



HEALTH AND SAFETY EVALUATION

2.1.2 Chemical Hazards of Concern

N/A

Chemical Contaminants of Concern

Attach data sheets from an acceptable source such as NIOSH pocket guide, condensed chemical dictionary, ACGIH TLV booklet, Hazardous Substances Data base (HSDB), etc. List chemicals and concentrations below and locate data sheets in Attachment A of this HASP.

N/A

Identify hazardous materials used or on-site and attach Safety Data Sheets (SDSs) for all reagent type chemicals, solutions, or other identified materials that in normal use in performing tasks related to this project could produce hazardous substances. Ensure that all subcontractors and other parties working nearby are informed of the presence of these chemicals and the location of the SDSs. Obtain from subcontractors and other parties, lists of the hazardous materials they use or have on-site and identify location of the SDSs here. List chemicals and quantities below and locate SDSs in Attachment B of this HASP.

Chemical Name	Concentration ()	Chemical Name	Quantity
Arsenic			
Lead			
Cadmium			

OSHA-SPECIFIC HAZARDOUS SUBSTANCES

<input type="checkbox"/> 1910.1001 Asbestos	<input type="checkbox"/> 1910.1002 Coal tar pitch volatiles	<input type="checkbox"/> 1910.1003 4-Nitrobiphenyl, etc.	<input type="checkbox"/> 1910.1004 alpha-Naphthylamine
<input type="checkbox"/> 1910.1005 [Reserved]	<input type="checkbox"/> 1910.1006 Methyl chloromethyl ether	<input type="checkbox"/> 1910.1007 3,3'-Dichlorobenzidine (and its salts)	<input type="checkbox"/> 1910.1008 bis-Chloromethyl ether
<input type="checkbox"/> 1910.1009 beta-Naphthylamine	<input type="checkbox"/> 1910.1010 Benzidine	<input type="checkbox"/> 1910.1011 4-Aminodiphenyl	<input type="checkbox"/> 1910.1012 Ethyleneimine
<input type="checkbox"/> 1910.1013 beta-Propiolactone	<input type="checkbox"/> 1910.1014 2-Acetylamino fluorene	<input type="checkbox"/> 1910.1015 4-Dimethylaminoazobenzene	<input type="checkbox"/> 1910.1016 N-Nitrosodimethylamine
<input type="checkbox"/> 1910.1017 Vinyl chloride	<input checked="" type="checkbox"/> 1910.1018 Inorganic arsenic	<input checked="" type="checkbox"/> 1910.1025 Lead (Att. FLD# 46)	<input type="checkbox"/> 1910.1026 Chromium VI (att. FLD 53)
<input checked="" type="checkbox"/> 1910.1027 Cadmium (Att. 50 FLD)	<input type="checkbox"/> 1910.1028 Benzene (Att. FLD# 54 or 61)	<input type="checkbox"/> 1910.1029 Coke oven emissions	<input type="checkbox"/> 1910.1043 Cotton dust
<input type="checkbox"/> 1910.1044 1,2-Dibromo-3-chloropropane	<input type="checkbox"/> 1910.1045 Acrylonitrile	<input type="checkbox"/> 1910.1047 Ethylene oxide	<input type="checkbox"/> 1910.1048 Formaldehyde
<input type="checkbox"/> 1910.1050 Methylenedianiline	<input type="checkbox"/> 1910.1051 1,3 Butadiene	<input type="checkbox"/> 1910.1052 Methylene chloride	<input type="checkbox"/> 1926.60 Methylenedianiline
<input checked="" type="checkbox"/> 1926.62 Lead	<input type="checkbox"/> 1926.1101 Asbestos (Att. FLD 52)	<input checked="" type="checkbox"/> 1926.1127 Cadmium	



HEALTH AND SAFETY EVALUATION

2.1.3 Biological Hazards of Concern

Poisonous Plants (FLD 43-D)

Location/Task No(s) **All**

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

Insects (FLD 43-B)

Location/Task No(s) **All**

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

Snakes, Reptiles (FLD 43-A)

Location/Task No(s) **All**

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

Animals (FLD 43-A)

Location/Task No(s) **All**

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

FLD 43 — WESTON Biohazard Field Operating Procedures: Att. OP

Sewage

Location/Task No.(s):

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

Tetanus Vaccination within Past 10 yrs: Yes No

Etiologic Agents (FLD -C)(List)

Location/Task No.(s):

Source: Known Suspect
 Route of Exposure: Inhalation Ingestion
 Contact Direct Penetration

Team Member(s) Allergic: Yes No
 Immunization required: Yes No

FLD 43-C — Mold and Fungus. Att. OP

FLD 44 — WESTON Bloodborne Pathogens Exposure Control Plan – First Aid Procedures: Att. OP

FLD 45 — WESTON Bloodborne Pathogens Exposure Control Plan – Working with Infectious Waste: Att. OP



HEALTH AND SAFETY EVALUATION

2.1.4 Radiation Hazards of Concern

NONIONIZING RADIATION

Task No.	Type of Nonionizing Radiation	Source On-Site	TLV/PEL	Wavelength Range	Control Measures	Monitoring Instrument
1	Ultraviolet	Solar			Appropriate clothing/ sunscreen	None
	Infrared					
	Radio Frequency					
	Microwave					
	Laser					

IONIZING RADIATION

Task No.	Radionuclide	Major Radiations	Radioactive Half-Life (Years)	DAC ($\mu\text{Ci}/\text{mL}$)			Surface Contamination Limit	Monitoring Instrument
				D	W	Y		



HEALTH AND SAFETY EVALUATION

2.1.5 Physical Hazards of Concern

Physical Hazard Condition	Physical Hazard	Attach OP	WESTON OP Titles
Loud noise	Hearing loss/disruption of communication	<input checked="" type="checkbox"/>	Section 7.0 - ECH&S Program Manual Occupational Noise & HC Program
Inclement weather	Rain/humidity/cold/ice/snow/lightning	<input checked="" type="checkbox"/>	FLD02 - Inclement Weather
Steam heat stress	Burns/displaced oxygen/wet working surfaces	<input type="checkbox"/>	FLD03 - Hot Process - Steam
Heat stress	Burns/hot surfaces/low pressure steam	<input type="checkbox"/>	FLD04 - Hot Process - LT3
Ambient heat stress	Heat rash/cramps/exhaustion/heat stroke	<input checked="" type="checkbox"/>	FLD05 - Heat Stress Prevention/Monitoring
Cold stress	Hypothermia/frostbite	<input checked="" type="checkbox"/>	FLD06 - Cold Stress
Cold/wet	Trench/paddy/immersion foot/edema	<input checked="" type="checkbox"/>	FLD02 - Inclement Weather
Confined spaces	Falls/burns/drowning/engulfment/electrocution	<input type="checkbox"/>	FLD08 - Confined Space Entry
Industrial Trucks	Fork Lift Truck Safety	<input type="checkbox"/>	FLD09 - Powered Industrial Trucks
Improper lifting	Back strain/abdomen/arm/leg muscle/joint injury	<input checked="" type="checkbox"/>	FLD10 - Manual Lifting/Handling Heavy Objects
Uneven surfaces	Vehicle accidents/slips/trips/falls	<input checked="" type="checkbox"/>	FLD11 - Rough Terrain
Poor housekeeping	Slips/trips/falls/punctures/cuts/fires	<input checked="" type="checkbox"/>	FLD12 - Housekeeping
Structural integrity	Crushing/overhead hazards/compromised floors	<input type="checkbox"/>	FLD13 - Structural Integrity
Improper cylinder. handling	Mechanical injury/fire/explosion/suffocation	<input type="checkbox"/>	FLD16 - Pressure Systems - Compressed Gases
Water hazards	Poor visibility/entanglement/drowning/cold stress	<input type="checkbox"/>	FLD17 - Diving
Water hazards	Drowning/heat/cold stress/hypothermia/falls	<input type="checkbox"/>	FLD18 - Operation and Use of Boats
Water hazards	Drowning/frostbite/hypothermia/falls/electrocution	<input checked="" type="checkbox"/>	FLD19 - Working Over Water
Vehicle hazards	Struck by vehicle/collision	<input checked="" type="checkbox"/>	FLD20 - Traffic
Explosions	Explosion/fire/thermal burns	<input type="checkbox"/>	FLD21 - Explosives
Moving mechanical parts	Crushing/pinch points/overhead hazards/electrocution	<input checked="" type="checkbox"/>	FLD22 - Earth Moving Equipment
Moving mech. parts	Overhead hazards/electrocution	<input type="checkbox"/>	FLD23 - Cranes, Rigging, and Slings
Working at elevation	Overhead hazards/falls/electrocution	<input type="checkbox"/>	FLD24 - Aerial Lifts/Man lifts
Working at elevation	Overhead hazards/falls/electrocution	<input type="checkbox"/>	FLD25 - Working at Elevation
Working at elevation	Overhead hazards/falls/electrocution/slips	<input type="checkbox"/>	FLD26 - Ladders
Working at elevation	Slips/trips/falls/overhead hazards	<input type="checkbox"/>	FLD27 - Scaffolding
Trench cave-in	Crushing/falling/overhead hazards/suffocation	<input checked="" type="checkbox"/>	FLD28 - Excavating/Trenching
Physiochemical	Explosions/fires from oxidizing, flam./corr. material	<input type="checkbox"/>	FLD30 - Hazardous Materials Use/Storage
Physiochemical	Fire and explosion	<input checked="" type="checkbox"/>	FLD31 - Fire Prevention/Response Plan Required
Physiochemical	Fire	<input checked="" type="checkbox"/>	FLD32 - Fire Extinguishers Required
Structural integrity	Overhead/electrocution/slips/trips/falls/fire	<input type="checkbox"/>	FLD33 - Demolition
Electrical	Electrocution/shock/thermal burns	<input checked="" type="checkbox"/>	FLD34 - Utilities
Electrical	Electrocution/shock/thermal burns	<input checked="" type="checkbox"/>	FLD35 - Electrical Safety
Burns/fires	Heat stress/fires/burns	<input type="checkbox"/>	FLD36 - Welding/Cutting/Brazing/Radiography
Impact/thermal	Thermal burns/high pressure impaction/heat stress	<input checked="" type="checkbox"/>	FLD37 - Pressure Washers/Sand Blasting
Impaction/electrical	Smashing body parts/pinching/cuts/electrocution	<input checked="" type="checkbox"/>	FLD38 - Hand and Power Tools
Poor visibility	Slips/trips/falls	<input type="checkbox"/>	FLD39 - Illumination
Fire/explosion	Burns/impaction	<input type="checkbox"/>	FLD40 - Storage Tank Removal/Decommissioning
Communications	Disruption of communications	<input type="checkbox"/>	FLD41 - Std. Hand/Emergency Signals
Energy/release	Unexpected release of energy	<input type="checkbox"/>	FLD42 - Lockout/Tag-out
Biological Hazards	Biological Hazards at site	<input type="checkbox"/>	FLD43 - Biological Hazards
Animals	Animals	<input checked="" type="checkbox"/>	FLD43A - Animals
Insects	Stinging and Biting Insects	<input checked="" type="checkbox"/>	FLD43B - Stinging and Biting Insects
Molds/Fungi	Molds and Fungi	<input type="checkbox"/>	FLD43C - Molds and Fungi



2.1.5 Physical Hazards of Concern (Continued)

Physical Hazard Condition	Physical Hazard	Attach OP	WESTON OP Titles
Hazardous Plants	Hazardous Plants	<input checked="" type="checkbox"/>	FLD43D - Hazardous Plants
Etiologic Agents	Etiologic Agents	<input type="checkbox"/>	FLD43E - Etiologic Agents
Biological Hazards/BBP	Biological Hazards/BBP at site/First Aid Providers	<input checked="" type="checkbox"/>	FLD44 - Biological Hazards – Bloodborne Pathogens Exposure Control Plan – First Aid Providers
Infectious Waste	Infectious Waste at site/BBP/ at site/Infectious Waste	<input type="checkbox"/>	FLD45 – Biological Hazards – Bloodborne Pathogens Exposure Control Plan – Work With Infectious Waste
Lead Contaminated sites	Lead poisoning	<input checked="" type="checkbox"/>	FLD46 - Control of Exposure to Lead
Puncture/cuts	Cuts/ dismemberment/gouges	<input type="checkbox"/>	FLD47 - Clearing, Grubbing and Logging Operations
Government Inspector	Disruption of Operations	<input type="checkbox"/>	FLD48 – Federal, State, Local Regulatory Agency Inspections
Unknown Chemicals	Exposure to hazardous materials/waste	<input checked="" type="checkbox"/>	FLD49 – Safe Storage of Samples
Cadmium	Exposure Control	<input checked="" type="checkbox"/>	FLD50 – Cadmium Exposure Control Plan
Process Safety Procedure	Safety Procedure	<input checked="" type="checkbox"/>	FLD51 – Process Safety Procedure
Asbestos	Asbestos Exposure	<input type="checkbox"/>	FLD52 – Asbestos Exposure Control Plan
Hexavalent Chromium	Exposure Control Plan	<input type="checkbox"/>	FLD53 – Hexavalent Chromium Exposure Control Plan
Benzene	Exposure Control Plan	<input type="checkbox"/>	FLD54 - <u>Benzene Exposure Control Plan</u>
Hydrofluoric acid	Working with HF	<input type="checkbox"/>	FLD55 – Working with Hydrofluoric Acid
Moving drill rig parts	Crushing/pinch points/overhead hazards/electrocution	<input checked="" type="checkbox"/>	FLD56 – Drilling Safety
Vehicles/driving	Accidents,/fatigue/cell phone use	<input checked="" type="checkbox"/>	FLD 57 – Motor Vehicle Safety
Improper material handling	Back injury/crushing from load shifts/equipment/tools	<input checked="" type="checkbox"/>	FLD 58 – Drum Handling Operations
COC decontamination	COCs/slip, trip, and falls/waste generation/environmental compliance/PPE	<input checked="" type="checkbox"/>	FLD59 - Decontamination
Drilling hazards	Electrocution/overhead hazards/pinch points	<input checked="" type="checkbox"/>	Environmental Remediation Drilling Safety Guideline - 2005
Fatigue	Long work hours	<input checked="" type="checkbox"/>	FLD60 – Employee Duty Schedule
Benzene/Gasoline	Benzene exposure	<input type="checkbox"/>	FLD61 – Gasoline Contaminant Exposure
Cardiac Arrest	Accident/Heart Attack	<input type="checkbox"/>	FLD62 – 2009 Automatic External Defibrillator (AED) Program Guidelines
Ionizing Radiation	Ionizing Radiation	<input type="checkbox"/>	FLD63 – Using Handheld X-Ray Fluorescence (XRF) Analyzers
Working Alone	Isolated Working Conditions	<input type="checkbox"/>	FLD64 – Employees Working Alone

3. SITE SECURITY

DRAFT



3.1 SITE SECURITY ASSESSMENT FORM

DESCRIPTION	
Site Name and Location: Former Study Area, Corning NY	Number of Employees and Subcontractors on Site: TBD
Type of Work: Study Area characterization sampling activities (Soil and/or groundwater sampling)	
Projected Start Date: 2014	Projected Completion Date: TBD
Are Chemicals Used or Stored That Meet DHS/CFATS Requirements? N/A http://www.dhs.gov/files/programs/gc_1185909570187.shtm	
If Yes, Attach Plan and DHS Approvals to HASP. http://www.dhs.gov/files/programs/gc_1169501486197.shtm	
SURROUNDING AREA (urban/suburban/rural; residential/commercial/industrial; traffic volume, population density, etc)	
Suburban, residential neighborhood with school property within Study Area limits.	
THREAT INDICATORS (apparent social, economic, political, ethnic, criminal, gang related, and other risk factors)	
N/A	
COUNTERMEASURES (Current and projected risk mitigation factors)	
Security Systems (Reference Site Security Checklist): 	
Security Procedures (Reference Site Security Checklist): 	
Closest police station location and contact information: Corning Police Department – 607-962-0340 1 Center Way Corning, NY 14830	
Other relevant observations or information to factor into the Site Security Plan: N/A	
OVERALL SECURITY ASSESSMENT (Submit “Medium” and “High” risk assessments to Corporate Security for review)	
Risk Level: <input checked="" type="checkbox"/> Low <input type="checkbox"/> Medium <input type="checkbox"/> High Date:	
Site Safety Officer:	Division Safety Manager:
USE ATTACHMENTS FOR ADDITIONAL COMMENTS, MAPS AND DIAGRAMS	

3.2 WESTON SITE SECURITY CHECKLIST

*To be used for completing the Site Security Assessment Form required on all WESTON projects.
Contact Corporate Security for guidance on any items that are "NEEDED" and "NOT IN PLACE".*

CONTROL MEASURES:	In-Place / Not In-Place	Needed / Not Needed
1. Fencing, lockable gates, no holes (enter details below): a. Chain Link material b. Other material (describe) c. Height (in feet and inches) d. Top cover (e.g., razor wire) e. Signage (e.g., No Trespassing)	<input checked="" type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input checked="" type="checkbox"/>
2. Guard service: a. During working hours? b. During non-working hours? c. As a stationary post? d. As a roving patrol? e. Do they have written instructions? f. Do they have adequate training? g. Do they have adequate supervision? h. Do they have daily reports? i. Do they have daily inspections?	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>
3. ID badges displayed by: a. Employees? b. Contractors? c. Visitors?	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>
4. Log books for: a. Employee sign-in? b. Visitor sign-in? c. Vehicle sign-in? d. Incident reports? e. Property removal? f. Keys and access cards?	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>
5. Electronics and hardware options (enter details below): a. Access card readers b. Adequate lighting c. Closed circuit TV d. Alarm system e. Other (describe)	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>
6. Procedures documented for: a. Security training? b. Security instructions? c. Contingency plans? d. Opening and closing protocols? e. Other (describe)?	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>
7. Law enforcement liaison documented for: a. Municipal police? b. County sheriff? c. State police? d. Federal agencies (specify)?	<input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>	<input type="checkbox"/> / <input checked="" type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/> <input type="checkbox"/> / <input type="checkbox"/>



WESTON SITE SECURITY CHECKLIST (CONTINUED)

To be used for completing the Site Security Assessment Form required on all WESTON projects.
Contact Corporate Security for guidance on any items that are "NEEDED" and "NOT IN PLACE".

CHAIN OF COMMAND:	Name	24/7 Contact Information
a. Security Coordinator		
b. Site Supervisor		
c. Project Manager	John Sontag	610-701-3679
d. PC Manager		

REMARKS (use this section and supplemental pages to comment on details, exceptions or additional observations):

DRAFT

4. TASK BY TASK ASSESSMENT

DRAFT



4.1 TASK-BY-TASK RISK ASSESSMENT

4.1.1 Task 1 Description

TASK 1: Soil sampling. Includes a combination of soil boring and surface soil sampling.

EQUIPMENT REQUIRED/USED

Geoprobe and/or Hollow-stem auger rig Scoops Nitrile gloves Safety Boots Safety Glasses Dust Monitoring	Hand tools Hearing Protection Mini Rae
--	---

POTENTIAL HAZARDS/RISKS

Chemical

Hazard Present Risk Level: H M L
 What justifies risk level?
Sampling soil with potential metals.

Physical

Hazard Present Risk Level: H M L
 What justifies risk level?
Work generally will occur at residential or school property, with some work in utility right-of-way areas and floodplain areas.

Biological

Hazard Present Risk Level: H M L
 What justifies risk level?
Potential for ticks, bees, snakes, vegetation and small animals.

RADIOLOGICAL

Hazard Present Risk Level: H M L
 What justifies risk level?

LEVELS OF PROTECTION/JUSTIFICATION

Level D

SAFETY PROCEDURES REQUIRED AND/OR FIELD OPS UTILIZED

All work will be performed in accordance with the provisions of this HASP, OSHA guidelines, and WESTON Standard Operating Procedures.
FLD 02, 05, 06, 10,11, 12, 13, 19, 20, 22, 28, 34, 37, 38, 41, 43, 47, 56, 57, 59, 60, Section 7.0, Environmental Remediation Drilling Safety Guidance – 2005, Air monitoring in accordance with the Study Area-specific Community Air Monitoring Plan (CAMP).



TASK-BY-TASK RISK ASSESSMENT (Continued)

4.1.2 Task 2 Description

TASK 2: Groundwater sampling activities, includes the installation of groundwater monitoring wells and groundwater sampling

EQUIPMENT REQUIRED/USED

Hollow-stem auger Rig Nitrile Gloves Safety Boots Safety Glasses Hearing Protection MiniRae	Hand Tools Sample Bottles Water Level Indicator Groundwater Pumps Bailers Tubing	Dust Monitoring
--	---	------------------------

POTENTIAL HAZARDS/RISKS

Chemical

Hazard Present Risk Level: H M L

What justifies risk level?

Ground water sampling with potential constituents at lower levels

Physical

Hazard Present Risk Level: H M L

What justifies risk level?

Work generally will occur at residential or school property, with some work possibly in utility right-of-way areas

Biological

Hazard Present Risk Level: H M L

What justifies risk level?

Potential for ticks, bees, snakes, vegetation and small animals.

RADIOLOGICAL

Hazard Present Risk Level: H M L

What justifies risk level?

LEVELS OF PROTECTION/JUSTIFICATION

Level D

SAFETY PROCEDURES REQUIRED AND/OR FIELD OPS UTILIZED

All work will be performed in accordance with the provisions of this HASP, OSHA guidelines, and WESTON Standard Operating Procedures.

FLD 01, 02, 05, 06, 10, 11, 12, 17, 18, 19, 20, 32, 34, 35, 36, 37, 41, 43, 47, 57, 59, 60 Section 7.0, Environmental Remediation Drilling Safety Guidance – 2005, Air monitoring in accordance with the Study Area-specific Community Air Monitoring Plan (CAMP).



4.1 TASK-BY-TASK RISK ASSESSMENT (Continued)

4.1.3 Task 3 Description

TASK 3: Excavation/test pitting, backfilling and sampling activities. Test pits will be approximately 1 foot to 18 inches wide, 4 to 7 feet long and up to 4 feet deep. Excavation activities include surface excavation/scraping up to 1 ft below ground surface.

EQUIPMENT REQUIRED/USED

Construction Equipment (Mini-backhoe/excavator/front end loader) Safety Boots Safety Glasses Hearing Protection MiniRae	Dust Monitoring Hearing Protection
--	---

POTENTIAL HAZARDS/RISKS

Chemical

Hazard Present Risk Level: H M L
 What justifies risk level?
Sampling soil with potential metals.

Physical

Hazard Present Risk Level: H M L
 What justifies risk level?
Activities include the use of heavy equipment in residential and public areas.

Biological

Hazard Present Risk Level: H M L
 What justifies risk level?
Potential for ticks, bees, snakes, vegetation and small animals.

RADIOLOGICAL

Hazard Present Risk Level: H M L
 What justifies risk level?

LEVELS OF PROTECTION/JUSTIFICATION

Level D

SAFETY PROCEDURES REQUIRED AND/OR FIELD OPS UTILIZED

All work will be performed in accordance with the provisions of this HASP, OSHA guidelines, and WESTON Standard Operating Procedures.
FLD 02, 05, 06, 10,11, 12, 13, 20, 22, 28, 34, 37, 38, 41, 43, 47, 56, 57, 59, Section 7.0, Environmental Remediation Drilling Safety Guidance – 2005, Air monitoring in accordance with the Study Area-specific Community Air Monitoring Plan (CAMP).



4.1 TASK-BY-TASK RISK ASSESSMENT (Continued)

4.1.4 Task 4 Description

EQUIPMENT REQUIRED/USED

POTENTIAL HAZARDS/RISKS

Chemical

Hazard Present
What justifies risk level?

Risk Level: H M L

Physical

Hazard Present
What justifies risk level?

Risk Level: H M L

Biological

Hazard Present
What justifies risk level?

Risk Level: H M L

RADIOLOGICAL

Hazard Present
What justifies risk level?

Risk Level: H M L

LEVELS OF PROTECTION/JUSTIFICATION

SAFETY PROCEDURES REQUIRED AND/OR FIELD OPS UTILIZED

All work will be performed in accordance with the provisions of this HASP, OSHA guidelines, and WESTON Standard Operating Procedures.

4.2 PERSONNEL PROTECTION PLAN

Engineering Controls

Describe Engineering Controls used as part of Personnel Protection Plan:

Task(s)
Tasks 1-3

Administrative Controls

Describe Administrative Controls used as part of Personnel Protection Plan:

Task(s) Tasks 1-3
 All Conduct hazard analysis of all work tasks.
 All Conduct safety briefings with contractors prior to performing daily tasks to discuss safety hazards and controls Taken to minimize or eliminate hazards

Personal Protective Equipment

Action Levels for Changing Levels of Protection. Refer to Site Air Monitoring Program—Action Levels. Define Action Levels for up or down grade for each task:

Task(s) Tasks 1-3
 All Hard hat, safety glasses, safety shoes, hearing protection (as necessary)
 All PPE will be reviewed with each hazard analysis to ensure level of PPE is appropriate for scope of work
 All Study Area Air Monitoring plan (i.e., Community Air Monitoring Plan [CAMP])

Description of Levels of Protection

Level D	Level D Modified
<p>Task(s): All</p> <p><input checked="" type="checkbox"/> Head</p> <p><input checked="" type="checkbox"/> Eye and Face</p> <p><input checked="" type="checkbox"/> Hearing</p> <p><input type="checkbox"/> Arms and Legs Only</p> <p><input checked="" type="checkbox"/> Appropriate Work Uniform</p> <p><input checked="" type="checkbox"/> Hand – Gloves</p> <p><input checked="" type="checkbox"/> Foot - Safety Boots</p> <p><input type="checkbox"/> Fall Protection</p> <p><input type="checkbox"/> Flotation</p> <p><input type="checkbox"/> Other</p>	<p>Task(s): NA</p> <p><input type="checkbox"/> Head</p> <p><input type="checkbox"/> Eye and Face</p> <p><input type="checkbox"/> Hearing</p> <p><input type="checkbox"/> Arms and Legs Only</p> <p><input type="checkbox"/> Whole Body</p> <p><input type="checkbox"/> Apron</p> <p><input type="checkbox"/> Hand - Gloves</p> <p><input type="checkbox"/> Gloves</p> <p><input type="checkbox"/> Gloves</p> <p><input type="checkbox"/> Foot - Safety Boots</p> <p><input type="checkbox"/> Over Boots</p>

4.3 DESCRIPTION OF LEVELS OF PROTECTION	
Level C	Level B () or Level A ()
<p>Task(s): NA</p> <input type="checkbox"/> Head <input type="checkbox"/> Eye and Face <input type="checkbox"/> Hearing <input type="checkbox"/> Arms and Legs Only <input type="checkbox"/> Whole Body <input type="checkbox"/> Apron <input type="checkbox"/> Hand – Gloves <input type="checkbox"/> Gloves <input type="checkbox"/> Gloves <input type="checkbox"/> Foot - Safety Boots <input type="checkbox"/> Outer Boots <input type="checkbox"/> Boots (Other) <input type="checkbox"/> Half Face <input type="checkbox"/> Cart./Canister <input type="checkbox"/> Full Face <input type="checkbox"/> Cart./Canister <input type="checkbox"/> PAPR <input type="checkbox"/> Cart./Canister <input type="checkbox"/> Type C <input type="checkbox"/> Fall Protection <input type="checkbox"/> Flotation <input type="checkbox"/> Other	<p>Task(s): NA</p> <input type="checkbox"/> Head <input type="checkbox"/> Eye and Face <input type="checkbox"/> Hearing <input type="checkbox"/> Arms and Legs Only <input type="checkbox"/> Whole Body <input type="checkbox"/> Apron <input type="checkbox"/> Hand - Gloves <input type="checkbox"/> Gloves <input type="checkbox"/> Gloves <input type="checkbox"/> Foot - Safety Boots <input type="checkbox"/> Outer Boots <input type="checkbox"/> Boots (Other) <input type="checkbox"/> SAR - Airline <input type="checkbox"/> SCBA <input type="checkbox"/> Comb. Airline/SCBA <input type="checkbox"/> Cascade System <input type="checkbox"/> Compressor <input type="checkbox"/> Fall Protection <input type="checkbox"/> Flotation <input type="checkbox"/> Other

5. MONITORING PROGRAM

DRAFT



5.1 SITE OR PROJECT HAZARD MONITORING PROGRAM

5.1.1 Air Monitoring Instruments

Instrument Selection and Initial Check Record

Reporting Format: Field Notebook Field Data Sheets* Air Monitoring Log Trip Report Other

Instrument	Task No.(s)	Number Required	Number Received	Checked Upon Receipt	Comment	Initials
<input type="checkbox"/> RAD <input type="checkbox"/> GM (Pancake) <input type="checkbox"/> NaI (Micro R) <input type="checkbox"/> ZnS (Alpha Scintillator) <input type="checkbox"/> Other _____				<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		
<input checked="" type="checkbox"/> PID <input checked="" type="checkbox"/> MiniRAE <input type="checkbox"/> MultiRAE (LEL/O2/H2S/CO/PID) <input type="checkbox"/> TVA 1000 (PID/FID) <input type="checkbox"/> Other _____	1-3			<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		
<input type="checkbox"/> FID <input type="checkbox"/> TVA 1000 (FID/PID) <input type="checkbox"/> Other _____				<input type="checkbox"/> <input type="checkbox"/>		
<input checked="" type="checkbox"/> PDR 1000 (Particulate) <input type="checkbox"/> Single Gas Meter (SGM) Specify Chemical:	1-3			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		
<input type="checkbox"/> Personal Sampling Pump Specify Media:				<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		
<input type="checkbox"/> Bio-Aerosol Monitor <input type="checkbox"/> Tubes/type: _____ <input type="checkbox"/> Tubes/type: _____ <input type="checkbox"/> Tubes/type: _____ <input type="checkbox"/> Tubes/type: _____				<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>		

5.2 SITE AIR MONITORING PROGRAM

Action Levels

These Action Levels, if not defined by regulation, are some percent (usually 50%) of the applicable PEL/TLV/REL. That number must also be adjusted to account for instrument response factors.

	Tasks	Action Level		Action
<input type="checkbox"/> Explosive or Flammable Atmosphere		Ambient Air Concentration	Confined Space Concentration	
		<10% LEL	0 to 1% LEL	Work may continue. Consider toxicity potential.
		10 to 25% LEL	1 to 10% LEL	Work may continue. Increase monitoring frequency.
		>25% LEL	>10% LEL	Work must stop. Ventilate area before returning.
<input type="checkbox"/> Oxygen		Ambient Air Concentration	Confined Space Concentration	
		<19.5% O ₂	<19.5% O ₂	Leave area. Re-enter only with self-contained breathing apparatus.
		19.5% to 25% O ₂	19.5% to 23.5% O ₂	Work may continue. Investigate changes from 21%.
		>25% O ₂	>23.5% O ₂	Work must stop. Ventilate area before returning.
<input type="checkbox"/> Radiation	3, Radiation screening related to XRF to be performed by selected subcontractor for XRF work	< 3 times background		Continue work.
		3 times background to < 1 mR/hour		Radiation above background levels (normally 0.01-0.02 mR/hr) signifies possible radiation source(s) present. Continue investigation with caution. Perform thorough monitoring. Consult with a Health Physicist.
		> 1 mrem/hour		Potential radiation hazard. Evacuate site. Continue investigation only upon the advice of Health Physicist.
<input checked="" type="checkbox"/> Organic Gases and Vapors	1, 2	1.0 units sustained		Increase monitoring frequency. Stop work and evaluate appropriate PPE
<input checked="" type="checkbox"/> Inorganic Gases, Vapors, and Particulates	1, 2	100 µg/m ³ above background per 15-minute period		Continue work with dust suppression techniques. If levels exceed 150 µg/m ³ above background per 15-minute period. Stop work and re-evaluate dust suppression.



5.3 ACTION LEVELS

(Attach action level calculations)

DRAFT

6. HOSPITAL INFORMATION

DRAFT



6.1 CONTINGENCIES

6.1.1 Emergency Contacts and Phone Numbers

Agency	Contact	Phone Number
WorkCare WESTON Medical Director WorkCare WESTON Program Administrator	Dr. Peter Greaney Heather Lind	From 6 am to 4:30 pm Pacific Time call 800-455-6155 and dial 0 for the Operator or ext. 475 for Heather Lind to request the on-call clinician.
After-Business Hours Contact (In Case of Emergency Only)		4:31 p.m. – 5:59 a.m. Pacific Time, all day Saturday, Sunday, and Holidays call 800-455-6155 Dial 3 to reach the after-hours answering service. Request that the service connect you with the on-call clinician or the on-call clinician will return your call within 30 minutes.
WESTON Corporate Environmental Health & Safety Director	Harold Hannah	(610) 701-3024 - (267) 516-0274 (Cell)
WESTON Health & Safety Division Safety Manager	George Crawford	(610) 701-3771 - (484) 437-5976 (Cell)
WESTON Health & Safety Local Safety Officer	George Crawford	(610) 701-3771- (484) 437-5976 (Cell)
Fire Department		911
Police Department		911
WESTON FSO Cell Phone		
WESTON PM Cell Phone	John Sontag	(610) 701-3679
Client Site Phone		
Site Telephone		
Nearest Telephone		
Poison Control		(800) 222-1222
Local Medical Emergency Facility(s) - LMF		
Name of Hospital: Guthrie Corning Hospital		
Address: 1 Guthrie Drive, Corning, NY 14830		Phone No.: 607-937-8674
Name of Contact:		Phone No.:
Type of Service: <input checked="" type="checkbox"/> Physical trauma only <input type="checkbox"/> Chemical exposure only <input type="checkbox"/> Physical trauma and chemical exposure <input type="checkbox"/> Available 24 hours	Route to Hospital: (See Attached)	Travel time from site: 9 Minutes Distance to hospital: 5.2 Miles Name/no. of 24-hr ambulance service: 911




Secondary or Specialty Service Provider		
Name of Hospital:		
Address:		Phone No.:
Name of Contact:		Phone No.:
Type of Service: <input type="checkbox"/> Physical trauma only <input type="checkbox"/> Chemical exposure only <input type="checkbox"/> Physical trauma and chemical exposure <input type="checkbox"/> Available 24 hours	Route to Hospital (see attached):	Travel time from site: Distance to hospital: Name/no. of 24-hr ambulance service: /

See reporting an incident in Attachment F.

DRAFT

6.1.2 Hospital Map

This map is subject to Google's Terms of Service, and Google is the owner of rights therein. Portions of this image may have been removed for clarity.

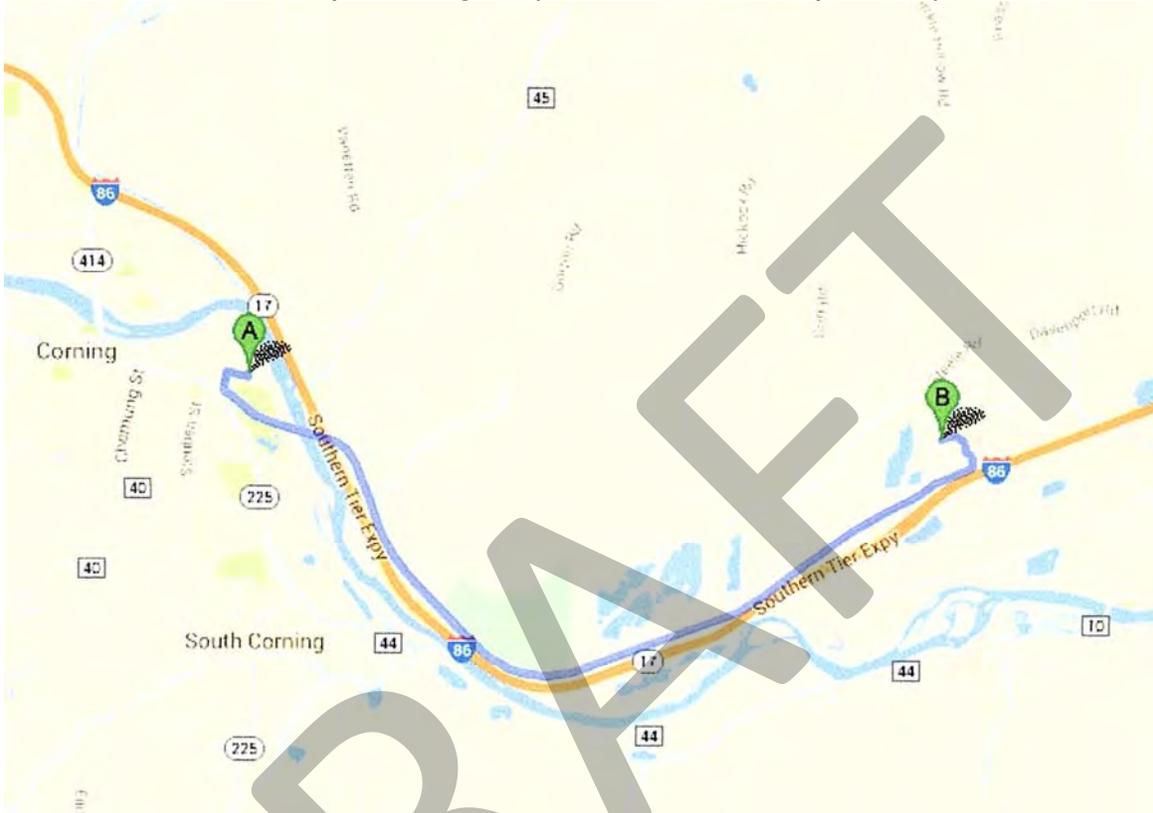

A 59 Canisteo St, Corning, NY 14830

1. Head **south** on **Canisteo St** toward **Woodview Ave** go 82 ft
total 82 ft
2. Take the 1st right onto **Woodview Ave** go 0.1 mi
total 0.1 mi
3. Take the 1st left onto **Conhocton St** go 495 ft
total 0.2 mi
4. Take the 2nd left onto **NY-352 E/E Corning Rd/Denison Pkwy E** go 3.8 mi
total 4.0 mi
Continue to follow NY-352 E/E Corning Rd
About 5 mins
5. Continue **straight** onto **E Corning Rd** go 1.2 mi
total 5.2 mi
Destination will be on the left
About 2 mins

B **Guthrie Corning Hospital**
1 Guthrie Drive, Corning, NY 14830



6.1 CONTINGENCIES				
6.1.3 Response Plans				
Medical - General Provide first aid, if trained; assess and determine need for further medical assistance. Transport or arrange for transport after appropriate decontamination. LMF = Local Medical Facility	First Aid Kit: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Type Appropriate sized ANSI-approved Type III Kit, plus BBP	Location In Vehicle near work area	Special First-Aid Procedures: Cyanides on-site <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, contact LMF. Do they have antidote kit? <input type="checkbox"/> Yes <input type="checkbox"/> No
	Blood Borne Pathogens Kit: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Eyewash required <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Type	Location	HF on-site <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, need neutralizing ointment for first-aid kit. Contact LMF.
	Shower required <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Type	Location	
Plan for Response to Spill/Release		Plan for Response to Fire/Explosion		Fire Extinguishers
In the event of a spill or release, ensure safety, assess situation, and perform containment and control measures, as appropriate.	a. Cleanup per SDSs if small; or sound alarm, call for assistance, notify Emergency Coordinator b. Evacuate to pre-determined safe place c. Account for personnel d. Determine if team can respond safely e. Mobilize per Site Spill Response Plan	In the event of a fire or explosion, ensure personal safety, assess situation, and perform containment and control measures, as appropriate:	a. Sound alarm and call for assistance, notify Emergency Coordinator b. Evacuate to predetermined safe place c. Account for personnel d. Use fire extinguisher <u>only if safe and trained</u> in its use e. Stand by to inform emergency responders of materials and conditions	Type/Location <u>ABC/Vehicle</u> / / / / /
Description of Spill Response Gear	Location	Description (Other Fire Response Equipment)		Location
Plan to Respond to Security Problems 911 Emergency				

7. DECONTAMINATION PLAN

DRAFT

7.1 GENERAL DECONTAMINATION PLAN

Personnel Decontamination

Consistent with the levels of protection required, step-by-step procedures for personnel decontamination for each level of protection are attached.

Level D PPE with used PPE properly disposed on-site

Levels of Protection Required for Decontamination Personnel

The levels of protection required for personnel assisting with decontamination will be:

Level B

Level C

Level D

Modifications include:

Disposition of Decontamination Wastes

Drill cuttings and other waste soil/water generated during characterization activities will be containerized daily in 55-gallon drums or other appropriate containers (as described in the Study Area Work Plan). The filled containers will be staged in a secure, designated area (TBD). The waste soil and waste water will be properly disposed in accordance with sample results.

Equipment Decontamination

A procedure for decontamination steps required for non-sampling equipment and heavy machinery follows:

Equipment will be decontaminated in accordance with the decontamination SOP included in the Study Area Work Plan.

Sampling Equipment Decontamination

Sampling equipment will be decontaminated in accordance with the following procedure:

All non-dedicated sampling and monitoring equipment will be decontaminated in accordance with the decontamination SOP included in the Study Area Work Plan.



7.2 LEVEL D DECONTAMINATION PLAN

Check indicated functions or add steps, as necessary:

Function	Description of Process, Solution, and Container
----------	---

- | | |
|--|--|
| <input type="checkbox"/> Segregated equipment drop | |
| <input type="checkbox"/> Boot cover and glove wash | |
| <input type="checkbox"/> Boot cover and glove rinse | |
| <input type="checkbox"/> Tape removal - outer glove and boot | |
| <input type="checkbox"/> Boot cover removal | |
| <input type="checkbox"/> Outer glove removal | |

HOTLINE

- | | |
|---|--|
| <input type="checkbox"/> Suit/safety boot wash | |
| <input type="checkbox"/> Suit/boot/glove rinse | |
| <input type="checkbox"/> Safety boot removal | |
| <input type="checkbox"/> Suit removal | |
| <input type="checkbox"/> Inner glove wash | |
| <input type="checkbox"/> Inner glove rinse | |
| <input type="checkbox"/> Inner glove removal | |
| <input type="checkbox"/> Inner clothing removal | |

CONTAMINATION REDUCTION ZONE (CRZ)/SAFE ZONE BOUNDARY

- | | |
|-------------------------------------|--|
| <input type="checkbox"/> Field wash | |
| <input type="checkbox"/> Redress | |

Disposal Plan, End of Day:

Disposal Plan, End of Week:

Disposal Plan, End of Project:



7.3 LEVEL C DECONTAMINATION PLAN

Check indicated functions or add steps, as necessary:

Function	Description of Process, Solution, and Container
<input type="checkbox"/> Segregated equipment drop	
<input type="checkbox"/> Boot cover and glove wash	
<input type="checkbox"/> Boot cover and glove rinse	
<input type="checkbox"/> Tape removal - outer glove and boot	
<input type="checkbox"/> Boot cover removal	
<input type="checkbox"/> Outer glove removal	

HOTLINE

<input type="checkbox"/> Suit/safety boot wash	
<input type="checkbox"/> Suit/boot/glove rinse	
<input type="checkbox"/> Safety boot removal	
<input type="checkbox"/> Suit removal	
<input type="checkbox"/> Inner glove wash	
<input type="checkbox"/> Inner glove rinse	
<input type="checkbox"/> Face piece removal	
<input type="checkbox"/> Inner glove removal	
<input type="checkbox"/> Inner clothing removal	

CONTAMINATION REDUCTION ZONE (CRZ)/SAFE ZONE BOUNDARY

<input type="checkbox"/> Field wash	
<input type="checkbox"/> Redress	

Disposal Plan, End of Day:

Disposal Plan, End of Week:

Disposal Plan, End of Project:



7.4 LEVEL B () or Level A () DECONTAMINATION PLAN

Check indicated functions or add steps, as necessary:

Function	Description of Process, Solution, and Container
<input type="checkbox"/> Segregated equipment drop	
<input type="checkbox"/> Boot cover and glove wash	
<input type="checkbox"/> Boot cover and glove rinse	
<input type="checkbox"/> Tape removal - outer glove and boot	
<input type="checkbox"/> Boot cover removal	
<input type="checkbox"/> Outer glove removal	

HOTLINE

<input type="checkbox"/> Suit/safety boot wash	
<input type="checkbox"/> Suit/SCBA/boot/glove rinse	
<input type="checkbox"/> Safety boot removal	
<input type="checkbox"/> Remove SCBA backpack without disconnecting	
<input type="checkbox"/> Splash suit removal	
<input type="checkbox"/> Inner glove wash	
<input type="checkbox"/> Inner glove rinse	
<input type="checkbox"/> SCBA disconnect and face piece removal	
<input type="checkbox"/> Inner glove removal	
<input type="checkbox"/> Inner clothing removal	

CONTAMINATION REDUCTION ZONE (CRZ)/SAFE ZONE BOUNDARY

<input type="checkbox"/> Field wash	
<input type="checkbox"/> Redress	

Disposal Plan, End of Day:
 All materials will be decontaminated daily in accordance with the decontamination SOP included in the Study Area Work Plan and containerized in 55-gallon drums or other appropriate containers in a secure area.

Disposal Plan, End of Week:

Disposal Plan, End of Project:
 All material, will be disposed of properly and in accordance with sampling results.

8. TRAINING AND BRIEFING TOPICS/SIGN OFF SHEET

DRAFT



8.1 TRAINING AND BRIEFING TOPICS

The following items will be covered at the site-specific training meeting, daily or periodically.

<input checked="" type="checkbox"/> Site characterization and analysis, Sec. 3.0, 29 CFR 1910.120 I	<input type="checkbox"/> Level A
<input checked="" type="checkbox"/> Physical hazards	<input type="checkbox"/> Level B
<input checked="" type="checkbox"/> Chemical hazards	<input type="checkbox"/> Level C
<input checked="" type="checkbox"/> Animal bites, stings, and poisonous plants	<input checked="" type="checkbox"/> Level D
<input type="checkbox"/> Etiologic (infectious) agents	<input checked="" type="checkbox"/> Monitoring, 29 CFR 1910.120 (h)
<input checked="" type="checkbox"/> Site control, 29 CFR 1910.120 d	<input checked="" type="checkbox"/> Decontamination, 29 CFR 1910.120 (k)
<input checked="" type="checkbox"/> Engineering controls and work practices, 29 CFR 1910.120 (g)	<input checked="" type="checkbox"/> Emergency response, 29 CFR 1910.120 (l)
<input checked="" type="checkbox"/> Heavy machinery	<input checked="" type="checkbox"/> Elements of an emergency response, 29 CFR 1910.120 (l)
<input type="checkbox"/> Forklift	<input checked="" type="checkbox"/> Procedures for handling site emergency incidents, 29 CFR 1910.120 (l)
<input checked="" type="checkbox"/> Backhoe	<input checked="" type="checkbox"/> Off-site emergency response, 29 CFR 1910.120 (l)
<input checked="" type="checkbox"/> Equipment	<input checked="" type="checkbox"/> Handling drums and containers, 29 CFR 1910.120 (j)
<input checked="" type="checkbox"/> Tools	<input type="checkbox"/> Opening drums and containers
<input type="checkbox"/> Ladder, 29 CFR 1910.25.26.26 + 29 CFR 1926.1053	<input type="checkbox"/> Electrical material handling equipment
<input checked="" type="checkbox"/> Overhead and underground utilities	<input type="checkbox"/> Radioactive waste
<input type="checkbox"/> Scaffolds	<input type="checkbox"/> Shock-sensitive waste
<input type="checkbox"/> Structural integrity	<input type="checkbox"/> Laboratory waste packs
<input type="checkbox"/> Unguarded openings - wall, floor, ceilings	<input type="checkbox"/> Sampling drums and containers
<input type="checkbox"/> Pressurized air cylinders	<input checked="" type="checkbox"/> Shipping and transport, 49 CFR 172.101, IATA
<input checked="" type="checkbox"/> Personal protective equipment, 29 CFR 1910.120 (g); 29 CFR 1910.134	<input type="checkbox"/> Tank and vault procedures
<input type="checkbox"/> Respiratory protection, 29 CFR 1910.120 (g); ANSI Z88.2	<input type="checkbox"/> Illumination, 29 CFR 1926.26
<input checked="" type="checkbox"/> Working over water FLD-19	<input type="checkbox"/> Sanitation, 29 CFR 1926.27
<input type="checkbox"/> Boating safety FLD-18	<input checked="" type="checkbox"/> Proper lifting techniques
<input checked="" type="checkbox"/> Heat Stress / Cold Stress	<input checked="" type="checkbox"/> Lead, Arsenic, Cadmium exposure training



**ATTACHMENT A
CHEMICAL CONTAMINANTS DATA SHEETS**

DRAFT

June 2014



**ATTACHMENT B
SAFETY DATA SHEETS
(ATTACH SDS)**

DRAFT

June 2014



ATTACHMENT C

SAFETY PROCEDURES/FIELD OPERATING PROCEDURES (FLD OPS)

In lieu of attaching individual copies of FLDs, the site safety officer or his designee may elect to maintain an electronic copy of the WESTON Corporate Environmental Compliance, Health, and Safety Program Manual (including all FLDs) on site in an electronic format. The most recent version of the CEHS Program Manual and supporting documents are located at:

<http://portal/services/EHS/SitePages/CEHSProgramElements.aspx>

DRAFT

June 2014



**ATTACHMENT D
HAZARD COMMUNICATION PROGRAM**

DRAFT

June 2014



SITE-SPECIFIC HAZARD COMMUNICATION PROGRAM

Location-Specific Hazard Communication Program/Checklist

To ensure an understanding of and compliance with the Hazard Communication Standard, WESTON will use this checklist/document (or similar document) in conjunction with the WESTON Written Hazard Communication Program as a means of meeting site- or location-specific requirements.

While responsibility for activities within this document reference the WESTON Safety Officer (SO), it is the responsibility of all personnel to ensure compliance. Responsibilities under various conditions can be found within the WESTON Written Hazard Communication Program.

To ensure that information about the dangers of all hazardous chemicals used by WESTON is known by all affected employees, the following Hazard Communication Program has been established. All affected personnel will participate in the Hazard Communication Program. This written program, as well as WESTON's Corporate Hazard Communication Program, will be available for review by any employee, employee representative, representative of OSHA, NIOSH, or any affected employer/employee on a multi-employer site.

- Site or other location name/address: Study Area, Corning, NY
- Site/Project/Location Manager: John Sontag
- Site/Location Safety Officer: TBD
- List of chemicals compiled, format: HASP Other: _____
- Location of SDS files: Attached
- Training conducted by: Name: TBD Date: _____
- Indicate format of training documentation: Field Log: Other: _____
- Client briefing conducted regarding hazard communication: _____
- If multi-employer site (client, subcontractor, agency, etc.), indicate name of affected companies:

- Other employer(s) notified of chemicals, labeling, and SDS information: _____
- Has WESTON been notified of other employer's or client's hazard communication program(s), as necessary? Yes No

List of Hazardous Chemicals

A list of known hazardous chemicals used by WESTON personnel must be prepared and attached to this document or placed in a centrally identified location with the SDSs. Further information on each chemical may be obtained by reviewing the appropriate SDS. The list will be arranged to enable cross-reference with the SDS file and the label on the container. The SO or Location Manager is responsible for ensuring the chemical listing remains up-to-date.

Container Labeling

The WESTON SO will verify that all containers received from the chemical manufacturer, importer, or distributor for use on-site are clearly labeled.

The SO is responsible for ensuring that labels are placed where required and for comparing SDSs and other information with label information to ensure correctness.

June 2014



Safety Data Sheets (SDSs)

The SO is responsible for establishing and monitoring WESTON's SDS program for the location. The SO will ensure that procedures are developed to obtain the necessary SDSs and will review incoming SDSs for new or significant health and safety information. He/she will see that any new information is passed on to the affected employees. If an SDS is not received at the time of initial shipment, the SO will call the manufacturer and have an SDS delivered for that product in accordance with the requirements of WESTON's Written Hazard Communication Program.

A log for, and copies of, SDSs for all hazardous chemicals in use will be kept in the SDS folder at a location known to all site workers. SDSs will be readily available to all employees during each work shift. If an MSDS is not available, immediately contact the WESTON SO or the designated alternate. When a revised SDS is received, the SO will immediately replace the old SDS.

Employee Training and Information

The SO is responsible for the WESTON site-specific personnel training program. The SO will ensure that all program elements specified below are supplied to all affected employees.

At the time of initial assignment for employees to the work site, or whenever a new hazard is introduced into the work area, employees will attend a health and safety meeting or briefing that includes the information indicated below.

- Hazardous chemicals present at the work site.
- Physical and health risks of the hazardous chemicals.
- The signs and symptoms of overexposure.
- Procedures to follow if employees are overexposed to hazardous chemicals.
- Location of the SDS file and Written Hazard Communication Program.
- How to determine the presence or release of hazardous chemicals in the employee's work area.
- How to read labels and review SDSs to obtain hazard information.
- Steps WESTON has taken to reduce or prevent exposure to hazardous chemicals.
- How to reduce or prevent exposure to hazardous chemicals through the use of controls procedures, work practices, and personal protective equipment.
- Hazardous, non-routine tasks to be performed (if any).
- Chemicals within unlabeled piping (if any).

Hazardous Non-routine Tasks

When employees are required to perform hazardous non-routine tasks, the affected employee(s) will be given information by the SO about the hazardous chemicals he or she may use during such activity. This information will include specific chemical hazards, protective and safety measures the employee can use, and steps WESTON is using to reduce the hazards. These steps include, but are not limited to, ventilation, respirators, presence of another employee, and emergency procedures.

Chemicals in Unlabeled Pipes

Work activities may be performed by employees in areas where chemicals are transferred through unlabeled pipes. Prior to starting work in these areas, the employee will contact the SO, at which time information as to the chemical(s) in the pipes, potential hazards of the chemicals or the process involved, and the safety precautions that should be taken will be determined and presented.

Multi-Employer Work Sites

It is the responsibility of the SO to provide other employers with information about hazardous chemicals imported by WESTON to which their employees may be exposed, along with suggested safety precautions. It is also the responsibility of the SO and the Site Manager to obtain information about hazardous chemicals used by other employers to which WESTON employees may be exposed.

June 2014



WESTON's chemical listing will be made available to other employers, as requested. SDSs will be available for viewing, as necessary.

The location, format, and/or procedures for accessing SDS information must be relayed to affected employees.

DRAFT

June 2014



ATTACHMENT E
AIR SAMPLING DATA SHEETS

DRAFT

June 2014



AIR MONITORING PROGRAM

Field Data Sheets

Location:

% LEL	% O ₂	PID (units)	FID (units)	Aerosol Monitor (mg/m ³)	GM: Shield Probe/Thin Window		NaI (uR/hr)	ZnS (cpm)
					mR/hr	cpm		
Monitox (ppm)				Detector Tube(s)				
Sound Levels (dBA)		Illumination	pH	Other	Other	Other	Other	Other

Location:

% LEL	% O ₂	PID (units)	FID (units)	Aerosol Monitor (mg/m ³)	GM: Shield Probe/Thin Window		NaI (uR/hr)	ZnS (cpm)
					mR/hr	cpm		
Monitox (ppm)				Detector Tube(s)				
Sound Levels (dBA)		Illumination	pH	Other	Other	Other	Other	Other



**ATTACHMENT F
INCIDENT REPORTING**

DRAFT

June 2014



**ATTACHMENT G
TRAFFIC CONTROL PLAN**

DRAFT

June 2014



**ATTACHMENT H
ENVIRONMENTAL HEALTH & SAFETY INSPECTION CHECKLIST**

DRAFT

June 2014



ENVIRONMENTAL HEALTH AND SAFETY INSPECTION CHECKLIST

Project Name: _____

Inspector: _____

Submit to: _____

Date: _____

DRAFT



THE WESTON SITE APPEARANCE

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Is the site secured to prevent inadvertent, unnecessary, or unauthorized access? Are gates closed and locked at any time that the access point is not occupied or visible to site workers?	
<input type="checkbox"/>	<input type="checkbox"/>	Are access points posted with signs to indicate client and end-user client name, WESTON's name and logo, names of other contractors and sub-contractors, project name and location, and appropriate safety messages?	
<input type="checkbox"/>	<input type="checkbox"/>	Are required postings in place (e.g., Labor Poster, Emergency Phone Numbers, Site Map, etc.)?	
<input type="checkbox"/>	<input type="checkbox"/>	Are site trailers tied down per local code and provided with stairs that have a landing platform with guard and stair railings?	
<input type="checkbox"/>	<input type="checkbox"/>	Is a Site Safety file system established in the office to maintain records required by applicable safety regulations	
<input type="checkbox"/>	<input type="checkbox"/>	Is the Health and Safety Plan (HASP) or Accident Prevention Plan (APP) amended as scope of work changes, hazards are discovered or eliminated or if risk change?	
<input type="checkbox"/>	<input type="checkbox"/>	Is the Site Safety Plan and the Safety Officers Field Manual on site?	
<input type="checkbox"/>	<input type="checkbox"/>	Is new employee indoctrination provided?	
<input type="checkbox"/>	<input type="checkbox"/>	Have site Rules been provided, discussed and signed off on by all employees	
<input type="checkbox"/>	<input type="checkbox"/>	Incident Reporting procedure explained to all?	
<input type="checkbox"/>	<input type="checkbox"/>	Is site management trained in the WESTON (and client as applicable) Incident Reporting system?	
<input type="checkbox"/>	<input type="checkbox"/>	Are NOI and Supplemental Report forms and OSHA 300 Log available on site?	
<input type="checkbox"/>	<input type="checkbox"/>	Is Site Management aware of the Case Management and Incident Investigation Procedures?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a list of preferred provider medical facilities available?	
<input type="checkbox"/>	<input type="checkbox"/>	Has the "Inspection By A Regulatory Agency" procedure been reviewed by all site management?	
<input type="checkbox"/>	<input type="checkbox"/>	Will Competent Persons be required because of activities to be performed, equipment to be used or hazards to be encountered?	

POLICIES

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Each individual employee is aware that he or she responsible for complying with applicable safety requirements, wearing prescribed safety equipment and preventing avoidable accidents.	
<input type="checkbox"/>	<input type="checkbox"/>	Do employees understand that they will wear clothing suitable for existing weather and work conditions and the minimum work uniform will include long pants, sleeved work shirts, protective footwear, hard hat, and safety glasses unless otherwise specified via the HASP.	
<input type="checkbox"/>	<input type="checkbox"/>	Are employees provided safety and health training to enable them to perform their work safely? Is all training documented to indicate the date of the session, topics covered, and names of participants?	
<input type="checkbox"/>	<input type="checkbox"/>	Safety meetings are conducted daily. The purpose of the meetings are to review past activities, review pertinent tailgate safety topics and establish safe working procedures for anticipated hazards encountered during the day.	
<input type="checkbox"/>	<input type="checkbox"/>	Training has been provided to all personnel regarding handling of emergency situations that may arise from the activity or use of equipment on the project.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees/contractors are informed and understand that they may not be under the influence of alcohol, narcotics, intoxicants, or similar mind-altering substances at any time. Employees found under the influence of or consuming such substances will be immediately removed from the job site.	
<input type="checkbox"/>	<input type="checkbox"/>	Site workers and operators of any equipment or vehicles are able to read and understand the signs, signals, and operating instructions of their use.	
<input type="checkbox"/>	<input type="checkbox"/>	Have contractors performing work provided copies of relevant documentation (such as medical fit-for-duty, training certificates, fit-tests, etc.) prior to initiation of the project?	



SANITATION
29 CFR 1926 Subparts C, D. EM 385-1-1, Section 2

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Is an adequate supply of drinking water provided? Is potable/drinking water labeled as such? Are there sufficient drinking cups provided?	
<input type="checkbox"/>	<input type="checkbox"/>	Are there a sufficient number of toilets?	
<input type="checkbox"/>	<input type="checkbox"/>	Are washing facilities readily available and appropriate for the cleaning needs?	
<input type="checkbox"/>	<input type="checkbox"/>	Are washing facilities kept sanitary with adequate cleansing and drying materials?	
<input type="checkbox"/>	<input type="checkbox"/>	Waste is secured so as not to attract rodents, insects, or other vermin?	
<input type="checkbox"/>	<input type="checkbox"/>	Is an effective housekeeping program established and implemented?	

ACCIDENT PREVENTION SIGNS, TAGS, LABELS, SIGNALS, AND PIPING SYSTEM IDENTIFICATION
29 CFR 1926 Subpart G. EM 385-1-1, Section 8

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Are signs, tags, and labels provided to give adequate warning and caution of hazards and instruction/directions to workers and the public?	
<input type="checkbox"/>	<input type="checkbox"/>	Are all employees informed as to the meaning of the various signs, tags, and labels used in the workplace and what special precautions are required?	
<input type="checkbox"/>	<input type="checkbox"/>	Are construction areas posted with legible traffic signs at points of hazard?	
<input type="checkbox"/>	<input type="checkbox"/>	Are signs required to be seen at night lighted or reflectorized?	
<input type="checkbox"/>	<input type="checkbox"/>	Tags contain a signal word ("danger" or "caution") and a major message to indicate the specific hazardous condition or the instruction to be communicated to the employee. Tags follow requirements as outlined in 29 CFR 1926.200.	

MEDICAL SERVICES AND FIRST AID
29 CFR 1926 Subparts C, D. EM 385-1-1, Section 3

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Is a local medical emergency facility (LMEF) identified in the HASP or APP?	
<input type="checkbox"/>	<input type="checkbox"/>	Has the LMEF been visited to verify the directions and establish contacts?	
<input type="checkbox"/>	<input type="checkbox"/>	Has site management reviewed WESTON's incident management procedures?	
<input type="checkbox"/>	<input type="checkbox"/>	Have clinics and specialists that will help WESTON manage injuries and illnesses been identified?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there at least two (2) people certified in First Aid and CPR?	
<input type="checkbox"/>	<input type="checkbox"/>	Are first aid kits available at the command post and appropriate remote locations?	
<input type="checkbox"/>	<input type="checkbox"/>	Are first Aid Kits and Eyewash/Safety Showers inspected weekly?	
<input type="checkbox"/>	<input type="checkbox"/>	Are 15 minute eyewash/safety showers in place if required?	



**FIRE PREVENTION AND PROTECTION
29 CFR 1926 Subpart F. EM 385-1-1, Section 9**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Is an Emergency Response and Contingency Plan in place?	
<input type="checkbox"/>	<input type="checkbox"/>	Are emergency phone numbers posted?	
<input type="checkbox"/>	<input type="checkbox"/>	Are fire extinguishers selected and provided based on the types of materials and potential fire classes in each area?	
<input type="checkbox"/>	<input type="checkbox"/>	Are fire extinguishers provided in each administrative and storage trailer, within 50 ft but no closer than 25 ft of any fuel or flammable liquids storage, on welding and cutting equipment, on mechanical equipment?	
<input type="checkbox"/>	<input type="checkbox"/>	Are fire extinguishers checked daily and inspected monthly?	
<input type="checkbox"/>	<input type="checkbox"/>	Do site personnel know the location of fire extinguishers and how to use them?	
<input type="checkbox"/>	<input type="checkbox"/>	Are flammable and combustible liquids stored in approved containers?	
<input type="checkbox"/>	<input type="checkbox"/>	Safety cans are used for dispensing flammable or combustible liquids in 5 gallon or less volumes.	
<input type="checkbox"/>	<input type="checkbox"/>	Are flammable and combustible liquids stored in flammable storage cabinets or appropriate storage areas?	
<input type="checkbox"/>	<input type="checkbox"/>	Are flammable materials separated from oxidizers by at least 20 feet (or 5 foot tall, ½ -hour rated fire wall) when in storage?	
<input type="checkbox"/>	<input type="checkbox"/>	Are fuel storage tanks double walled or placed in a lined berm?	
<input type="checkbox"/>	<input type="checkbox"/>	Spills are cleaned up immediately and wastes are disposed of properly.	
<input type="checkbox"/>	<input type="checkbox"/>	Combustible scrap, debris, and waste material (oily rags) are stored in closed metal containers and disposed of promptly.	
<input type="checkbox"/>	<input type="checkbox"/>	Vehicle fueling tanks are grounded and bonding between the tank and vehicle being fueled is provided?	
<input type="checkbox"/>	<input type="checkbox"/>	LPG is stored, handled, and used according to OSHA regulations 29 CFR 1926.	
<input type="checkbox"/>	<input type="checkbox"/>	LPG cylinders are not stored indoors.	
<input type="checkbox"/>	<input type="checkbox"/>	Is a hot work permit program in place? See WESTON FLD-36	
<input type="checkbox"/>	<input type="checkbox"/>	Is smoking limited to specific areas, prohibited in flammable storage areas and are signs posted to this effect?	



HAZARDOUS SUBSTANCES, AGENTS, AND ENVIRONMENTS
29 CFR 1926 Subparts D, Z. EM 385-1-1, Sections 6, 28

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Are operations, materials and equipment evaluated to determine the presence of hazardous contaminants or if hazardous agents could be released in the work environment?	
<input type="checkbox"/>	<input type="checkbox"/>	Are SDS for substances made available at the work-site when any hazardous substance is procured, used, or stored?	
<input type="checkbox"/>	<input type="checkbox"/>	Are all containers and piping containing hazardous substances labeled appropriately?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there an inventory of hazardous substances?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a site Specific Hazard Communication Program?	
<input type="checkbox"/>	<input type="checkbox"/>	Spill kits appropriate for the hazardous materials present are on site and their location is known to spill responders.	
<input type="checkbox"/>	<input type="checkbox"/>	Is disposal of excess hazardous chemicals performed according to WESTON's guidelines and RCRA regulations?	
<input type="checkbox"/>	<input type="checkbox"/>	Before initiation of activities where there is an identified asbestos or lead hazard, is there a written plan detailing compliance with OSHA and EPA asbestos or lead abatement requirements? Does the plan comply with state and local authority, and USACE requirements, as applicable?	
<input type="checkbox"/>	<input type="checkbox"/>	Are personnel trained and provided with protection against hazards from animals, poisonous plants, and insects?	

DRAFT



**PERSONAL PROTECTIVE AND SAFETY EQUIPMENT, RESPIRATORY AND FALL PROTECTION
29 CFR 1926 Subparts D, E, M. EM 385-1-1, Section 5**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Do employees understand that the minimum PPE is hard hat, safety glasses with side shields and safety shoes or boots and that long pants and a sleeved shirt are required?	
<input type="checkbox"/>	<input type="checkbox"/>	Has the SSHC reviewed the PPE requirements in the HASP against actual site conditions and certified that the PPE is appropriate? (see Field Manual, PPE Program)	
<input type="checkbox"/>	<input type="checkbox"/>	PPE is inspected, tested and maintained in serviceable and sanitary condition as recommended by the manufacturer. Is defective or damaged equipment taken out of service and repaired or replaced?	
<input type="checkbox"/>	<input type="checkbox"/>	Are workers trained in the use of the PPE required?	
<input type="checkbox"/>	<input type="checkbox"/>	Are personnel exposed to vehicular or equipment traffic, including signal persons, spotters or inspectors required to vests or apparel marked with a reflective or high visibility material?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a noise hazard? If yes, hearing protection will be required.	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a splash or splatter hazard? Face shields or goggles will be required.	
<input type="checkbox"/>	<input type="checkbox"/>	Will personnel be working in or over water? Personnel Floatation devices will be required.	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a welding hazard? Welding helmet and leathers will be required. Is there a cutting torch hazard? Goggles and protective clothing will be required.	
<input type="checkbox"/>	<input type="checkbox"/>	Is each person on a walking/working surface with an unprotected side or edge which is 6 feet (1.8 m) or more above a lower level protected from falling by the use of guardrail systems, safety net systems or personal fall arrest systems? See WESTON FLD 25 (Note General Industry standard is four feet).	
<input type="checkbox"/>	<input type="checkbox"/>	Guardrail systems are used as primary protection whenever feasible. Guardrail construction meets criteria in 29 CFR 1926.502(b).	
<input type="checkbox"/>	<input type="checkbox"/>	Personal fall arrest systems (PFAS) are inspected and appropriate for use.	
<input type="checkbox"/>	<input type="checkbox"/>	Ropes and straps (webbing) used in lanyards, lifelines, and strength components of body belts and body harnesses are from synthetic fibers.	
<input type="checkbox"/>	<input type="checkbox"/>	Safety nets and safety net installations are constructed, tested and used according to 29 CFR 1926.502.c	
<input type="checkbox"/>	<input type="checkbox"/>	Is respirator use required? See WESTON Respiratory Protection Program	
<input type="checkbox"/>	<input type="checkbox"/>	Persons using respiratory protection have been successfully medically cleared, trained, and fit tested.	
<input type="checkbox"/>	<input type="checkbox"/>	Respirators are used according to the manufacturer's instructions, regulatory requirements, selection criteria, and health and safety plan provisions.	
<input type="checkbox"/>	<input type="checkbox"/>	For Level C operations with organic vapor contamination, is the cartridge change-out schedule documented?	
<input type="checkbox"/>	<input type="checkbox"/>	Is breathing certified as Grade D, or better, and certification available on-site?	



MACHINERY AND MECHANIZED EQUIPMENT
29 CFR 1926 Subparts N, O, CC and DD. EM 385-1-1, Sections 16, 17, 18

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Are inspections of machinery by a competent person established?	
<input type="checkbox"/>	<input type="checkbox"/>	Is equipment inspected daily before its next use?	
<input type="checkbox"/>	<input type="checkbox"/>	Equipment inspection reports are reviewed, followed-up on negative findings and records of inspections are maintained?	
<input type="checkbox"/>	<input type="checkbox"/>	Machinery or equipment found to be unsafe is taken out of service until the unsafe condition has been corrected.	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a preventive maintenance program established?	
<input type="checkbox"/>	<input type="checkbox"/>	Are operators of equipment qualified and authorized to operate?	
<input type="checkbox"/>	<input type="checkbox"/>	Is all self-propelled construction and industrial equipment equipped with a reverse signal alarm?	
<input type="checkbox"/>	<input type="checkbox"/>	Are seats or equal protection provided for each person required to ride on equipment. Are seatbelts installed and worn on motor vehicles, as appropriate.	
<input type="checkbox"/>	<input type="checkbox"/>	All equipment with windshields is equipped with powered wipers. If fogging or frosting is possible, operable defogging or defrosting devices are required.	
<input type="checkbox"/>	<input type="checkbox"/>	Internal combustion engines are not operated in enclosed areas unless adequate ventilation is made. Air monitoring is conducted to assure safe working conditions.	
<input type="checkbox"/>	<input type="checkbox"/>	Is each bulldozer, scraper, dragline, crane, motor grader, front-end loader, mechanical shovel, backhoe, or similar equipment equipped with at least one dry chemical or carbon dioxide fire extinguisher with a minimum rating of 5-B:C?	
<input type="checkbox"/>	<input type="checkbox"/>	Will cranes or other lifting devices be used? If so, are the following documents available on site: 1) a copy of the operating manual, 2) load rating chart, 3) log book, 4) a copy of the last annual inspection and 5) the initial on-site inspection?	
<input type="checkbox"/>	<input type="checkbox"/>	Do operators have certificates of training to operate the type of crane(s) to be used?	
<input type="checkbox"/>	<input type="checkbox"/>	Is a signal person provided when the point of operation is not in full view of the vehicle, machine, or equipment operator? When manual (hand) signals are used, is only one person designated to give signals to the operator?	
<input type="checkbox"/>	<input type="checkbox"/>	Signal persons back one vehicle at a time. While under the control of a signal person, drivers do not back or maneuver until directed. Drivers stop if contact with the signal person is lost.	
<input type="checkbox"/>	<input type="checkbox"/>	Is a critical lift plan prepared by a competent person whenever: a lift is not routine, or a lift exceeds 75% of a crane's capacity, a lift results in the load being out of the operator's line of sight, or a lift involves more than one crane, a man basket is used, or the operator believes there is a need for a critical lift plan.	
<input type="checkbox"/>	<input type="checkbox"/>	Fork Lifts (Powered Industrial Trucks) - Will forklifts be used on site?	
<input type="checkbox"/>	<input type="checkbox"/>	All forklifts meet the requirements of design, construction, stability, inspection, testing, maintenance, and operation as indicated in ANSI/ASME B56.1 Safety Standards for Low Lift and High Lift Trucks.	
<input type="checkbox"/>	<input type="checkbox"/>	Do forklift operators have certificates of training?	
<input type="checkbox"/>	<input type="checkbox"/>	Are pile driving operations conducted according to EM 385-1-1, Section 16.L?	
<input type="checkbox"/>	<input type="checkbox"/>	Is drilling equipment operated, inspected, and maintained as specified in the manufacturer's operating manual? Is a copy of the manual available at the work-site? See also the Drilling Safety Guide in the Safety Officers Field Manual.	
<input type="checkbox"/>	<input type="checkbox"/>	Are flag persons provided when operations or equipment on or near a highway expose workers to traffic hazards? Do flag persons and persons working in proximity to a road wear high visibility vests? Are persons exposed to highway vehicle traffic protected by signs in all directions warning of the presence of the flag persons and the work? Do signs and distances from the work zone conform to federal and local regulations?	



MOTOR VEHICLES
29 CFR 1926 Subpart O. EM 385-1-1, Section 18

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Motor vehicle operators have a valid permit, license, or certification of ability for the equipment being operated.	
<input type="checkbox"/>	<input type="checkbox"/>	Inspection, maintenance, and repair is according to manufacturer's requirements by qualified persons.	
<input type="checkbox"/>	<input type="checkbox"/>	Vehicles are inspected on a scheduled maintenance program.	
<input type="checkbox"/>	<input type="checkbox"/>	Vehicles not in safe operating condition are removed from service until defects are corrected.	
<input type="checkbox"/>	<input type="checkbox"/>	Glass in windshields, windows, and doors is safety glass. Any cracked or broken glass is replaced.	
<input type="checkbox"/>	<input type="checkbox"/>	Seatbelts are installed and worn.	
<input type="checkbox"/>	<input type="checkbox"/>	The number of passengers in passenger-type vehicles does not exceed the number which can be seated.	
<input type="checkbox"/>	<input type="checkbox"/>	Trucks used to transport personnel have securely anchored seating, a rear end gate, and a guardrail.	
<input type="checkbox"/>	<input type="checkbox"/>	No person is permitted to ride with arms or legs outside of a vehicle body; in a standing position on the body; on running boards; seated on side fenders, cabs, cab shields, rear of the truck or on the load.	
<input type="checkbox"/>	<input type="checkbox"/>	ATV operators possess a valid state driver's license, have completed an ATV training course prior to operation of the vehicle, and wear appropriate protective equipment such as helmets, boots, and gloves.	

DRAFT



EXCAVATING AND TRENCHING
29 CFR 1926 Subpart P. EM 385-1-1, Section 25

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Has the known or estimated location of utility installations such as sewer, telephone, fuel, electric, water lines, or any other underground installations that may be expected to be encountered during excavation been determined before excavation? Have utility locations been verified by designated state services according to state regulations? Has the client provided clearance where state jurisdiction doesn't apply?	
<input type="checkbox"/>	<input type="checkbox"/>	Have overhead utilities in excavation areas been identified and either de-energized, shielded or barricaded so excavating equipment will not come within 10 feet?	
<input type="checkbox"/>	<input type="checkbox"/>	Are inspections of the excavation, the adjacent areas, and protective systems made daily and as necessary by a competent person?	
<input type="checkbox"/>	<input type="checkbox"/>	Are Protective systems in place as prescribed by the competent person?	
<input type="checkbox"/>	<input type="checkbox"/>	Is material removed from excavations managed so it will not overwhelm the protective systems?	
<input type="checkbox"/>	<input type="checkbox"/>	Are barriers provided between excavations and walkways?	
<input type="checkbox"/>	<input type="checkbox"/>	Are excavations by roadways barricaded to warn vehicles of presence or to prevent them from falling in?	
<input type="checkbox"/>	<input type="checkbox"/>	Is there a means of exit from the excavation every 25 feet?	
<input type="checkbox"/>	<input type="checkbox"/>	Is air monitoring required? If yes, Is it performed?	

CONFINED SPACES
29 CFR 1910 Subpart J. EM 385-1-1, Section 6

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Is there a Confined Space Entry Program in place?	
<input type="checkbox"/>	<input type="checkbox"/>	Are the confined Spaces identified and labeled?	
<input type="checkbox"/>	<input type="checkbox"/>	Will the Confined Spaces be entered?	
<input type="checkbox"/>	<input type="checkbox"/>	Is appropriate entry documentation used and on-file?	



ELECTRICAL
29 CFR 1926 Subpart K. EM 385-1-1, Section 11

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Are electrical installations made according to the National Electrical Code and applicable local codes?	
<input type="checkbox"/>	<input type="checkbox"/>	Qualified electricians make all connections and perform all work within 10 feet of live electric equipment.	
<input type="checkbox"/>	<input type="checkbox"/>	Location of underground, overhead, under floor, behind wall electrical lines is known and communicated. Lines are documented by qualified person as de-energized where necessary.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers understand they must not work near live parts of electric circuits, unless they are qualified as required by OSHA or are protected by de-energizing and grounding the parts, guarding the parts by insulation, or other effective means?	
<input type="checkbox"/>	<input type="checkbox"/>	Employees who regularly work on or around energized electrical equipment or lines are instructed in the cardiopulmonary resuscitation (CPR) methods.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers are prohibited from working alone on energized lines or equipment over 600 volts.	
<input type="checkbox"/>	<input type="checkbox"/>	Are Ground-fault circuit interrupters (GFCI's) or is ground fault circuit protection provided to protect employees from ground-fault hazards for all 115 – 120 Volt, 15 and 20 amp receptacle outlets which are not a part of the permanent wiring of a building or structure at construction sites?	
<input type="checkbox"/>	<input type="checkbox"/>	Circuit breakers are labeled.	
<input type="checkbox"/>	<input type="checkbox"/>	Circuit breaker and all cabinets with exposed electric conductors are kept tightly closed.	
<input type="checkbox"/>	<input type="checkbox"/>	Unused openings (including conduit knockouts) in electrical enclosures and fittings are closed with appropriate covers, plugs, or plates.	
<input type="checkbox"/>	<input type="checkbox"/>	Sufficient access and working space is provided and maintained about all electrical equipment to permit ready and safe operations and maintenance.	
<input type="checkbox"/>	<input type="checkbox"/>	Motors are located within sight of their controllers or controller disconnecting means are capable of being locked in the pen position or is a separate disconnecting means installed in the circuit within sight of the motor.	
<input type="checkbox"/>	<input type="checkbox"/>	Are visual inspections of extension cords and cord-and plug-connected equipment conducted daily? Is equipment found damaged or defective tagged and removed from service, and not used until repaired?	
<input type="checkbox"/>	<input type="checkbox"/>	Wet Areas - Is portable lighting used in wet or conductive locations, such as tanks or boilers operated at no more than 12 volts and protected by GFCIs.	
<input type="checkbox"/>	<input type="checkbox"/>	Are electrical installations in hazardous areas to NEC?	
<input type="checkbox"/>	<input type="checkbox"/>	Metal ladders and tools including tape measures or fabric with metal thread are prohibited where contact with energized electrically parts is possible.	
<input type="checkbox"/>	<input type="checkbox"/>	All extension cords are the three-wire type, designed and rated for hard or extra hard usage?	
<input type="checkbox"/>	<input type="checkbox"/>	Worn or frayed electrical cords or cables are taken out of service. Fastening with staples, hanging from nails or suspending extension cords by wire is prohibited.	
<input type="checkbox"/>	<input type="checkbox"/>	Electric wire/flexible cord passing through work areas is protected from damage such as foot traffic, vehicles, sharp corners, projections and pinching? Flexible cords and cables passing through holes are protected by bushings or fittings?	
<input type="checkbox"/>	<input type="checkbox"/>	Before an employee or contractor performs any service or maintenance on a system where the unexpected energizing, start up, or release of kinetic or stored energy could occur and cause injury or damage, the system is to be isolated. Only authorized persons may apply and remove lockouts and tags.	
<input type="checkbox"/>	<input type="checkbox"/>	Contractors planning to use hazardous energy control procedures submit their hazardous energy control plan to the WESTON site safety officer or designee before implementing lockout/tagout procedures.	
<input type="checkbox"/>	<input type="checkbox"/>	There is a site specific hazardous energy control plan that clearly and specifically outlines the scope, purpose, authorization, rules and techniques to be used for the control of hazardous energy.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers possess the knowledge and skills required for the safe application, usage, and removal of energy controls.	



WELDING AND CUTTING
29 CFR 1926 Subpart J. EM 385-1-1, Section 10

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Prior to performing welding, cutting or any other heat or spark producing activity, an assessment of the area is made by a competent person to identify combustible materials and potential sources of flammable atmospheres.	
<input type="checkbox"/>	<input type="checkbox"/>	Welders, cutters and their supervisors are trained in the safe operation of their equipment, safe welding and cutting practices, hot work permit requirements, and fire protection.	
<input type="checkbox"/>	<input type="checkbox"/>	Welding and cutting equipment is inspected daily before use. Unsafe equipment is taken out of use, replaced, or repaired.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers and the public are shielded from welding rays, flashes, sparks, molten metal, and slag.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees performing welding, cutting, or heating are protected by PPE appropriate for the hazards (e.g., respiratory, vision and skin protection).	
<input type="checkbox"/>	<input type="checkbox"/>	Compatible fire extinguishing equipment is provided in the immediate vicinity of welding or cutting operations.	
<input type="checkbox"/>	<input type="checkbox"/>	Drums, tanks, or other containers and equipment which have contained hazardous materials shall be thoroughly cleaned before welding or cutting. Cleaning shall be performed in accordance with NFPA 327, <u>Cleaning or Safeguarding Small Tanks and Containers</u> , ANSI/AWS F4.1, <u>Recommended Safe Practices for the Preparation for Welding and Cutting of Containers That Have Held Hazardous Substances</u> , and applicable health and safety plan requirements.	

HAND AND POWER TOOL SAFETY
29 CFR 1926 Subpart I. EM 385-1-1, Section 13

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Power tools are from a manufacturer listed by a nationally recognized testing laboratory for the specific application for which they are to be used.	
<input type="checkbox"/>	<input type="checkbox"/>	Hand & power tools are inspected, maintained, tested, and determined to be in safe operating condition before use.	
<input type="checkbox"/>	<input type="checkbox"/>	Tools found to be unsafe are not used, tagged and repaired or destroyed.	
<input type="checkbox"/>	<input type="checkbox"/>	Users of tools are trained in safe use.	
<input type="checkbox"/>	<input type="checkbox"/>	Electrical tools have cords and plug connections in good repair.	
<input type="checkbox"/>	<input type="checkbox"/>	Electrical tools are effectively grounded or approved double insulated.	
<input type="checkbox"/>	<input type="checkbox"/>	Reciprocating, rotating, and moving parts of equipment are guarded if they may be accessed by employees or they otherwise create a hazard.	
<input type="checkbox"/>	<input type="checkbox"/>	Safety clips/retainers are installed and maintained on pneumatic impact tool connections.	
<input type="checkbox"/>	<input type="checkbox"/>	Chain saws have an automatic chain brake or anti-kickback device.	
<input type="checkbox"/>	<input type="checkbox"/>	Pneumatic and hydraulic hoses and fittings are inspected regularly.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees who operate powder actuated tools are trained and carry valid operator's cards.	
<input type="checkbox"/>	<input type="checkbox"/>	Powder activated tools are stored in individual locked containers, when not in use and are not loaded until ready to use.	
<input type="checkbox"/>	<input type="checkbox"/>	Powder actuated tools are inspected for obstructions or defects daily before use.	
<input type="checkbox"/>	<input type="checkbox"/>	Powder actuated tool operators have appropriate PPE.	



RIGGING
29 CFR 1926 Subpart H. EM 385-1-1, Section 15

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Rigging equipment is inspected as specified by the manufacturer, by a qualified person, before use on each shift and as necessary to assure that it is safe.	
<input type="checkbox"/>	<input type="checkbox"/>	Defective equipment is removed from service.	
<input type="checkbox"/>	<input type="checkbox"/>	Rigging not in use is removed from the work area, properly stored, and maintained in good condition.	
<input type="checkbox"/>	<input type="checkbox"/>	Wire rope removed from service for defects is cut up or plainly marked as unfit for use as rigging.	
<input type="checkbox"/>	<input type="checkbox"/>	The number of saddle clips used to form eyes in wire rope conforms with Table H-20, are spaced evenly and the saddles are on the live side.	
<input type="checkbox"/>	<input type="checkbox"/>	Chain rigging has a tag clearly indicating load limits, is inspected before initial use, then weekly, and is of alloyed metal.	
<input type="checkbox"/>	<input type="checkbox"/>	Fiber rope rigging is not used if it is frozen or has been subject to acids or excessive heat.	
<input type="checkbox"/>	<input type="checkbox"/>	Slings and their fittings and fastenings are inspected before use on each shift and as needed during use.	
<input type="checkbox"/>	<input type="checkbox"/>	Drums, sheaves, and pulleys on rigging hardware are smooth and free of surface defects that can damage rigging.	

MATERIAL HANDLING, STORAGE, AND DISPOSAL
29 CFR 1926 Subpart H. EM 385-1-1, Section 14

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Employees are trained in and use safe lifting techniques.	
<input type="checkbox"/>	<input type="checkbox"/>	Materials are not moved or suspended over workers unless positive precautions have been taken to protect workers.	
<input type="checkbox"/>	<input type="checkbox"/>	Conveyors are constructed, inspected, & maintained by qualified persons according to manufacturer's recommendations.	
<input type="checkbox"/>	<input type="checkbox"/>	All conveyors are to be equipped with emergency stopping devices.	
<input type="checkbox"/>	<input type="checkbox"/>	Hazardous exposed moving machine parts are guarded mechanically, electrically or by location.	
<input type="checkbox"/>	<input type="checkbox"/>	Controls are clearly marked and/or labeled to indicate the function controlled.	
<input type="checkbox"/>	<input type="checkbox"/>	Taglines are used for suspended loads where the movement may be hazardous to persons.	
<input type="checkbox"/>	<input type="checkbox"/>	Material in storage is protected from falling or collapse by effective stacking, blocking, cribbing, etc.	
<input type="checkbox"/>	<input type="checkbox"/>	Walkways and aisles are to be kept clear.	
<input type="checkbox"/>	<input type="checkbox"/>	Materials are not stored on scaffolds or runways in excess of normal placement or in excess of safe load limits.	
<input type="checkbox"/>	<input type="checkbox"/>	Work areas and means of access are maintained safe and orderly.	
<input type="checkbox"/>	<input type="checkbox"/>	Tools, materials, extension cords, hoses or debris do not cause tripping or other hazards.	
<input type="checkbox"/>	<input type="checkbox"/>	Storage and construction sites are kept free from the accumulation of combustible materials.	
<input type="checkbox"/>	<input type="checkbox"/>	Waste materials and rubbish are placed in containers or, if appropriate, in piles. Waste materials are disposed of in accord with applicable local, state, or federal requirements.	



**FLOATING PLANT AND MARINE ACTIVITIES
29 CFR 1926 Subpart O. EM 385-1-1 Section 19**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Floating plants that are regulated by the USCG have current inspections and certificates.	
<input type="checkbox"/>	<input type="checkbox"/>	Before any floating plant is brought to the job site and placed in service it is inspected and determined to be in safe operating condition	
<input type="checkbox"/>	<input type="checkbox"/>	Periodic inspections are made such that safe operating conditions are maintained. Strict compliance with EM 385-1-1, Section 19 is expected.	
<input type="checkbox"/>	<input type="checkbox"/>	Plans are in place for removing or securing the plant and evacuation of personnel endangered by severe weather and other marine emergencies such as; fire, flooding, man overboard, hazardous materials incidents, etc.	
<input type="checkbox"/>	<input type="checkbox"/>	Means of access are properly secured, guarded, and maintained free of slipping and tripping hazards.	
<input type="checkbox"/>	<input type="checkbox"/>	Dredging operations follow guidelines as established in EM 385-1-1, Section 19.D.	

**PRESSURIZED EQUIPMENT AND SYSTEMS
29 CFR 1926 Subparts I, F. EM 385-1-1, Section 20**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Pressurized equipment and systems are inspected before being placed into service.	
<input type="checkbox"/>	<input type="checkbox"/>	Pressurized equipment or systems found to be unsafe are tagged "Out of Service-Do Not Use".	
<input type="checkbox"/>	<input type="checkbox"/>	Systems and equipment are operated, inspected, and maintained by qualified, designated personnel.	
<input type="checkbox"/>	<input type="checkbox"/>	Safe clearance, lockout/tagout procedures are followed as appropriate during maintenance or repair.	
<input type="checkbox"/>	<input type="checkbox"/>	Air hose, pipes, fittings are pressure-rated for the activity. Defective hoses are removed from service.	
<input type="checkbox"/>	<input type="checkbox"/>	Hoses aren't laid over ladders, steps, scaffolds, or walkways in a manner that creates a tripping hazard.	
<input type="checkbox"/>	<input type="checkbox"/>	The use of compressed air for personal cleaning is prohibited. The use of compressed air for other cleaning is restricted to less than 30 psig.	
<input type="checkbox"/>	<input type="checkbox"/>	Compressed gas cylinders are stored in well-ventilated locations.	
<input type="checkbox"/>	<input type="checkbox"/>	Cylinders in storage are separated from flammable or combustible liquids and from easily ignitable materials by at least 40 feet or by a minimum five feet tall, ½ -hour fire resistive partition.	
<input type="checkbox"/>	<input type="checkbox"/>	Stored cylinders containing oxidizing gases are separated from fuel gas cylinders by at least 20 feet or by a minimum five feet tall, ½ -hour fire resistive partition.	
<input type="checkbox"/>	<input type="checkbox"/>	Cylinder valve caps are in place when cylinders are in storage, in transit, or a regulator is not in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Compressed gas cylinders in service are secured in substantial fixed or portable racks or hand trucks.	
<input type="checkbox"/>	<input type="checkbox"/>	Oxygen cylinders and fittings are kept away from, and free from oil and grease.	
<input type="checkbox"/>	<input type="checkbox"/>	Cylinder Storage areas are posted with the names of the gases in storage and with signs indicating "No Smoking or Open Flame".	
<input type="checkbox"/>	<input type="checkbox"/>	Cylinders are to be stored such that mechanical and corrosion damage is avoided. Cylinders are not to be stored in areas required as an egress path.	
<input type="checkbox"/>	<input type="checkbox"/>	Cylinders may be stored in the open outdoors, however, they must be protected from the ground to prevent corrosion and must be protected from temperatures that may exceed 125 degrees F.	



WORK PLATFORMS/SCAFFOLDS
29 CFR 1926 Subparts L, M, N. EM 385-1-1 Sections 21, 22

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Work platforms are erected, used, inspected, tested, maintained and repaired according to manufacturer's requirements.	
<input type="checkbox"/>	<input type="checkbox"/>	Construction, inspection, and disassembly of scaffolds is under the direction of a competent person.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers on scaffolding have been trained by a qualified person.	
<input type="checkbox"/>	<input type="checkbox"/>	Scaffolds are erected on a firm and level surface and are square and plumb.	
<input type="checkbox"/>	<input type="checkbox"/>	Scaffolds are not loaded in excess of rated capacity.	
<input type="checkbox"/>	<input type="checkbox"/>	Working levels of work platforms are fully planked or decked.	
<input type="checkbox"/>	<input type="checkbox"/>	Planks are in good condition and free from obvious defects.	
<input type="checkbox"/>	<input type="checkbox"/>	Fabricated frame scaffolding four times higher than the base width is secured to building/structure according to manufacturer's instruction and/or OSHA requirements.	
<input type="checkbox"/>	<input type="checkbox"/>	Working platforms of scaffolding over ten feet in height have guard rails meeting OSHA specifications. Fall protection is suggested at four feet or greater.	
<input type="checkbox"/>	<input type="checkbox"/>	Scaffolding/work platforms are accessed by means of a properly secured ladder or equivalent. Built on ladders conform to scaffold ladder requirements. Climbing of braces is not allowed.	
<input type="checkbox"/>	<input type="checkbox"/>	Crane supported work platforms are designed and used in accordance with OSHA standards.	
<input type="checkbox"/>	<input type="checkbox"/>	Elevating work platforms are operated, inspected, and maintained according to the equipment operations manual.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees working in aerial lifts remain firmly on the floor of the basket. Employees use fall protection while in an aerial lift basket.	



**WALKING AND WORKING SURFACES AND STAIRS
29 CFR 1926 Subparts L, M, X. EM 385-1-1, Sections 21, 22, 24**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Work areas are clean, sanitary, and orderly	
<input type="checkbox"/>	<input type="checkbox"/>	Work surfaces are kept dry or appropriate means are taken to assure the surfaces are slip-resistant	
<input type="checkbox"/>	<input type="checkbox"/>	Accumulations of combustible dust are routinely removed.	
<input type="checkbox"/>	<input type="checkbox"/>	Aisles and passageways are kept clear and marked as appropriate.	
<input type="checkbox"/>	<input type="checkbox"/>	There is safe clearance for walking in aisles where motorized or mechanical handling equipment is operating.	
<input type="checkbox"/>	<input type="checkbox"/>	Materials or equipment is stored in such a way that sharp projections will not interfere with the walkway.	
<input type="checkbox"/>	<input type="checkbox"/>	Changes of direction or elevation are readily identifiable.	
<input type="checkbox"/>	<input type="checkbox"/>	Aisles or walkways that pass near moving or operating machinery, welding operations or similar operations are arranged so employees will not be subjected to potential hazards.	
<input type="checkbox"/>	<input type="checkbox"/>	Standard guardrails are provided wherever aisle or walkway surfaces are elevated more than 30 inches above any adjacent floor or the ground and bridges provided where workers must cross over conveyors and similar hazards.	
<input type="checkbox"/>	<input type="checkbox"/>	There are standard stair rails or handrails on all stairways having four or more risers or with an elevation of 30 or more inches.	
<input type="checkbox"/>	<input type="checkbox"/>	Stairways are at least 22 inches wide. (General Industry Standard)	
<input type="checkbox"/>	<input type="checkbox"/>	Stairs angle no more than 50 and no less than 30 degrees, risers are uniform from top to bottom (plus or minus 1/4 inch) and are provided with a surface that renders them slip resistant.	
<input type="checkbox"/>	<input type="checkbox"/>	Stairway handrails are not less than 36 inches above the leading edge of stair treads and have at least 3 inches of clearance between the handrails and the wall or surface they are mounted on.	
<input type="checkbox"/>	<input type="checkbox"/>	Where doors or gates open directly on a stairway, there is a platform provided so the swing of the door does not reduce the width of the platform to less than 20 inches.	
<input type="checkbox"/>	<input type="checkbox"/>	Where stairs or stairways exit directly into any area where vehicles may be operated, there are adequate barriers and warnings provided to prevent employees stepping into the path of traffic.	
<input type="checkbox"/>	<input type="checkbox"/>	Signs are posted showing the load capacity of elevated storage areas.	
<input type="checkbox"/>	<input type="checkbox"/>	An appropriate means of access and egress is provided for surfaces with 19 or more inches of elevation change.	
<input type="checkbox"/>	<input type="checkbox"/>	Material on elevated surfaces is minimized, with that necessary for immediate work requirements piled, stacked, or racked in a manner to prevent it from tipping, falling, collapsing, rolling, or spreading.	

**FLOOR AND WALL HOLES AND OPENINGS
29 CFR 1926 Subpart M. EM 385-1-1, Section 24**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Floor and roof openings that persons can walk into or fall through are guarded by a physical barrier or covered.	
<input type="checkbox"/>	<input type="checkbox"/>	Holes (defined as equal to or greater than 2 inches in least dimension) where person could trip must be covered/protected.	
<input type="checkbox"/>	<input type="checkbox"/>	Unprotected sides and edges on a walking/working surface six feet or more (note four feet in General Industry) are protected by guardrail system, safety net, or Personal Fall Arrest System (PFAS).	
<input type="checkbox"/>	<input type="checkbox"/>	Unused portions of service pits and pits not actually in use are either covered or protected by guardrails or equivalent.	
<input type="checkbox"/>	<input type="checkbox"/>	Coverings for holes or other openings must be constructed of sufficient strength to support any anticipated load, must be secured in place to prevent accidental removal or displacement, and must be marked indicating purpose (e.g., stenciled "Hole" or painted contrasting color to surroundings).	



LADDERS
29 CFR 1926 Subpart X. EM 385-1-1, Section 21

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Portable ladders are used for their designed purpose only.	
<input type="checkbox"/>	<input type="checkbox"/>	Portable ladders are examined for defects prior to, and after use.	
<input type="checkbox"/>	<input type="checkbox"/>	Ladders found to be defective are clearly tagged to indicate "DO NOT USE" if repairable, or destroyed immediately if no repair is possible.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers are trained in hazards associated with ladder use and how to inspect ladders.	
<input type="checkbox"/>	<input type="checkbox"/>	Ladders have secure footing provided by a combination of safety feet, top of ladder tie-offs and mud cills or a person holding the ladder to prevent slipping.	
<input type="checkbox"/>	<input type="checkbox"/>	The handrails of a straight ladder used to get from one level to another extend at least 36 inches above the landing.	
<input type="checkbox"/>	<input type="checkbox"/>	Ladders conform to construction criteria of ANSI Standards A-14.1 and A-14.2.	
<input type="checkbox"/>	<input type="checkbox"/>	Wooden ladders are not painted with an opaque covering such that signs of flaws, cracks, or drying are obscured.	
<input type="checkbox"/>	<input type="checkbox"/>	Fixed ladders are constructed and used according to OSHA Standards, 29 CFR 1910.27 and ANSI A-14.3.	
<input type="checkbox"/>	<input type="checkbox"/>	Rungs, cleats or steps, and side rails that may be used for handholds when climbing, offer adequate gripping surface and are free of splinters, splinters or burrs, and substances that could cause slipping.	
<input type="checkbox"/>	<input type="checkbox"/>	Fixed ladders of greater than 24 feet have cages or other approved fall protection devices. (Note General Industry is 20 feet).	
<input type="checkbox"/>	<input type="checkbox"/>	Where fall protection is provided by ladder safety systems (body belts or harnesses, lanyards and braking devices with safety lines or rails), systems meet the requirements of and are used in accordance with WESTON Fall Protection Standard Practices and are compatible with construction of the ladder system.	

DEMOLITION
29 CFR 1926 Subpart T. EM 385-1-1, Section 23

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Prior to initiating demolition activities an engineering survey (by a competent person) and a demolition plan (by a competent person) is completed.	
<input type="checkbox"/>	<input type="checkbox"/>	All employees engaged in demolition activities are instructed in the demolition plan.	
<input type="checkbox"/>	<input type="checkbox"/>	It has been determined through the engineering survey and outlined in the plan, if any hazardous materials or conditions (e.g., asbestos, lead, utility connections, etc.) exist. Such hazards are controlled or eliminated before demolition is started.	
<input type="checkbox"/>	<input type="checkbox"/>	Continued inspections, by a competent person, are conducted to ensure safe employee working conditions.	



TREE MAINTENANCE AND REMOVAL
29 CFR 1910 Subpart R. EM 385-1-1, Section 31

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Tree maintenance or removal is done is under the direction of a qualified person.	
<input type="checkbox"/>	<input type="checkbox"/>	Tree work, in the vicinity of charged electric lines, is by trained persons qualified to work with electricity and tree work. Appropriate distances are maintained for all workers who are not qualified.	
<input type="checkbox"/>	<input type="checkbox"/>	Equipment is inspected, maintained, repaired, and used in accordance with the manufacturer's directions.	
<input type="checkbox"/>	<input type="checkbox"/>	Prior to felling actions are planned to include clearing of the area to permit safe working conditions and escape.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees must be trained in the safe operation of all equipment.	
<input type="checkbox"/>	<input type="checkbox"/>	All equipment and machinery is inspected and determined safe prior to use.	
<input type="checkbox"/>	<input type="checkbox"/>	Work is performed under requirements of FLD 43.	

BLASTING
29 CFR 1926 Subpart U. EM 385-1-1, Section 29

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	A blasting safety plan is developed prior to bringing explosives on-site.	
<input type="checkbox"/>	<input type="checkbox"/>	The transportation, handling, storage, and use of explosives, blasting agents, and blasting equipment must be directed and supervised by a person with proven experience and ability in blasting operations. Licensing of person is verified.	
<input type="checkbox"/>	<input type="checkbox"/>	Blasting operations in or adjacent to cofferdams, piers, underwater structures, buildings, structures, or other facilities must be carefully planned with full consideration to potential vibration and damage.	

HAZARDOUS, TOXIC, AND RADIOACTIVE WASTE AND UNDERGROUND STORAGE TANK (UST) ACTIVITIES
29 CFR 1926 Subpart D. EM 385-1-1, Section 28

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	All construction activities performed with known or potential exposure to hazardous waste are conducted in accordance with Hazardous Waste Operations and Emergency Response requirements.	



**CONCRETE and MASONRY CONSTRUCTION
29 CFR 1926 Subpart Q. EM 385-1-1, Section 27**

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Construction loads are not placed on a concrete or masonry structure or portion of a concrete or masonry structure unless the employer determines, based on information from a person who is qualified in structural design, that the structure or portion of the structure is capable of supporting the loads.	
<input type="checkbox"/>	<input type="checkbox"/>	Employees are not permitted to work above or in positions exposed to protruding reinforcing steel or other impalement hazards unless provisions have been made to control the hazard.	
<input type="checkbox"/>	<input type="checkbox"/>	Sections of concrete conveyances and airlines under pressure are secured with wire rope (or equivalent material) in addition to the regular couplings or connections.	
<input type="checkbox"/>	<input type="checkbox"/>	Structural and reinforcing steel for walls, piers, columns, and similar vertical structures is supported and/or guyed to prevent overturning or collapse	
<input type="checkbox"/>	<input type="checkbox"/>	All form-work, shoring, and bracing is designed, fabricated, erected, supported, braced, and maintained so it will safely support all vertical and lateral loads that may be applied until the loads can be supported by the structure.	
<input type="checkbox"/>	<input type="checkbox"/>	Shoring equipment is inspected prior to erection to determine that it is specified in the shoring design. Any equipment found to be damaged is not used.	
<input type="checkbox"/>	<input type="checkbox"/>	Erected shoring equipment is inspected immediately prior to, during, and immediately after the placement of concrete. Any shoring equipment that is found to be damaged, displaced, or weakened is immediately reinforced or re-shored.	
<input type="checkbox"/>	<input type="checkbox"/>	Shoring, vertical slip forms and jacks conform with requirements of Section 27.B.08-13 of USACE EM 385-1-1.	
<input type="checkbox"/>	<input type="checkbox"/>	Forms and shores (except those on slab or grade and slip forms) are not removed until the individual responsible for forming and/or shoring determines that the concrete has gained sufficient strength to support its weight and all superimposed loads.	
<input type="checkbox"/>	<input type="checkbox"/>	Precast concrete members are adequately supported to prevent overturning or collapse until permanent connections are complete	
<input type="checkbox"/>	<input type="checkbox"/>	No one is permitted under pre-cast concrete members being lifted or tilted into position except employees required for the erection of those members.	
<input type="checkbox"/>	<input type="checkbox"/>	Lift slab operations are planned and designed by a registered engineer or architect.	
<input type="checkbox"/>	<input type="checkbox"/>	Hydraulic jacks used in lift slab construction have a safety device that causes the jacks to support the load in any position if the jack malfunctions	
<input type="checkbox"/>	<input type="checkbox"/>	No one is permitted under the slab during jacking operations.	
<input type="checkbox"/>	<input type="checkbox"/>	A limited access zone is established whenever a masonry wall is being constructed.	
<input type="checkbox"/>	<input type="checkbox"/>	Fall protection is provided to masonry workers exposed to falls of 6 feet or more.	



STEEL ERECTION
29 CFR 1926 Subpart R. EM 385-1-1, Section 27

YES	NO		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	Impact wrenches have a locking device for retaining the socket. Containers shall be provided for storing or carrying rivets, bolts, and drift pins, and secured against accidental displacement when aloft.	
<input type="checkbox"/>	<input type="checkbox"/>	Structural and reinforcing steel for walls, piers, columns, and similar vertical structures shall be guyed and supported to prevent collapse	
<input type="checkbox"/>	<input type="checkbox"/>	No loading is placed upon steel joists until all bridging is completely and permanently installed.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers are provided fall protection whenever they are exposed to falls of 1.8 m (6 ft) or more (EM 385-1-1).	
<input type="checkbox"/>	<input type="checkbox"/>	Temporary flooring in skeleton steel erection conforms with Section 27.F of USACE 385-1-1	

ROOFING
29 CFR 1926 Subpart M. EM 385-1-1, Sections 21, 22, 24, 27

Yes	No		COMMENT
<input type="checkbox"/>	<input type="checkbox"/>	In the construction, maintenance, repair, and demolition, of roofs, fall protection systems is provided that will prevent personnel from slipping and falling from the roof and prevent personnel on lower levels from being struck by falling objects	
<input type="checkbox"/>	<input type="checkbox"/>	On all roofs greater than 4.8 m (16 ft) in height, a hoisting device, stairways, or progressive platforms are furnished for supplying materials and equipment.	
<input type="checkbox"/>	<input type="checkbox"/>	Roofing materials and accessories that could be moved by the wind, including metal roofing panels, that are on the roof and unattached are secured when wind speeds are greater than, or are anticipated to exceed, 10 mph.	
<input type="checkbox"/>	<input type="checkbox"/>	Level, guarded platforms are provided at the landing area on the roof.	
<input type="checkbox"/>	<input type="checkbox"/>	When their use is permitted, warning line systems comply with USACE Section 27.07 of EM 385-1-1.	
<input type="checkbox"/>	<input type="checkbox"/>	Workers involved in roof-edge materials handling or working in a storage area located on a roof with a slope -/= to four vertical to twelve horizontal and with edges 6 ft or more above lower levels are protected by the use of a guardrail, safety net, or personal fall arrest system along all unprotected roof sides and edges of the area.	



ENVIRONMENTAL COMPLIANCE

Yes	No		Comments
<input type="checkbox"/>	<input type="checkbox"/>	Environmental Compliance and Waste Management Plan on file.	
<input type="checkbox"/>	<input type="checkbox"/>	Waste Determination Made.	
<input type="checkbox"/>	<input type="checkbox"/>	Manifest and/or Shipping Papers prepared and filed.	
<input type="checkbox"/>	<input type="checkbox"/>	Manifest Exception Reports Prepared, as necessary. Procedures to track manifests in place.	
<input type="checkbox"/>	<input type="checkbox"/>	State Annual and EPA Biennial Reporting Information Available.	
<input type="checkbox"/>	<input type="checkbox"/>	RCRA Personnel Training Records on file.	
<input type="checkbox"/>	<input type="checkbox"/>	CAA Permits on file.	
<input type="checkbox"/>	<input type="checkbox"/>	CWA Permits on file.	
<input type="checkbox"/>	<input type="checkbox"/>	RCRA Permits on file.	
<input type="checkbox"/>	<input type="checkbox"/>	State and/or Local Permits on file.	
<input type="checkbox"/>	<input type="checkbox"/>	RCRA Inspections conducted and Documentation on file.	
<input type="checkbox"/>	<input type="checkbox"/>	Transporter and TSD compliance information on file.	
<input type="checkbox"/>	<input type="checkbox"/>	Waste Accumulation Areas Managed Properly.	
<input type="checkbox"/>	<input type="checkbox"/>	Wetlands Areas Identified and Protected.	
<input type="checkbox"/>	<input type="checkbox"/>	Endangered, Threatened, or Special Concern Species or Areas Identified and Protective Methods Determined.	
<input type="checkbox"/>	<input type="checkbox"/>	Run-on and Runoff Concerns Identified and Managed.	
<input type="checkbox"/>	<input type="checkbox"/>	Adjacent Land Areas Protected as Necessary.	
<input type="checkbox"/>	<input type="checkbox"/>	Non-Hazardous Solid Wastes Managed Properly.	



MISCELLANEOUS REGULATORY and POLICY COMPLIANCE

Yes	No		Comments
<input type="checkbox"/>	<input type="checkbox"/>	Personnel Training Records for DOT Materials Handling on file.	
<input type="checkbox"/>	<input type="checkbox"/>	Noise Control Issues Addressed and Managed.	
<input type="checkbox"/>	<input type="checkbox"/>	Site Security Issues Identified and Managed.	
<input type="checkbox"/>	<input type="checkbox"/>	Known Historical, Archeological, and Cultural Resources Identified and Managed.	
<input type="checkbox"/>	<input type="checkbox"/>	WESTON EHS Analysis Checklist In Use.	
<input type="checkbox"/>	<input type="checkbox"/>	Safety Observation and Recognition Program in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Weekly EHS Report Card System in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Federal, State, and Local Required Postings in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Site specific Lockout/Tagout Program is in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Site-specific Confined Space Program is in place.	
<input type="checkbox"/>	<input type="checkbox"/>	Site Safety Officer filing system is in place and up to date.	

DRAFT



APPENDIX C

COMMUNITY AIR MONITORING PLAN (CAMP)

DRAFT



Community Air Monitoring Plan

**Study Area Bounded by Pyrex Street, E. Pulteney Street,
Post Creek and Chemung River
Corning, NY
NYSDEC Project ID 851046**

June 2014

Prepared for

**Corning Incorporated
Corning, New York**

Prepared by

**WESTON SOLUTIONS, INC.
West Chester, Pennsylvania 19380**

W.O. No. 02005.056.001.0001

TABLE OF CONTENTS

Section	Page
1. INTRODUCTION.....	1
2. METHODS	1
3. CALIBRATIONS.....	2
4. DATA RECORDING	3
5. ACTION LEVELS.....	3

DRAFT

LIST OF ACRONYMS

CAMP	Community Air Monitoring Plan
COPCs	constituents of potential concern
HASP	Health and Safety Plan
mg/m ³	milligrams per cubic meter
µg/m ³	micrograms per cubic meter
NYSDEC	New York State Department of Environmental Conservation
WESTON [®]	Weston Solutions, Inc.

DRAFT



1. INTRODUCTION

This Community Air Monitoring Plan (CAMP) has been prepared by Weston Solutions, Inc. (WESTON®) on behalf of Corning Incorporated to detail the dust control and air monitoring procedures to be performed during the execution of characterization activities at the Study Area located in Corning, New York, bounded by Pyrex Street on the west, E. Pulteney Street on the north, Post Creek on the east and the Chemung River on the south (Study Area). This air monitoring plan will supplement the existing Health and Safety Plan (HASP) and provide an additional measure of protection to potential receptors not directly involved with the characterization activities.

As presented in the Study Area Characterization Work Plan (Work Plan), intrusive characterization activities planned to be conducted within the Study Area may include subsurface soil sampling and groundwater investigations. Since the primary constituents of potential concern (COPCs) at the Study Area are arsenic, cadmium, and lead, air monitoring for dust particulates and dust control techniques will be performed during intrusive activities to provide an additional measure of protection to the surrounding community.

2. METHODS

Perimeter air monitoring for dust particles will be conducted at a minimum of two stations, one generally located upwind, and one generally located downwind of any intrusive characterization activity. In addition, due to the close proximity of playgrounds, athletic playing fields, schools and childcare centers, more stringent CAMP requirements will be necessary. When work areas are within 20 feet of these locations, the continuous monitoring locations for particulates must reflect the nearest potentially exposed individuals. The use of engineering controls such as dust barriers will be considered to prevent exposures related to the work activities and to control dust and odors. Consideration will be given to implementing the planned activities when potentially exposed populations are at a minimum (i.e. during hours when children are not likely to be present). Common-sense measures to keep dust and odors at a minimum around the work areas

will also be implemented to ensure that the children are protected at all times. No visible dust will leave the work area.

As the location of characterization activities will change, the location of the monitoring point relative to the activity will be modified as needed and documented. The monitoring location will be positioned to provide data representative of potential migration of dust in the direction of nearby receptors. The perimeter monitoring equipment will be portable, which will allow the monitoring network to be adjusted if needed to adapt to changes in activities or meteorological conditions.

Particulate monitoring is the measurement of fine liquid or solid particles such as dust, smoke, mist, fumes or smog, in particle sizes less than 10 microns (PM_{10}), in the ambient air. During intrusive activities such as subsurface soil sampling and groundwater monitoring well installation, the generation of dust particles will be monitored. The equipment selected to monitor PM_{10} will be the Thermo Electron Corporation personal DataRAM (pDR), or equivalent. The pDR is a light-scattering monitor, designed for measuring airborne particulates such as aerosols and dusts. The units are portable and measure the concentration of airborne particulate matter (up to 10 μm in size) continuously and in real time, with results expressed in milligrams per cubic meter (mg/m^3), or 1,000 micrograms per cubic meter ($\mu g/m^3$). Particulate concentrations can be measured over the following ranges: 0.01 – 10 mg/m^3 (equivalent to 10 – 10,000 $\mu g/m^3$) and 0.1 – 100 mg/m^3 (equivalent to 100 – 100,000 $\mu g/m^3$). The pDR meets performance standard for a real-time particulate monitor according to the New York State Department of Environmental Conservation (NYSDEC) Technical Guidance for Site Investigation and Remediation; May 2010.

3. CALIBRATIONS

Calibration of instruments will be performed prior to the start of daily activities. Additional calibrations will be performed as needed or whenever maintenance is performed involving the functional elements of the unit. Calibration data will be documented in the field log book or on designated calibration log sheets.

4. DATA RECORDING

The data collected during the monitoring program will be used for real-time data display and notification to on-site personnel when the action levels are exceeded (action levels are discussed in Section 5). All ambient air monitoring data will be recorded in the site field logbook or designated field sheets and the results of the air monitoring will be communicated to the NYSDEC and NYSDOH on scheduled basis (i.e. daily for levels which require actions, weekly for routine monitoring data).

5. ACTION LEVELS

The action level established herein will be used as an indicator that potential excessive migration of dust particles may be occurring during the characterization activities. Monitored ambient air concentrations above the action level will result in actions being taken to more stringently control fugitive emissions or trigger quantitative sampling.

The NYSDEC recommended action level for fugitive dust is $100 \mu\text{g}/\text{m}^3$ greater than background (measured at the upwind location) for a 15 minute period. At this concentration, work may continue with dust suppression techniques provided that no visible dust is migrating from the working area, and the downwind particulate levels do not exceed $150 \mu\text{g}/\text{m}^3$ greater than background (measured at the upwind location). If the downwind particulate levels exceed $150 \mu\text{g}/\text{m}^3$ greater than background (measured at the upwind location), work will stop and dust suppression techniques will be re-evaluated.

If the perimeter monitors detect concentrations above the $100 \mu\text{g}/\text{m}^3$ action level, Site supervisory personnel will be notified. Notifications will be sent to the WESTON Site Manager and the Site Health and Safety Officer. Upon receiving the notification message, the supervisor will assess the situation and initiate appropriate administrative and/or engineering controls to mitigate the migration of dust particles.